
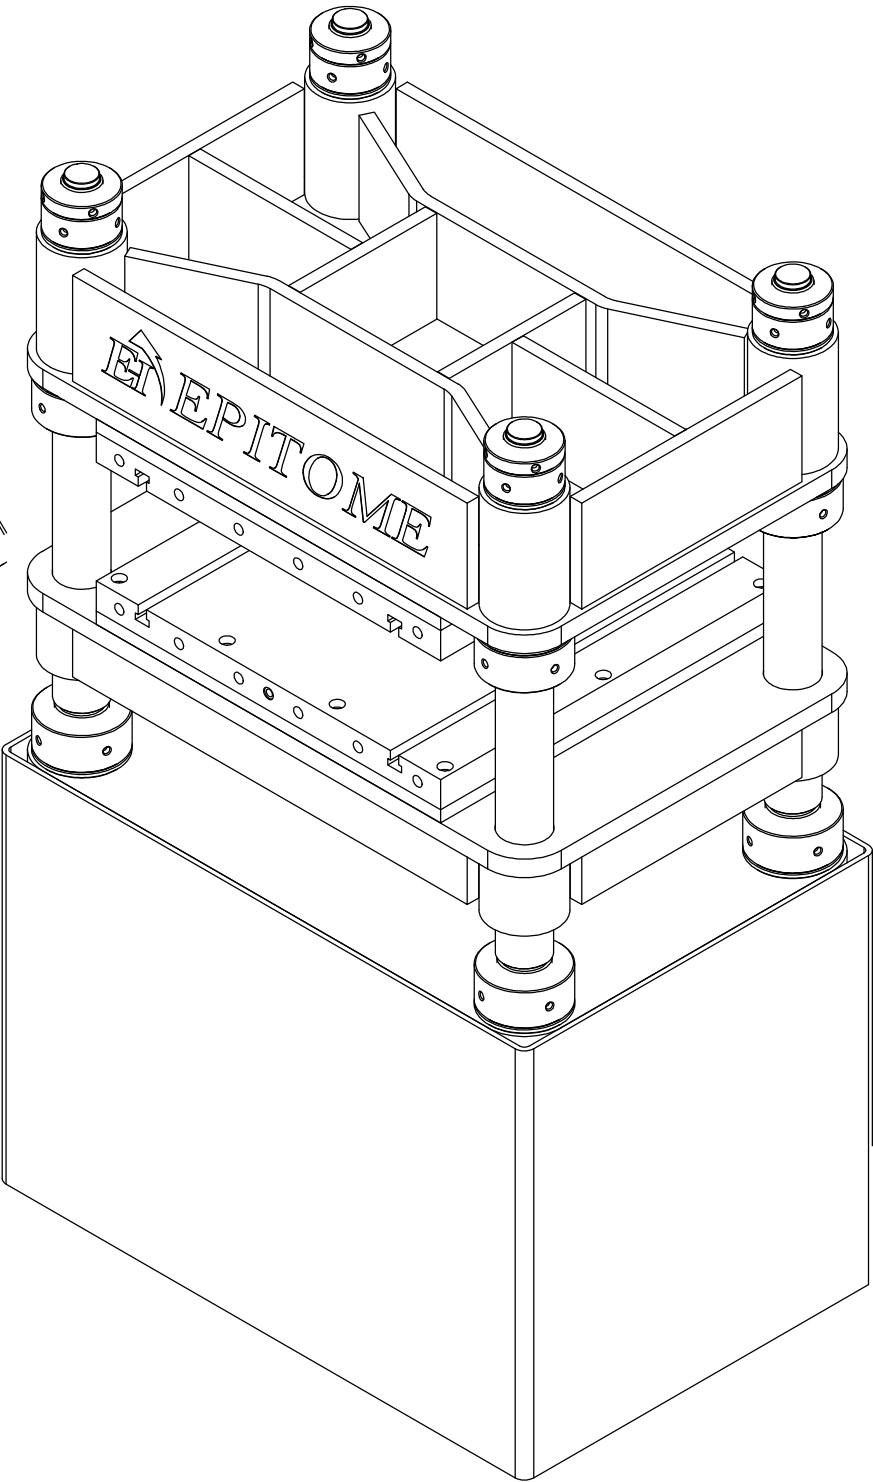
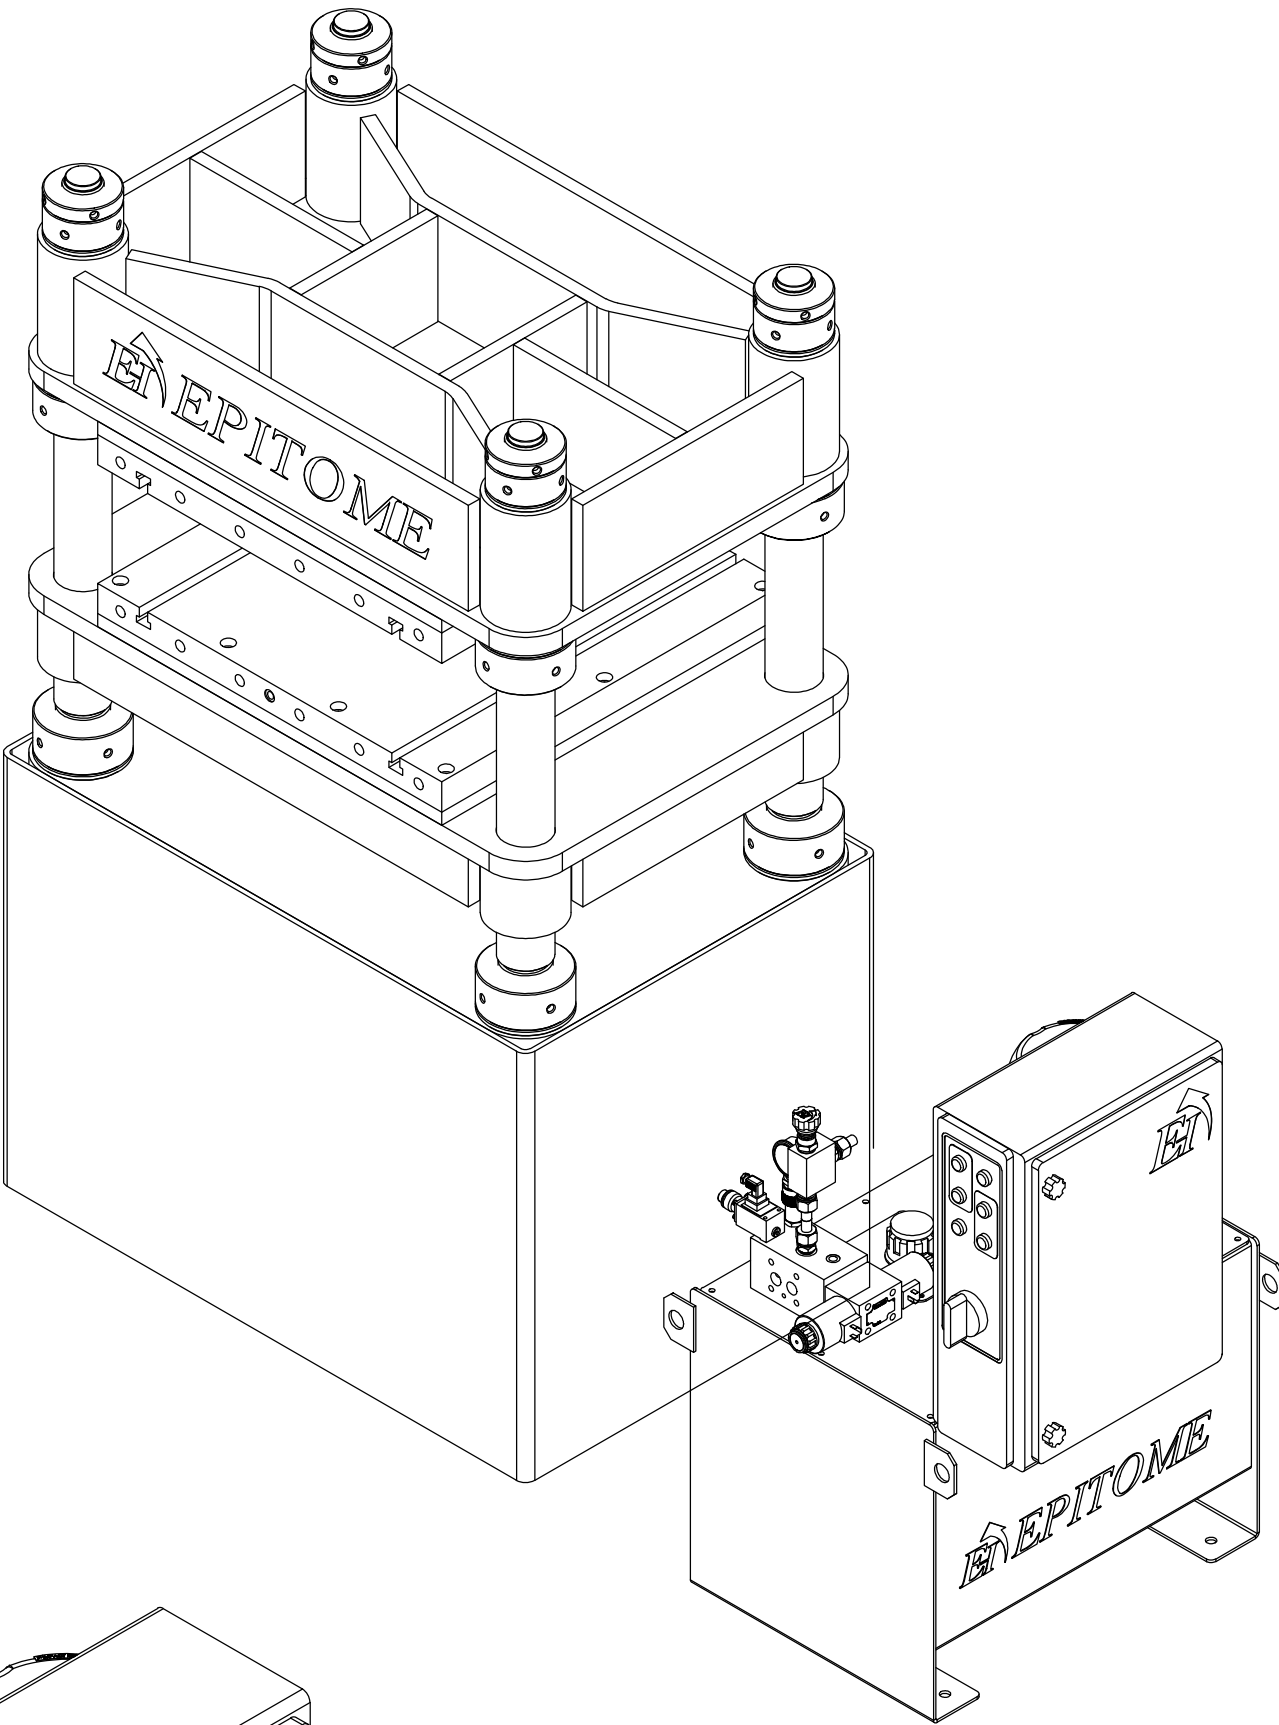


TAILOR MADE HYDRAULIC FOUR PILLAR RUBBER MOULDING PRESS CAPACITY 10 TON. TO 1000TON.

- 1.CAPACITY :---50TON. TO 1000 TON.
- 2.CYLINDER STROKE:-----4 INCH TO 25 INCH .
- 3.CYLINDER SINGLE ACTING OR DOUBLE ACTING.
- 4.OIL TANK 500 LTRS. TO 1000LTRS.
- 5.TABLE SIZE:----LEFT TO RIGHT , FRONT TO BACK .
- 6.DAYLIGHT :-----MM. OR INCH .
- 7.NUMBER OF DAYLIGHT :--- 2 TO 4 TON.
- 8.NUMBER OF STATION :----- 2 TO 4 TON.
- 9.STROKING :----UP STROKING OR DOWN STROKING .
- 10.POWER PACK :----- 5HP TO 250 HP .
- 11.PUSH BUTTON, PLC , HMI.
- 12.POWER PACK SINGLE SPEED OR DOUBLE SPEED.
- 13.STROKE ADJUSTABLE THROUGH LIMIT SWITCH.
- 14.PULL BACK CYLINDER:-----2NOS.
- 15.WORKING TEMPERATURE :-----120 TO 200 Deg.C .
- 16.SAFETY FEATURES. :---PHOTO SENSORS.

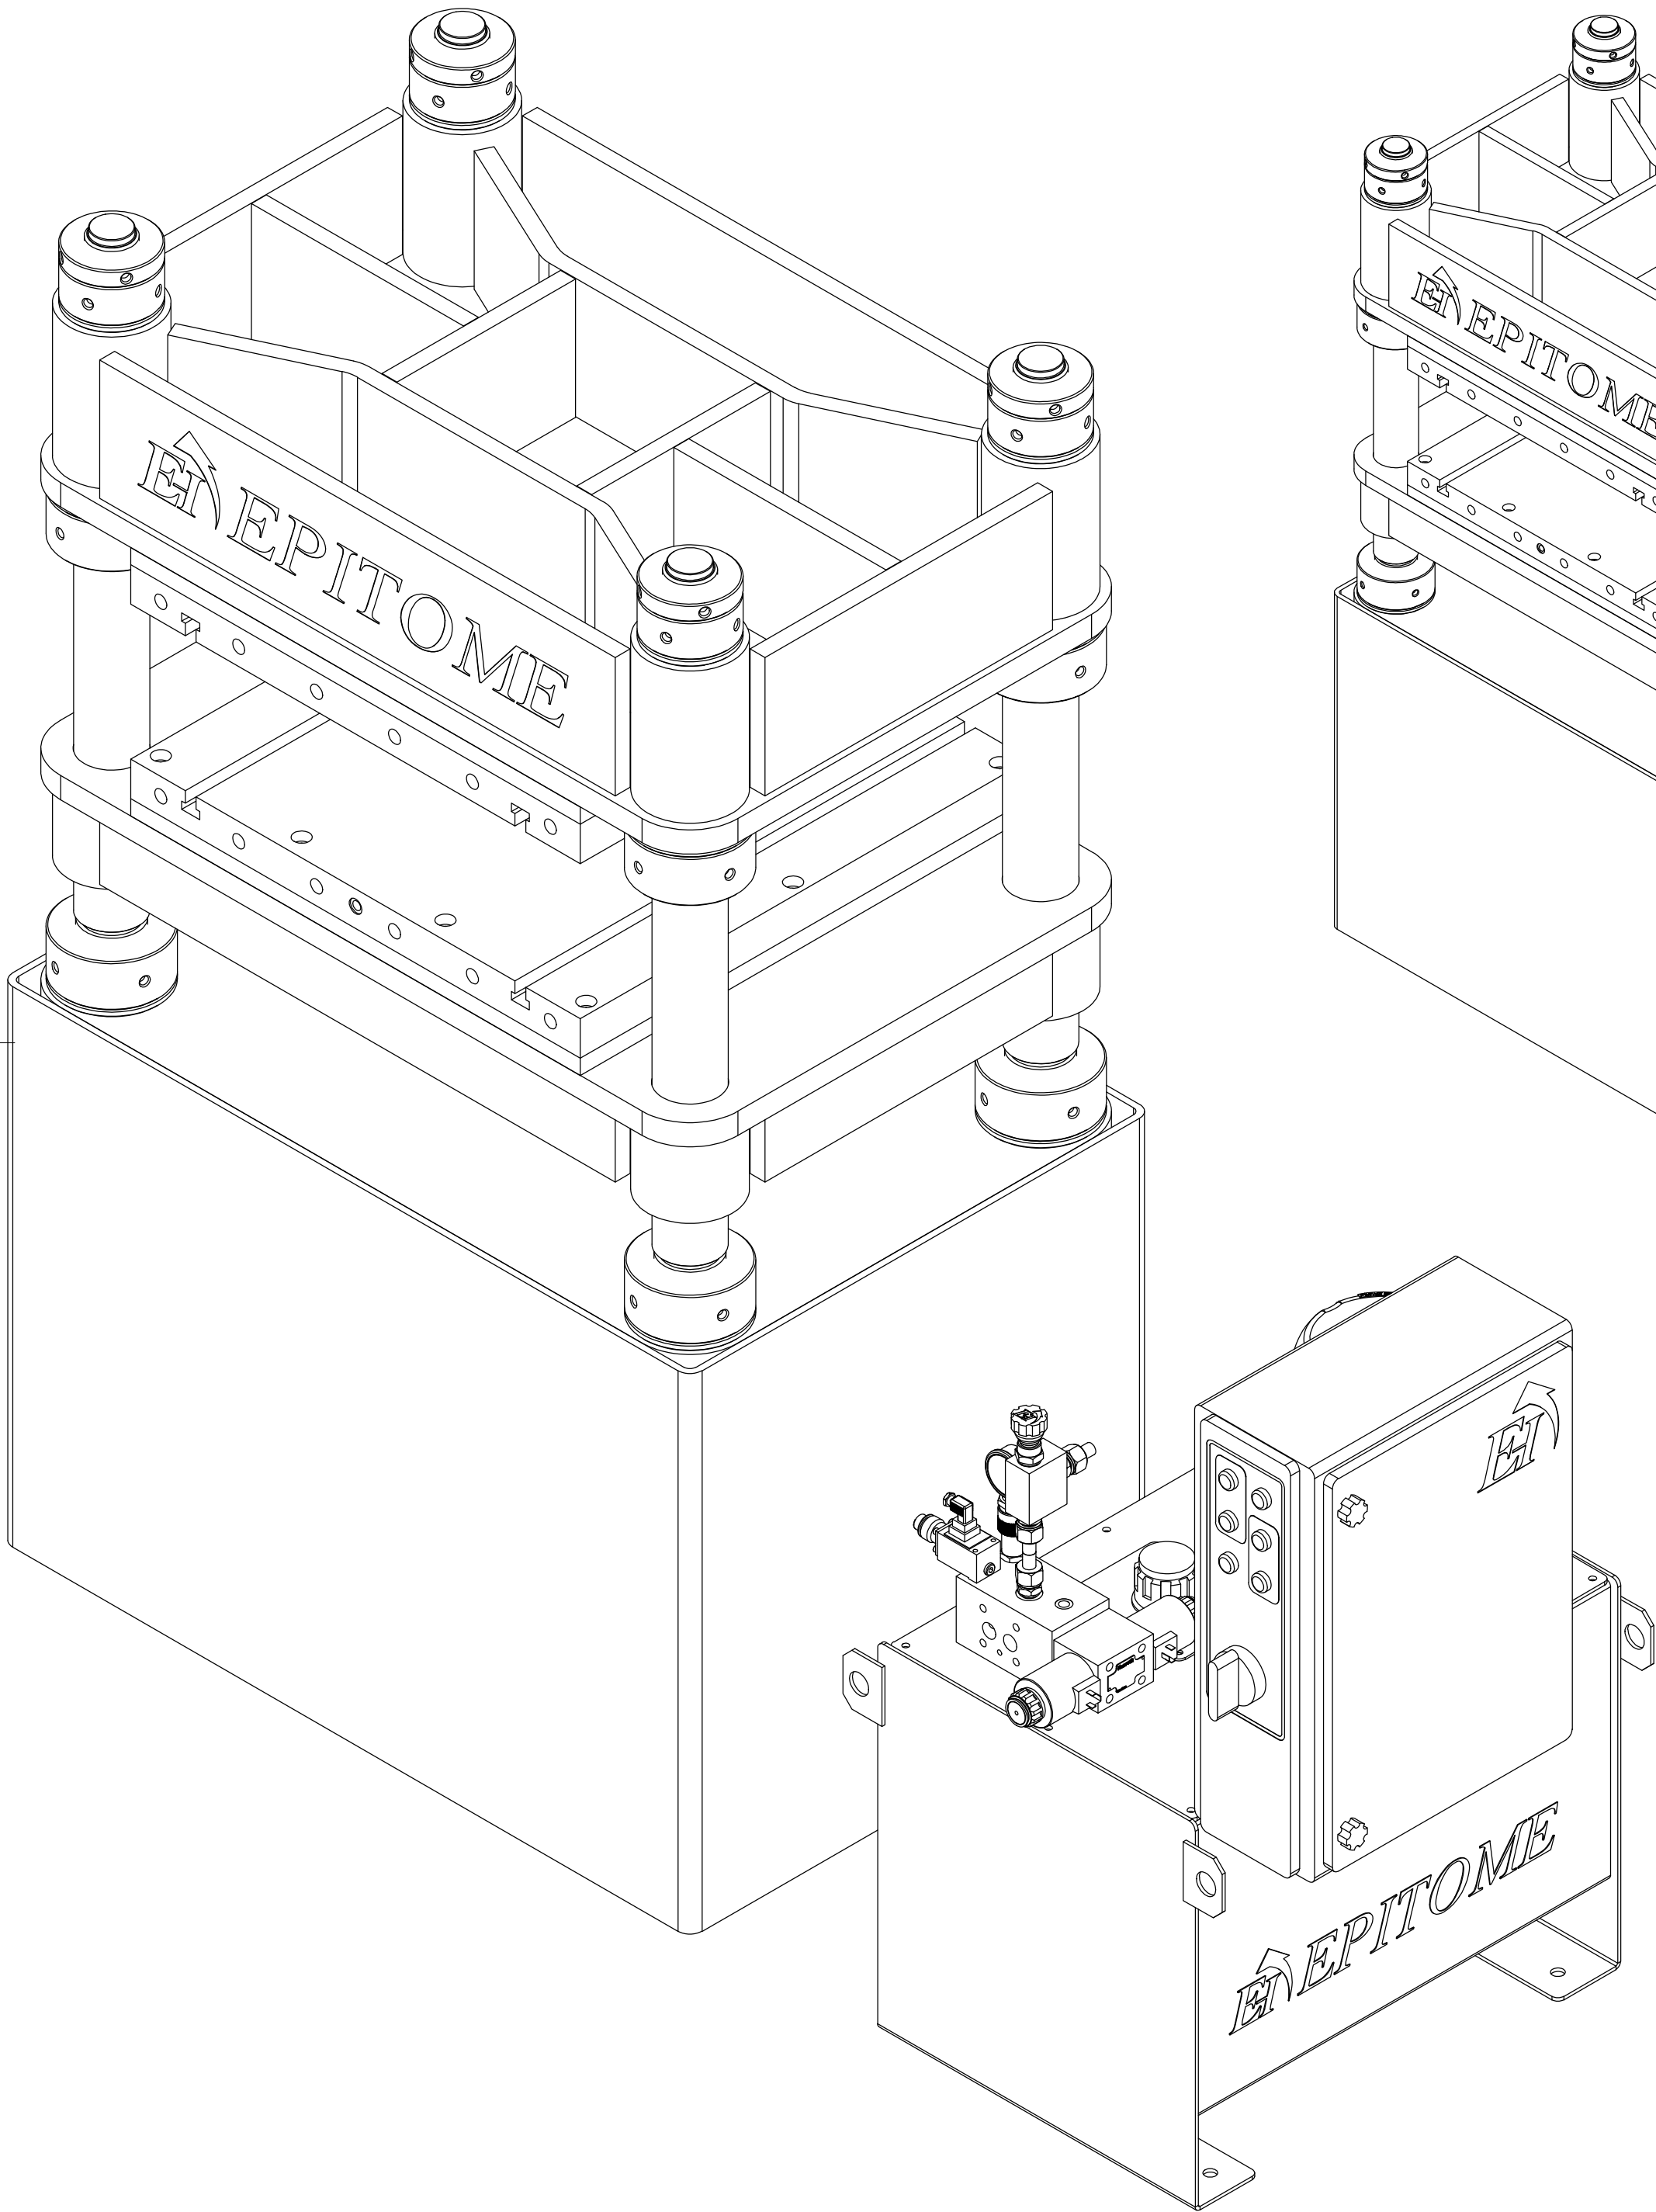

ANGLE OF PROJECTION							
DO NOT SCALE DRAWING		CHK'D	DESCRIPTION				REVISION
	NAME	SIGNATURE	DATE			DRAWING NO. FOUR PILLAR RUBBER MOULDING PRESS	
DRAWN	PRADEEP		22.02.2022				
CHK'D	PATIL		22.02.2022				
APPV'D	P.B.PATIL		22.02.2022				
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:						UDYAMBAG-BELAGAVI KARNATAKA-INDIA sudhir.epitome@gmail.com.	