EST- EPITOME Single Acting Load Return Threaded Ram Jack 5 Capacity-ton 100 Stroke-mm

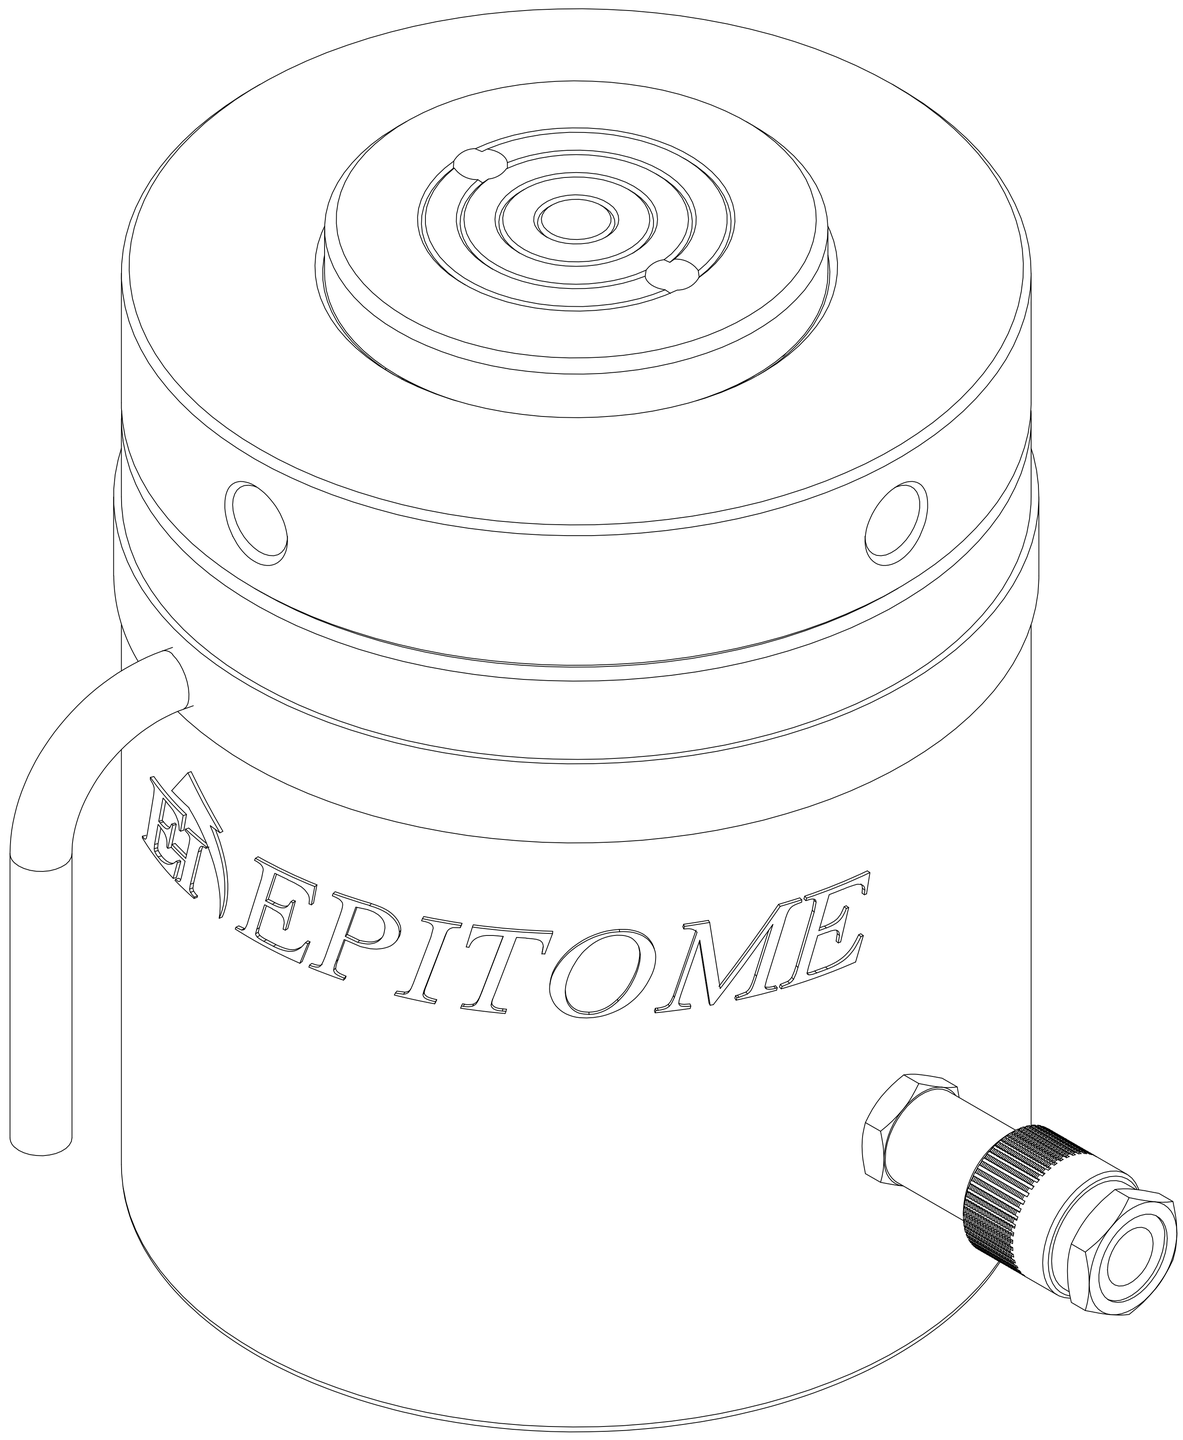

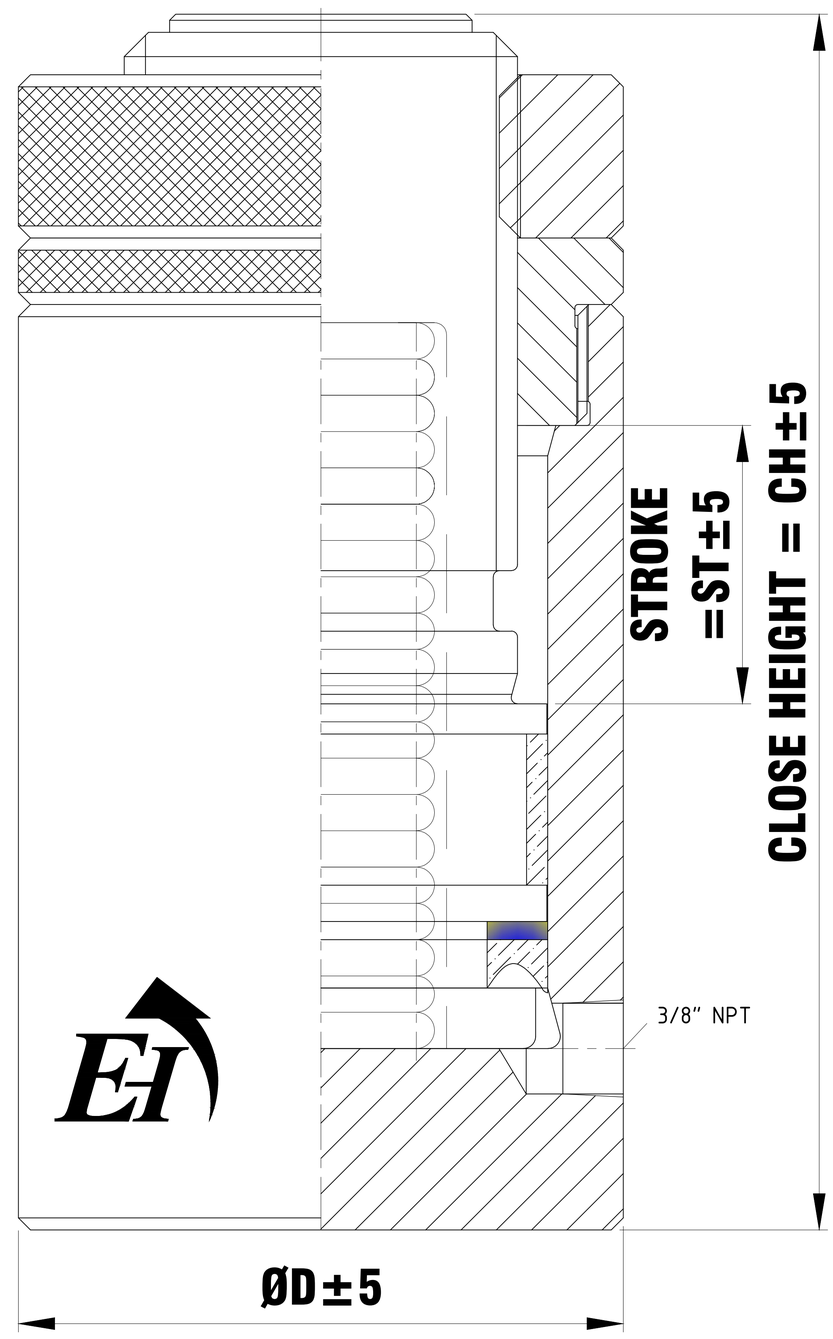

EST SERIES- E EPITOMRE S SINGLE ACTING SPRING RETURN T THREADED RAM 10 CAPACITY -TON 150 STROKE -MM

RATED CAPACITY (TON)	CAPACITY @700 BAR (KN)	STROKE (MM)	MODEL	EFFECTIVE AREA ($CM^{2)}$	OIL CAP (CC)	A CLOSED HEIGHT (MM)	B CYLIINDER OD (MM)	C BORE DIA (MM)	D RAMDIA (MM)	WT (APPROX)(KG)
10	111	150	EST 10-150	15.9	239	245	60	45	40	4.5
15	167	150	EST 15-150	23.8	356	250	70	55	50	6.5
20	218	150	EST 20-150	31.2	468	260	80	63	55	9
25	270	150	OST 25-150	38.5	577	270	90	70	55	11.5
30	309	150	EST 30-150	44.2	663	275	100	75	60	15
50	550	150	EST 50-150	78.5	1178	290	130	100	80	27
75	792	150	EST 75-150	113.1	1696	295	155	120	95	39
100	1077	150	EST 100-150	153.9	2309	305	180	140	110	54
150	1589	150	EST 150-150	227.0	3405	325	220	170	140	87.5
200	2199	150	EST 200-150	314.2	4712	340	255	200	160	122
250	2661	150	EST 250-150	380.1	5702	350	280	220	180	154
300	3167	150	EST 300-150	452.4	6786	370	310	240	200	202
400	4008	150	EST 400-150	572.6	8588	405	350	270	220	283

ANGLE OF PROJECTION

DO NOT SCALE DRAWING

CHK'D | DESCRIPTION | REVISION

	NAME	SIGNATURE	DATE
DRAWN	PRADEEP		22.02.2022
CHK'D	PATIL		22.02.2022
APPV'D	P.B.PATIL		22.02.2022

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

EPITOME
UDYAMBAG-BELAGAVI
KARANATAKA-INDIA
sudhir.epitome@gmail.com.

DRAWING NO.
EST-SERIES

MATERIAL:

WEIGHT: