

Jersey Top

Olive off-shoulder top / asymmetric folded band

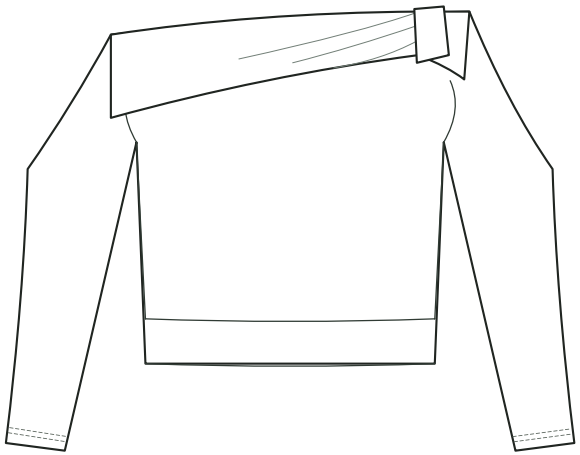

FRONT / DEVELOPMENT FLAT

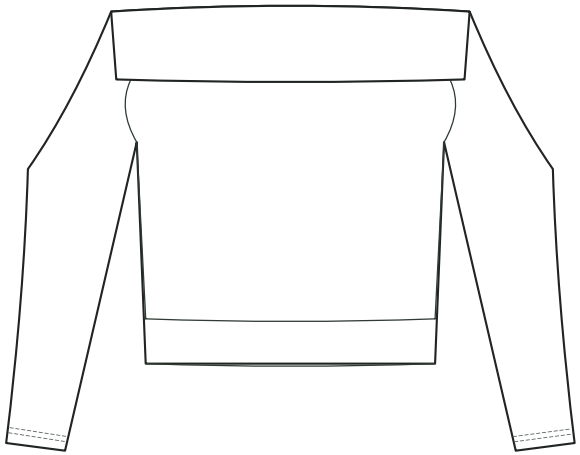

BACK / DEVELOPMENT FLAT

AB-TP-01 / 0.1

Olive off-shoulder top / asymmetric folded band

Soft body blouson above a close lower band; slim long sleeves; off-shoulder upper band.

> Proposed development specification.
> Sample validation required.

Base EU 38 · range EU 34–42 · centimetres

Technical documentation by ABERBACH. Source garment authorship and physical manufacture are unverified.


CONFIRMED
Source-visible or documented facts only.

PROPOSED
Engineering, dimensions and grades for first sampling.


TBD
Supplier, testing and approval information still unresolved.

Design evidence & colourway

One source colourway / editable coloured flats / no invented approved colour standard

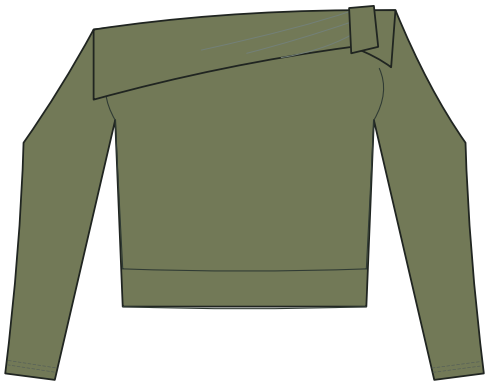

FRONT / DEVELOPMENT FLAT

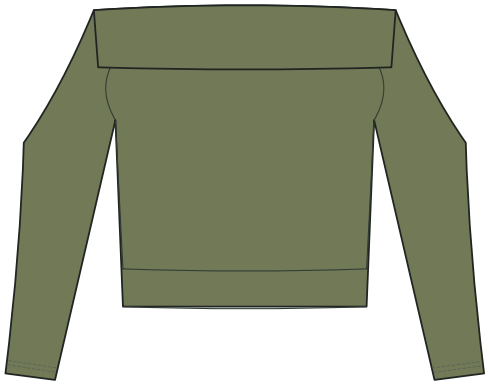

BACK / DEVELOPMENT FLAT

Source evidence and colour

- CONFIRMED in reference: olive colour family, long fitted sleeves, broad folded upper band, gathered tab on wearer-left front, plain folded band across back, lower body band.
- Knit classification is a development interpretation supported by the portfolio knit reference; fibre, knit structure and elastic performance are untested.
- No closure, pocket or exposed shoulder seam is visible. Back vertical shadows are folds, not specified panel seams.

Development interpretation

- PROPOSED cut-and-sew jersey engineering, not a claim that an original fully-fashioned knitting pattern exists.
- Upper sleeve/body junction is hidden by the folded band: use a low set-in sleeve with concealed cap seam; verify reach and band stability on body.
- No separate inserted elastic at neckline in this issue. If recovery fails, revise BOM and upper-band construction together.

Source-relative digital colour only. No verified Pantone match. Shell, trims and thread require physical approval.

Primary reference: `assets/source/JERSEY & KNITS/8.png`
Repository revision: `4653f40626938ceeece2438e7ee8fb073280cdc2` · rtw-ref-15
Existing portfolio visual reference; physical manufacture, designer ownership and hidden construction unverified. ABERBACH authors this development documentation, not a claim of original garment manufacture.

Bill of materials

Garment-specific sourcing and estimated consumption / no nominated supplier


ID / component	Technical specification	Composition / colour	Placement	Qty / unit / status
F01 Main jersey	PROPOSED stable fine-gauge double jersey, 220–260 g/m²; ≥40 % crosswise / ≥20 % length extension without damage	TBD; viscose-rich blend with elastane is a sampling option Olive / source-relative; lab dip TBD	Body, sleeves, upper/lower bands, tab	**1.25–1.55** m PROPOSED
T01 Sewing thread	Core-spun polyester Tex 24 needle; soft textured polyester looper option; tune needle Nm 70–80 ballpoint	PROPOSED polyester Match olive	All joins and hems	**120–160** m PROPOSED
L01 Development ID / size	Soft 35 × 12 mm label; neutral AB-TP-01 / EU size; not retail brand artwork	TBD label base Neutral	Inner left side seam, 60 mm above lower-band seam	**1** pc PROPOSED
L02 Composition/care label	Content pending fibre and care verification; no preprinted wool/cotton claim	TBD Neutral	Inner left side seam below ID label	**1** pc PROPOSED
PK01 Protective sleeve	Unprinted; dimensions/gauge pending folded sample	TBD Clear or paper	One folded garment	**1** pc PROPOSED

Consumption basis
ESTIMATE: 1.25–1.55 m shell at 150 cm usable width, EU 38, non-directional knit, body pair + sleeve pair + long folded upper band + lower band + tab. Preliminary nesting: sleeves beside body where width permits; 15 % cutting/shrink reserve. Verify after pattern, relaxation and marker; not an approved yield.

Supplier and material codes: TBD for every component. Numeric thread use is a preliminary sewing estimate, not measured consumption. Labels/packing are one set per garment. All BOM entries are PROPOSED.

Front construction

Leaders identify actual feature anchors / hidden construction remains proposed

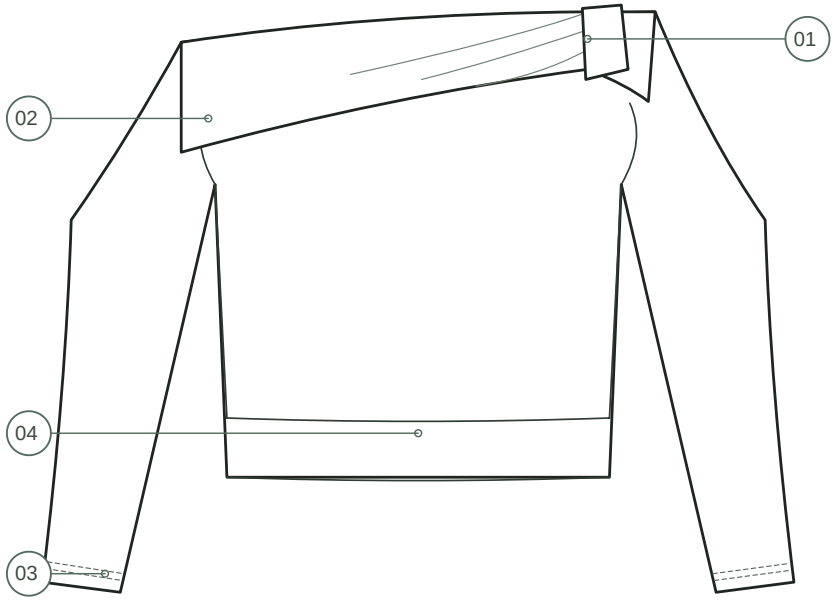

C01 / Folded upper band / tab

Cut band with greatest stretch around body; fold double. Join short ends away from tab, 6 mm SA, 514 four-thread overedge, 2.8–3.0 mm stitch. Tab captures localized front folds at wearer left; secure to band only with concealed 301, no visible decorative tack.

BOM F01 · T01 / PROPOSED METHOD

C02 / Concealed low set-in sleeve

Join sleeve cap to body under band, 6 mm SA using 514, 2.8–3.0 mm. Match front/back cap notches; zero woven-style cap ease. Band must cover junction when worn. Fit trial required.

BOM F01 · T01 / PROPOSED METHOD

C03 / Sleeve hem

Turn 20 mm; 406 two-needle coverseam, 4 mm needle gauge, 3 mm stitch. Catch raw edge inside. Test extension; no lockstitch-only load-bearing hem.

BOM F01 · T01 / PROPOSED METHOD


C04 / Lower folded band

Close band ring at left side, 6 mm SA / 514. Fold wrong sides together and attach to relaxed body, distributing slight fullness evenly; proposed seam-line band/body ratio 0.90 at EU 38, adjust after recovery trial.

BOM F01 · T01 / PROPOSED METHOD

Back construction

Leaders identify actual feature anchors / hidden construction remains proposed

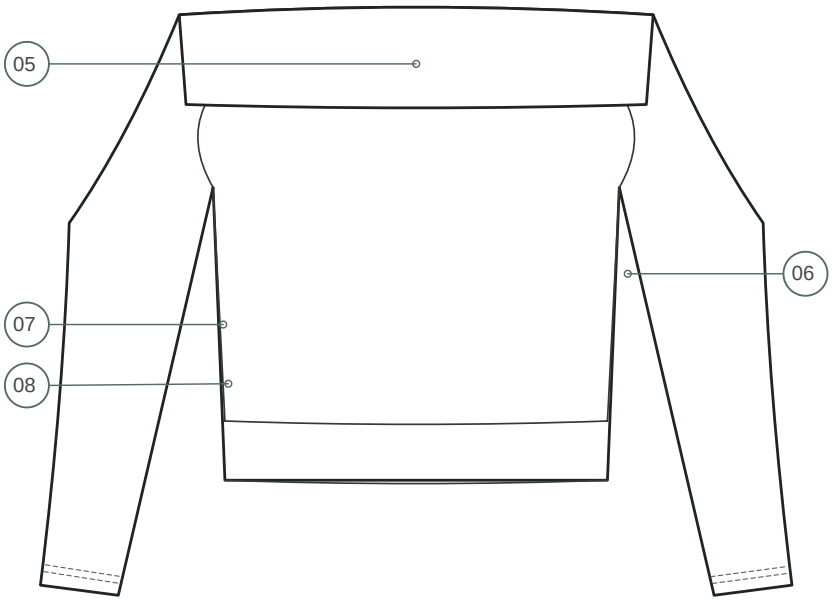

C05 / Back band continuity

Plain folded band across back; do not add centre-back body seam. Align band join to left body side; conceal joining seam within folded construction. Press with low tension and test temperature.

BOM F01 · T01 / PROPOSED METHOD

C06 / Underarm and side seam

Close underarm/side in one continuous pass where band sequence allows; superimposed join, 6 mm SA, 514, 3 mm stitch. Secure ends into band/hem. No seam twisting.

BOM F01 · T01 / PROPOSED METHOD

C07 / Inner seam comfort

Keep overedge allowance toward back; use differential feed to avoid waviness. Trial seam extension ≥40% without stitch break; recover flat after 30 min.

BOM T01 / PROPOSED METHOD

C08 / Identification labels

Catch L01/L02 in wearer-left side seam with smooth edges away from skin. Position 60 mm above lower-band join. Care content remains TBD; do not attach unverified retail care artwork.


BOM L01 · L02 · T01 / PROPOSED METHOD

Construction details / 1

Layer relationships and component dimensions / schematic views, not cutting patterns

Upper band and gathered tab

PROPOSED / schematic — not a cutting pattern

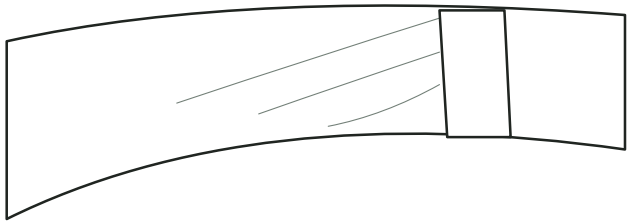

Folded self band; localized folds at wearer-left tab




Section: double band encloses concealed neckline join

6 mm join / 514; tab secured inside only

Sleeve hem / 406 coverseam

PROPOSED / schematic — not a cutting pattern

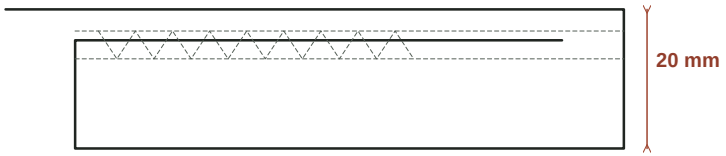

406 coverseam: two needle rows / looper inside

4 mm needle gauge; confirm extension without pop

Upper band and gathered tab
Folded self band; tab attachment hidden inside. Proposed concealed sleeve junction, no exposed shoulder seam.


Sleeve hem / 406 coverseam
20 mm turn; 4 mm needle gauge; preserve crosswise extension. Stitch formation is not a flatseam.

Construction details / 2

Layer relationships and component dimensions / schematic views, not cutting patterns

Lower band attachment

PROPOSED / schematic — not a cutting pattern

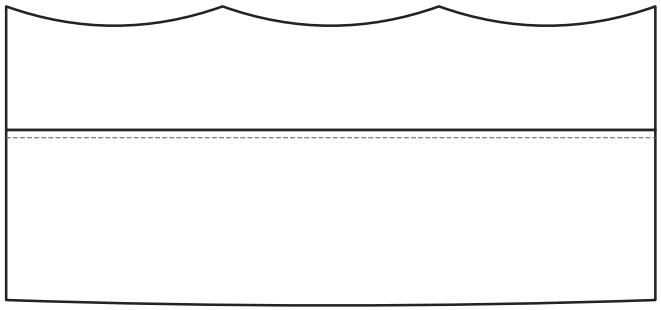

Body fullness distributed evenly into folded band

Ratio is measured at seam line; no hidden elastic

Lower band attachment
Folded self band; proposed 0.90 seam-line ratio to body, verify after relaxation. No separate elastic specified.

Pattern interface and sampling controls

- Front ×1 on fold; back ×1 on fold; sleeves ×2 mirrored; upper band ×1 cut across stretch (piece/length trial); lower band ×1; tab ×1. These are proposed pattern components, not existing measured patterns.
- Match sleeve cap/armhole lengths with no cap gathering; walk low-cap seam and notch front/back separately.
- Tab gathering only at wearer-left front band; do not gather back band. Body fullness is absorbed at lower band; no invented body darts.

Assembly dependency

Prepare upper band ring and tab; pretest tab fold bulk.

Measurement specification / 1


EU 38 highlighted in bold / full size range calculated independently per POM


POM	Measurement / cm	Step	34	36	38 base	40	42	Tol. cm
A	Body length from upper-band top	+0.5	44	44.5	**45**	45.5	46	±0.7
B	Bust width	+2	44	46	**48**	50	52	±0.7
C	Lower-band opening	+1.5	37	38.5	**40**	41.5	43	±0.5
D	Upper opening width	+1.5	42	43.5	**45**	46.5	48	±0.5
E	Sleeve outer length	+0.5	47	47.5	**48**	48.5	49	±0.5
F	Bicep width	+0.6	14.3	14.9	**15.5**	16.1	16.7	±0.4
G	Sleeve opening	+0.3	8.4	8.7	**9**	9.3	9.6	±0.3
H	Lower-band finished depth	+0	6	6	**6**	6	6	±0.3
I	Upper-band finished depth	+0	10	10	**10**	10	10	±0.3
J	Across back body	+2	44	46	**48**	50	52	±0.7
K	Front tab finished width	+0	4	4	**4**	4	4	±0.2
L	Underarm to body hem	+0.5	28	28.5	**29**	29.5	30	±0.5

PROPOSED DEVELOPMENT SPECIFICATION — SAMPLE VALIDATION REQUIRED
Each step is one EU-labelled size. Values = base + (size position − base position) × step. All widths are half-flat unless explicitly marked otherwise. No UK conversion or sample-measured claim. Methods and arrows follow on the POM pages.

Points of measurement / 1

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

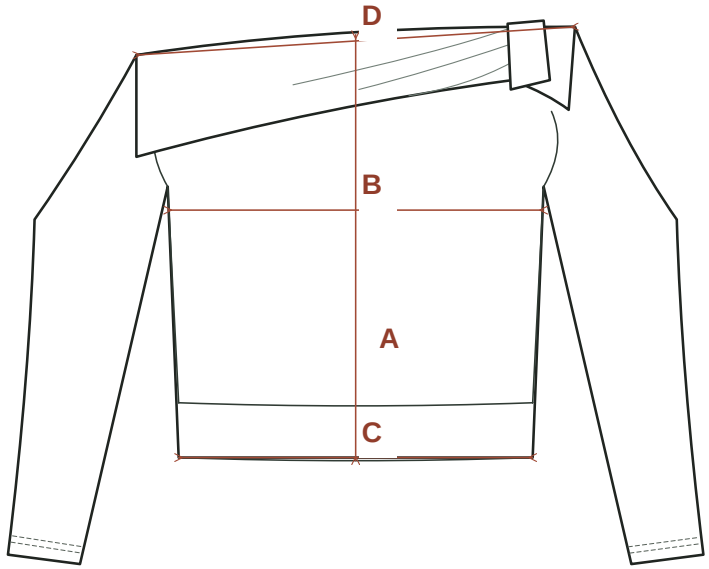

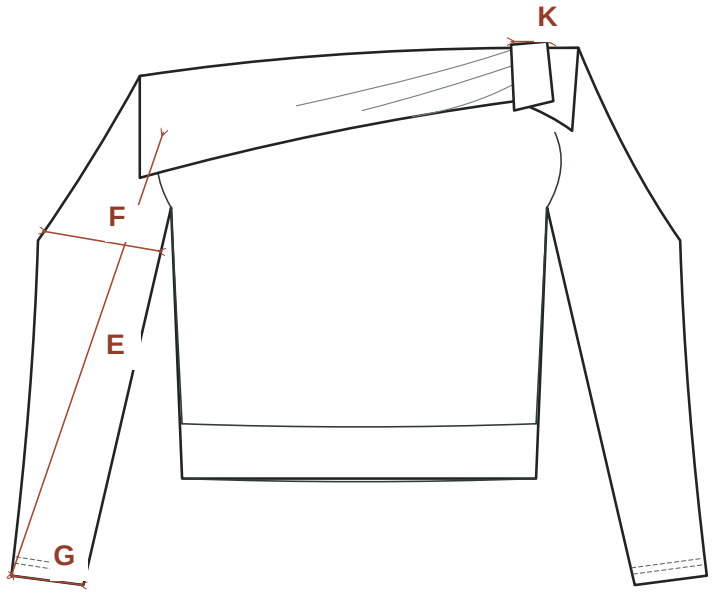

Front

A / Body length from upper-band top
Front centre: relaxed upper edge to lower hem, straight vertically; band unfolded only as worn.
vertical · base 45 cm

B / Bust width
Flatten without stretching; 25 mm below lowest underarm junction, edge to edge.
half-flat · base 48 cm

C / Lower-band opening
Bottom folded edge, relaxed, edge to edge.
half-flat · base 40 cm

D / Upper opening width
Upper-band top edge laid flat without tab distortion, edge to edge.
half-flat · base 45 cm

Front

E / Sleeve outer length
Straight from the concealed low-cap junction beneath the band to outer finished sleeve edge; no curved tape path.
vertical · base 48 cm


F / Bicep width
Sleeve laid flat, 25 mm below concealed armhole base, perpendicular to sleeve grain.
half-flat · base 15.5 cm

G / Sleeve opening
Finished sleeve edge perpendicular to sleeve grain; no extension.
half-flat · base 9 cm

K / Front tab finished width
Measure crosswise on finished tab, excluding folded seam allowance.
component · base 4 cm

Points of measurement / 2

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

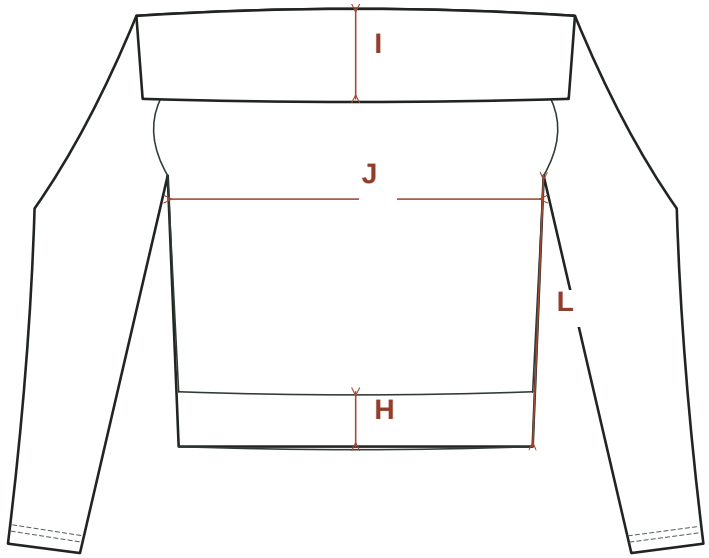

Back

H / Lower-band finished depth
At centre back from attachment seam to folded bottom edge.
component · base 6 cm

I / Upper-band finished depth
At centre back, folded top to lower band edge, exclude seam allowance.
component · base 10 cm

J / Across back body
25 mm below underarm junction; match bust measuring level.
half-flat · base 48 cm

L / Underarm to body hem
Wearer-right side: lowest sleeve junction to lower folded hem.
vertical · base 29 cm

Measurement preparation

Condition and relax garment 24 h. Close all fastenings unless a method specifies otherwise. Lay flat on a level surface; do not stretch knitted parts for relaxed POMs. Use a flexible tape on contour measurements.

Arrows terminate on the defined garment/component endpoints. A component view represents seam-line dimensions unless the method states finished external edges.

Contour rise/armhole/hood measurements follow the curve; straight depth is a separate method. Recheck after laundering and fit changes.

Pattern, grading & assembly

Proposed first-sample engineering / sequence follows the actual product type

Proposed body basis / cm

EU label	Bust full	Waist full	Hip full
34	84	66	90
36	88	70	94
38	92	74	98
40	96	78	102
42	100	82	106

Adult Womenswear, stature 168 cm; internal development chart only, not an asserted national sizing standard. EU 38 is a document label, not universal body equivalence.

Fit and grade rationale

Soft body blouson above a close lower band; slim long sleeves; off-shoulder upper band.

Torso widths grow with body progression; vertical/component grades are smaller or zero. The published per-POM rules, rather than a blanket grade, control this proposal. Test range endpoints before approving a nest.

Pattern components / interfaces

- Front ×1 on fold; back ×1 on fold; sleeves ×2 mirrored; upper band ×1 cut across stretch (piece/length trial); lower band ×1; tab ×1. These are proposed pattern components, not existing measured patterns.
- Match sleeve cap/armhole lengths with no cap gathering; walk low-cap seam and notch front/back separately.
- Tab gathering only at wearer-left front band; do not gather back band. Body fullness is absorbed at lower band; no invented body darts.

Assembly order

1. Relax knit 24 h; test extension, recovery and dimensional change before cutting.
2. Cut mirrored sleeves; mark band join, tab centre and low-armhole balance points.
3. Prepare upper band ring and tab; pretest tab fold bulk.
4. Join low sleeve caps to open body; close underarms and side seams.
5. Apply upper band to concealed neckline/cap edge; secure tab from inside.
6. Attach folded lower band; coverseam sleeve hems; attach development labels.
7. Steam without stretching; cool flat 24 h before measurement.

No production pattern has been measured or generated by this document. Seam allowances are operation-specific and excluded from finished POM values.

Quality, labels & revision

Sampling documentation / not approved for bulk production

Garment quality checkpoints

- Upper band lies level at back; front tab on wearer left; no accidental twisted band.
- Reach trial: arms forward/raised, neckline remains comfortable; no sleeve-cap strain.
- 406 hems stretch without pop; 514 seams no tunnelling or grinning.
- Check bust and bands after 24 h relaxation; all POMs within listed tolerances.

Development risks / release holds

- Unverified knit recovery may cause neckline slip; do not solve by an unrecorded elastic addition.
- Off-shoulder fit must be checked against actual upper-arm/chest dimensions and movement.
- Shrinkage and tab bulk may change band length; revise after first prototype.

Labels and finishing

PROPOSED: neutral development ID + EU size; 35 × 12 mm soft ID label, ends turned 5 mm and secured with 301. No third-party logo or manufacturer claim. Placement: inner left side, 60 mm above band.

TBD: fibre identity, component compatibility, care testing, country of origin and destination-market legal review. Do not print generic care symbols.

Packing

PROPOSED: fold only after cooling; use unprinted recyclable protective sleeve sized to the actual folded sample. Bag material, gauge and dimensions TBD after packing trial. One garment per sleeve; no invented approved bag size.

Production approval requires

Owner/source provenance review; measured and fitted prototype; pattern and graded nest approval; material/trim supplier approval; seam and laundering tests; marker verification; label/legal checks and signed sample approval. None is claimed complete.

Version / date	Revision / validation status
0.1 / 2026-10-25	Initial source-referenced development specification; no physical sample, marker or fit validation **PROPOSED / sampling review**