

Tailored Trouser

Oatmeal wide leg / single pleat / rear welt pockets

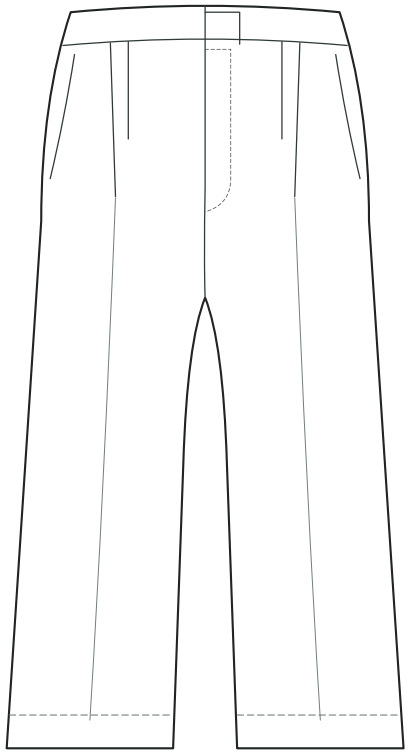

FRONT / DEVELOPMENT FLAT

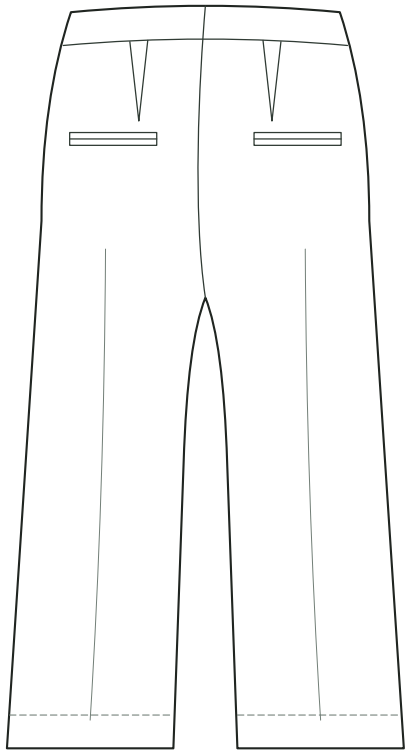

BACK / DEVELOPMENT FLAT

AB-TP-02 / 0.1

Oatmeal wide leg / single pleat / rear welt pockets

High waist with 4 cm waist ease and 8 cm seat ease at base EU 38; full wide leg.

> Proposed development specification.
> Sample validation required.

Base EU 38 · range EU 34–42 · centimetres

Technical documentation by ABERBACH. Source garment authorship and physical manufacture are unverified.


CONFIRMED
Source-visible or documented facts only.

PROPOSED
Engineering, dimensions and grades for first sampling.


TBD
Supplier, testing and approval information still unresolved.

Design evidence & colourway

One source colourway / editable coloured flats / no invented approved colour standard

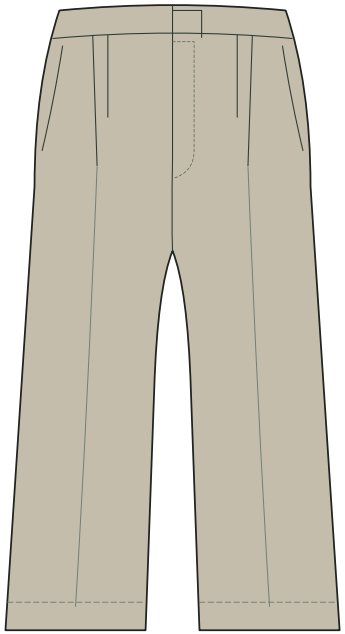

FRONT / DEVELOPMENT FLAT

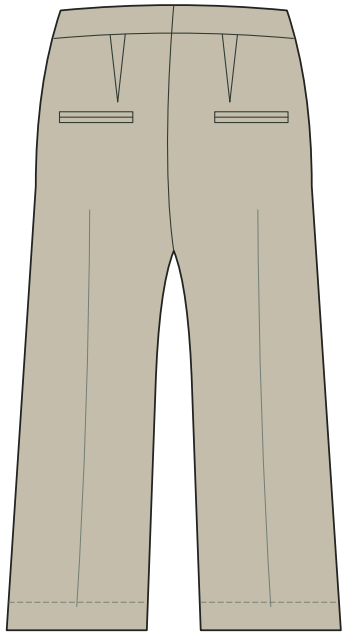

BACK / DEVELOPMENT FLAT

Source evidence and colour

- CONFIRMED in source: separate waistband, covered front closure area, one visible pleat per front, wide legs, rear horizontal welt-like openings and pressed leg lines.
- Fly zip, hook/bar, pocket bags, dart intake and internal waistband construction are PROPOSED; reference is exterior photography only.
- No belt loops or rear pocket buttons visible: none specified. Shirt in source is excluded.

Development interpretation

- PROPOSED adult womenswear tailored construction with a waistband fly opening and hook/bar extension. Handedness must be confirmed at first sample; illustration uses wearer-left overlap.
- Rear opening engineered as double welt pockets. Source does not prove number of welt lips or pocket-bag depth.
- Use a stable woven suiting option, not stretch-knit negative ease. No full lining is required in this proposal.

Source-relative digital colour only. No verified Pantone match. Shell, trims and thread require physical approval.

Primary reference: `assets/source/WOMENSWEAR - WOVEN/2.png`
Repository revision: `4653f40626938ceeece2438e7ee8fb073280cdc2` · rtw-ref-02
Existing portfolio visual reference; physical manufacture, designer ownership and hidden construction unverified. ABERBACH authors this development documentation, not a claim of original garment manufacture.

Bill of materials

Garment-specific sourcing and estimated consumption / no nominated supplier


ID / component	Technical specification	Composition / colour	Placement	Qty / unit / status
F01 Shell woven suiting	PROPOSED drapey stable twill/plain suiting, 220–280 g/m²; no stretch required	TBD; wool blend or viscose-rich suiting option Oatmeal / lab dip TBD	Front/back legs, waistband, fly, welts	**1.80–2.10** m PROPOSED
F02 Pocketing	PROPOSED dense smooth pocketing, 100–130 g/m², preshrunk with shell	TBD; cotton/polyester option Match pale oatmeal	Side and rear pocket bags	**0.40–0.50** m PROPOSED
I01 Fusible support	Light woven fusible; compatibility/peel and temperature trial required	TBD Ivory	Outer waistband, fly, welt openings	**0.20–0.30** m PROPOSED
Z01 Fly zipper	PROPOSED closed-end nylon coil No.3, 18 cm chain; matching tape	TBD nylon coil/polyester tape Match oatmeal	Centre-front fly	**1** pc PROPOSED
H01 Hook and bar	PROPOSED flat trouser hook/bar set, sew-on, 12 mm width; nickel status TBD	TBD metal Concealed	Waistband extension	**1** set PROPOSED
T01 Sewing thread	Core-spun polyester Tex 24–30; Nm 80–90 sharp needle after trial	PROPOSED polyester Match oatmeal	301 seams / 504 edge finish / 103 hem	**180–230** m PROPOSED
L01 ID / size and care set	35 × 12 mm neutral ID/size plus care label with unverified content withheld	TBD Neutral	Inside left waistband / left pocketing	**1** set PROPOSED
PK01 Protective sleeve	Fit folded pressed sample; no hard crease across pocket area	TBD Unprinted	One garment	**1** pc PROPOSED

Consumption basis
ESTIMATE: shell 1.80–2.10 m at 150 cm usable width, EU 38; paired front/back legs + waistband + fly facings + welts, straight grain, no nap. Assumes two lengthwise leg rows/nesting, 12% cutting/shrink reserve. Pocketing 0.40–0.50 m at 140 cm; fusing 0.20–0.30 m at 90 cm. Directional/nap fabric increases yield; verify marker.

Supplier and material codes: TBD for every component. Numeric thread use is a preliminary sewing estimate, not measured consumption. Labels/packing are one set per garment. All BOM entries are PROPOSED.

Front construction

Leaders identify actual feature anchors / hidden construction remains proposed

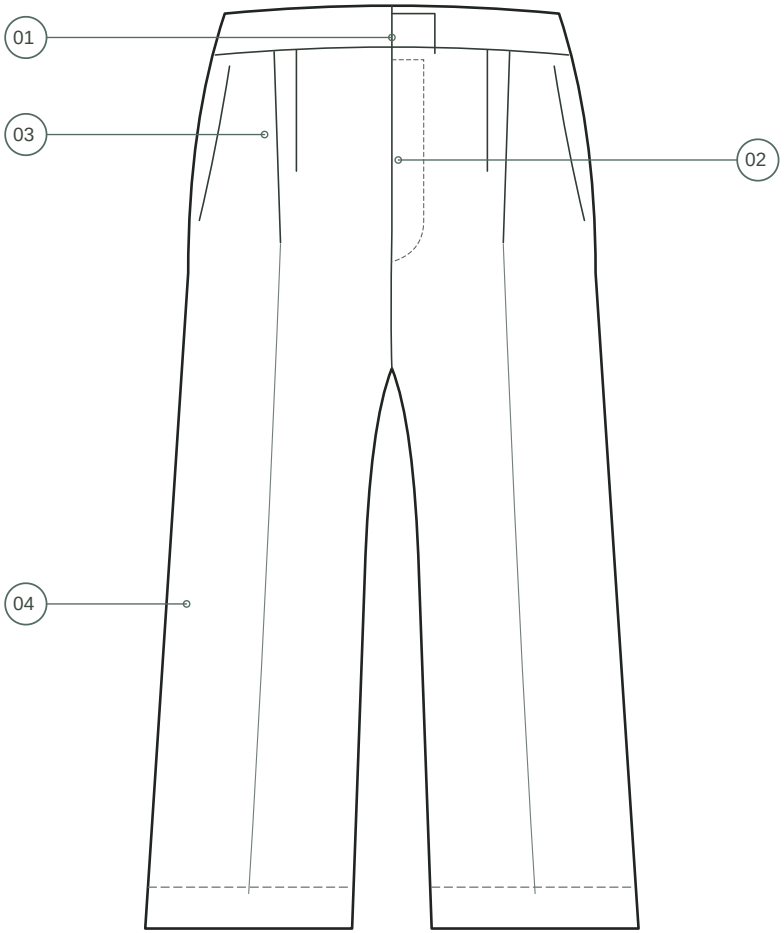

C01 / Waistband / concealed closure

Finished waistband 4 cm. Fuse outer band I01; join outer to waist 10 mm SA / 301 at 2.5 mm. Inner lower edge turn under and stitch in ditch. Wearer-left overlap extension 30 mm, H01 concealed; no visible extra button.

BOM F01 · I01 · H01 · T01 / PROPOSED METHOD

C02 / Fly assembly

Use Z01 18 cm chain with separate fly facing and doubled shield. CF SA 15 mm. Stitch tape to facing/underlap at 301 / 2.5 mm; shield separates coil from skin. Fly topstitch 30 mm from CF on overlap only; reinforce base clear of coil.

BOM F01 · I01 · Z01 · T01 / PROPOSED METHOD

C03 / Pleat and side pocket

One forward pleat per front, fold toward CF; proposed 3 cm total intake, baste at waist inside 10 mm SA. Slant side pocket 16 cm opening; attach pocketing 10 mm / 301, understitch 2 mm from seam; bartack both opening ends.

BOM F01 · F02 · T01 / PROPOSED METHOD


C04 / Leg joining and pressed line

Outseam 15 mm / 301, 2.8 mm; inseam 10 mm / 301, 2.8 mm. 504-neaten edges separately and press open. Press centre leg crease from grainline, not a stitched panel seam.

BOM F01 · T01 / PROPOSED METHOD

Back construction

Leaders identify actual feature anchors / hidden construction remains proposed

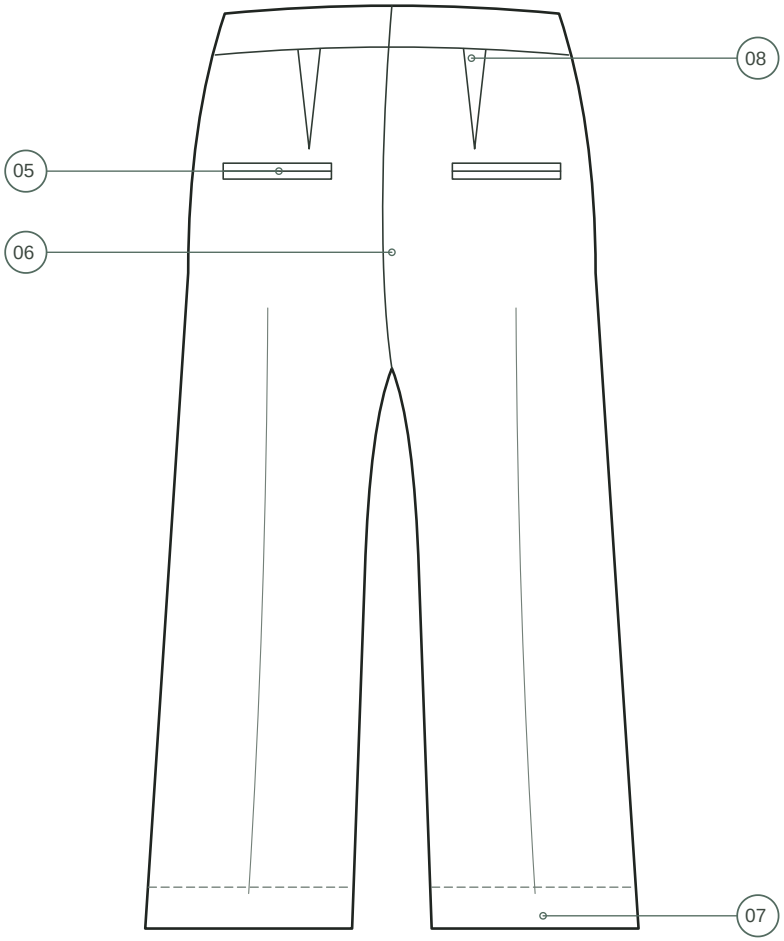

C05 / Rear welt pockets

PROPOSED double welt: opening 12 × 1 cm finished, 0.5 cm each lip. Fuse opening, 10 mm sewing allowance around welt unit; 301 / 2.2 mm. Cut corners accurately, secure triangles; pocket bag depth 16 cm, 10 mm / 301 + 504.

BOM F01 · F02 · I01 · T01 / PROPOSED METHOD

C06 / Darts / centre back

PROPOSED one dart per back: 2 cm intake × 9 cm long at EU 38. Sew 301 / 2.5 mm taper without backtack at tip; tie ends. CB/rise 15 mm SA, 301 / 2.5 mm, reinforce crotch curve with second row inside SA; press open above curve.

BOM F01 · T01 / PROPOSED METHOD

C07 / Blind hem

Finished 4 cm hem allowance. 504-neaten raw edge; turn once, secure with 103 blindhemming, pick up minimal face fibres. Avoid seam allowance ridge; press through cloth after heat trial.

BOM F01 · T01 / PROPOSED METHOD

C08 / Final waistband / pocket control

Secure hook/bar to fused extension with concealed hand overcast stitches through support; do not call hand sewing a machine lockstitch. Pocket bags anchored at waist; L01 inside left waistband clear of closure.


BOM H01 · I01 · F02 · L01 · T01 / PROPOSED METHOD

Construction details / 1

Layer relationships and component dimensions / schematic views, not cutting patterns

Fly / waistband closure

PROPOSED / schematic — not a cutting pattern

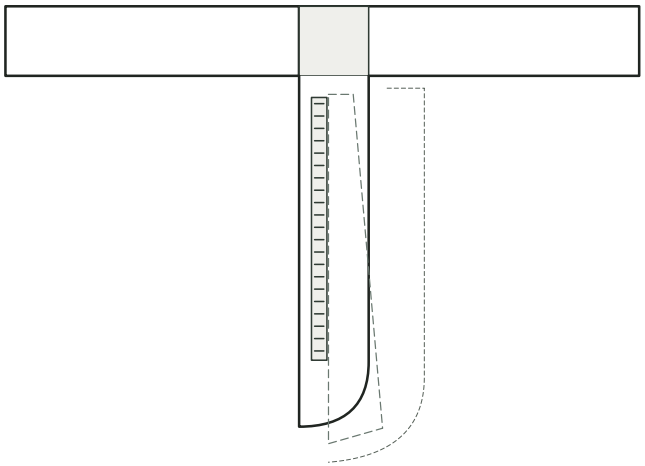


Tape → facing / shield → underlap; coil isolated from skin

18 cm chain; 30 mm overlap; concealed hook/bar at waist

Fly / waistband closure
18 cm closed-end coil; separate facing and shield; 30 mm overlap extension; hook/bar concealed.

Double-welt pocket

PROPOSED / schematic — not a cutting pattern

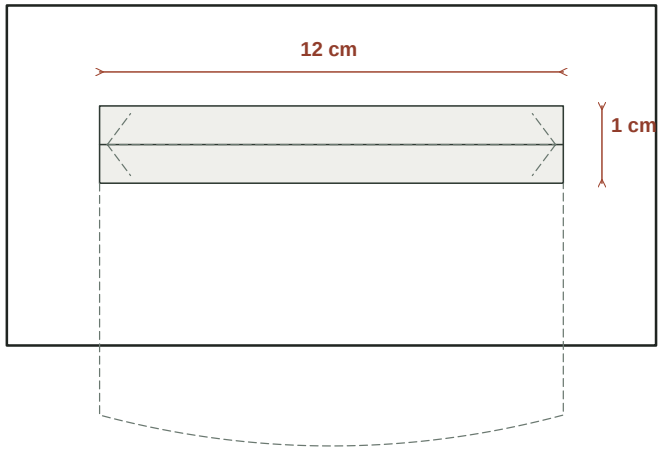

Two 5 mm welt lips; secure corner triangles to welts

Bag depth 16 cm / fused opening; no rear button


Double-welt pocket
12 × 1 cm opening; two 5 mm lips; fused opening; corner triangles secured to welts; 16 cm bag depth.

Construction details / 2

Layer relationships and component dimensions / schematic views, not cutting patterns

Front pleat / pocket interface

PROPOSED / schematic — not a cutting pattern

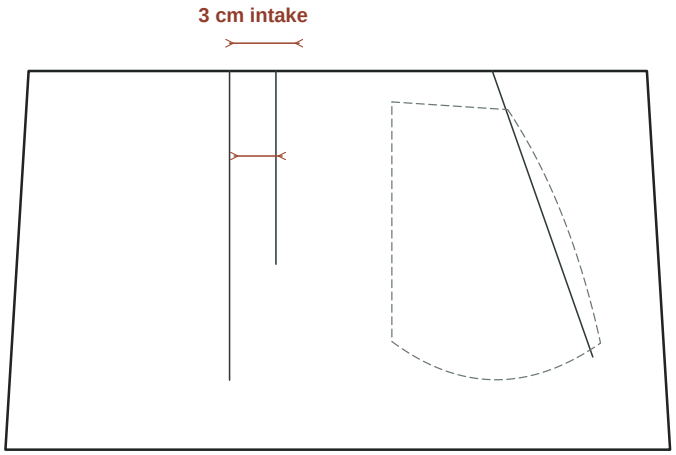


Fold toward CF; bag caught in waistband allowance

Pleat is not a dart; release below waist basting

Front pleat / pocket interface
3 cm total pleat intake folded toward CF; side pocket bag caught to waist, avoiding pleat bulk.

Blind hem / pressed seam

PROPOSED / schematic — not a cutting pattern

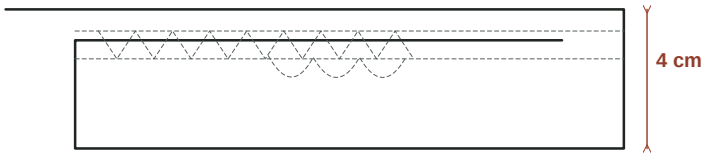

103 blindhem: minimum face pickup, 4 cm turn

Blind hem / pressed seam
4 cm turn with 504 edge neatening; 103 minimal face pickup; outseam allowances pressed open.

Measurement specification / 1


EU 38 highlighted in bold / full size range calculated independently per POM


POM	Measurement / cm	Step	34	36	38 base	40	42	Tol. cm
A	Waist closed	+2	35	37	**39**	41	43	±0.5
B	Hip width	+2	49	51	**53**	55	57	±0.7
C	Front rise incl. waistband	+0.5	30	30.5	**31**	31.5	32	±0.5
D	Outseam incl. waistband	+0.5	108	108.5	**109**	109.5	110	±0.7
E	Inseam	+0	79	79	**79**	79	79	±0.5
F	Thigh width	+1.2	30.6	31.8	**33**	34.2	35.4	±0.5
G	Knee width	+0.8	25.9	26.7	**27.5**	28.3	29.1	±0.5
H	Leg opening	+0.7	25.6	26.3	**27**	27.7	28.4	±0.4
I	Back rise incl. waistband	+0.7	40.6	41.3	**42**	42.7	43.4	±0.5
J	Waistband finished height	+0	4	4	**4**	4	4	±0.2
K	Rear pocket opening	+0	12	12	**12**	12	12	±0.2
L	Rear pocket drop	+0	14	14	**14**	14	14	±0.3
M	Side pocket opening	+0.3	15.4	15.7	**16**	16.3	16.6	±0.3
N	Fly chain length	+0	18	18	**18**	18	18	±0.2
O	Pleat intake per front	+0	3	3	**3**	3	3	±0.2
P	Back dart length	+0	9	9	**9**	9	9	±0.3
Q	Hem turn depth	+0	4	4	**4**	4	4	±0.2

PROPOSED DEVELOPMENT SPECIFICATION — SAMPLE VALIDATION REQUIRED
Each step is one EU-labelled size. Values = base + (size position − base position) × step. All widths are half-flat unless explicitly marked otherwise. No UK conversion or sample-measured claim. Methods and arrows follow on the POM pages.

Points of measurement / 1

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

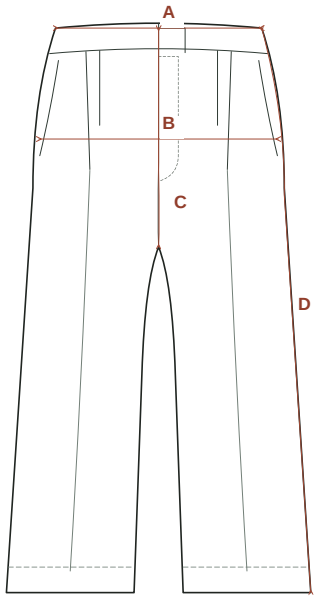

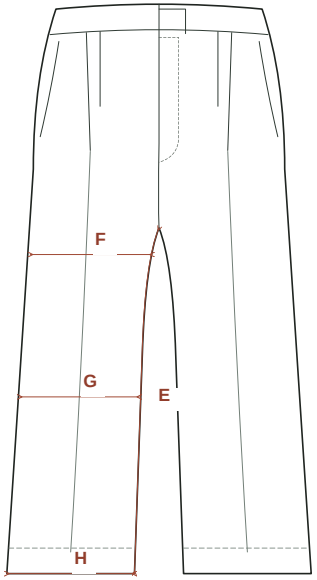

Front

A / Waist closed
Fasten H01/zip; align waistband edges; measure straight across top without stretching.
half-flat · base 39 cm

B / Hip width
20 cm below top waistband, parallel to waist; smooth pleats closed.
half-flat · base 53 cm

C / Front rise incl. waistband
Tape follows CF curve from waistband top to inseam intersection.
contour · base 31 cm

D / Outseam incl. waistband
Along side seam from waistband top to finished hem.
contour · base 109 cm

Front

E / Inseam
Along inseam from crotch intersection to finished hem.
contour · base 79 cm


F / Thigh width
25 mm below crotch; perpendicular to grain, outside edge to inseam.
half-flat · base 33 cm


G / Knee width
35 cm down inseam from crotch; perpendicular to grain.
half-flat · base 27.5 cm

H / Leg opening
Lay one leg flat without tension; measure edge to edge along the finished hem, perpendicular to leg grain.
half-flat · base 27 cm

Points of measurement / 2

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

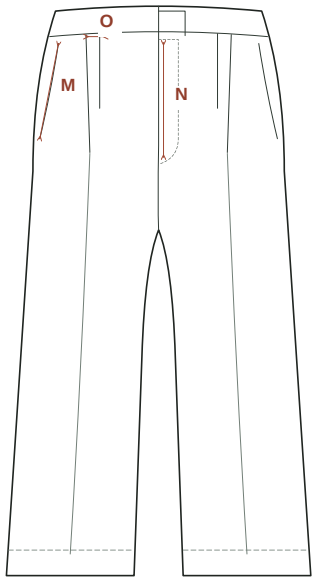

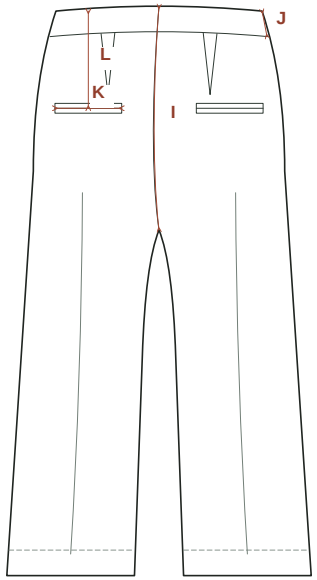

Front

M / Side pocket opening
Along finished slant opening between reinforcement points.
component · base 16 cm

N / Fly chain length
Actual closed zipper chain, from top stop to bottom stop; exclude tape.
component · base 18 cm

O / Pleat intake per front
Unfold pleat at waist seam: difference between unfolded and folded seam-line length.
component · base 3 cm

Back

I / Back rise incl. waistband
Tape follows CB curve, waistband top to crotch intersection.
contour · base 42 cm


J / Waistband finished height
At side away from extension, top edge to waist seam.
component · base 4 cm

K / Rear pocket opening
Between finished opening ends; excludes bartacks.
component · base 12 cm

L / Rear pocket drop
Top waistband edge to welt opening at pocket centre, vertically.
component · base 14 cm

Points of measurement / 3

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

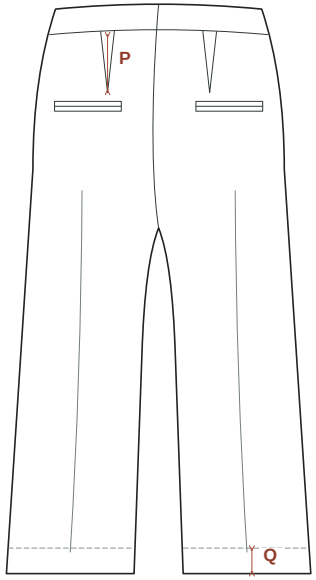

Back

P / Back dart length
Waist seam to dart tip along dart centre; excludes waistband.
component · base 9 cm

Q / Hem turn depth
Inside back leg: finished fold to neatened raw hem edge.
component · base 4 cm

Measurement preparation

Condition and relax garment 24 h. Close all fastenings unless a method specifies otherwise. Lay flat on a level surface; do not stretch knitted parts for relaxed POMs. Use a flexible tape on contour measurements.

Arrows terminate on the defined garment/component endpoints. A component view represents seam-line dimensions unless the method states finished external edges.

Contour rise/armhole/hood measurements follow the curve; straight depth is a separate method. Recheck after laundering and fit changes.

Pattern, grading & assembly

Proposed first-sample engineering / sequence follows the actual product type

Proposed body basis / cm

EU label	Bust full	Waist full	Hip full
34	84	66	90
36	88	70	94
38	92	74	98
40	96	78	102
42	100	82	106

Adult Womenswear, stature 168 cm; internal development chart only, not an asserted national sizing standard. EU 38 is a document label, not universal body equivalence.

Fit and grade rationale

High waist with 4 cm waist ease and 8 cm seat ease at base EU 38; full wide leg.

Torso widths grow with body progression; vertical/component grades are smaller or zero. The published per-POM rules, rather than a blanket grade, control this proposal. Test range endpoints before approving a nest.

Pattern components / interfaces

- Front legs ×2 mirrored incl. 3 cm pleat intake; back legs ×2 mirrored incl. dart; outer/inner waistband each ×2 shaped halves; fly facing ×1, shield ×1 doubled; side pocket bags ×4, rear bags ×4, welt strips ×4.
- Front pleat intake 3 cm + back dart intake 2 cm per side are proposed seam-line shaping. Reconcile waist seam after closing darts/pleats to waistband seam length including extension.
- Leg grain through knee/hem crease. Walk inseam/outseam; retain 15 mm outseam/CB for sampling adjustment. No belt loops.

Assembly order

1. Relax and shrink-test shell/pocketing; fuse-test I01 before bulk cutting.
2. Cut on straight grain; mark pleat, dart, welt box and zipper stops.
3. Fuse welt areas; make back darts then double welts and bags.
4. Prepare front slant pockets; baste pleats closed within waist allowance.
5. Assemble fly facing, Z01 and shield; complete fly curve stitching.
6. Close side/inseams; close rise; edge-neaten and press.
7. Attach outer/inner waistband; install H01, anchor pocket bags and labels.
8. Set leg length, blind hem, press grainline creases and cool before POM check.

No production pattern has been measured or generated by this document. Seam allowances are operation-specific and excluded from finished POM values.

Quality, labels & revision

Sampling documentation / not approved for bulk production

Garment quality checkpoints

- Rear welts level and equal; lips total 10 mm, no open corner holes.
- Zip slides freely; shield covers coil; H01 aligns without waist step.
- Pleats release cleanly; pocket bags cannot hang below pleat or pull waist.
- Check seat/rise in sitting trial, no horizontal drag or inseam roping.
- Creases track grain; hem edges equal, no face blind-stitch showthrough.

Development risks / release holds

- Pocket and dart geometry is proposed from exterior appearance, not a measured production pattern.
- Fly handedness, extension and hook/bar require sample confirmation.
- Shell/fusing/pocketing shrinkage mismatch can distort waist and welt openings.

Labels and finishing

PROPOSED: neutral development ID + EU size; 35 × 12 mm soft ID label, ends turned 5 mm and secured with 301. No third-party logo or manufacturer claim. Placement: inside left waistband and pocketing.

TBD: fibre identity, component compatibility, care testing, country of origin and destination-market legal review. Do not print generic care symbols.

Packing

PROPOSED: fold only after cooling; use unprinted recyclable protective sleeve sized to the actual folded sample. Bag material, gauge and dimensions TBD after packing trial. One garment per sleeve; no invented approved bag size.

Production approval requires

Owner/source provenance review; measured and fitted prototype; pattern and graded nest approval; material/trim supplier approval; seam and laundering tests; marker verification; label/legal checks and signed sample approval. None is claimed complete.

Version / date	Revision / validation status
0.1 / 2026-10-25	Initial source-referenced development specification; no physical sample, marker or fit validation **PROPOSED / sampling review**