

Woven Dress

Blue / ivory diagonal stripe / open back / gathered skirt

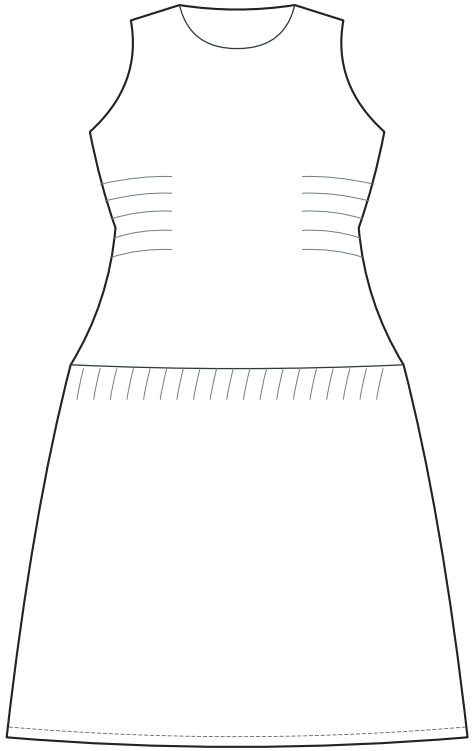

FRONT / DEVELOPMENT FLAT

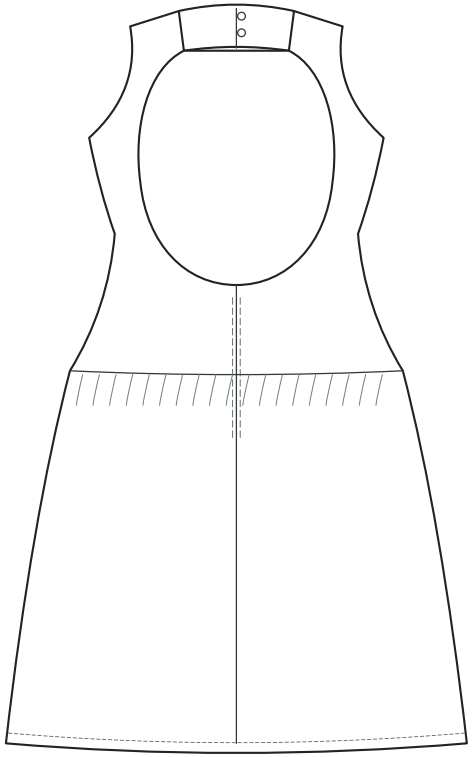

BACK / DEVELOPMENT FLAT

AB-TP-04 / 0.1

Blue / ivory diagonal stripe / open back / gathered skirt

Close upper body with 4 cm bust ease, shaped long upper section and softly gathered midi lower skirt.

> Proposed development specification.
> Sample validation required.

Base EU 38 · range EU 34–42 · centimetres

Technical documentation by ABERBACH. Source garment authorship and physical manufacture are unverified.


CONFIRMED
Source-visible or documented facts only.

PROPOSED
Engineering, dimensions and grades for first sampling.


TBD
Supplier, testing and approval information still unresolved.

Design evidence & colourway

One source colourway / editable coloured flats / no invented approved colour standard

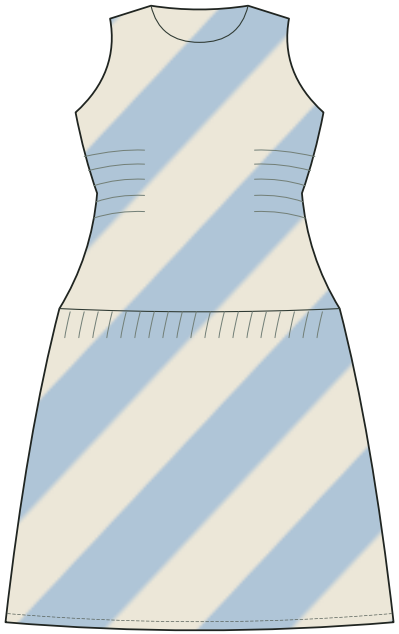

FRONT / DEVELOPMENT FLAT

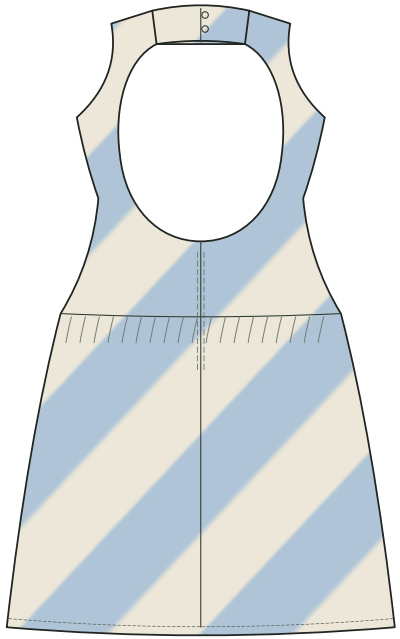

BACK / DEVELOPMENT FLAT

Source evidence and colour

- CONFIRMED in source: sleeveless round front neck, large rounded open back, two small rear-neck buttons, visible CB zip below opening, low horizontal skirt join and gathered lower skirt.
- Diagonal stripes are surface pattern, not diagonal construction seams. Source shows localized side-front gathering; arms conceal exact endpoints.
- Woven classification is PROPOSED from appearance and folder context; no fibre or fabric test confirms it.

Development interpretation

- PROPOSED lightweight stable woven with engineered diagonal print, cut on straight grain. Do not infer bias cutting from stripe direction.
- Propose lined upper section with neckline/open-back stabilization, no boning. Lower skirt unlined in this issue, subject to opacity trial.
- Side-front gathering distributed over a proposed 12 cm waist-level seam segment; fullness ratio and precise location require toile validation.

Source-relative digital colour only. No verified Pantone match. Shell, trims and thread require physical approval.

Primary reference: `assets/source/WOMENSWEAR - WOVEN/4.png`
Repository revision: `4653f40626938ceeece2438e7ee8fb073280cdc2` · rtw-ref-04
Existing portfolio visual reference; physical manufacture, designer ownership and hidden construction unverified. ABERBACH authors this development documentation, not a claim of original garment manufacture.

Bill of materials

Garment-specific sourcing and estimated consumption / no nominated supplier


ID / component	Technical specification	Composition / colour	Placement	Qty / unit / status
F01 Printed woven shell	PROPOSED drapey stable plain weave, 130–170 g/m²; diagonal engineered print; shrinkage trial	TBD; viscose/cotton blend option Blue / ivory; lab dips and print strike-off TBD	Upper body, skirt, neck closure loops	**2.40–2.80** m PROPOSED
F02 Upper-body lining	PROPOSED lightweight breathable woven lining 65–90 g/m²; no bulk at back opening	TBD; viscose lining option Ivory	Upper front/back sections only	**0.75–0.90** m PROPOSED
I01 Stabilizing fusible tape	10 mm lightweight straight-grain tape; trial peel/strike-through	TBD Ivory concealed	Neck, armholes, back opening, zip area	**2.5–3.0** m PROPOSED
Z01 Invisible zipper	PROPOSED closed-end concealed coil No.3, 22 cm chain; no face topstitch over coil	TBD Match blue/ivory ground	CB below open-back lower edge	**1** pc PROPOSED
B01 Rear-neck buttons	Two 8 mm covered/tonal shank buttons; actual material TBD	TBD Ivory	Rear neck bridge	**2** pc PROPOSED
T01 Sewing thread	Polyester Tex 18–24; Nm 65–75 sharp needle trial	PROPOSED polyester Match ground	301 seams / understitch / hem; 504 edge finish	**180–230** m PROPOSED
L01 ID / size and care set	Neutral development ID; fibre, care and origin text withheld pending verification	TBD Neutral	Inside wearer-left upper lining seam	**1** set PROPOSED
PK01 Protective sleeve	Fold with tissue at open back and gathers; fit actual folded sample	TBD Unprinted	One dress	**1** pc PROPOSED

Consumption basis
ESTIMATE: shell 2.40–2.80 m at 150 cm usable width, EU 38, one-way diagonal print, 20% matching/cutting reserve; front/back upper sections + gathered lower skirt + neck opening facings. Upper lining 0.75–0.90 m at 140 cm. Stripe repeat unknown: estimate may increase after matching marker. No approved print/yield claim.

Supplier and material codes: TBD for every component. Numeric thread use is a preliminary sewing estimate, not measured consumption. Labels/packing are one set per garment. All BOM entries are PROPOSED.

Front construction

Leaders identify actual feature anchors / hidden construction remains proposed

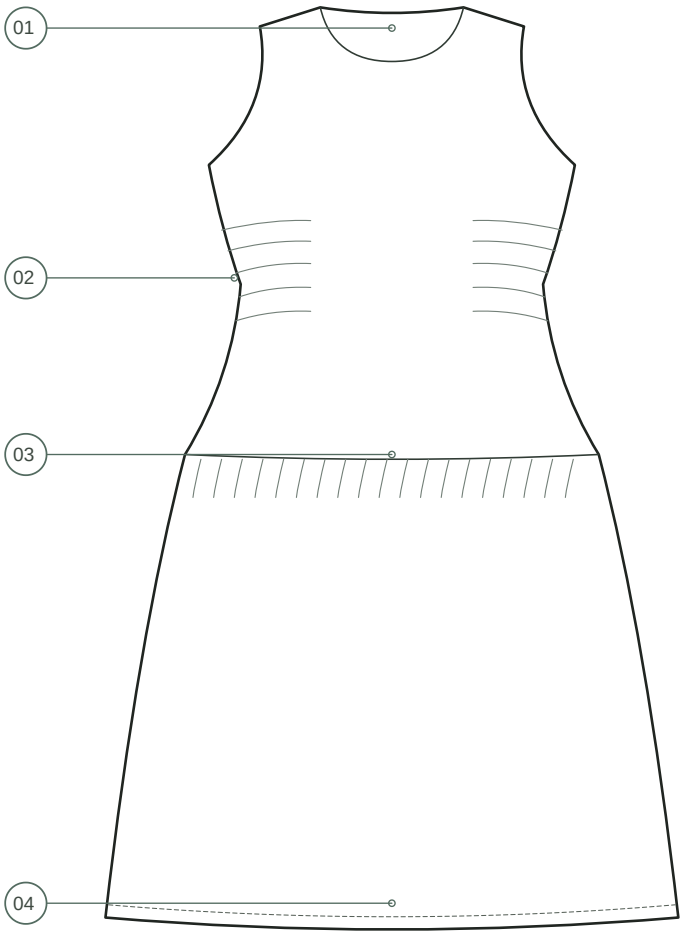

C01 / Neck / armhole clean finish

Stabilize seam line l01; join shell to upper lining at neck and armholes, 8 mm SA / 301, 2.2–2.5 mm. Clip curves, grade allowances, understitch lining 2 mm where accessible. No visible neckline topstitch.

BOM F01 · F02 · I01 · T01 / PROPOSED METHOD

C02 / Localized side-front gathers

PROPOSED 12 cm seam segment centred on waist at each side-front; source confirms gathers but not exact symmetry. Two temporary 301 gathering rows at 4 and 6 mm inside 10 mm SA; distribute fullness, join side seam at 2.5 mm stitch, remove exposed gathering threads.

BOM F01 · T01 / PROPOSED METHOD

C03 / Low skirt join

Gather lower skirt evenly into low horizontal upper-body seam. Proposed lower-skirt/upper-join seam-line ratio 1.45; seam SA 10 mm / 301 at 2.5 mm. 504-neaten allowance together downward; no gathers trapped into zipper.

BOM F01 · T01 / PROPOSED METHOD


C04 / Midi hem

Narrow 10 + 10 mm double-turn hem / 301, 2.5 mm. Relax hanging dress 24 h before levelling; press without stretching diagonal print. Hem is not blind-stitched in this issue.

BOM F01 · T01 / PROPOSED METHOD

Back construction

Leaders identify actual feature anchors / hidden construction remains proposed

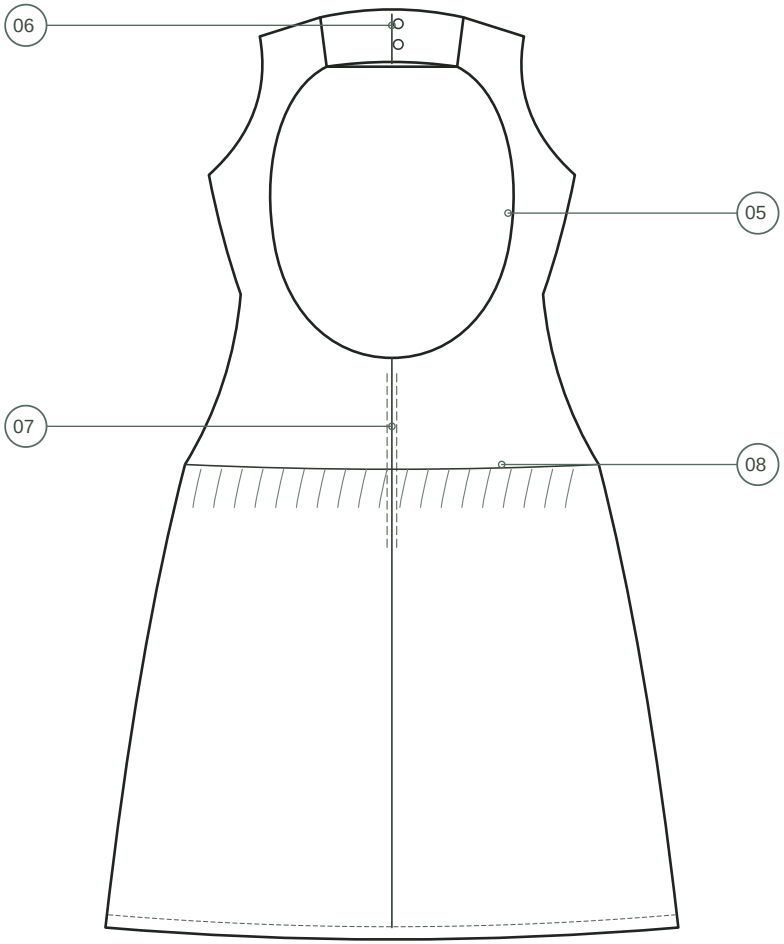

C05 / Open-back edge / upper lining

Stay I01 to back opening seam line before handling. Bag opening with F02, 8 mm SA / 301, 2.2 mm; clip/grade and understitch where possible. No unsupported elastic or boning. Confirm opening does not gape in movement.

BOM F01 · F02 · I01 · T01 / PROPOSED METHOD

C06 / Two-button neck bridge

Two B01 at rear bridge, proposed 12 mm vertical spacing. Make 2 mm finished self-fabric rouleau loops, each 12 mm finished projection, captured in 8 mm seam. Hand overcast shank attachment to reinforced shell/lining; no claimed machine hand-lockstitch.

BOM F01 · F02 · I01 · B01 · T01 / PROPOSED METHOD

C07 / CB invisible zip

Z01 22 cm chain starts 10 mm below open-back lower edge. CB SA 15 mm; stabilize 10 mm tape. Stitch tape close to unrolled coil with concealed-zip foot, 301 / 2.5 mm. Join CB below stop; lining turned and hand slipstitched to tape clear of coil.

BOM F01 · F02 · I01 · Z01 · T01 / PROPOSED METHOD

C08 / Stripe / lining control

Match stripe phase at CB and low skirt seam where repeat permits; no false continuous-stripe guarantee before strike-off. Upper lining lower edge free, neatened 504, swing-tacked at side seams; L01 in lining side.


BOM F01 · F02 · L01 · T01 / PROPOSED METHOD

Construction details / 1

Layer relationships and component dimensions / schematic views, not cutting patterns

Open-back / lining section

PROPOSED / schematic — not a cutting pattern

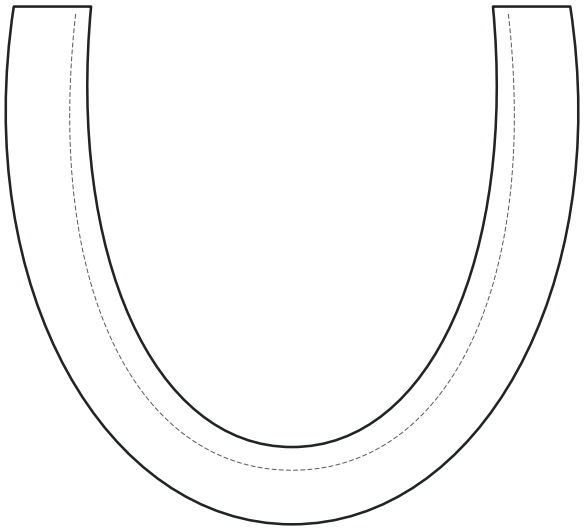


8 mm shell/lining join; 10 mm stay tape on seam line

Clip/grade curves; understitch lining, no face topstitch

Open-back / lining section
8 mm clean-finished shell/lining seam with 10 mm stay tape; understitch where accessible, no exposed face stitch.

Low skirt / side gather control

PROPOSED / schematic — not a cutting pattern

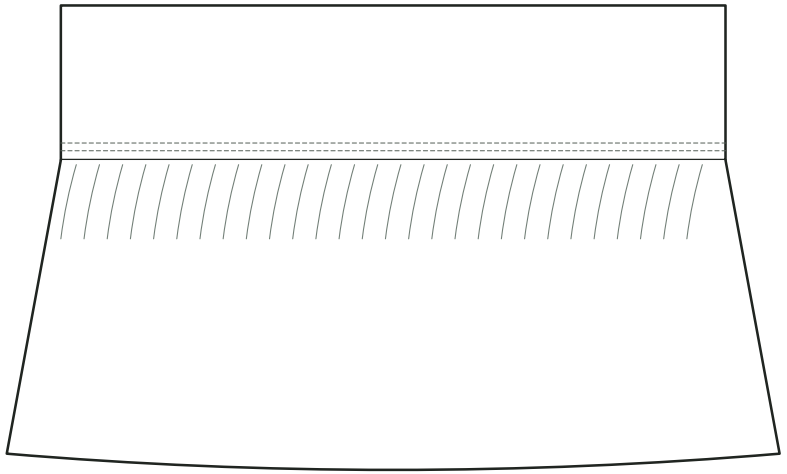


Gather at 4/6 mm inside 10 mm SA; remove visible basting

Lower skirt ratio 1.45; no gathers into zipper tape

Low skirt / side gather control
Lower skirt ratio 1.45 seam line; temporary 4/6 mm rows inside 10 mm seam. Side-front gather segment 12 cm proposed.

Construction details / 2

Layer relationships and component dimensions / schematic views, not cutting patterns

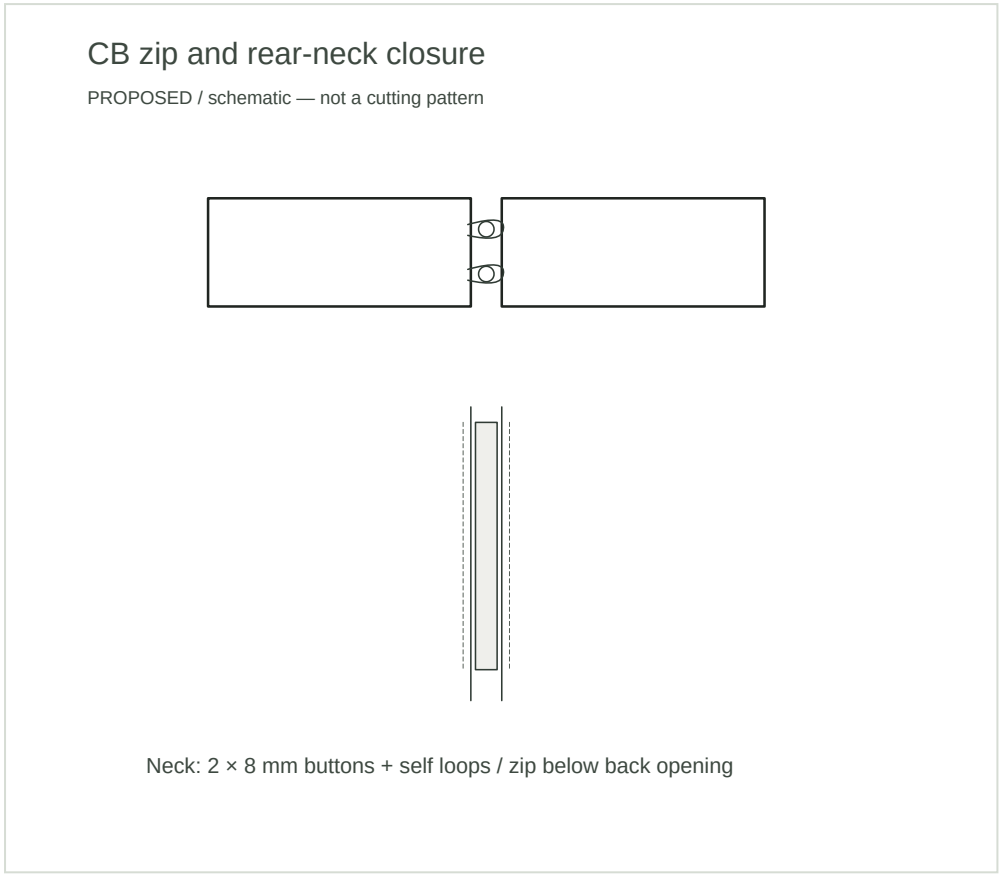

CB zip and rear-neck closure
22 cm invisible chain below opening; two 8 mm buttons at neck bridge; self loops. Coil remains free of lining stitches.

Pattern interface and sampling controls

- Front upper section ×1 on fold (side gathering allowance proposed); upper backs ×2, lower skirt front/back ×1 each (CB opening continued for zip); upper lining front ×1/back ×2; two self-loop strips.
- Stripe direction is printed diagonal on straight grain in this proposal; no extra diagonal panel seams. Confirm actual fabric repeat before cutting.
- Do not invent princess seams or front darts; shape through side seams/gather allowance and back sections. Walk gathered/ungathered seam lengths separately.
- Lower skirt seam-line circumference 108 × 1.45 = 156.6 cm base before seam allowances; hem expands to 160 cm full. This is a proposed pattern target, not marker evidence.

Assembly dependency

Apply stay tape; prepare two neck loops and bridge reinforcement.

Measurement specification / 1


EU 38 highlighted in bold / full size range calculated independently per POM


POM	Measurement / cm	Step	34	36	38 base	40	42	Tol. cm
A	SNP to finished hem	+1	118	119	**120**	121	122	±0.7
B	Bust width	+2	44	46	**48**	50	52	±0.7
C	Waist width	+2	36	38	**40**	42	44	±0.5
D	Hip width	+2	49	51	**53**	55	57	±0.7
E	Low skirt join width	+2	50	52	**54**	56	58	±0.5
F	Hem sweep width	+3	74	77	**80**	83	86	±1
G	Front neck width	+0.4	19.2	19.6	**20**	20.4	20.8	±0.3
H	Front neck drop	+0.2	7.1	7.3	**7.5**	7.7	7.9	±0.3
I	Back opening height	+0.5	35	35.5	**36**	36.5	37	±0.5
J	Back opening maximum width	+0.5	27	27.5	**28**	28.5	29	±0.5
K	Armhole straight depth	+0.5	19	19.5	**20**	20.5	21	±0.4
L	Lower-skirt length	+0.5	57	57.5	**58**	58.5	59	±0.7
M	CB zip chain length	+0	22	22	**22**	22	22	±0.2
N	Gathered side segment length	+0	12	12	**12**	12	12	±0.3

PROPOSED DEVELOPMENT SPECIFICATION — SAMPLE VALIDATION REQUIRED
Each step is one EU-labelled size. Values = base + (size position − base position) × step. All widths are half-flat unless explicitly marked otherwise. No UK conversion or sample-measured claim. Methods and arrows follow on the POM pages.

Points of measurement / 1

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

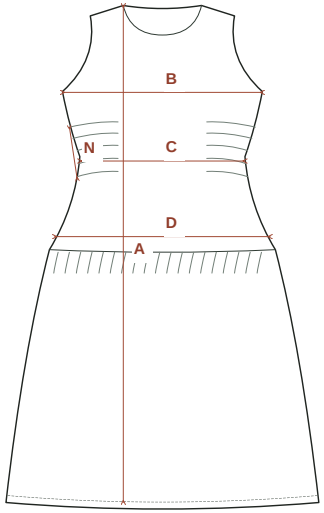

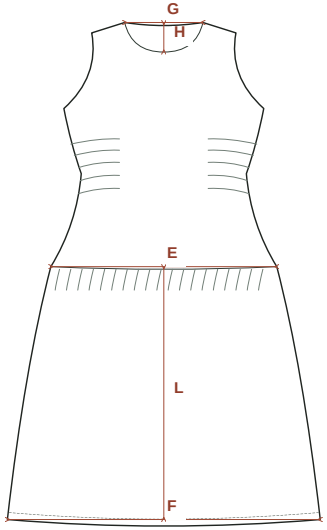

Front

A / SNP to finished hem
From shoulder-neck seam intersection straight down front, garment flat without stretching gathers.
vertical · base 120 cm

B / Bust width
25 mm below underarm, edge to edge, gathers settled but not stretched.
half-flat · base 48 cm

C / Waist width
At marked waist datum 40 cm below SNP, relaxed edge to edge.
half-flat · base 40 cm

D / Hip width
20 cm below waist datum, edge to edge across upper section.
half-flat · base 53 cm

N / Gathered side segment length
Finished seam segment at waist; between matching gather notches.
component · base 12 cm

Front

E / Low skirt join width
Upper section at horizontal skirt attachment seam, relaxed flat.
half-flat · base 54 cm

F / Hem sweep width
Flatten lower skirt without stretching; finished hem edge to edge.
half-flat · base 80 cm


G / Front neck width
Between shoulder-neck seam intersections, neckline at seam line.
half-flat · base 20 cm

H / Front neck drop
Vertical from line joining SNPs to CF neckline seam.
vertical · base 7.5 cm

L / Lower-skirt length
From low skirt joining seam to finished hem at CF.
vertical · base 58 cm

Points of measurement / 2

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

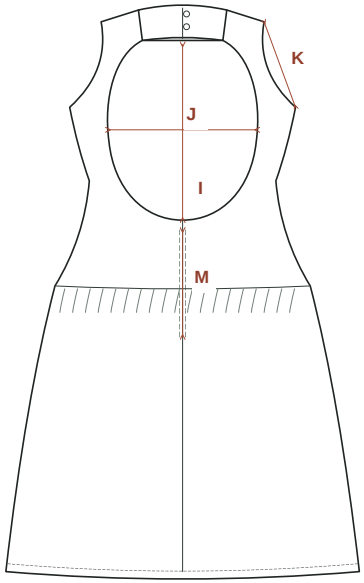

Back

I / Back opening height
CB: upper edge of open-back cutout to lower edge; exclude neck bridge.
vertical · base 36 cm

J / Back opening maximum width
Maximum horizontal clear opening between finished edges.
component · base 28 cm

K / Armhole straight depth
From shoulder-armhole junction to underarm base straight, not contour length.
vertical · base 20 cm

M / CB zip chain length
Actual coil top stop to bottom stop with garment open, exclude tape.
component · base 22 cm

Measurement preparation

Condition and relax garment 24 h. Close all fastenings unless a method specifies otherwise. Lay flat on a level surface; do not stretch knitted parts for relaxed POMs. Use a flexible tape on contour measurements.

Arrows terminate on the defined garment/component endpoints. A component view represents seam-line dimensions unless the method states finished external edges.

Contour rise/armhole/hood measurements follow the curve; straight depth is a separate method. Recheck after laundering and fit changes.

Pattern, grading & assembly

Proposed first-sample engineering / sequence follows the actual product type

Proposed body basis / cm

EU label	Bust full	Waist full	Hip full
34	84	66	90
36	88	70	94
38	92	74	98
40	96	78	102
42	100	82	106

Adult Womenswear, stature 168 cm; internal development chart only, not an asserted national sizing standard. EU 38 is a document label, not universal body equivalence.

Fit and grade rationale

Close upper body with 4 cm bust ease, shaped long upper section and softly gathered midi lower skirt.

Torso widths grow with body progression; vertical/component grades are smaller or zero. The published per-POM rules, rather than a blanket grade, control this proposal. Test range endpoints before approving a nest.

Pattern components / interfaces

- Front upper section ×1 on fold (side gathering allowance proposed); upper backs ×2, lower skirt front/back ×1 each (CB opening continued for zip); upper lining front ×1/back ×2; two self-loop strips.
- Stripe direction is printed diagonal on straight grain in this proposal; no extra diagonal panel seams. Confirm actual fabric repeat before cutting.
- Do not invent princess seams or front darts; shape through side seams/gather allowance and back sections. Walk gathered/ungathered seam lengths separately.
- Lower skirt seam-line circumference 108 × 1.45 = 156.6 cm base before seam allowances; hem expands to 160 cm full. This is a proposed pattern target, not marker evidence.

Assembly order

1. Test shell/lining shrinkage and print transfer; approve stripe strike-off.
2. Cut single layer for stripe matching; mark SNP, waist, gather segments and low seam.
3. Apply stay tape; prepare two neck loops and bridge reinforcement.
4. Join upper shell and lining using burrito/accessible shoulder sequence; clean neck, armholes and open back.
5. Gather side-front segments, close shell sides and lining sides independently.
6. Gather lower skirt into upper section; insert CB invisible zipper and close CB below.
7. Finish lining to zip tape, free lower lining edge and swing tacks.
8. Hang 24 h, level hem, narrow-turn stitch; attach buttons/labels, cool and inspect.

No production pattern has been measured or generated by this document. Seam allowances are operation-specific and excluded from finished POM values.

Quality, labels & revision

Sampling documentation / not approved for bulk production

Garment quality checkpoints

- Open-back edge lies flat with arms forward; no stretching or lining roll.
- Two buttons/loops align without neck strain; zip opens sufficient dressing aperture.
- Gathers evenly distributed at low seam; no stray gathering stitches visible.
- Stripe alignment target assessed against actual repeat; no accidental slant seams.
- Check bust/waist/hip ease and sitting mobility; lower skirt hangs level after relaxation.

Development risks / release holds

- Material identity is untested; stable woven proposal may need side-gather/ease adjustment during toile fit.
- Open-back stability and dressing aperture require sample fitting; no support/boning performance claimed.
- Stripe repeat may materially increase fabric consumption and prevent perfect seam matching.

Labels and finishing

PROPOSED: neutral development ID + EU size; 35 × 12 mm soft ID label, ends turned 5 mm and secured with 301. No third-party logo or manufacturer claim. Placement: inside left upper lining side seam.

TBD: fibre identity, component compatibility, care testing, country of origin and destination-market legal review. Do not print generic care symbols.

Packing

PROPOSED: fold only after cooling; use unprinted recyclable protective sleeve sized to the actual folded sample. Bag material, gauge and dimensions TBD after packing trial. One garment per sleeve; no invented approved bag size.

Production approval requires

Owner/source provenance review; measured and fitted prototype; pattern and graded nest approval; material/trim supplier approval; seam and laundering tests; marker verification; label/legal checks and signed sample approval. None is claimed complete.

Version / date	Revision / validation status
0.1 / 2026-10-25	Initial source-referenced development specification; no physical sample, marker or fit validation **PROPOSED / sampling review**