

Performance Legging

Red high waist / white contrast side panels

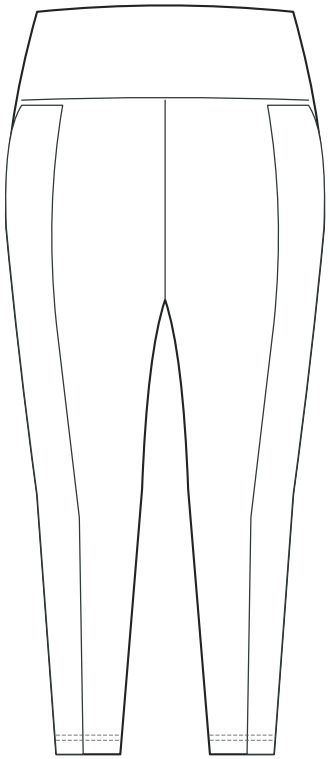

FRONT / DEVELOPMENT FLAT

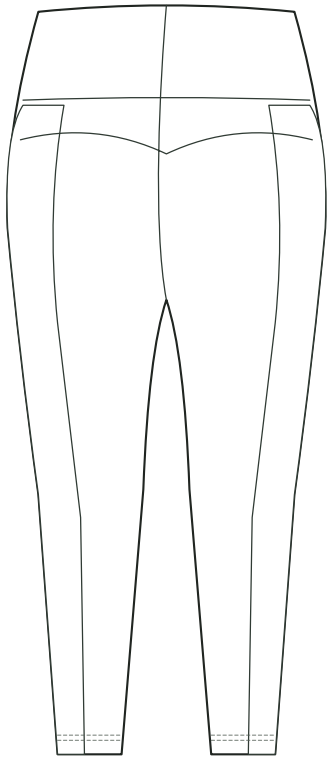

BACK / DEVELOPMENT FLAT

AB-TP-03 / 0.1

Red high waist / white contrast side panels

Close fit with proposed 13.5% waist and 14.3% hip negative ease at EU 38; not a tested compression claim.

> Proposed development specification.
> Sample validation required.

Base EU 38 · range EU 34–42 · centimetres

Technical documentation by ABERBACH. Source garment authorship and physical manufacture are unverified.

CONFIRMED
Source-visible or documented facts only.

PROPOSED
Engineering, dimensions and grades for first sampling.

TBD
Supplier, testing and approval information still unresolved.

Design evidence & colourway

One source colourway / editable coloured flats / no invented approved colour standard



FRONT / DEVELOPMENT FLAT



BACK / DEVELOPMENT FLAT

Source evidence and colour

- CONFIRMED in source: red leggings, deep red waistband, wide white side panels, curved rear seam lines and ankle-length hem. Sports bra and footwear are excluded.
- No pocket is visible; no pocket specified. Source logo is excluded from all new production artwork; ABERBACH credits documentation only.
- Gusset and top-waist elastic are PROPOSED internal development decisions, not visible confirmed components.

Development interpretation

- PROPOSED front/back legs with separate contrast side panels and small diamond gusset for mobility; shape requires fit trial.
- Waistband is proposed double self fabric with 10 mm elastic at top inside fold; stretch must allow garment to pass 98 cm base hip.
- Curved rear line engineered as a yoke seam only as a proposal; source appearance does not prove seam section.

Source-relative digital colour only. No verified Pantone match. Shell, trims and thread require physical approval.

Primary reference: `assets/source/SPORTSWEAR & ACTIVEWEAR/8.png`
Repository revision: `4653f40626938ceeece2438e7ee8fb073280cdc2` · activewear-ref-08
Existing portfolio visual reference; physical manufacture, designer ownership and hidden construction unverified. ABERBACH authors this development documentation, not a claim of original garment manufacture.

Bill of materials

Garment-specific sourcing and estimated consumption / no nominated supplier


ID / component	Technical specification	Composition / colour	Placement	Qty / unit / status
F01 Red performance knit	PROPOSED compact interlock, 240–280 g/m²; ≥65% crosswise and ≥40% length extension; ≤5% residual growth after agreed recovery trial	TBD; polyamide/elastane or polyester/elastane option Red / lab dip TBD	Legs, rear yokes, two-layer waistband, gusset	**1.00–1.20** m PROPOSED
F02 White contrast knit	Same weight/extension/recovery class as F01; opacity/colour migration trial mandatory	TBD; match F01 base White / match standard TBD	Both side panels	**0.25–0.35** m PROPOSED
E01 Waist elastic	10 mm soft knitted elastic; ≥70% usable extension without damage; 62 cm finished ring, cut 64 cm incl. 2 cm overlap at EU 38	TBD elastomer/textile Red or white concealed	Inside waistband top fold	**0.65** m PROPOSED
T01 Stretch seam thread	Polyester needle Tex 24, soft textured polyester loopers; ballpoint Nm 75–80 trial	PROPOSED polyester Match red / white by panel	514 joints / 406 hems	**160–210** m PROPOSED
L01 Heat-transfer ID/size + care	PROPOSED low-temperature soft transfer; migration/stretch trials; care content pending	TBD transfer system Neutral	Inside CB waistband, below top elastic	**1** set PROPOSED
PK01 Protective sleeve	Keep red/white surfaces separated during damp transit test; fold after cooling	TBD Unprinted	One legging	**1** pc PROPOSED

Consumption basis
ESTIMATE: red shell 1.00–1.20 m at 150 cm usable width; white contrast 0.25–0.35 m at 150 cm, EU 38. Paired legs/yokes + two-layer waistband + gusset; greatest stretch around body; non-directional; 15% relaxation/cutting reserve. Contrast nested in separate colour marker. Verify marker and shrinkage before costing.

Supplier and material codes: TBD for every component. Numeric thread use is a preliminary sewing estimate, not measured consumption. Labels/packing are one set per garment. All BOM entries are PROPOSED.

Front construction

Leaders identify actual feature anchors / hidden construction remains proposed

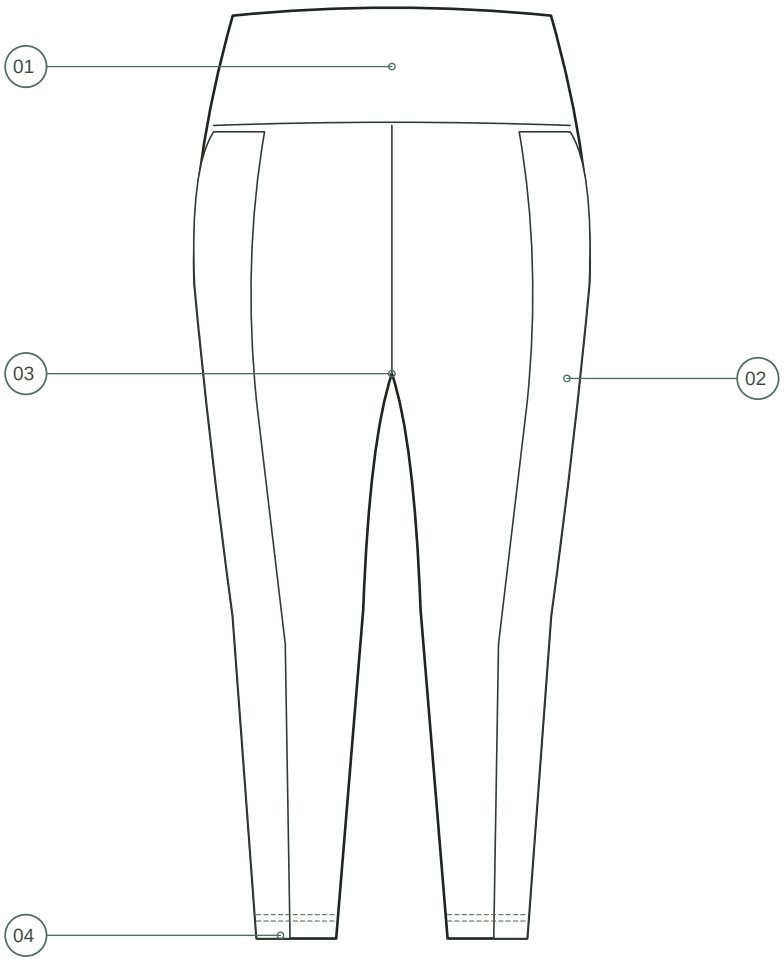

C01 / Double-layer waistband

Join waistband rings at CB with 6 mm SA / 514, 3 mm stitch. Enclose E01 at folded top without twisting. Finished height 9 cm. Attach lower band edge to legs, 6 mm SA / 514; quarters matched, no feed distortion.

BOM F01 · E01 · T01 / PROPOSED METHOD

C02 / Contrast side-panel joins

Superimposed seam 6 mm SA, 514 four-thread overedge, 3 mm stitch, allowance toward red. Optional seam-cover row is not specified in this issue; do not call this flatlock. Match hip/knee/hem notches on both colours.

BOM F01 · F02 · T01 / PROPOSED METHOD

C03 / Proposed gusset

Diamond gusset F01, finished tip-to-tip 12 × 7 cm at base size. Insert with 6 mm SA / 514, 2.8 mm; needle-down pivot without cutting tip. Orient greatest stretch across body; no visible exterior outline claimed from source.

BOM F01 · T01 / PROPOSED METHOD


C04 / Ankle hems

Turn 20 mm, 406 two-needle coverseam / 4 mm gauge, 3 mm stitch. Needle thread tension must allow ≥40% seam extension without pop. No gripper or zip.

BOM F01 · F02 · T01 / PROPOSED METHOD

Back construction

Leaders identify actual feature anchors / hidden construction remains proposed

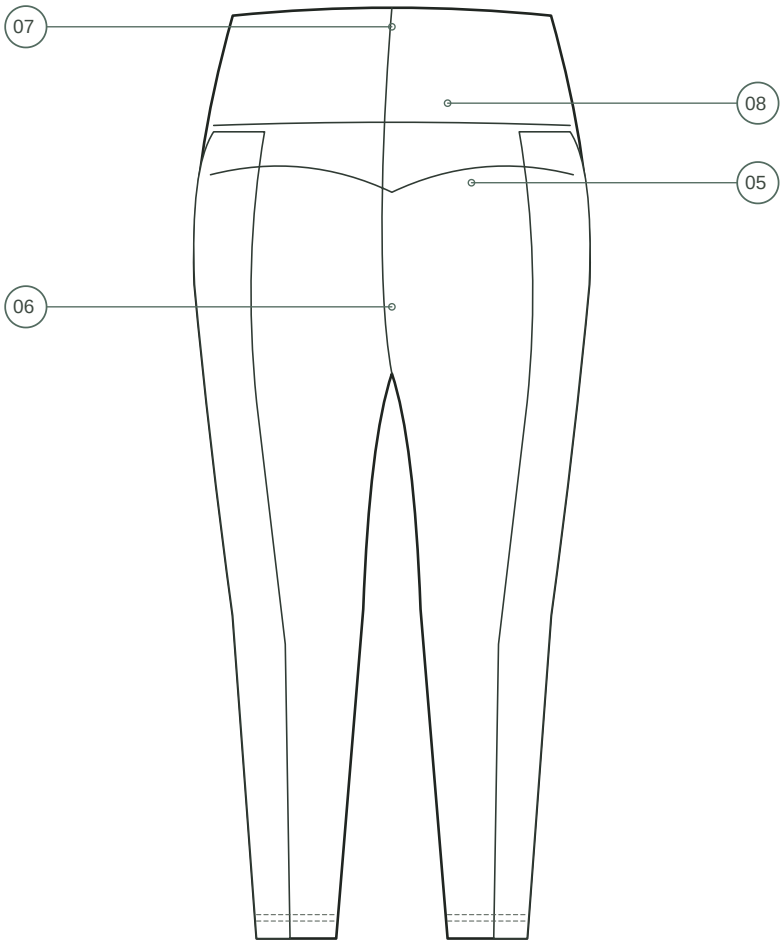

C05 / Curved rear yoke

PROPOSED seam mapping of visible rear curve. Join yoke to back leg 6 mm SA / 514, 3 mm; match across CB. No darts. Check curve sits below waistband and does not create seat pressure ridge.

BOM F01 · T01 / PROPOSED METHOD

C06 / Rise / inseam mobility

CB/CF and inseams 6 mm SA / 514, 2.8–3 mm. Gusset inserted before final inseam closure; no four-seam pile at crotch. Stretch test every seam direction after conditioning.

BOM F01 · T01 / PROPOSED METHOD

C07 / Waist elastic joining

Overlap E01 ends 20 mm; secure with two 304 zigzag rows, 3 mm width × 2 mm length. Proposed ring 62 cm relaxed; working circumference must reach ≥100 cm without damage or stitch break.

BOM E01 · T01 / PROPOSED METHOD

C08 / ID / surface integrity

Apply L01 inside CB on waistband inner layer before closing, below elastic. Transfer temperature/dwell TBD by supplier trial. No reproduction of the photographed sports logo.


BOM L01 / PROPOSED METHOD

Construction details / 1

Layer relationships and component dimensions / schematic views, not cutting patterns

Waistband / elastic section

PROPOSED / schematic — not a cutting pattern

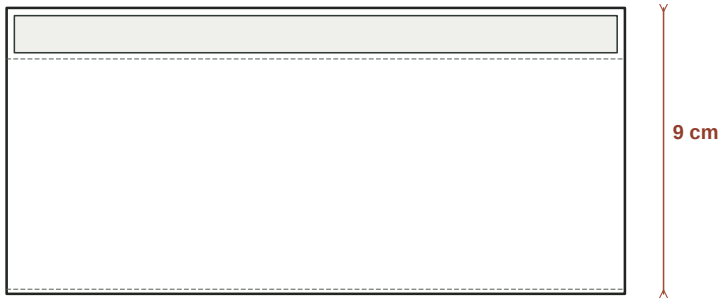


10 mm elastic at top fold; 20 mm overlap joint



Ring 62 cm base / cut 64 cm + 1 cm handling reserve

Proposed diamond gusset

PROPOSED / schematic — not a cutting pattern

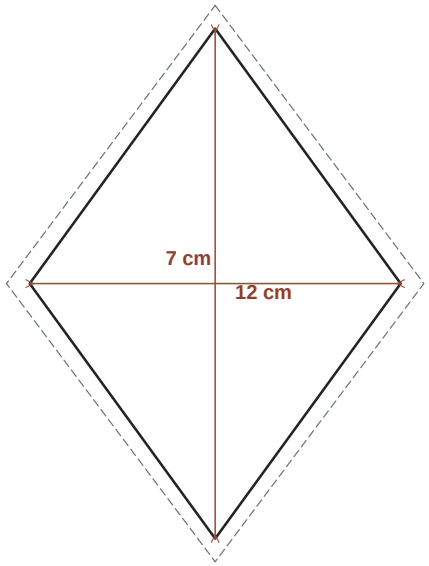

6 mm SA outside finished line; crosswise stretch across width

Waistband / elastic section
Double self layer; 10 mm elastic inside top fold; 20 mm overlap; passage target checked at 100 cm full base circumference.


Proposed diamond gusset
12 × 7 cm finished seam-line component; 6 mm SA added outside; stretch direction across width.

Construction details / 2

Layer relationships and component dimensions / schematic views, not cutting patterns

Panel join / coverseam hem

PROPOSED / schematic — not a cutting pattern

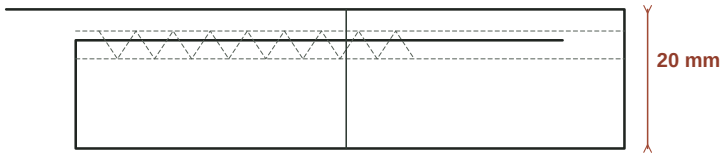

406 coverseam: two needle rows / looper inside

4 mm needle gauge; confirm extension without pop

514 panel join pressed toward red before hemming

Panel join / coverseam hem
514 superimposed panel join, allowances toward red; 20 mm turned hem secured with 406. No false flatlock claim.

Pattern interface and sampling controls

- Front legs ×2, back legs ×2, rear yokes ×2, contrast panels ×2 mirrored, outer/inner waistband each ×1, gusset ×1. All PROPOSED; walk curved yoke seam and gusset interfaces.
- Greatest stretch around hip/waist; align red/white stretch axes. No pocket, zip or logo artwork.
- Base waist 64/74 cm = −13.5%; hip 84/98 = −14.3%. These are development ratios, not measured compression; approve fit after material tests.

Assembly dependency

Join rear yokes, then contrast panels to front/back legs.

Measurement specification / 1


EU 38 highlighted in bold / full size range calculated independently per POM


POM	Measurement / cm	Step	34	36	38 base	40	42	Tol. cm
A	Waist relaxed	+1.5	29	30.5	**32**	33.5	35	±0.5
B	Waist extended minimum	+2	46	48	**50**	52	54	minimum
C	Hip width relaxed	+1.7	38.6	40.3	**42**	43.7	45.4	±0.5
D	Front rise incl. waistband	+0.5	26	26.5	**27**	27.5	28	±0.5
E	Inseam	+0	72	72	**72**	72	72	±0.5
F	Thigh width	+1	23.5	24.5	**25.5**	26.5	27.5	±0.4
G	Knee width	+0.6	15.3	15.9	**16.5**	17.1	17.7	±0.4
H	Leg opening	+0.4	9.7	10.1	**10.5**	10.9	11.3	±0.3
I	Back rise incl. waistband	+0.7	32.6	33.3	**34**	34.7	35.4	±0.5
J	Waistband finished height	+0	9	9	**9**	9	9	±0.3
K	Outseam incl. waistband	+0.5	98	98.5	**99**	99.5	100	±0.7
L	Contrast panel width at knee	+0.2	6.6	6.8	**7**	7.2	7.4	±0.3
M	Gusset finished length	+0.2	11.6	11.8	**12**	12.2	12.4	±0.3
N	Gusset finished width	+0.2	6.6	6.8	**7**	7.2	7.4	±0.3

PROPOSED DEVELOPMENT SPECIFICATION — SAMPLE VALIDATION REQUIRED
Each step is one EU-labelled size. Values = base + (size position − base position) × step. All widths are half-flat unless explicitly marked otherwise. No UK conversion or sample-measured claim. Methods and arrows follow on the POM pages.

Points of measurement / 1

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

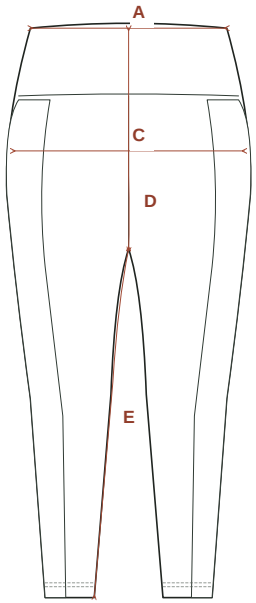

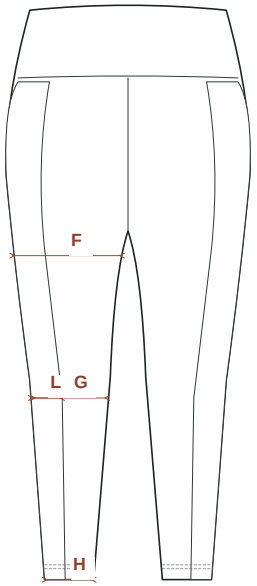

Front

A / Waist relaxed
Top edge flat, 24 h relaxed, no tension.
half-flat · base 32 cm

C / Hip width relaxed
20 cm below waistband top, parallel to waist.
half-flat · base 42 cm

D / Front rise incl. waistband
Follow CF from band top to gusset front/crotch junction; contour, not straight chord.
contour · base 27 cm

E / Inseam
From crotch datum at gusset centre to finished hem along inseam; include half gusset longitudinal contribution.
contour · base 72 cm

Front

F / Thigh width
25 mm below crotch datum, perpendicular to grain.
half-flat · base 25.5 cm


G / Knee width
32 cm below crotch along inseam; width perpendicular to leg grain.
half-flat · base 16.5 cm


H / Leg opening
Lay one leg flat without tension; measure edge to edge along the finished hem, perpendicular to leg grain.
half-flat · base 10.5 cm

L / Contrast panel width at knee
Across white panel at knee datum, finished seam to seam.
component · base 7 cm

Points of measurement / 2

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

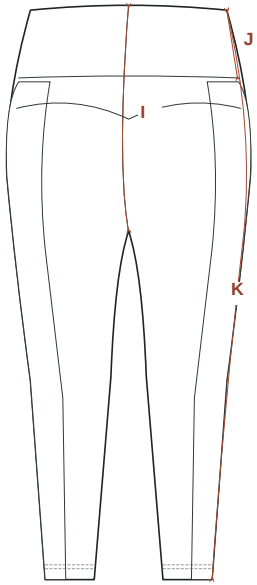

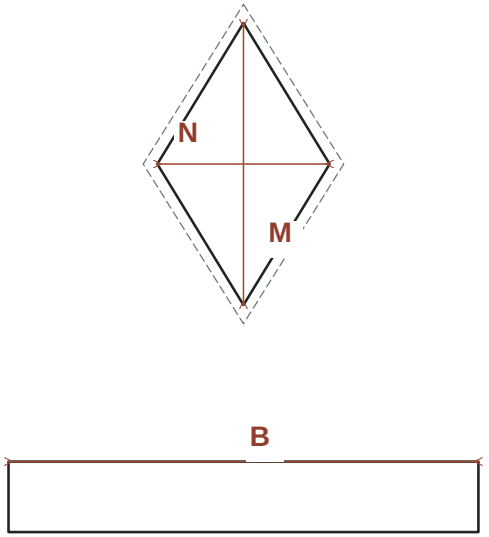

Waistband / extended minimum

Back

I / Back rise incl. waistband
Follow CB curve band top to gusset centre/crotch datum.
contour · base 34 cm

J / Waistband finished height
At side, top fold to lower attachment seam.
component · base 9 cm

K / Outseam incl. waistband
Along outer leg/panel centre from top to hem.
contour · base 99 cm

Components

B / Waist extended minimum
Extend uniformly until 100 cm full circumference at base size without damage; value is half of minimum pass-over target, not maximum stretch.
half-flat · base 50 cm

M / Gusset finished length
Removed flat component: front tip to rear tip on seam line.
component · base 12 cm

N / Gusset finished width
Removed flat component: widest side tip to opposite tip on seam line.
component · base 7 cm

Pattern, grading & assembly

Proposed first-sample engineering / sequence follows the actual product type

Proposed body basis / cm

EU label	Bust full	Waist full	Hip full
34	84	66	90
36	88	70	94
38	92	74	98
40	96	78	102
42	100	82	106

Adult Womenswear, stature 168 cm; internal development chart only, not an asserted national sizing standard. EU 38 is a document label, not universal body equivalence.

Fit and grade rationale

Close fit with proposed 13.5% waist and 14.3% hip negative ease at EU 38; not a tested compression claim.

Torso widths grow with body progression; vertical/component grades are smaller or zero. The published per-POM rules, rather than a blanket grade, control this proposal. Test range endpoints before approving a nest.

Pattern components / interfaces

- Front legs ×2, back legs ×2, rear yokes ×2, contrast panels ×2 mirrored, outer/inner waistband each ×1, gusset ×1. All PROPOSED; walk curved yoke seam and gusset interfaces.
- Greatest stretch around hip/waist; align red/white stretch axes. No pocket, zip or logo artwork.
- Base waist 64/74 cm = −13.5%; hip 84/98 = −14.3%. These are development ratios, not measured compression; approve fit after material tests.

Assembly order

1. Condition knit 24 h; compare red/white extension and laundering response.
2. Cut mirrored panels/yokes, mark knee/hip/gusset notches and stretch direction.
3. Join rear yokes, then contrast panels to front/back legs.
4. Join rise; insert diamond gusset; close remaining inseams without stacked crotch bulk.
5. Join elastic and waistband rings; apply transfer to inner band after heat trial.
6. Enclose elastic; attach double waistband with quarter matching.
7. Coverseam hems; cool and relax before fit/measurement.

No production pattern has been measured or generated by this document. Seam allowances are operation-specific and excluded from finished POM values.

Quality, labels & revision

Sampling documentation / not approved for bulk production

Garment quality checkpoints

- White panel opacity at squat and wet condition; no red dye migration.
- Five cycles to 50% extension, hold 10 s each; after 30 min recovery residual growth ≤5% as proposed screening method, not a certified standard.
- Waist passes 100 cm full base circumference without damage; returns to relaxed POM within tolerance after 30 min.
- Seams extend ≥40% without pop; no tunnelling or gusset tip holes.
- Left/right panel widths and knee notches match; no twisted leg after wash trial.

Development risks / release holds

- Negative ease cannot be released for production without actual fabric force/extension/recovery and wearer tests.
- Rear yoke/gusset are proposed and may need remapping after physical sample.
- Sublimation/migration and transfer damage must be assessed on selected red/white fabrics.

Labels and finishing

PROPOSED: 35 × 12 mm soft ID/size heat transfer inside CB waistband below the elastic, plus compatible care transfer with content withheld until verified. Confirm temperature, dwell, migration and stretch before application. No sewn 301 label or third-party logo.

TBD: fibre identity, component compatibility, care testing, country of origin and destination-market legal review. Do not print generic care symbols.

Packing

PROPOSED: fold only after cooling; use unprinted recyclable protective sleeve sized to the actual folded sample. Bag material, gauge and dimensions TBD after packing trial. One garment per sleeve; no invented approved bag size.

Production approval requires

Owner/source provenance review; measured and fitted prototype; pattern and graded nest approval; material/trim supplier approval; seam and laundering tests; marker verification; label/legal checks and signed sample approval. None is claimed complete.

Version / date	Revision / validation status
0.1 / 2026-10-25	Initial source-referenced development specification; no physical sample, marker or fit validation **PROPOSED / sampling review**