

Hooded Sweatshirt

Burgundy cropped raglan / drawcord hood / rib trims

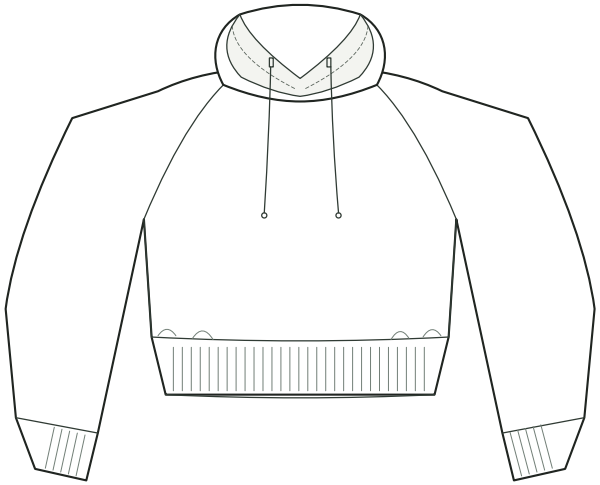

FRONT / DEVELOPMENT FLAT

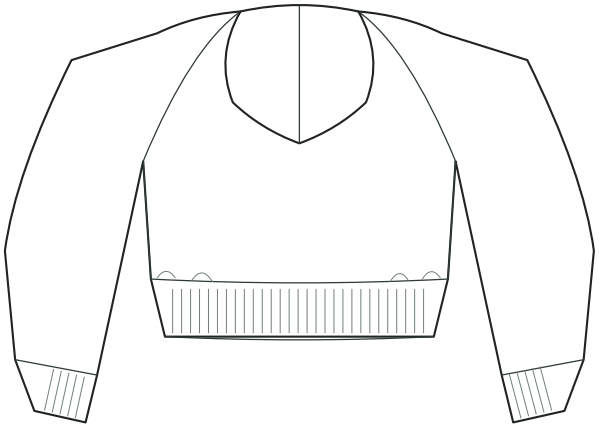

BACK / DEVELOPMENT FLAT

AB-TP-05 / 0.1

Burgundy cropped raglan / drawcord hood / rib trims

Relaxed cropped body, full raglan sleeves, gathered into close rib cuffs and waistband.

> Proposed development specification.
> Sample validation required.

Base EU 38 · range EU 34–42 · centimetres

Technical documentation by ABERBACH. Source garment authorship and physical manufacture are unverified.

CONFIRMED
Source-visible or documented facts only.

PROPOSED
Engineering, dimensions and grades for first sampling.

TBD
Supplier, testing and approval information still unresolved.

Design evidence & colourway

One source colourway / editable coloured flats / no invented approved colour standard



FRONT / DEVELOPMENT FLAT



BACK / DEVELOPMENT FLAT

Source evidence and colour

- CONFIRMED in source: burgundy hooded sweatshirt, front/back raglan lines, drawcord, cropped gathered body, rib-look hem band and cuffs.
- No kangaroo pocket, zipper or metal eyelet is visible; none specified. Joggers and shoes excluded.
- Hood internal layers, cord channel and rib structure are PROPOSED; source does not show inside construction.

Development interpretation

- PROPOSED two-piece hood with self lining (four shell-shaped pieces total); no centre panel added.
- Drawcord exits through reinforced stitched buttonholes, not assumed metal eyelets.
- Rib is proposed 2×2 matching knit; exact shell/rib composition, recovery and shrinkage remain unverified. Adult garment only; market cord review pending.

Source-relative digital colour only. No verified Pantone match. Shell, trims and thread require physical approval.

Primary reference: `assets/source/JERSEY & KNITS/6.png`
Repository revision: `4653f40626938ceeece2438e7ee8fb073280cdc2` · streetwear-ref-02
Existing portfolio visual reference; physical manufacture, designer ownership and hidden construction unverified. ABERBACH authors this development documentation, not a claim of original garment manufacture.

Bill of materials

Garment-specific sourcing and estimated consumption / no nominated supplier


ID / component	Technical specification	Composition / colour	Placement	Qty / unit / status
F01 Sweatshirt shell	PROPOSED loopback or brushed sweatshirt knit 300–340 g/m²; ≥20 % cross extension	TBD; cotton-rich polyester blend option Burgundy / lab dip TBD	Body, raglan sleeves, outer/inner hood	**1.70–2.00** m PROPOSED
F02 Rib trim	PROPOSED 2×2 rib, 300–360 g/m²; ≥60 % usable extension and recovery compatible with F01	TBD; elastane-supported rib option Match burgundy	Waistband and cuffs	**0.25–0.35** m PROPOSED
D01 Drawcord	PROPOSED round 5 mm soft cord, no metal aglets; heat/knotted ends after material trial	TBD Match burgundy	Hood channel	**1.25** m PROPOSED
I01 Exit reinforcement	Soft fusible knit patches 25 × 25 mm; peel/strike-through trial	TBD Concealed	Two hood drawcord exits	**2** pc PROPOSED
N01 Neck seam tape	10 mm soft jersey tape, compatible extension; no hard woven binding	TBD Match burgundy	Inside back neck / hood join	**0.3** m PROPOSED
T01 Sewing thread	Polyester Tex 30 needle and soft looper; Nm 80–90 ballpoint after ply trial	PROPOSED polyester Match burgundy	514 joins / 301 hood, channel and neck tape	**180–230** m PROPOSED
L01 ID / size and care set	Neutral development identity; retail care content withheld	TBD Neutral	Inside back neck tape / left side seam	**1** set PROPOSED
PK01 Protective sleeve	Hood folded inward without crushing cord; size to cooled sample	TBD Unprinted	One sweatshirt	**1** pc PROPOSED

Consumption basis
ESTIMATE: shell 1.70–2.00 m at 150 cm usable width, EU 38, non-directional sweatshirt knit, body pair + sleeve pair + four hood panels (self-lined); 15 % cutting/shrink reserve. Rib 0.25–0.35 m at 100 cm open width, band/cuffs across stretch. Verify actual marker, nap and laundering shrinkage.

Supplier and material codes: TBD for every component. Numeric thread use is a preliminary sewing estimate, not measured consumption. Labels/packing are one set per garment. All BOM entries are PROPOSED.

Front construction

Leaders identify actual feature anchors / hidden construction remains proposed

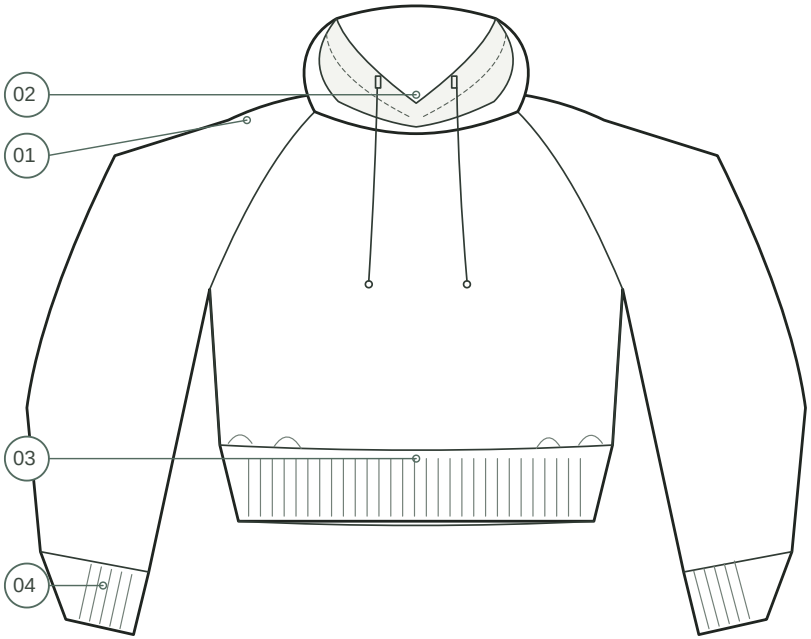

C01 / Raglan sleeve joining

Front/back raglan seam 6 mm SA / 514 four-thread overedge, 3 mm stitch. Match neck and underarm notches; no set-in armhole or separate shoulder seam. Optional cover row not specified; visible source seam lines represented only.

BOM F01 · T01 / PROPOSED METHOD

C02 / Hood channel and exits

Self-lined hood, 10 mm bagged face-edge SA / 301, 3 mm. Channel stitch 25 mm from finished opening, 301 / 3 mm, keeping needle out of cord. Two 8 mm stitched buttonholes on I01 reinforcement, centres 18 mm above neckline and 18 mm from CF edge; no metal eyelets.

BOM F01 · I01 · D01 · T01 / PROPOSED METHOD

C03 / Folded hem rib

Finish 8 cm band; ring join 6 mm / 514. Proposed seam-line rib/body attachment ratio 0.80 (80/100 cm base). Quarter-match and distribute body fullness; 6 mm / 514, 3 mm stitch; recovery trial before approval.

BOM F02 · T01 / PROPOSED METHOD


C04 / Rib cuffs

Finish 7 cm cuff, proposed seam-line cuff/sleeve-opening ratio 0.75. Close cuff ring / 6 mm 514; fold and attach evenly without tucks. Do not stretch body sleeve during pressing.

BOM F02 · T01 / PROPOSED METHOD

Back construction

Leaders identify actual feature anchors / hidden construction remains proposed

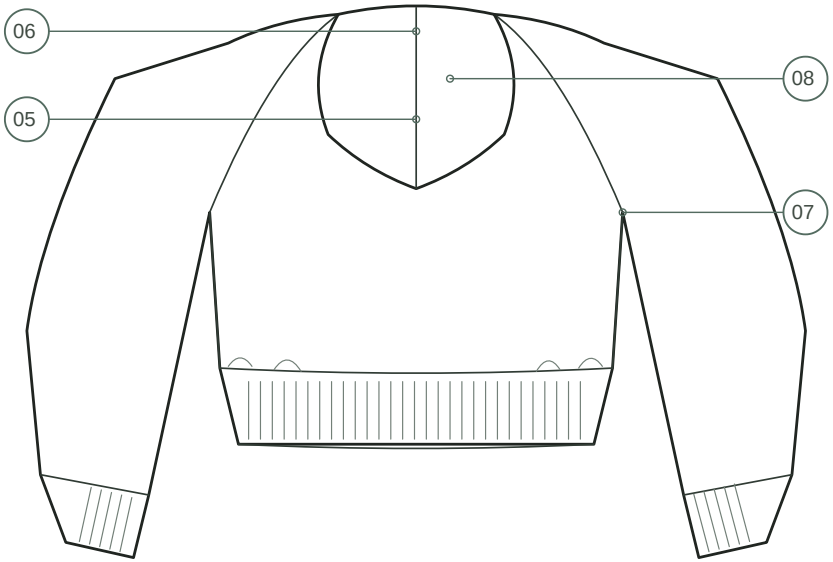

C05 / Two-piece self-lined hood

Outer and inner hood each two mirrored halves. Join CB curve 10 mm SA / 301, 3 mm, press allowances apart on ham. Bag outer/inner face; turn, channel stitch. No unsupported third centre strip.

BOM F01 · T01 / PROPOSED METHOD

C06 / Hood-to-neck seam / tape

Hood neck seam 10 mm / 514 at 3 mm; match CF, CB and raglan junctions. Cover inside back seam with N01, 301 / 3 mm, secure only to allowance/inside where possible to avoid invented face topstitch.

BOM F01 · N01 · T01 / PROPOSED METHOD

C07 / Continuous underarm / side

Close from sleeve cuff to lower body edge, 6 mm SA / 514, 3 mm. Match raglan seam intersections; allowance toward back. Rib rings attached after body closure.

BOM F01 · T01 / PROPOSED METHOD

C08 / Cord / label control

Thread D01 through channel after stitching. Proposed cut 125 cm, knot ends; aim equal exposed lengths with hood open. L01 on neck tape and inner left side. Adult market/cord entrapment review before production.


BOM D01 · N01 · L01 · T01 / PROPOSED METHOD

Construction details / 1

Layer relationships and component dimensions / schematic views, not cutting patterns

Hood pieces / channel / exit

PROPOSED / schematic — not a cutting pattern

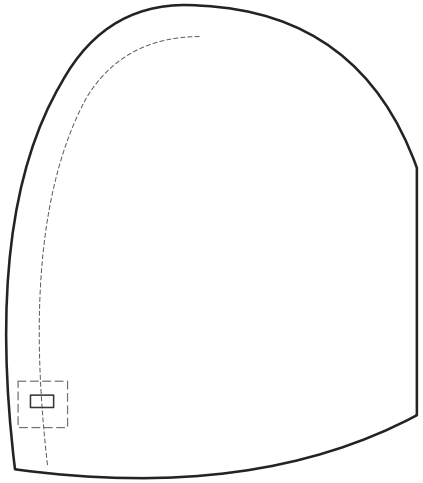


25 mm channel / 8 mm stitched exit / 25 mm reinforcement

Two mirrored halves × outer + inner = four hood pieces

Hood pieces / channel / exit
Two outer + two inner mirrored hood halves. 25 mm face channel; stitched exits reinforced with 25 mm patches; no eyelets.

Rib ring / attachment

PROPOSED / schematic — not a cutting pattern

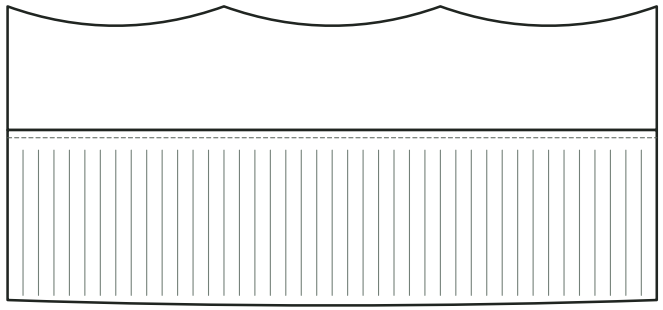

Body fullness distributed evenly into folded band

Ratio is measured at seam line; no hidden elastic


Rib ring / attachment
8 cm hem / 7 cm cuff; proposed 0.80 hem and 0.75 cuff seam-line ratios; no inserted waist elastic.

Construction details / 2

Layer relationships and component dimensions / schematic views, not cutting patterns

Raglan and inside-neck finish

PROPOSED / schematic — not a cutting pattern

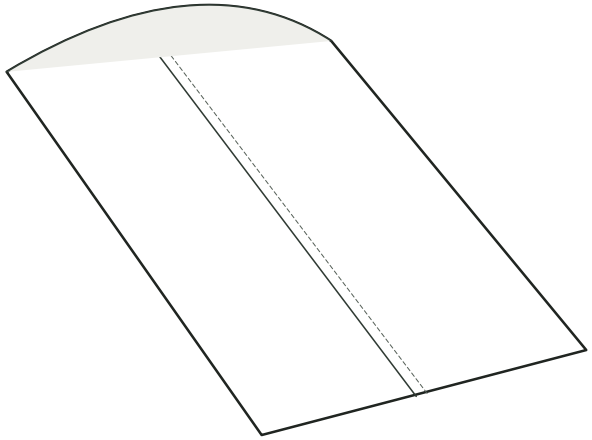

Raglan join 6 mm / 514; no set-in sleeve cap

Inside hood seam 10 mm; 10 mm soft neck tape covers allowance

Raglan and inside-neck finish
6 mm raglan join / 514; 10 mm hood attachment; soft 10 mm tape covers back seam allowance.

Pattern interface and sampling controls

- Front ×1 on fold, back ×1 on fold, raglan sleeves ×2 mirrored, outer hood halves ×2, inner hood halves ×2, rib hem band ×1, rib cuffs ×2. PROPOSED components, no measured pattern claim.
- Walk front/back raglan lengths independently; place notches clear of underarm; retain sleeve pitch.
- Hood neck seam length must equal completed neckline excluding overlap; face channel must clear lining and cord exits.
- Rib ratios at base: hem 80/100 = 0.80; cuff seam-line ring 18/24 = 0.75 (opening is narrower after shaping). Refit using actual rib recovery; do not apply same ratio blindly to every size.

Assembly dependency

Make stitched hood exits; join outer/inner CB hood curves.

Measurement specification / 1


EU 38 highlighted in bold / full size range calculated independently per POM


POM	Measurement / cm	Step	34	36	38 base	40	42	Tol. cm
A	CB body length excl. hood	+0.5	45	45.5	**46**	46.5	47	±0.7
B	Bust width	+2	50	52	**54**	56	58	±0.7
C	Hem-band opening relaxed	+1.5	37	38.5	**40**	41.5	43	±0.5
D	Neck-to-cuff raglan length	+0.7	67.6	68.3	**69**	69.7	70.4	±0.7
E	Bicep width	+0.8	21.4	22.2	**23**	23.8	24.6	±0.5
F	Cuff opening relaxed	+0.3	7.9	8.2	**8.5**	8.8	9.1	±0.3
G	Cuff finished depth	+0	7	7	**7**	7	7	±0.3
H	Hem-band finished depth	+0	8	8	**8**	8	8	±0.3
I	Hood height	+0.5	34	34.5	**35**	35.5	36	±0.5
J	Hood depth	+0.3	26.4	26.7	**27**	27.3	27.6	±0.5
K	Hood face opening length	+0.5	37	37.5	**38**	38.5	39	±0.5
L	Cord cut length	+0	125	125	**125**	125	125	±1
M	Underarm to hem	+0.5	26	26.5	**27**	27.5	28	±0.5
N	Body width at band join	+2	46	48	**50**	52	54	±0.7

PROPOSED DEVELOPMENT SPECIFICATION — SAMPLE VALIDATION REQUIRED
Each step is one EU-labelled size. Values = base + (size position − base position) × step. All widths are half-flat unless explicitly marked otherwise. No UK conversion or sample-measured claim. Methods and arrows follow on the POM pages.

Points of measurement / 1

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

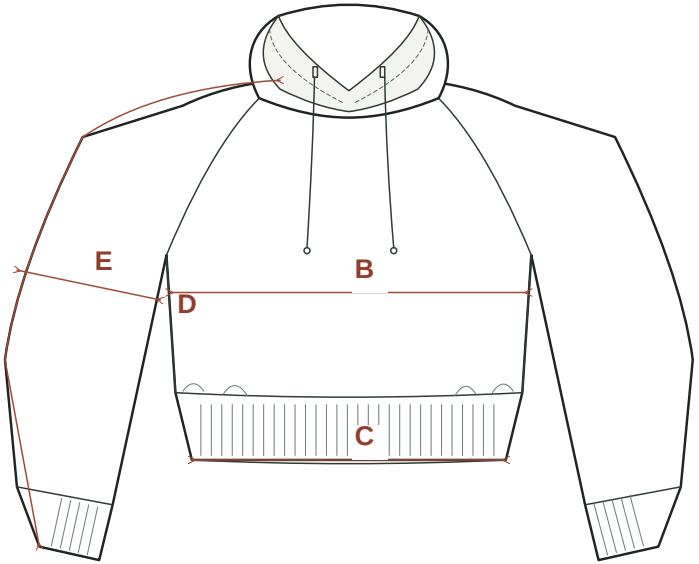

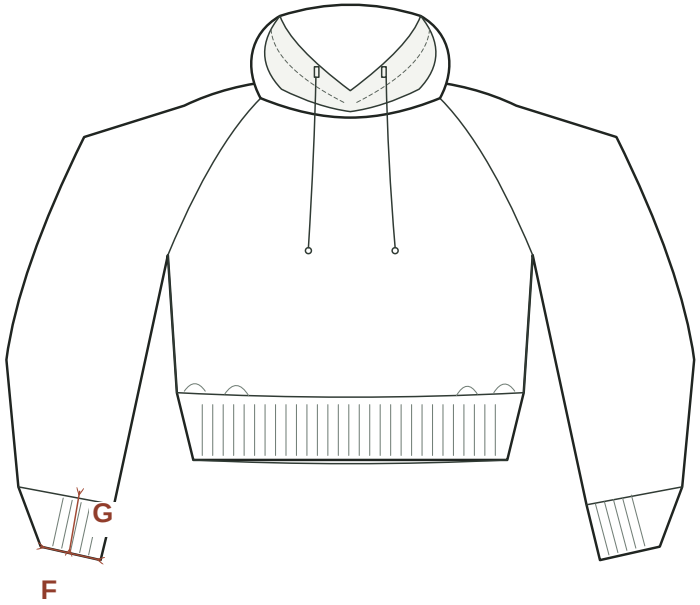

Front

B / Bust width
25 mm below underarm raglan junction, edge to edge relaxed.
half-flat · base 54 cm

C / Hem-band opening relaxed
Folded lower rib edge flat, no extension.
half-flat · base 40 cm

D / Neck-to-cuff raglan length
From front neckline/raglan seam intersection along outer sleeve to finished cuff.
contour · base 69 cm

E / Bicep width
25 mm below raglan underarm junction perpendicular to sleeve grain.
half-flat · base 23 cm


Front


F / Cuff opening relaxed
Folded cuff edge perpendicular to sleeve grain.
half-flat · base 8.5 cm

G / Cuff finished depth
Along sleeve from cuff attachment seam to fold.
component · base 7 cm

Points of measurement / 2

Every table ID is drawn exactly once / methods define preparation, datums and endpoints

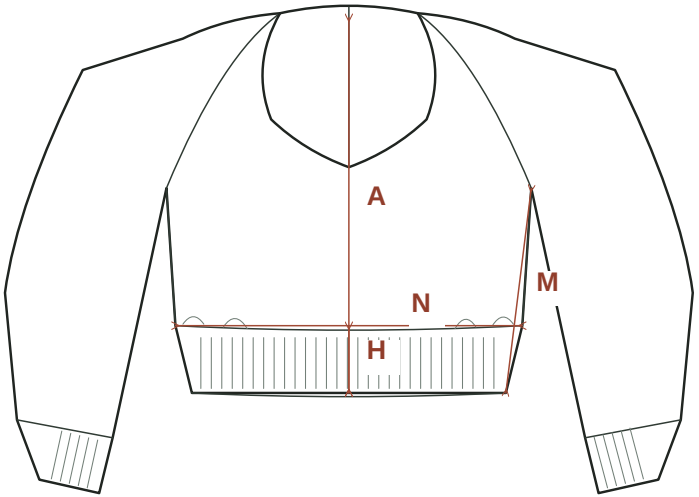

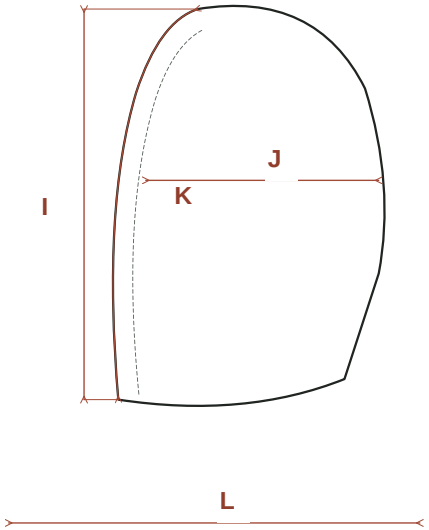

Back

A / CB body length excl. hood
From CB hood/neck attachment seam to finished rib hem vertically.
vertical · base 46 cm

H / Hem-band finished depth
At CB, attachment seam to folded lower edge.
component · base 8 cm

M / Underarm to hem
Side seam from raglan underarm junction to folded bottom rib edge.
vertical · base 27 cm

N / Body width at band join
Body side edge to side edge directly above rib attachment, gathers gently opened without stretching knit.
half-flat · base 50 cm

Hood

I / Hood height
Hood laid on side, neck seam base to crown vertically; exclude SA.
component · base 35 cm

J / Hood depth
Hood laid on side, face edge to back curve at mid-height.
component · base 27 cm

K / Hood face opening length
One side from face/neck point to crown along finished face curve.
contour · base 38 cm

L / Cord cut length
Loose component straight without tension, tip to tip before knotting.
component · base 125 cm

Pattern, grading & assembly

Proposed first-sample engineering / sequence follows the actual product type

Proposed body basis / cm

EU label	Bust full	Waist full	Hip full
34	84	66	90
36	88	70	94
38	92	74	98
40	96	78	102
42	100	82	106

Adult Womenswear, stature 168 cm; internal development chart only, not an asserted national sizing standard. EU 38 is a document label, not universal body equivalence.

Fit and grade rationale

Relaxed cropped body, full raglan sleeves, gathered into close rib cuffs and waistband.

Torso widths grow with body progression; vertical/component grades are smaller or zero. The published per-POM rules, rather than a blanket grade, control this proposal. Test range endpoints before approving a nest.

Pattern components / interfaces

- Front ×1 on fold, back ×1 on fold, raglan sleeves ×2 mirrored, outer hood halves ×2, inner hood halves ×2, rib hem band ×1, rib cuffs ×2. PROPOSED components, no measured pattern claim.
- Walk front/back raglan lengths independently; place notches clear of underarm; retain sleeve pitch.
- Hood neck seam length must equal completed neckline excluding overlap; face channel must clear lining and cord exits.
- Rib ratios at base: hem 80/100 = 0.80; cuff seam-line ring 18/24 = 0.75 (opening is narrower after shaping). Refit using actual rib recovery; do not apply same ratio blindly to every size.

Assembly order

1. Relax shell/rib; wash and recovery-test together; approve compatible shrinkage.
2. Cut body/sleeves and mirrored hood halves; fuse exit patches.
3. Make stitched hood exits; join outer/inner CB hood curves.
4. Bag face edge, turn and form channel before inserting cord.
5. Join raglan sleeves; close underarms/sides with matched junctions.
6. Attach hood; cover inside back neck seam with soft tape/ID.
7. Prepare and attach rib rings; insert cord and knot ends.
8. Steam lightly, cool/relax flat and inspect cropped balance and hood drape.

No production pattern has been measured or generated by this document. Seam allowances are operation-specific and excluded from finished POM values.

Quality, labels & revision

Sampling documentation / not approved for bulk production

Garment quality checkpoints

- Raglan neck/underarm junctions align; no twisted sleeves or cap-ease tucks.
- Hood back curve smooth; lining not hanging beyond face; cord runs free.
- Buttonhole exits do not tear; no hidden unlisted eyelets.
- Rib seams recover after extension; shell not scalloped at attachment.
- Neck-to-cuff and CB length within tolerance after 24 h relaxation.

Development risks / release holds

- Rib/shrink mismatch may collapse cropped hem or constrict cuff; ratios are trial values.
- Self-lined hood weight may pull neckline back; assess on fit model.
- Cord length and exits need destination-market adult safety review; no youth compliance claim.

Labels and finishing

PROPOSED: neutral development ID + EU size; 35 × 12 mm soft ID label, ends turned 5 mm and secured with 301. No third-party logo or manufacturer claim. Placement: inside back neck tape plus left side seam.

TBD: fibre identity, component compatibility, care testing, country of origin and destination-market legal review. Do not print generic care symbols.

Packing

PROPOSED: fold only after cooling; use unprinted recyclable protective sleeve sized to the actual folded sample. Bag material, gauge and dimensions TBD after packing trial. One garment per sleeve; no invented approved bag size.

Production approval requires

Owner/source provenance review; measured and fitted prototype; pattern and graded nest approval; material/trim supplier approval; seam and laundering tests; marker verification; label/legal checks and signed sample approval. None is claimed complete.

Version / date	Revision / validation status
0.1 / 2026-10-25	Initial source-referenced development specification; no physical sample, marker or fit validation **PROPOSED / sampling review**