


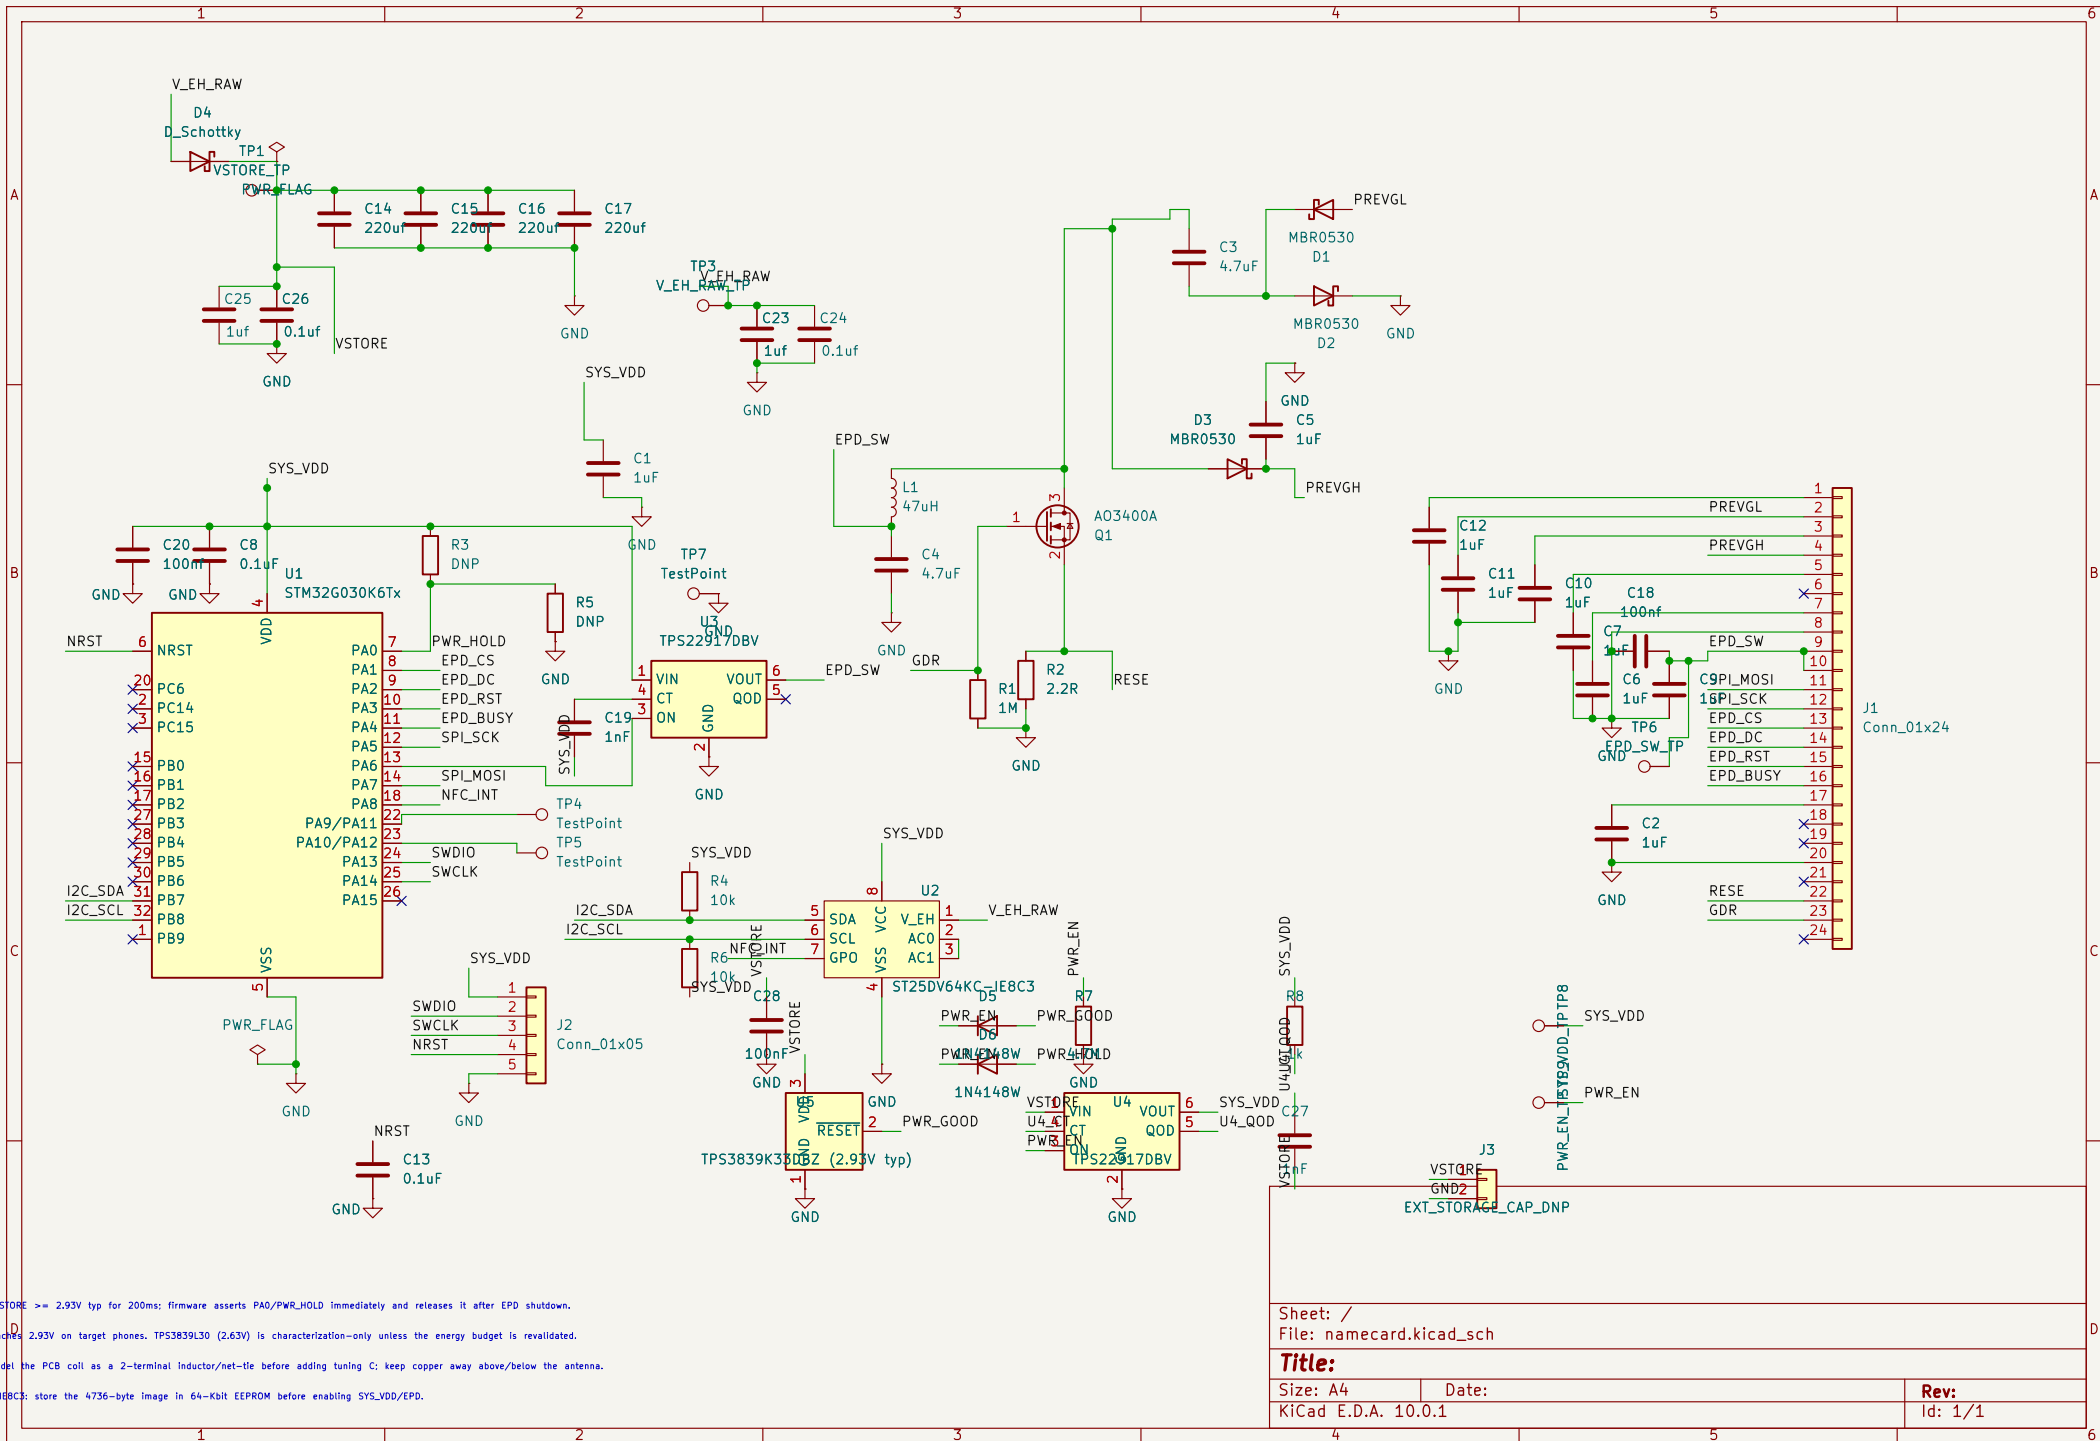

es U4 after VSTORE >= 2.93V typ for 200ms; firmware asserts PA0/PWR_HOLD immediately and releases it after EPD shutdown.

and VSTORE reaches 2.93V on target phones. TPS3839L30 (2.63V) is characterization-only unless the energy budget is revalidated.

-to-GND). Model the PCB coil as a 2-terminal Inductor/net-tie before adding tuning C; keep copper away above/below the antenna.

ST25DV64KC-19BC3: store the 4736-byte Image in 64-Kbit EEPROM before enabling SYS_VDD/EPD.

Sheet: /
File: namecard.kicad_sch

Title:

Size: A4 Date:

KiCad E.D.A. 10.0.1

Rev:
Id: 1/1