


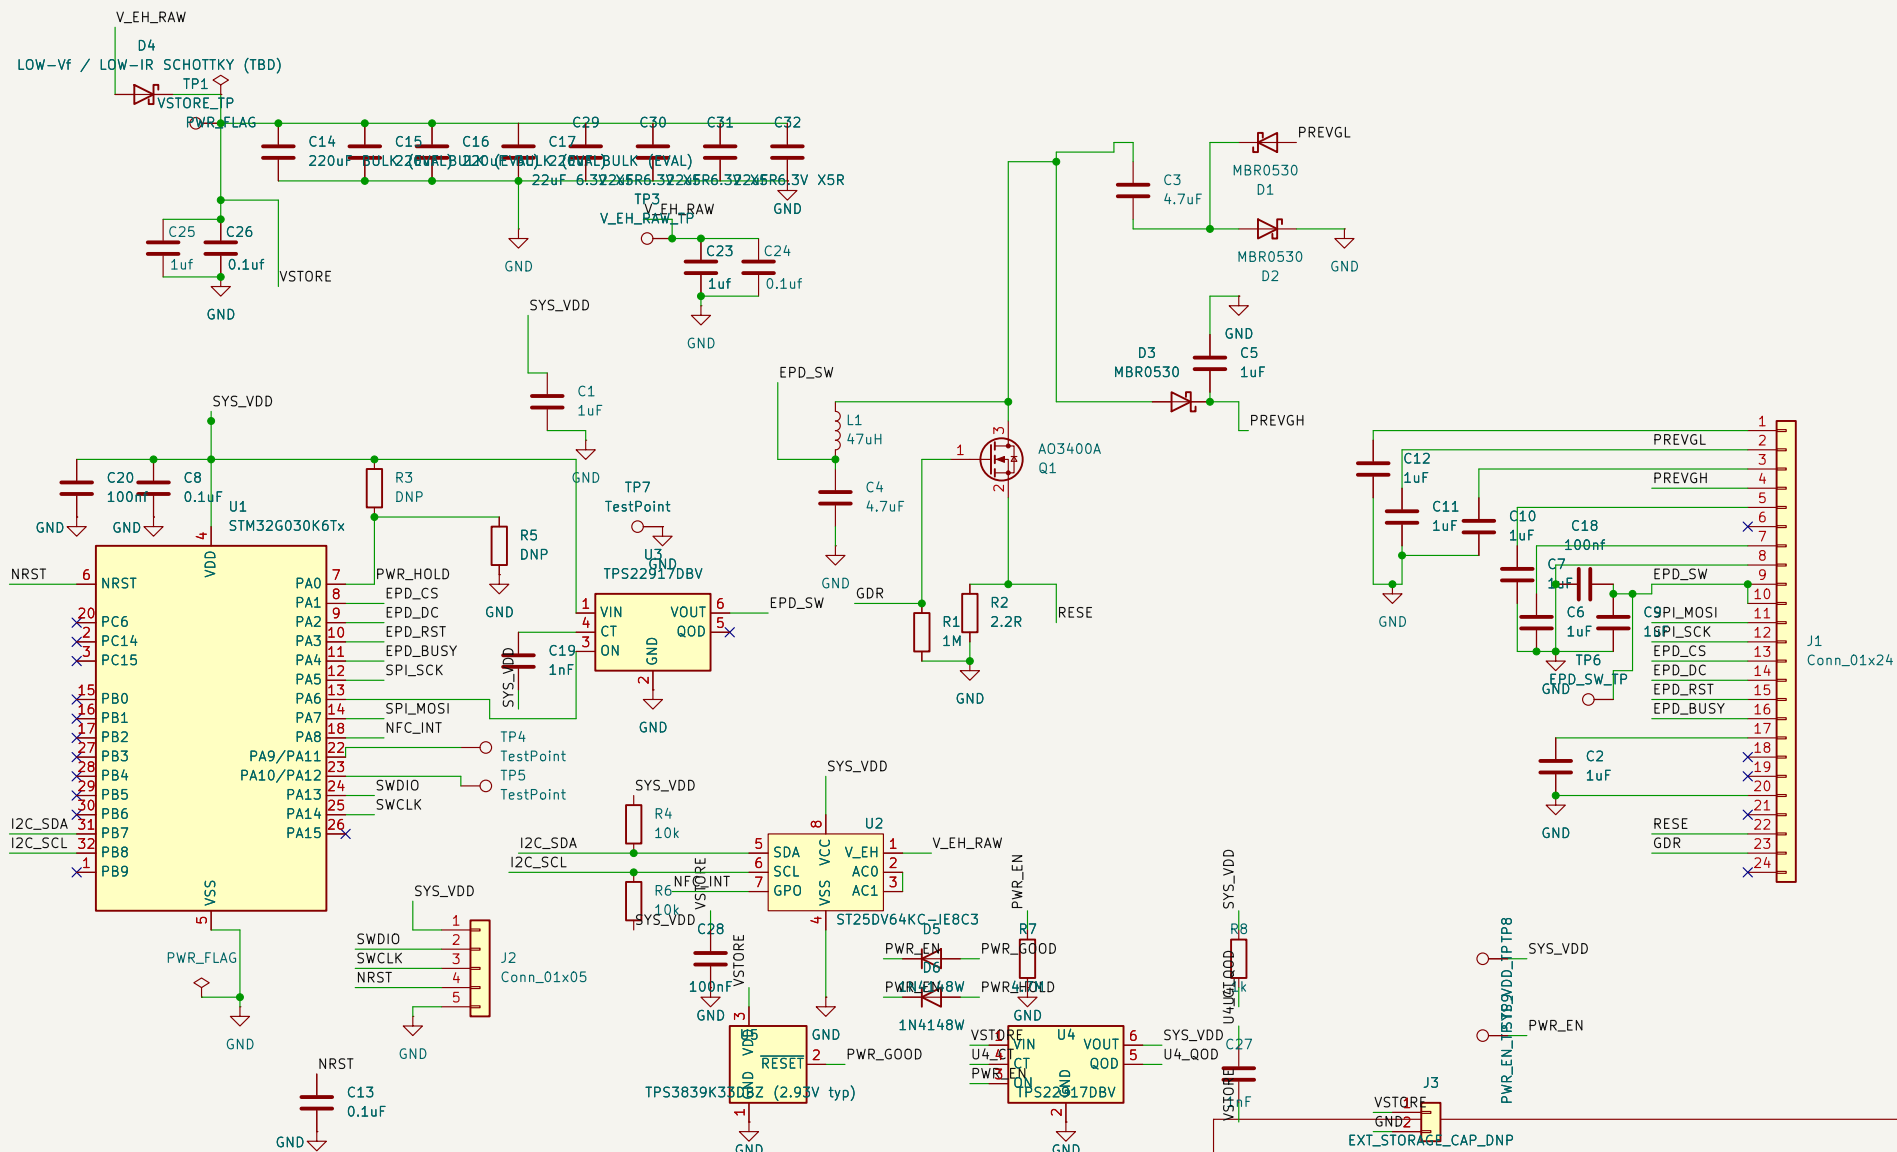

REV.B EVALUATION: U5 enables U4 after VSTORE >= 2.93V typ for 200ms; firmware asserts PA0/PWR_HOLD immediately and releases it after EPD shutdown.

VERIFY BEFORE ORDER: unloaded VSTORE reaches 2.93V on target phones. TPS3839L30 (2.63V) is characterization-only unless the energy budget is revalidated.

C19/C27 are CT-to-VIN (never CT-to-GND). Model the PCB coil as a 2-terminal inductor/net-tie before adding tuning C; keep copper away above/below the antenna.

U2 ST25DV64KC-IEBC3: store the 4736-byte Image in 64-Kbit EEPROM before enabling SYS_VDD/EPD.

Sheet: /
File: namecard.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.1

Date:

Rev:
Id: 1/1