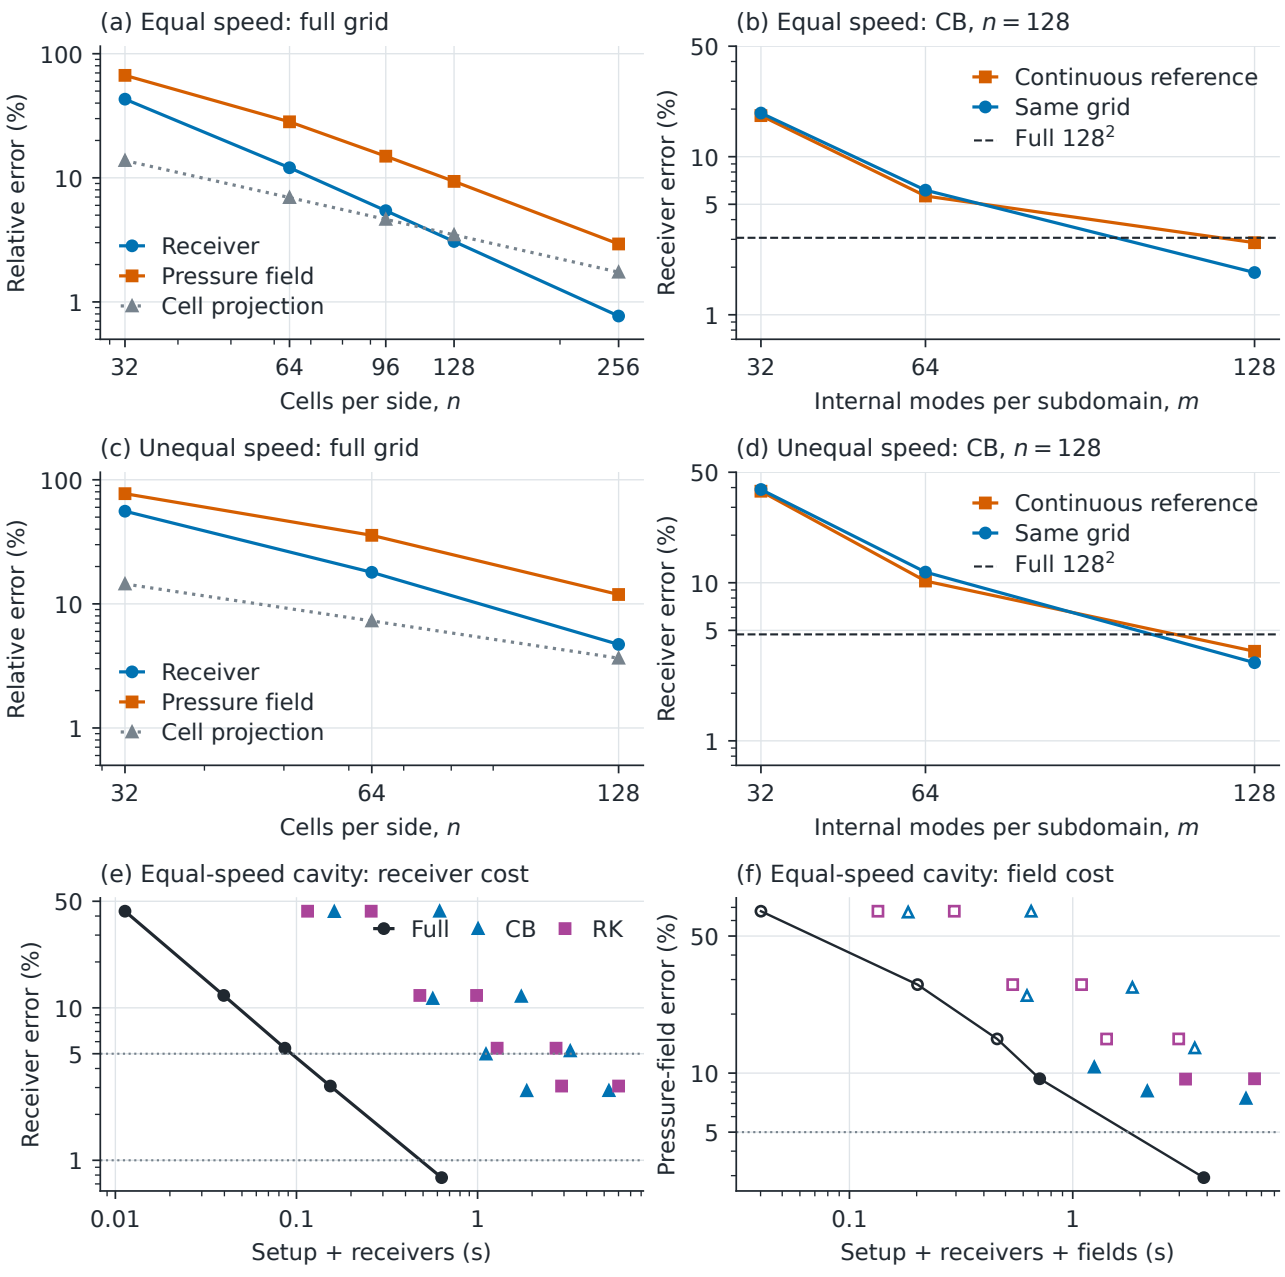
(a) Equal speed: full grid
Relative error (%)
100
10
1
Receiver
Pressure field
Cell projection
32
64
96
128
256
Cells per side, n
(b) Equal speed: CB, n = 128
Receiver error (%)
50
10
5
1
Continuous reference
Same grid
Full 128²
32
64
128
Internal modes per subdomain, m
(c) Unequal speed: full grid
Relative error (%)
100
10
1
Receiver
Pressure field
Cell projection
32
64
128
Cells per side, n
(d) Unequal speed: CB, n = 128
Receiver error (%)
50
10
5
1
Continuous reference
Same grid
Full 128²
32
64
128
Internal modes per subdomain, m
(e) Equal-speed cavity: receiver cost
Receiver error (%)
50
10
5
1
Full
CB
RK
0.01
0.1
1
Setup + receivers (s)
(f) Equal-speed cavity: field cost
Pressure-field error (%)
50
10
5
0.1
1
Setup + receivers + fields (s)