


Lifting Clutch for Concrete Precast Element



ANCHOR AND CLUTCH MUST BE MATCHED.

Tract Lift Lifting Clutch are a versatile lifting product for lifting pre-cast concrete products such as construction panels, pipes, columns etc.

- Marked with workload limit, serial number and SLR brand.
- Made from G80 alloy steel with a safety factor of 4 to 1.

Regularly Check Table *		
WLL(TM)	max(mm)	Nmin(mm)
1.3	13	5.5
2.5	18	5.5
5	25	8
10	32	12
20	46	18
32	58	24

	WLL	Wt.	DIMENSIONS						
	tonne	kg	C mm	D mm	E mm	F mm	H mm	M mm	L mm
	1.3	0.89	80.4	70.5	45	73	157	11.5	181
	2.5	1.3	99	85	57	88	190	16	220
	5	3.24	133	88	69	110	233	22	271
	10	10	176	116	83	161	336.5	30	386
	20	20.37	228	133.5	107.5	182	437	42	497
	32	47	325	188	160	272	555	52	760

*Panel Lifters should be checked regularly follow the Regularly Check Table.


Ring Clutch for Concrete Precast Element

Tract Lift Ring Clutch is a lifting device which is used together with Cast Plate Anchors. Ring Clutches are used for lifting large precast concrete panels. The Ring Head of the clutch has a locking bolt, which helps to safely lock into plate anchors while the concrete panels is in lifting process. Safe Lifters Ring Clutches are available in a variety of lifting capacities to suite to your work.

- Capacities available from 2.5 tonne to 10 tonne.
- All clutches are proof loaded, Test Certificate supplied.
- Ring Clutches have a safety factor of 5 to 1.



ANCHOR AND CLUTCH MUST BE MATCHED.

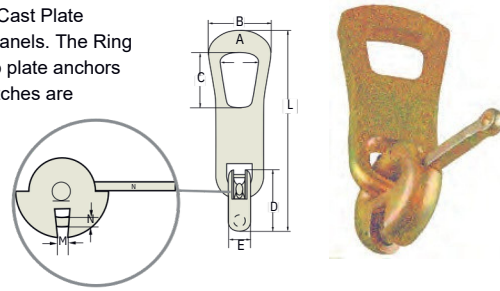

	WLL	DIMENSIONS					
	tonne	A mm	B mm	C mm	D mm	E mm	L mm
	2.5 0.7-2.5	58	95	70	74	35	264
	5.0 3.0-5.0	66	117	85	98	45	333
	10.5 3-10.0	85	148	110	139	56	424

Regularly Check Table *		
WLL (T)	Mmax (mm)	Nmin (mm)
0.7-2.5	13	12
3.0-5.0	19.5	15.5
5.3-10.0	23.5	22.5

*Panel Lifters should be checked regularly follow the Regularly Check Table.


Spread Anchor

WLL	DIMENSIONS			
tonne	a mm	b mm	c mm	L mm
0.7	30	14	5	110
1.4	30	14	6	110
1.4	30	14	6	160
2.0	30	14	8	130
2.0	30	14	8	160
2.0	30	14	8	210
2.5	30	14	10	150
2.5	30	14	10	200
2.5	30	14	10	250


Tract Lift Anchors are produced from high strength low alloy steel plates. Safe Lifters Anchors have high tensile strength and good elongation. Due to special material. Anchors has high impact test value and can be used under low temperature circumstances (up to - 20) Upper hole of Spread Anchor is used for connection with Safe Lifters Ring Clutch. Bottom hole is used for reinforcement. Due to reinforcement, force is transmitted to precast concrete element. Safe Lifters Two Holes Anchor can be used for lifting of precast concrete girders, plates other elements.

WLL	DIMENSIONS			
tonne	a mm	b mm	c mm	L mm
3.0	40	18	10	160
3.0	40	18	10	200
3.0	40	18	10	280
4.0	40	18	12	180
4.0	40	18	12	240
4.0	40	18	12	320
5.0	40	18	15	180
5.0	40	18	15	240
5.0	40	18	15	400

WLL	DIMENSIONS			
tonne	a mm	b mm	c mm	L mm
5.3	60	26	12	220
5.3	60	26	12	260
5.3	60	26	12	340
7.5	60	26	16	260
7.5	60	26	16	300
7.5	60	26	16	420
10	60	26	20	300
10	60	26	20	370
10	60	26	20	520

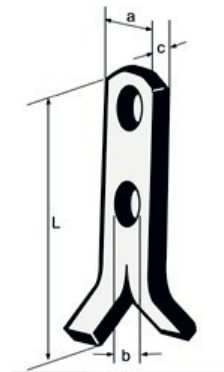

RECESS FORMER KIT

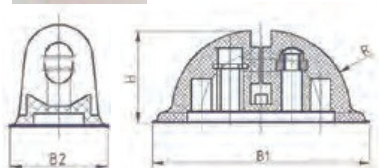

Tract Lift Recess Former kit are special lifting accessories which used together with Safe Lifters Spread Anchor and Safe Lifters Ring Clutch. They are needed to create a hole in the concrete element, when lifting stud is mounted to the concrete. After concrete is stable, Recess Former is taken out and Ring clutch is used to lift the precast concrete element. Safe Lifters Recess Former Round is made from rubber. Each size has a different colour, which makes identification of load class easier.

WLL	DIMENSIONS				
ton	B1 mm	B2 mm	R mm	H mm	Wt kg/pc
2.5	106	43	40	45	0.13
5	134	55	56	59	0.24
10	188	78	80	81	0.66

Head Lifting Anchor Bolts

ANCHOR BOLT AND CLUTCH MUST BE MATCHED.

WLL	Dimensions (mm)				Quantity
t	L	H	S	F	per Box
1.3	35	19	10	25	200
1.3	45	19	10	25	200
1.3	55	19	10	25	200
1.3	65	19	10	25	200
1.3	85	19	10	25	100
1.3	120	19	10	25	100
1.3	240	19	10	25	50
2.5	55	26	14	35	100
2.5	75	26	14	35	100
2.5	85	26	14	35	50
2.5	120	26	14	35	50
2.5	170	26	14	35	25
2.5	280	26	14	35	25
5.0	75	36	20	50	50
5.0	95	36	20	50	50
5.0	120	36	20	50	25
5.0	150	36	20	50	25
5.0	170	36	20	50	25
5.0	240	36	20	50	20
5.0	340	36	20	50	10
5.0	960	36	20	50	1
10.0	150	47	28	70	10
10.0	340	47	28	70	5
20.0	340	70	39	98	1
20.0	500	70	39	98	1
32.0	700	88	50	135	1
32.0	1,200	88	50	135	1

