Technical Data Sheet

Model No: 29CLH4959 29dBi 2x2 MIMO Dish Antenna

4.9-5.9GHz 29dBi 2x2 MIMO

Features:

- Spread Spectrum – Unlicensed 5 GHz Band
- Public Safety – Licensed 4.9 GHz Band.
- Solids & High Performance.
- ConnectLH "Best In Class" Quality and Dependability.
- Type "N" Female connector for Superior outdoor environmental conditions.
- Reflector Material Aluminum/Stainless Steel.
- Antenna Dish Dia 2 feet, powder quoted.

Electrical Specifications

Frequency (MHz)	4900 – 5900
Gain (dBi)	29±1
VSWR (Max)	1.5 : 1
H Plane BW (°)	6±0.5
E Plane BW (°)	6±0.5
Polarization	Linear V & H
Port to Port Isolation (dB)	> 30
Max. Power Input (Watts)	50
Impedance (Ω)	50
Front to Back Ratio (dB)	>30
Cross Poln. (dB)	>30
Connector Termination	2 x N(F)

Environmental Specifications

Temperature Range (°C)	(-) 35 to (+) 65
Wind Speed Survival (km/hr)	200
Humidity	95% No Condensation
Ingress Protection	IP 65

email: reachus@youconnecttech.com

Mechanical Specifications

Dimension (mm)	Ø 650 ±10
Reflector Material	Aluminum Alloy
Finish	Powder coated
Gross Weight (Kg)	5±0.5
Mounting Bracket	Galvanized Steel
Mounting Hardware	Stainless Steel
Mounting Style	Pole
Mounting Pole Diameter (mm)	90 - 120mm
Mounting Adjustment	H Plane ± 180°
	V Plane ± 15°

TEST REPORT

Description: 5180MHz - 5900MHz 29dBi Dual Polarisation Dish Antenna
Model No: 29CLH4959

VSWR and Gain Measurement

VSWR and Gain Measurement Values.

Frequency (MHz)	VSWR (V Port)	VSWR (H Port)	Isolation (dB)
5180	1.39	1.45	32
5300	1.22	1.08	42
5500	1.45	1.47	37
5700	1.09	1.33	40
5900	1.08	1.16	33

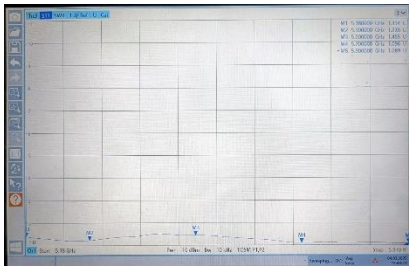

V Port

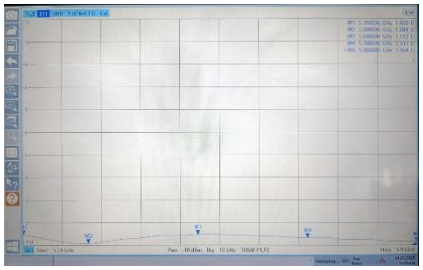

H Port

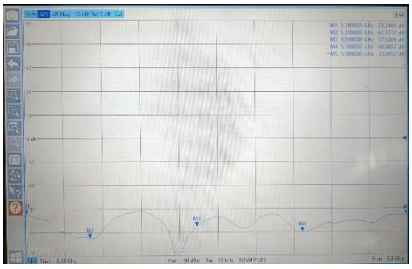

Isolation

Connect LH™ are trademark of YouConnect Technologies
All specifications are subject to change without notice.

email: reachus@youconnecttech.com