



[rexresearch.com](http://www.rexresearch.com)

---

## Bioenergetic Devices Patents ( II )

---

See also :

<http://www.rexresearch.com/radionics/radionics.htm>  
<http://www.rexresearch.com/radiesthpat/radiesthpat.htm>  
<http://www.rexresearch.com/pyramid/pyramid.htm>  
<http://www.rexresearch.com/pyramid/pyramid2.html>

---

**[RO128968](#) -- BIOENERGETIC BATTERY**

**[RU94025802](#) -- APPARATUS OF DISTANT BIOENERGETIC ORIENTED ACTION ON OBJECTS**

**[US2004146607](#) -- Method of preparing bioenergetic nourishing water**

**[US6896909](#) -- Formulations containing iron ores for the topical treatment of bioenergetic and electromagnetic disorders**

**[US2003190374](#) -- Methods of using silica hydride mineral**

**[UA29000](#) -- METHOD FOR REJUVENATION OF FACE AND NECK**

**[UA15158](#) -- DEVICE FOR BIOENERGETIC EXPOSURE OF HUMAN BODY**

**[RU2045290](#) -- METHOD OF BIOENERGETIC TREATMENT**

**[SI21904](#) -- BED OVERPAD WITH BIOENERGETIC EFFECT**

**[RU2157707](#) -- VALASHVESH METHOD FOR BUILDING AND SETTING HUMAN BIOENERGETIC MECHANISM IN ACTION...**

**[RU2143290](#) -- METHOD OF BIOENERGETIC INFORMATION INTERACTION OF TEACHER-SENSITIVE AND PUPIL ..**

**[RU2151618](#) -- BIOENERGETIC DEVICE FOR PROTECTING HUMAN BEINGS AND LIVING ORGANISMS**

**[RU2161996](#) -- METHOD AND DEVICE FOR ACTING UPON HUMAN ORGANISM**

**[RU2148421](#) -- METHOD FOR REPAIRING FUNCTIONAL STATE OF HUMAN GROUP...**

[RU2182800](#) -- METHOD FOR INCREASING BIOENERGETIC VALUE OF FOOD

[RU2143289](#) -- METHOD OF BIOENERGETIC CORRECTION OF MAN'S STATE BY MEANS OF EXTERNAL MECHANICAL GENERATOR

[RU2144380](#) -- METHOD OF HOMEOPATHIC PREPARATION SELECTION

[RU2164127](#) -- METHOD FOR PRODUCING HOMEOPATHIC BIOENERGETIC MEDICAL REMEDY

[RU2153896](#) -- METHOD FOR PROTECTION OF BIOENERGETIC ECOLOGY IN BUILDING

[SU1311740](#) -- APPARATUS FOR MAGNETOTHERAPY

[RU2104718](#) -- METHOD OF PERFORMING PSYCHOTHERAPEUTIC AND BIOENERGETIC ACTION ON HUMANS TO IMPROVE THEIR PSYCHOSOMATIC CONDITION

[RU2132204](#) -- ACTIVE PROTECTION DEVICE

[RU2100008](#) -- BIOENERGETIC HELMET

[RU2129428](#) -- METHOD OF CORRECTING MAN'S BIOENERGETIC FIELD TOPOLOGY

[WO03072494](#) -- LIQUID CONSISTING OF ELECTRONICALLY EXCITED MOLECULES AND HAVING ENERGY STORAGE, ENERGY CARRIER AND CATALYST PROPERTIES

[ES2125785](#) -- Pyramidal bioenergetic magnetizer which produces rest with absence of voluntary movement except in the eyes, but with the senses active

[EP0469661](#) -- Method for the identification of frequency and bioenergetic activities in waters and their use.

[DE4308523](#) -- Method for permanent optimisation of bioenergetic states

[DE3741949](#) -- Arrangement with bioenergetic activity

---

## **RO128968** **BIOENERGETIC BATTERY**

The invention relates to a bioenergetic battery which allows the regeneration of the human body due to the resonance phenomena which are established between the body of the human being the battery is connected to and the solution on whose base it operates. According to the invention, the bioenergetic battery is made of carbon elements and a recipient containing colloidal gold with sizes smaller than 100 Angstrom and which has the walls made as metallic and organic layers, thus being an organic amplifier.

---

**RU94025802**

## **APPARATUS OF DISTANT BIOENERGETIC ORIENTED ACTION ON OBJECTS**

FIELD: biophysics, production of apparatuses used for action on biological objects and in processes of semiconductors monocrystals and films growing. SUBSTANCE: aim is to produce apparatus for distant bioenergetic oriented action on biological objects. The aim is realized due to the fact, that apparatus has dielectric base and active members made in the form of spirals, to which conical shape is given and that corresponds to "golden section" condition and space between spiral coils corresponds to numbers of Fibonacci row. EFFECT: improved design.

---

**US2004146607**

## **Method of preparing bioenergetic nourishing water**

A method of preparing bioenergetic nourishing water has steps of filtrating water from a water source to form a filtrated water, adjusting a hardness of the filtrated water, filtrating the filtrated water with ceramics to remove an original memory structure of the filtrated water, adding main herb liquid into the filtrated water to form a mixture, magnetizing the mixture to remove the main herb liquid from the mixture and to input and to arrange a new memory structure of the mixture, staying the mixture in a mineral-containing container still to release trace mineral elements into the mixture, and killing bacteria in the mixture to form a product.

## **BACKGROUND OF THE INVENTION**

[0001] The present invention relates to a method of preparing bioenergetic nourishing water. More particularly, the present invention relates to a method of preparing bioenergetic nourishing water which will increase a health of a user under such a regimen.

[0002] There are many methods to clean water from a water source. A water softening method uses cations in an ion exchange resin to exchange magnesium and calcium in water. However, the water softening method cannot filter impurities in water effectively. An active carbon filtration method uses active carbons to adsorb organic compounds such as trichloromethane and pesticides in order to clean water. However, active carbons cannot remove nitrates, nitrites, and heavy metals effectively. Furthermore, bacteria will be adsorbed on the active carbons to produce biological films. A distillation method cannot remove volatile compounds such as trichloromethane and trifluoromethane from the distilled water. Volatile compounds such as trichloromethane and trifluoromethane will remain in a boiling water also. A reverse osmosis method will produce pure water. However, trace mineral elements cannot remain in the pure water. Trace mineral elements are essential to health.

## **SUMMARY OF THE INVENTION**

[0003] An object of the present invention is to provide a method of preparing bioenergetic nourishing water which will increase a health of a user under such a regimen.

[0004] Accordingly, a method of preparing bioenergetic nourishing water comprises steps of filtrating water from a water source to form a filtrated water, adjusting a hardness of the filtrated water, filtrating the filtrated water with ceramics to remove an original memory structure of the filtrated water, adding main herb liquid into the filtrated water to form a mixture, magnetizing the mixture to remove the main herb liquid from the mixture and to

input and to arrange a new memory structure of the mixture, staying the mixture in a mineral-containing container still to release trace mineral elements into the mixture, and killing bacteria in the mixture to form a product.

## **DETAILED DESCRIPTION OF THE INVENTION**

[0005] A method of preparing bioenergetic nourishing water comprises steps of:

[0006] step A: filtrate water from a water source to form a filtrated water in order to remove impurities and toxic materials in the water source,

[0007] step B: adjust a hardness of the filtrated water in order to decrease a degree of calcification and a total solid amount in the filtrated water,

[0008] step C: filtrate the filtrated water with ceramics to remove an original memory structure of the filtrated water and to remove alga and fungi in the filtrated water,

[0009] step D: add main herb liquid into the filtrated water to form a mixture,

[0010] step E: magnetize the mixture to remove the main herb liquid from the mixture and to input and to arrange a new memory structure of the mixture with a frequency resonance method,

[0011] step F: stay the mixture in a mineral-containing container still to release trace mineral elements into the mixture, and

[0012] step G: kill bacteria in the mixture to form a product.

[0013] The trace mineral elements comprise magnesium, iron, zinc, copper, cobalt, chromium, iodine, fluorine, nickel, and selenium. The trace mineral elements will become active centers of hormones, vitamins, and nucleic acids.

[0014] The bioenergetic nourishing water will increase a health of a user under such a regimen. The bioenergetic nourishing water has trace mineral elements and maintain a herb effect.

---

### **US6896909**

#### **Formulations containing iron ores for the topical treatment of bioenergetic and electromagnetic disorders**

The invention relates to formulations for the topical treatment of disorders with a bioenergetic basis, which contain a suspension obtainable by treating one or more iron ores with aqueous solutions having pH values of between 4 and 8. These formulations will be applied directly to the acupuncture points corresponding to the meridians involved in the conditions to be treated.

## **DESCRIPTION OF INVENTION**

[0001] This invention relates to ore-based formulations for the topical treatment of disorders with a bioenergetic basis.

[0002] In particular, the invention relates to topical formulations containing a suspension obtainable by treating iron ores with aqueous solutions having pH values of between 4 and 8.

[0003] The formulations of the invention are prepared by suspending suitable iron ores, previously pulverised, in sulphate-alkaline-ferruginous waters or in suitable inorganic salt solutions.

[0004] The iron ores used in accordance with the invention include, in particular:

[0005] a) Ferrites, especially spinels such as chromite, magnetite and magnesioferrite

[0006] b) Ferric oxides and hydroxides such as haematite, limonite and goethite

[0007] c) Ferric carbonates such as siderite

[0008] d) Sulphides such as pyrrhotine or pyrrhotite, also known as magnetic pyrite or magnetopyrite

[0009] e) Disulphides such as pyrite and marcasite

[0010] f) Sulphates such as fibroferrite and jarosite

[0011] g) Micas such as biotite

[0012] h) Chlorites such as chamosite

[0013] i) Silicates or metasilicates such as orthorhombic or monoclinic pyroxenes

[0014] j) Iron organic compounds.

[0015] The compositions of the invention may contain a mixture of iron ores constituted by all the types listed above or only some of them, such as a mixture of ferrites/spinels, carbonates, disulphides, sulphates and chlorites or oxides/hydroxides, sulphides, titanites, micas and silicates. Chlorites, jarosite, marcasite, pyrite and mixtures thereof are particularly preferred.

[0016] Metallic iron, for example in the form of iron-bearing sands, iron filings and the like, may be added to the ore suspensions of the invention to further increase their electromagnetic potential.

[0017] This potential can be further boosted by subjecting the suspensions, possibly enriched with iron powder, to magnetic fields which impart electromagnetic charges of at least 500 gauss to the suspensions; this is the minimum value for cosmetic applications, while higher values (=3000 gauss) are indicated for therapeutic use.

[0018] Suspensions of particular ores of volcanic origin are known (EP 0759290) which differ from those forming the object of the invention because they have little or no iron ore content. Known suspensions are based on a totally different application concept associated with antioxidant activity and inhibition of the formation of free radicals of suitably treated volcanic ores.

[0019] The novel compositions of this invention have little antioxidant activity, but focus on electromagnetic and bioenergetic properties typical of ores with a high iron content. These

properties are to some extent the opposite of the antioxidant and anti-free radical properties of the suspensions described in EP 0759290.

[0020] Powdered iron ores, obtained by grinding operations, for example, are suspended in ferruginous sulphate water, possibly after separation by sieving and heat treatment up to 50[deg.] C. or magnetic treatment (exposure to pulsating magnetic fields), at the typical rate of 1 kg of ore to 500 ml of water. Suitable rheological agents such as amorphous or microcrystalline silica, diatomaceous earths, and argillaceous phyllosilicates such as montmorillonite, bentonite, smectite, halloysite and the like, can then be added to the suspension.

[0021] Iron salts solutions can replace the ferruginous sulphate waters. The pH of the suspensions of the invention is between 4 and 8.

[0022] The waters or solutions usable in accordance with the invention will preferably contain other salts, in particular reducing salts, so as to reduce the ferric or ferrous ion content of the ore at least partly to metallic iron, thus further enhancing the magnetic properties of the formulations.

[0023] An increase in the metallic iron component can also be obtained at the ore treatment stage, by subjecting iron sulphates, carbonates, oxides or sulphates in particular to suitable degassing of the solutions at high temperature, under vacuum.

[0024] The process for preparation of the formulations of the invention comprises the following steps:

[0025] 1) drying the ore in air current at temperatures of between 20[deg.] and 40[deg.] C.;

[0026] 2) grinding without thermal stress;

[0027] 3) screening to a constant, homogenous particle size of approx. 340 microns;

[0028] 4) addition of predetermined volumes of aqueous solutions with a suitable pH to the resulting powders.

[0029] At step 4), each ore component is added under stirring with turboemulsifiers at high speed for predefined times.

[0030] The process is characterised by continuous extraction and recycling of the soluble or finely dispersed phase, the coarser solid components being eliminated by sifting with a vibrating sieve. After dissolving/dispersal, a pre-determined amount of a thickener such as diatomaceous earth is added until the required viscosity is reached.

[0031] The formulations of the invention will be presented in the form of ore suspensions packaged in polyethylene-lined aluminium sachets, heat-sealed under a 99.9% vacuum.

[0032] The iron ores usable in accordance with this invention may be of synthetic or natural origin, extracted from rocks with a high content of the ore in question, or of volcanic, sedimentary or other origin, provided that they are characterised by the same or very similar chemical and crystallographic compositions and the absence of other inorganic elements liable to interfere adversely with the biological activity of the suspensions of the invention.

[0033] These compositions are useful for the cosmetic or therapeutic treatment of a variety of

conditions, such as diffuse oedema, local adiposity, vascular lability, excess weight, hypotonicity, dysmetabolism, atonicity, acute and chronic articular and extra-articular muscular degenerative processes with an inflammatory basis, organic hypofunctionality, metabolic disorders, endocrine disorders, hypofunctionality of individual organs and apparatus, inappropriate immune responses, etc.

[0034] The main therapeutic indications for the ore suspensions of the invention comprise acute joint disease (arthritis) and chronic joint disease (osteoarthritis), as demonstrated by comparison with classic therapeutic strategies (drugs), instrumental strategies (laser, ultrasound, direct and alternating current) and manual strategies (acupuncture and electroacupuncture).

[0035] The therapeutic use of the formulations of the invention is based on the concepts of bioenergetic and electromagnetic remodulation of the affected apparatus and/or organs, thus inhibiting the degenerative processes before they reach them. In fact, measurement of the electromotive force potentials with suitable instruments at the acupuncture and/or electroacupuncture points reveals the hypo/hyperfunctionality of the areas concerned, allowing their bioenergetic remodulation and consequent restoration of the impaired metabolic processes.

[0036] The topical formulations of the invention are applied directly to the acupuncture points corresponding to the various meridians involved in the cosmetic or pathological conditions to be treated.

[0037] Particular attention should be paid to the application of these ore fractions in the spaces between the fingers and toes, the anatomical areas in which the acupuncture points corresponding to each meridian are most easily found.

[0038] The ore suspensions of the invention may be used in association with the ore suspensions with a high antioxidant capacity disclosed in EP 0759290, which perform their specific activity directly in the areas in which they are applied, and can attract the electromagnetic flows released by the iron ore suspensions applied to the peripheral acupuncture points as a result of the potential difference.

[0039] Energy is therefore released which flows from the hands or feet towards other areas, modifying their biochemical, functional and reactive characteristics, and synergising the antioxidant and anti-inflammatory action of the antioxidant ore suspensions already known.

[0040] The following examples describe the invention in greater detail.

## **EXAMPLE 1**

[0041] The types of formulation can be summarised in three different methods.

[0042] 10 kg of each type of iron ore constituting the 10 groups listed is added separately to 50 l of ferruginous sulphate water or suitably prepared iron salt solution (total 100 kg of ore +50 l of ore solution).

[0043] This is followed by centrifugation, sieving and molecular excitation at different temperatures (30/40/50[deg.] C.), and a suitable consistency is obtained by adding micronised diatomaceous earths.

[0044] The same process can be repeated using only one of the ores listed above or a mixture

thereof, such as those constituted by ferrites/spinels, carbonates, disulphides, sulphates and chlorites or oxides/hydroxides, sulphides, micas and silicates.

## **EXAMPLE 2**

[0045] STEP A: 30 kg of chlorite-based ore, 10 kg of pyrite, 10 kg of marcasite and 10 kg of jarosite.

[0046] STEP B: each ore in the formulation is added successively to a 100 l quantity of sulphate-ferruginous water by centrifugation for 20 minutes at not less than 1200 rpm.

[0047] The suspensions are subjected to a first filtration with a vibrating sieve, then 20 kg of bentonite+20 kg of montmorillonite are added. The suspensions are then left to dissolve with a suitable emulsifier overnight (at least 12 hours), refiltered with a vibrating sieve, made up to consistency with 10 kg of diatomaceous earth, homogenised for 24 consecutive hours, and vacuum packed.

[0048] This formulation can be used for cosmetic and pharmaceutical purposes, for the treatment of conditions such as such as diffuse oedema, local adiposity, vascular lability, excess weight, hypotonicity, dysmetabolism, atonicity, acute and chronic articular and extra-articular muscular degenerative processes with an inflammatory basis, organic hypofunctionality, metabolic disorders, endocrine disorders, hypofunctionality of individual organs and apparatus, inappropriate immune responses, etc.

---

## **US2003190374**

### **Methods of using silica hydride mineral**

The exact health benefits of silica hydride minerals, traditionally found in glacial streams, have long been the subject of speculation. Geochemical analysis indicates that such colloidal silica hydrides in water possess a silica-water interface that provides a hydrated surface and adsorbs other elements or compounds such as potassium, iron, magnesium, lithium, calcium, and hydrogen. Dietary supplements with similar properties have been formulated. When the silica-water interface of such compounds is saturated with reduced hydrogen, the compounds take on an overall negative charge and act as a reducing agent or antioxidant when in solution. When consumed, hydride ions introduced into the body by the silica hydride supplement donate electrons to body fluids. With proper dosages, the benefits of consuming silica hydride include reduction of lactic acid build-up, increasing cellular hydration, reduction of free radical damage, enhancement of mitochondrial bioenergetic capacity, increasing antioxidant activity, and enhancing the properties of drinking water.

## **TECHNICAL FIELD OF THE INVENTION**

[0001] This invention relates to methods of using silica hydride minerals. More particularly, this invention relates to methods of using silica hydride minerals that have beneficial effects on lactic acid buildup during exercise, cellular hydration, free radical damage, mitochondrial bioenergetic capacity, antioxidant activity, and the suitability of water for conversion into optimal cellular body fluids.

## **BACKGROUND OF THE INVENTION**

[0002] Amorphous silicate minerals, many of which are in the nanoparticle size range, were



once common in natural water sources and abundant in glacial stream waters. Not only do the silica mineral particles bond water and other elements for transport; they also can be adsorbed with reduced hydrogen, which releases electrons, providing antioxidant or reducing potential to surrounding fluids.

[0003] In one region of West Pakistan the people are known to enjoy excellent health and amazing longevity. A team of cardiologists found the heart health of the people to be exceptionally good and evidence of the people's delayed aging. The cardiologists attributed the good health and longevity in significant part to the abundance of colloidal silicate minerals in the glacial streams the people used for irrigation of food crops and drinking water.

[0004] Geochemical analysis indicates that colloidal silicate minerals display a variety of properties, including the formation of structured water around the silica-water interface, which provides a hydrated surface that adsorbs elements or compounds such as potassium, iron, magnesium, lithium, calcium, and hydrogen. FIG. 1 illustrates an example of the silica-water interface and the concentric structured water arrangement about the interface with the adsorption of elements within the layers.

[0005] From silicate analogs, it is possible to formulate dietary supplements that are similar to the colloidal silicate minerals found in glacial waters and retain the geo-physical properties inherent to these minerals. An example of such synthesized silicate analogs is a silica hydride formula sold under the trademark Microhydrin(R) (a proprietary formula manufactured by Flanagan Technologies, Inc., Cottonwood, Ariz.). Substances possessing the characteristics and functions described in this application, such as Microhydrin(R), have assumed many names. For example, in addition to being called silica hydrides, such substances are known as amorphous silicate minerals, silicate particles, silicates, colloidal silicate minerals, silicate analogs, synthesized silicate analogs, functional silicate nanocolloids, dielectric interstitial hydrides, dietary silicate supplements, or dietary silicate antioxidants. Considering the many labels afforded this class of substances, the characteristics and functions of supplements must necessarily determine whether a particular supplement falls within the class.

[0006] Referring again to FIG. 1, the particle's silica-water interface can be saturated with reduced hydrogen, or hydride (H-) ions, and takes on an overall negative charge. In such cases, the particle then acts as a reducing agent or antioxidant when in solution (standard reduction-oxidation potential, -550 mV). It is capable of providing literally trillions of hydride ions able to donate electrons into body fluids. Electrons, which Albert Szent-Gyorgyi called the "fuel of life," are abundantly available in inorganically grown raw vegetables, fruits, and grains, but are deficient in our modern diet of over-cooked, acidic, or highly oxidized foods, beverages, and drinking water. In silica hydride minerals, the structured water around the silica-water interface stabilizes electron transfer. Such specific silicate interactions could play a substantial role in many biological processes by enhancing salvation properties and ion and water transport and by providing free radical antioxidant protection.

[0007] Such electron deficiencies resulting from inadequate diet have a derogatory impact on specific biological processes such as lactic acid build-up, cellular hydration, damage from free radicals, mitochondrial bioenergetic capacity, antioxidant activity, and suitability of drinking water for conversion into optional cellular body fluids. Therefore, a need exists for a method of counter balancing these electron deficiencies and, as a result, enhancing each of these biological phenomena.

## **SUMMARY OF THE INVENTION**

[0008] The present invention identifies certain beneficial health effects of silica hydride

minerals and the effective doses necessary to achieve desired results. With proper dosages, the benefits of using silica hydride minerals as a dietary supplement include: reduction of lactic acid buildup during and after exercise, increasing cellular hydration, reduction of free radical damage, enhancement of mitochondrial bioenergetic capacity, increasing antioxidant activity, and enhancing the suitability of water for conversion into optimal cellular body fluids.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

[0009] The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objects and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

**[0010] FIG. 1 is an enlarged view of a hypothetical silica hydride particle showing the silica-water interface and other adsorbed elements;**

**[0011] FIG. 2 is a chart showing the reduction in lactic acid buildup affected by consumption of silica hydride;**

**[0012] FIG. 3 is a chart of the increase in total body water affected by consumption of silica hydride;**

**[0013] FIG. 4 is a chart of the increase in intracellular water affected by consumption of silica hydride;**

**[0014] FIG. 5 is a chart of the increase in body cell mass affected by consumption of silica hydride;**

**[0015] FIG. 6 is a chart of the increase in extracellular water affected by consumption of silica hydride;**

**[0016] FIG. 7 is a chart of the reduction in free radical damage affected by consumption of silica hydride;**

**[0017] FIG. 8 is a chart of the increase in NADH production affected by silica hydride within in vitro assays;**

**[0018] FIG. 9 is a chart of the increase in NADH production in liver cells by introduction of silica hydride;**

**[0019] FIG. 10 is a chart of the increase in mitochondrial membrane potential in liver cells affected by introduction of silica hydride;**

**[0020] FIG. 11 is a chart of the inhibition of epinephrine oxidation by the super oxide free radical in the standard assay for super oxide dismutase activity;**

**[0021] FIG. 12 is a table reflecting oxidation/reduction potential values of various water samples, some including silica hydride;**

**[0022] FIG. 13 is a table reflecting the oxidation/reduction potential values of various known antioxidants, including silica hydride;**

[0023] FIG. 14 is a chart reflecting the desired decrease in saliva pH affected by consumption of silica hydride;

[0024] FIG. 15 is a chart reflecting the desired decrease in Saliva rH2 affected by consumption of silica hydride;

[0025] FIG. 16 is a chart reflecting the desired decrease in Blood Resistivity affected by consumption of silica hydride;

[0026] FIG. 17 is a chart reflecting the desired decrease in Urine Resistivity affected by consumption of silica hydride;

[0027] FIG. 18 is a chart reflecting the desired increase in Urine pH affected by consumption of silica hydride;

[0028] FIG. 19 is a chart reflecting the desired increase in Urine rH2 affected by consumption of silica hydride;

[0029] FIG. 20 is a chart reflecting the desired decrease in Saliva Resistivity affected by consumption of silica hydride.

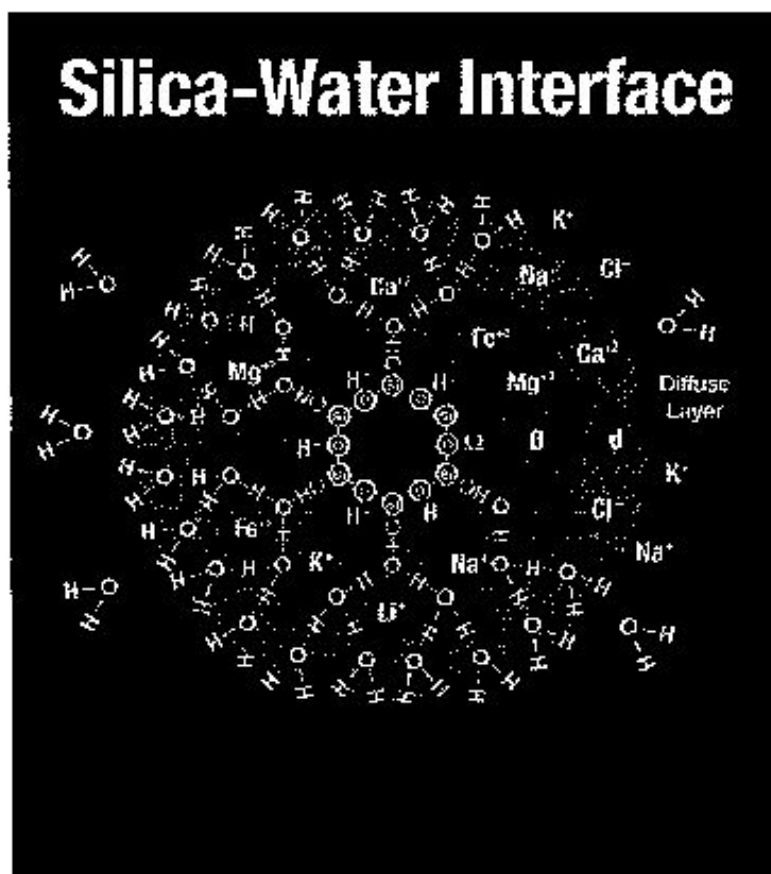


Figure 1  
PRIOR ART

Silica Hydride Reduces Lactic Acid  
Buildup After Strainuous Exercise:  
40K (24.8mi) Bicycling (6 Fit Males)

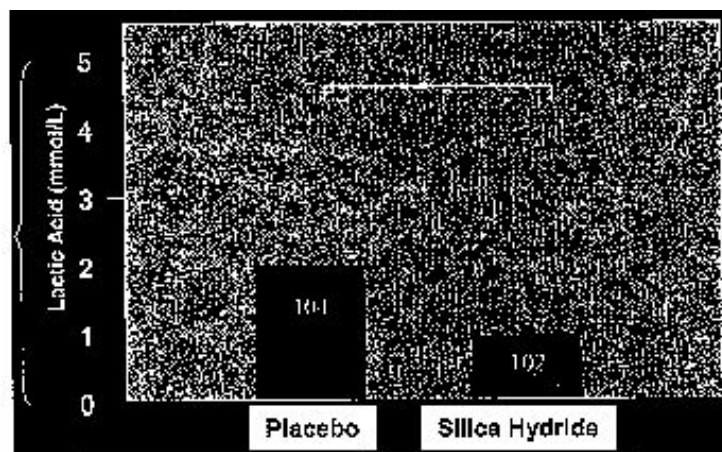


Figure 2

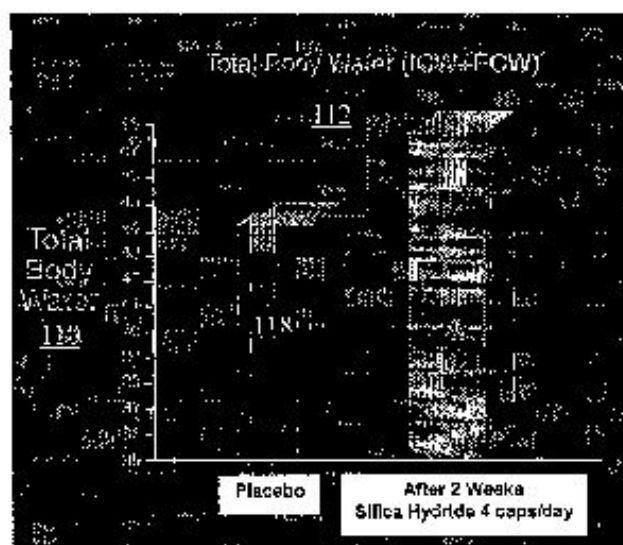


Figure 3

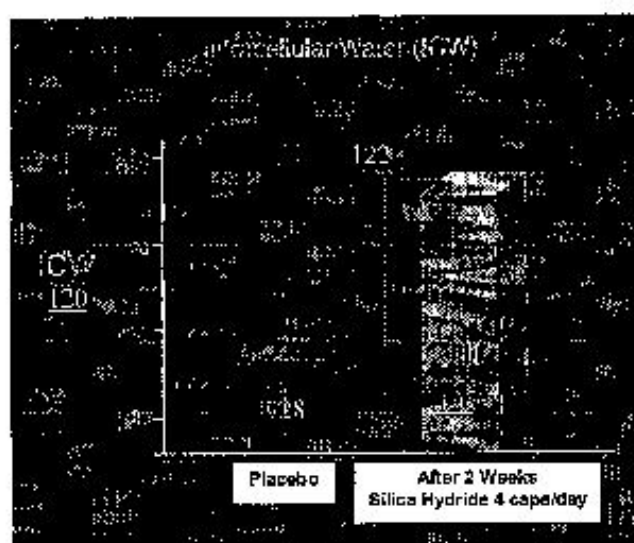


Figure 4

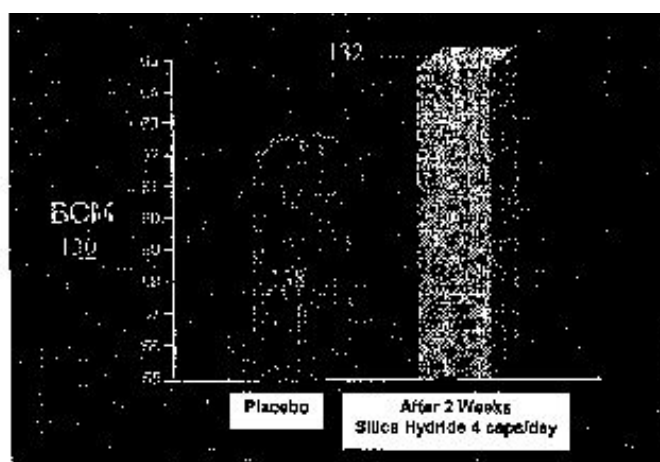


Figure 5

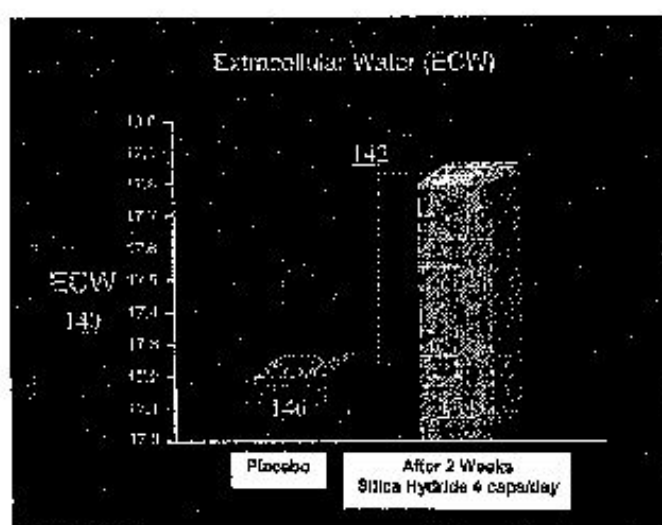


Figure 6

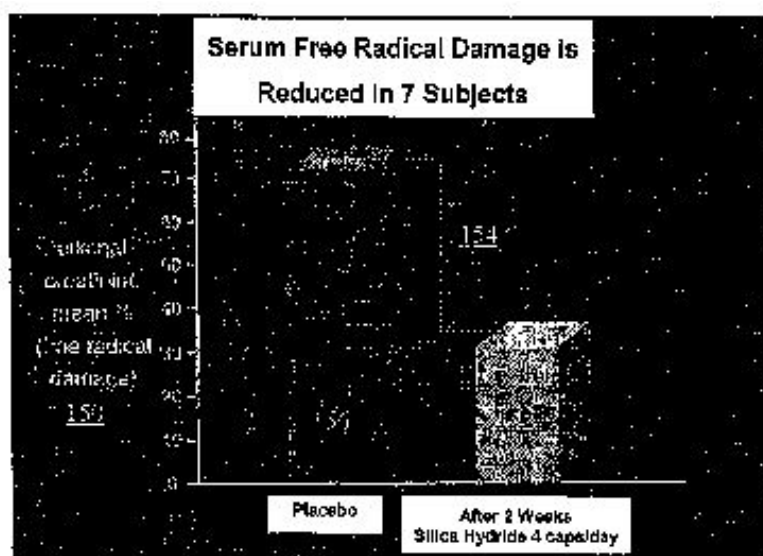


Figure 7

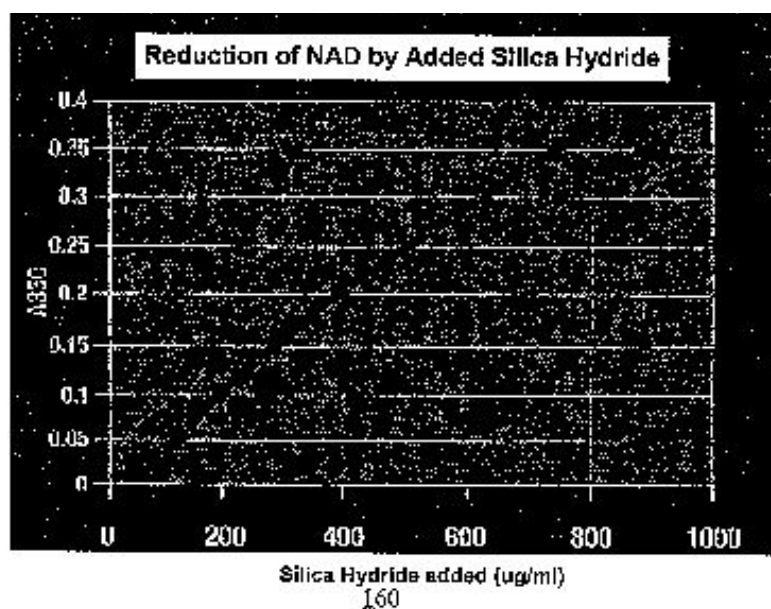


Figure 8

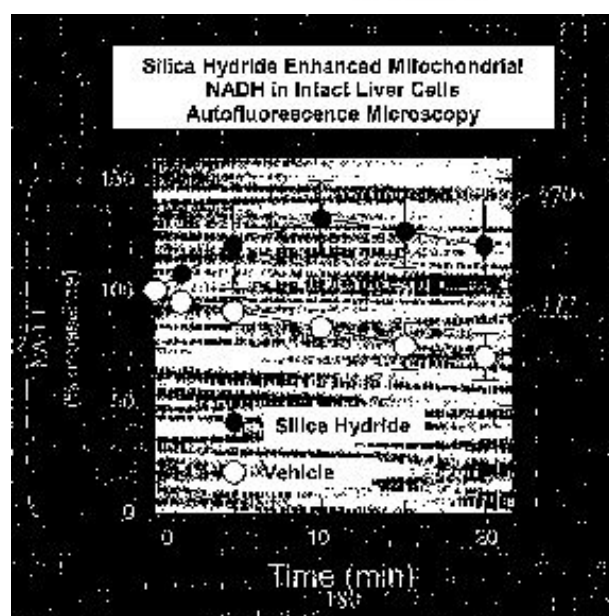


Figure 9

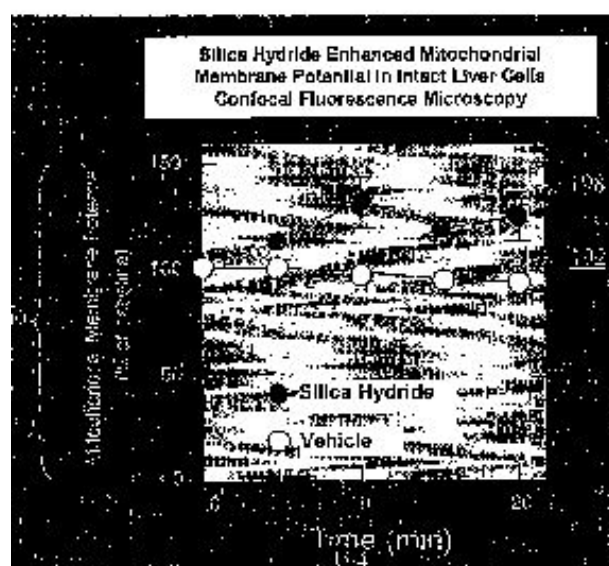


Figure 10

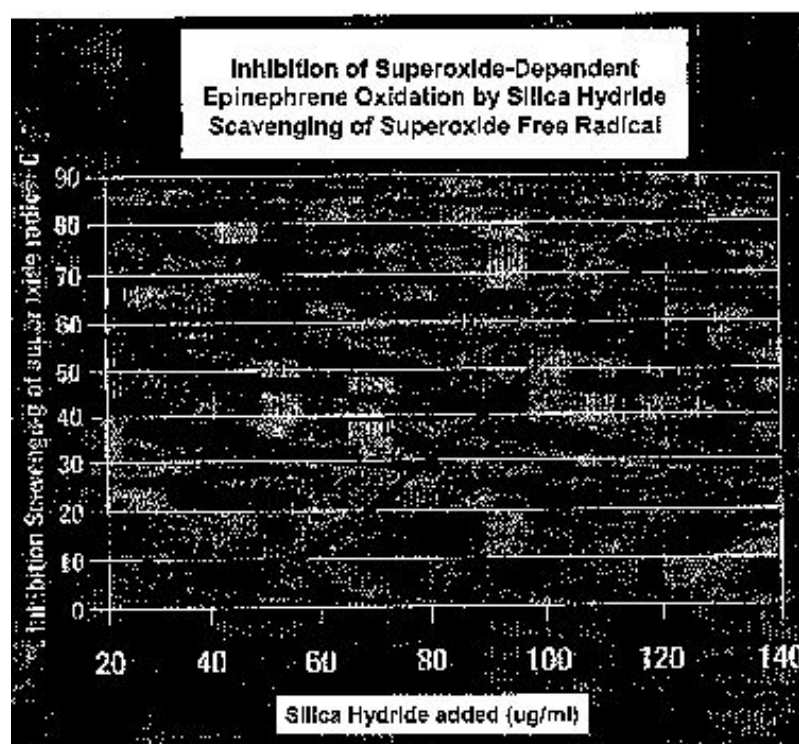


Figure 11

<u>Liquids</u>	<u>Range of pH</u>	<u>Range of ORP</u>	
Tap Water	6 - 6.5	+250 to -600 mv	242
Tap Water + 250 mg Silica Hydride	9 - 10	-300 to -650 mv	244
12 brands of Bottled Water	6.4 - 8.2	+60 to +490 mv	240
12 brands Bottled Water - 250 mg Silica Hydride	9.2 - 9.8	-300 to -650 mv	246

Figure 12

<u>ORP COMPARISON OF ANTIOXIDANTS</u>			
<u>Liquids</u>	<u>pH</u>	<u>ORP</u>	
Silica Hydride 250 mg/4 oz @1 hr.	9.5	-500	248
Orange Juice	3.54	-191	
Ex(a - Cee (RBC)	5.80	-31	
Phycotene Microclusters (RBC)	9.00	-56	
Coral Calcium	10.30	-112	
Organic Carrot Juice	6.56	-120	
Pycnogenol (50 mg)	4.20	+145	
Green Tea (tea bag)	6.00	+86	
CoQ 10 (30 mg)	6.20	+49	

Organic Lemon Juice	2.19	+77
Vitamin C (500 mg)	4.50	+47
Wheat Grass	6.20	+36

Figure 13

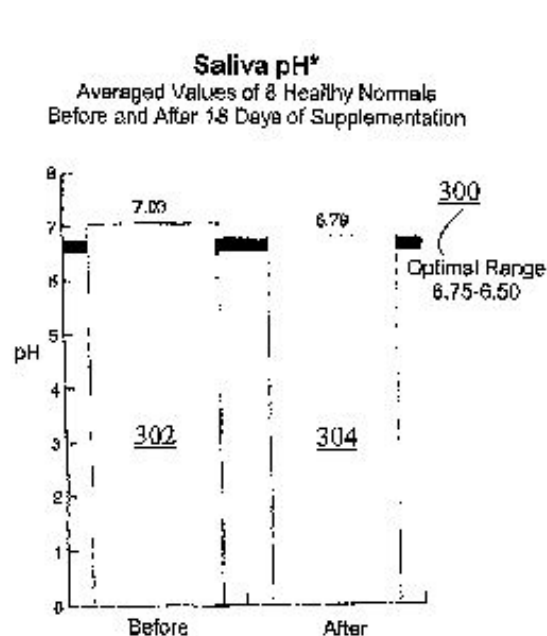


Figure 14

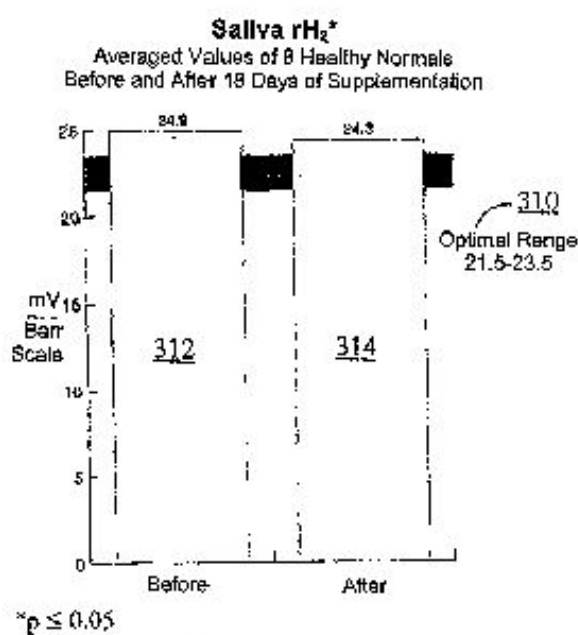


Figure 15

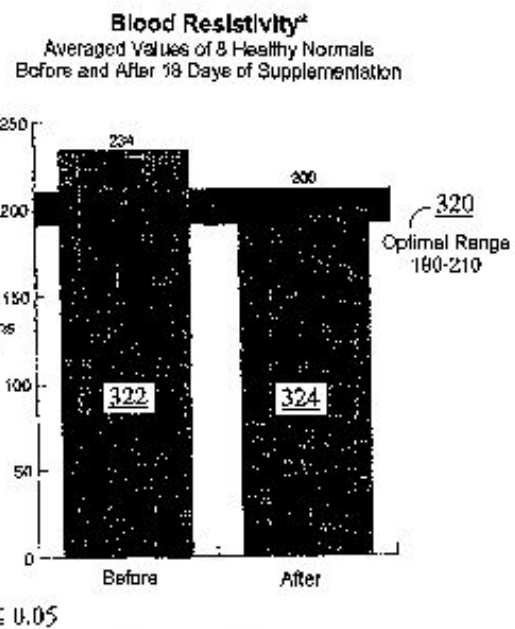


Figure 16

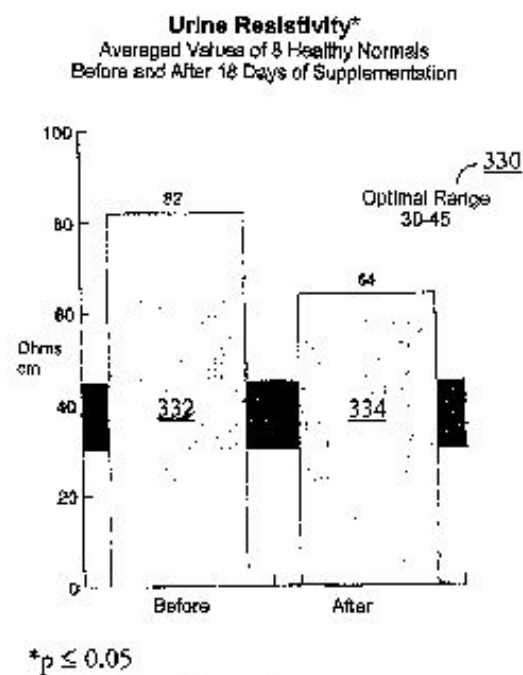


Figure 17



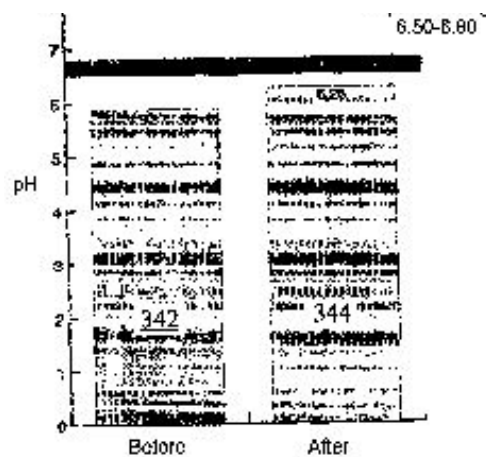


Figure 18

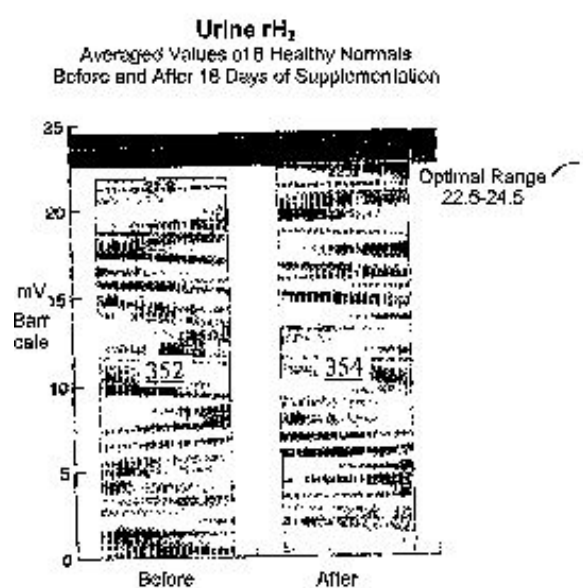
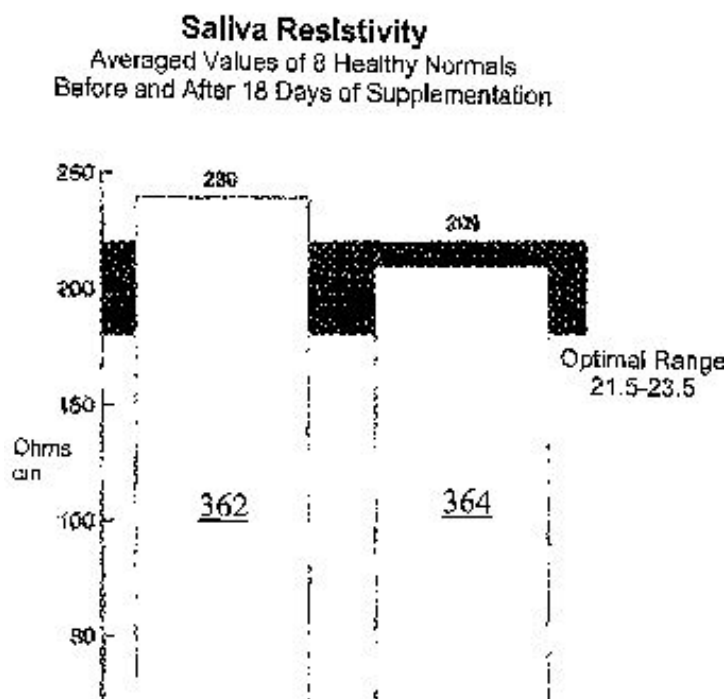



Figure 19





**Figure 20**

## **DETAILED DESCRIPTION OF THE DRAWINGS**

[0030] FIG. 2 charts the results of a study of blood lactic acid (lactate) levels 100 in six male cyclists during a 40K (24.8 mi) timed bicycle ride at maximum speed. In this embodiment of an effective dose, subjects received four 250 mg capsules of a silica hydride mineral or placebo each day, taking one in the morning, two at noon and one in the evening during the week prior to testing and during the week of testing. Subjects refrained from all other non-prescribed supplements during the testing period. Additionally, subjects took two 250 mg capsules with water thirty minutes before the start of exercise. Blood lactate was measured before, and five minutes after, each exercise session. During strenuous exercise, the blood lactate levels 100 of the group taking silica hydride 102 were significantly decreased as compared to the placebo group 104, from about 2 to about 1 mmol/L.

[0031] Typically, lactic acid accumulates during strenuous or prolonged exercise. It causes pain, limits endurance, and is a common problem for athletes and people who lift weights, play sports, or do physical exercise for an extended time. Decreased lactate levels observed immediately after strenuous exercise indicate the silica hydride mineral's ability to help in providing a direct energy source (ATP production) to cellular function. An ergogenic energy function, such as this, is one that occurs when a substance enhances biochemical energy without introducing additional carbohydrates or calories to the diet.

[0032] The dose of silica hydride for reduction of lactic acid build-up described above calls for 250 mg, four times per day. It will be understood by those skilled in the art, however, that a wide range of doses, ascertainable without undo experimentation, produce similar beneficial effects to a greater or lesser degree. Alternative embodiments for reduction of lactic acid build-up include ingesting silica hydride in amounts as small as about 10 mg per day, or amounts as large as about 5000 mg per day. In addition, the doses may be ingested any number of times per day, as infrequently as once, or several more than the above-mentioned four times per day. Individuals may also find it necessary to increase or decrease the amount of silica hydride ingested to achieve desired results. For example, an individual may find 75 mg of silica hydride per day more beneficial than 10 mg. Similarly, one may find that increasing the dosage to 150 mg per day, 250 mg per day, or even 400 mg per day, and so on, achieves progressively better results. On the other hand, where one individual sees peak results taking 5000 mg per day at various intervals, another may see similar results by ingesting 3500 mg per day at a different set of intervals. Likewise, it may be advantageous to limit the dose, say from 3500 mg per day to 2000 mg per day, or to 1000 mg per day, or even to 750 mg per day, in order to see if the same results may be obtained at lower dosage levels.

[0033] FIGS. 3 through 6 show the results of a study where consumption of silica hydride mineral increased intra- and extra-cellular hydration as compared to a placebo group. Hydration of the body was measured using the RJL Bioelectrical Impedance Analyzer, developed by R. J. Liedtke, which measures body hydration based on nutritional status. In the study, seven subjects received four 250 mg capsules of silica hydride mineral per day for two weeks and were crossed over receiving four capsules per day of a placebo.

[0034] Body Cell Mass and Intracellular Water are assessments of intracellular volume and water inside the cell, respectively. Intracellular Water makes up approximately 60% of the total body water of healthy adults. Intracellular Water, as an indicator of cell integrity, is found to be higher in babies but decreases as adults age or lose body cell mass. Healthy tissue cells hold water within the cells and have higher anabolic (building up) function rather than catabolic (breaking down) function.

[0035] FIG. 3 charts the value for Total Body Water (TBW) (110), the sum of intracellular (ICW) and extracellular water (ECW), which increased by 2.7% (112) when consuming silica hydride. The changes observed in TBW when subjects consumed the silica hydride mineral (116), compared to the placebo (118), showed statistical significance using a student's test for small sample groups.

[0036] FIG. 4 shows the consumption of silica hydride also increased ICW (120), the most sensitive indicator of nutrition and metabolic state, of the silica hydride consuming group (126) over the placebo group (128), by 2.7% (122). As indicated by FIG. 5, Body Cell Mass (BCM) (130), or intracellular volume, another indicator of water within cells, also showed a 2% increase (132) during supplementation with silica hydride (136) compared to the placebo (138). Similarly, as indicated by FIG. 6, the increase in volume of water observed in ECW values (140), was also statistically significant, about 3.0% (142), when consuming silica hydride (144) as compared to taking the placebo (146).

[0037] The dose of silica hydride for increasing cellular hydration described above calls for 250 mg, four times per day. It will be understood by those skilled in the art, however, that a wide range of doses, ascertainable without undo experimentation, produce similar beneficial effects to a greater or lesser degree. Alternative embodiments for increasing cellular hydration include ingesting silica hydride in amounts as small as about 10 mg per day, or amounts as large as about 5000 mg per day. In addition, the doses may be ingested any number of times per day, as infrequently as once, or several more than the above-mentioned four times per day. Individuals may also find it necessary to increase or decrease the amount of silica hydride ingested to achieve desired results. For example, an individual may find 75 mg of silica hydride per day more beneficial than 10 mg. Similarly, one may find that increasing the dosage to 150 mg per day, 250 mg per day, or even 400 mg per day, and so on, achieves progressively better results. On the other hand, where one individual sees peak results taking 5000 mg per day at various intervals, another may see similar results by ingesting 3500 mg per day at a different set of intervals. Likewise, it may be advantageous to limit the dose, say from 3500 mg per day to 2000 mg per day, or to 1000 mg per day, or even to 750 mg per day, in order to see if the same results may be obtained at lower dosage levels.

[0038] FIG. 7 shows the results of testing to observe the effect of silica hydride mineral consumption on protection against free radical damage. The test of free radical damage was a double blind placebo controlled crossover pilot study conducted on seven subjects who received four 250 mg capsules per day of silica hydride for two weeks and received four capsules per day of a placebo for two weeks. Urine alkenal/creatinine ratios reflect free radical damage (150). The ratios were measured during silica hydride mineral supplementation (152). A 43% decrease (154) in free radical damage was observed as compared to the placebo group (156). The results demonstrate the ability of silica hydride to protect against serum alkenals. Alkenals are the oxidative products of serum lipid peroxides occurring from free radical attacks on cellular lipid membranes and lipoproteins. They are indicators of free radical damage in the body associated with a higher risk of age related diseases.

[0039] The dose of silica hydride for reduction of free radical damage described above calls

for 250 mg, four times per day. It will be understood by those skilled in the art, however, that a wide range of doses, ascertainable without undue experimentation, produce similar beneficial effects to a greater or lesser degree. Alternative embodiments for reduction of free radical damage include ingesting silica hydride in amounts as small as about 10 mg per day, or amounts as large as about 5000 mg per day. In addition, the doses may be ingested any number of times per day, as infrequently as once, or several more than the above-mentioned four times per day. Individuals may also find it necessary to increase or decrease the amount of silica hydride ingested to achieve desired results. For example, an individual may find 75 mg of silica hydride per day more beneficial than 10 mg. Similarly, one may find that increasing the dosage to 150 mg per day, 250 mg per day, or even 400 mg per day, and so on, achieves progressively better results. On the other hand, where one individual sees peak results taking 5000 mg per day at various intervals, another may see similar results by ingesting 3500 mg per day at a different set of intervals. Likewise, it may be advantageous to limit the dose, say from 3500 mg per day to 2000 mg per day, or to 1000 mg per day, or even to 750 mg per day, in order to see if the same results may be obtained at lower dosage levels.

[0040] Another benefit of consumption of silica hydride is enhancement of the bioenergetic capacity of the mitochondria. Such enhancement occurs by promoting formation of NADH, which enhances production of ATP, the principal mitochondrial energy source, as well as by enhancing the membrane potential of the mitochondria.

[0041] Hydrogen is one of the most important elements donating an electron, an electron pair, or its proton to reduction/oxidation reactions of numerous enzymes and intermediates within the cell's metabolic pathways. Some of those reactions lead to production of ATP, the principal energy source of the mitochondria. In particular, ATP production depends on the production of NADH. NADH carries reduced hydrogen, generated by the Krebs Cycle, into the mitochondria for the electron transport chain reactions that will ultimately create a molecule of water and ATP.

[0042] FIG. 8 shows the results of tests of in vitro assays designed to measure the direct conversion of  $\text{NAD}^{+}$  to NADH by the addition of silica hydride mineral. The sequential addition of increasing concentrations of silica hydride (160), up to at least 800 micrograms/ml (164), to  $\text{NAD}^{+}$  shows a linear increase in NADH production (162) as measured by its absorption at 350 nm.

[0043] Silica hydride mineral has also proven to enhance NADH production in other tests. FIG. 9 shows measurements of mitochondrial NADH in cultures of intact living hepatocytes. Silica hydride mineral was introduced to the cultured 90% viable rat hepatocytes. A laser scanning confocal microscope was used to visualize the blue auto-fluorescence of mitochondrial NADH. Under the conditions used, auto-fluorescence arises primarily from mitochondrial NADH. Oxidation of NADH to  $\text{NAD}^{+}$  causes loss of fluorescence since only NADH is fluorescent, not  $\text{NAD}^{+}$ .

[0044] FIG. 9 summarizes data from three silica hydride mineral and three vehicle (control) experiments. In the silica hydride mineral group, NADH (178) increased 20% (170) over 20 minutes (180), while the vehicle group showed that NADH fluorescence (178) decreased by about 30% (172). These experiments demonstrate the promotion of electron transfers to  $\text{NAD}^{+}$  in intact living hepatocytes. Moreover, the silica hydride mineral prevented the spontaneous oxidation (or bleaching) of NADH that generally occurs during incubation (see vehicle plot (172)), thereby indicating a continuous recharging of the pyridine nucleotide (NADH).

[0045] In FIG. 10, mitochondrial membrane potential (200) was monitored using overnight

cultured hepatocytes similar to the NADH experiment. The cultured hepatocytes were loaded for 20 minutes (194) with the fluorescent probe, tetramethylrhodamine methylester (TMRM). The medium was adjusted to pH 7.4. In these experiments, an increase of the mitochondrial fluorescence of TMRM represents an increase of mitochondrial depolarization (more negative membrane potential). The line graph summarizes data from three silica hydride mineral, and four vehicle experiments. In the vehicle group, TMRM fluorescence decreased by about 6% (192) over twenty minutes (194). In the silica hydride group, TMRM increased about 25% (198). These experiments demonstrate that silica hydride minerals enhance mitochondrial membrane potential in intact living hepatocytes.

[0046] The combination of increased mitochondrial membrane potential and increased NADH relates to an enhancement of bioenergetic capacity of the mitochondria when silica hydride is present in the cell suspension. Silica hydride makes electrons or H<sup>-</sup> available to cofactors able to utilize these for cellular energy production. NADH provides electrons to the mitochondrial electron transport chain, directly producing H<sub>2</sub>O and ATP, the primary cellular energy source for numerous biochemical reactions throughout the cell.

[0047] It will be understood by those skilled in the art that a wide range of effective doses of silica hydride, ascertainable without undo experimentation, enhance mitochondrial bioenergetic capacity in humans to a greater or lesser degree. Such range includes doses as small as about 10 mg per day, or doses as large as about 5000 mg per day. The doses may be ingested any number of times per day. Additionally, individuals may find it necessary to increase or decrease the amount of silica hydride ingested to achieve desired results. For example, an individual may find 75 mg of silica hydride per day more beneficial than 10 mg. Similarly, one may find that increasing the dosage to 150 mg per day, 250 mg per day, or even 400 mg per day, and so on, achieves progressively better results. On the other hand, where one individual sees peak results taking 5000 mg per day at various intervals, another may see similar results by ingesting 3500 mg per day at a different set of intervals. Likewise, it may be advantageous to limit the dose, say from 3500 mg per day to 2000 mg per day, or to 1000 mg per day, or even to 750 mg per day, in order to see if the same results may be obtained at lower dosage levels.

[0048] Silica hydride minerals have also been tested for, and shown, antioxidant characteristics. In one evaluation, tests on silica hydride were conducted using electron spin resonance techniques (ESR) by a scientist who specializes in the evaluation of antioxidants at a major university. The following is quoted from the test report:

[0049] We have made a thorough investigation of the antioxidant activity of [silica hydride] by several experimental methods. Hydroxyl radical scavenging activity was found in two different [silica hydride] preparations provided.

[0050] Our conclusions are that [silica hydride] has antioxidant activity towards hydroxyl radicals. Hydroxyl radicals are among the most dangerous of oxygen free radicals that occur in biological systems. They are the same types of radicals that can be produced by exposure to ionizing radiation. Therefore, it can be stated that [silica hydride] has antioxidant activity in this regard.

[0051] (Lester Packer, Ph.D., University of California at Berkeley, 1999).

[0052] In a second evaluation of the antioxidant characteristics of silica hydride, tests were conducted by another scientist who specializes in the evaluation of antioxidants at a separate major university. The following is quoted from the test report:

[0053] When assayed in the standard assay for super oxide dismutase activity based upon the reduction of cytochrome c by xanthine (see J. Biol. Chem. 244: 6049-6055, 1969), silica hydride mineral showed two characteristics:

[0054] 1) Silica hydride can directly reduce cytochrome c, showing that it is a reducing agent (or an antioxidant).

[0055] 2) Silica hydride can inhibit the superoxide-mediated reduction of cytochrome c, indicating that it can scavenge the superoxide free radical.

[0056] (Joe McCord, Ph.D., University of Colorado Health Sciences Center, 1998).

[0057] FIG. 11 shows the results of one evaluation of silica hydride's antioxidant capabilities. In this test, the silica hydride mineral was assayed with an alternative method based on the ability of superoxide to oxidize epinephrine to adrenochrome. As FIG. 11 demonstrates, silica hydride's antioxidant effects (200) increased linearly (210) from concentrations of less than 60 micrograms/ml (220) to greater than 120 micrograms/ml (230).

[0058] It will be understood by those skilled in the art that a wide range of effective doses of silica hydride, ascertainable without undo experimentation, increase antioxidant activity in humans to a greater or lesser degree. Such range includes doses as small as about 10 mg per day, or doses as large as about 5000 mg per day. The doses may be ingested any number of times per day. Additionally, individuals may find it necessary to increase or decrease the amount of silica hydride ingested to achieve desired results. For example, an individual may find 75 mg of silica hydride per day more beneficial than 10 mg. Similarly, one may find that increasing the dosage to 150 mg per day, 250 mg per day, or even 400 mg per day, and so on, achieves progressively better results. On the other hand, where one individual sees peak results taking 5000 mg per day at various intervals, another may see similar results by ingesting 3500 mg per day at a different set of intervals. Likewise, it may be advantageous to limit the dose, say from 3500 mg per day to 2000 mg per day, or to 1000 mg per day, or even to 750 mg per day, in order to see if the same results may be obtained at lower dosage levels.

[0059] Silica hydride minerals are also capable of making water more suitable for conversion into optimal extracellular and intracellular body fluids. Tap water and bottled waters are oxidized, acidic, and do not provide a source of electrons. When consumed, the body must substantially alter their chemical characteristics in order to convert water into optimal extracellular and intracellular body fluids. Three such characteristics are conductivity, oxidation-reduction potential (ORP) and surface tension.

[0060] Conductivity is critical to the optimal function of body fluids, and the conductivity of typical tap water is much lower than desirable. When conductivity was assessed, 250 mg of silica hydride in 8 oz of tap water increased conductivity from 10 to 895 [ $\mu$ ]Mhos/c. Total dissolved solids also increased from 30 ppm to 400-450 ppm.

[0061] Oxidation-reduction potential is a measure of negative ions in solution. Metabolic oxidation-reduction reactions are extremely important to the cell. Oxidation-reduction reactions (or "redox" reactions) involve the loss of electrons by one chemical species, becoming oxidized, and the gain of electrons by another species, becoming reduced. The flow of electrons in redox reactions is responsible, directly or indirectly, for all of the work done by living organisms. The tendency of these reactions to occur depends upon the relative affinity of the electron acceptor for electrons. Electron flow is spontaneous and exergonic (releases energy) in the cell because oxygen, the final electron acceptor, has a higher affinity for electrons than do the intermediates that donate electrons.

[0062] ORP is a measure of oxidation-reduction potential with standard meters, such as the Electronmeter, that measure negative ions in solution. Various types of water, depending on mineral salt content, and water treatments will show variability in ORP readings with standard meters. ORP measurements, when silica hydride is added to water, vary depending on water purity, dilution, the time it has remained in solution, proper cleaning of the meter probes, and maintenance of the meter.

[0063] To measure the level of electrons available in silica hydride, a 250 mg capsule was dispersed into 8 oz of tap water and into each of twelve 8 oz. glasses of different brands of bottled water. The results shown in FIG. 12 were measured before, and one hour after, the addition of silica hydride. The average ORP of the bottled waters (240), +60 to +490 mv, was lower and more desirable than the ORP of tap water (242), +250 to +600 mv. In contrast, the average ORP of both tap water and bottled water after addition of 250 mg of silica hydride (244), (246), -300 to -650 mv for both, was dramatically lower. FIG. 13 compares the ORP of 250 mg of silica hydride mineral in 4 oz. of water (248) to that of other common antioxidants.

[0064] In addition to conductivity and oxidation-reduction potential, surface tension is a third property of concern when comparing the characteristics of tap or bottled water to the characteristics of optimal body fluids. The surface tension of tap water is approximately 73 dynes. The surface tension of extracellular fluids is much lower at approximately 45 dynes. This low surface tension is critical to cellular function, absorption of nutrients, and to the removal of toxins. 250 mg of silica hydride dispersed into an 8 oz. glass of tap water has been shown to reduce surface tension to approximately 45 dynes, the same surface tension as extracellular fluids.

[0065] A wide range of doses of silica hydride, readily ascertainable by those skilled in the art, will make water more suitable for conversion into optimal intra- and extra-cellular body fluids. Such range includes amounts as small as about 1 mg per 8 oz. of tap water, or amounts as large as about 5000 mg per 8 oz. of tap water. Individuals may find it necessary to increase or decrease the amount in order to achieve desired results. For example, an individual may find 30 mg of silica hydride per 8 oz. of tap water more beneficial than 1 mg. Similarly, one may find that increasing the dosage to 100 mg, 200 mg, or even 400 mg per 8 oz. of tap water, and so on, achieves progressively better results. On the other hand, where one individual sees peak results by including 5000 mg of silica hydride in 8 oz. of tap, another may see similar results by mixing 3500 mg per 8 oz. of tap water. Likewise, it may be advantageous to limit the dose, say from 3500 mg, to 2000 mg, to 1000 mg, or even to 750 mg per 8 oz. of tap water, in order to see if the same results may be obtained at lower dosage levels.

[0066] Other tests of silica hydride also showed that in eight normal adult subjects, supplementation with silica hydride improved the characteristics of body fluids. As shown in FIGS. 14 through 17, respectively, saliva pH, saliva rH<sub>2</sub>, blood resistivity, and urine resistivity showed statistically significant improvement in eight subjects after eighteen days of supplementation with four 250 mg doses of silica hydride per day on a schedule of one in the morning, two at midday, and one in the evening. FIG. 14 shows that the optimal range for saliva pH is 6.75 to 6.50 (300) and that the supplementation decreased the group's average saliva pH from 7.03 (302) to 6.79 (304). FIG. 15 shows that the optimal range for saliva rH<sub>2</sub> is 21.5 to 23.5 (310) and the supplementation decreased the group's average saliva rH<sub>2</sub> from 24.9 (312) to 24.3 (314). The optimal range for blood resistivity, as shown by FIG. 16, is 190 to 210 (320), and the supplementation accounted for an average decrease of from 234 (322) to 200 (324). The results of the urine resistivity tests are shown in FIG. 17, which reflects an optimal range from 30 to 45 (330) and a decrease in the average value for the group after

supplementation from 82 (332) to 64 (334).

[0067] FIGS. 18 through 20 reflect data for three other parameters, urine pH, urine rH2, and saliva resistivity, respectively, that also showed improvement over the 18-day supplementation period when their average changes were calculated. The optimal range for urine pH is reported from 6.50 to 6.80 (340). The described supplementation with silica hydride increased the average urine pH value from 5.87 (342) to 6.26 (344). The optimal range for Urine rH2 is reported from 22.5 to 24.5 (350). The silica hydride supplementation increased average urine rH2 values from 21.9 (352) to 22.6 (354). As for saliva resistivity, FIG. 20 shows the optimal range is reported from 21.5 to 23.5 (360) and the average values for the group decreased from 239 (362) to 209 (364) with supplementation.

[0068] The preceding effective dose of silica hydride for improving the characteristics of certain body fluids calls for 250 mg, four times per day. It will be understood by those skilled in the art, however, that a wide range of doses, ascertainable without undo experimentation, produce similar beneficial effects to a greater or lesser degree. Alternative embodiments for improving the characteristics of certain body fluids include ingesting silica hydride in amounts as small as about 10 mg per day, or amounts as large as about 5000 mg per day. In addition, the doses may be ingested any number of times per day, as infrequently as once, or several more than the above-mentioned four times per day. Individuals may also find it necessary to increase or decrease the amount of silica hydride ingested to achieve desired results. For example, an individual may find 75 mg of silica hydride per day more beneficial than 10 mg. Similarly, one may find that increasing the dosage to 150 mg per day, 250 mg per day, or even 400 mg per day, and so on, achieves progressively better results. On the other hand, where one individual sees peak results taking 5000 mg per day at various intervals, another may see similar results by ingesting 3500 mg per day at a different set of intervals. Likewise, it may be advantageous to limit the dose, say from 3500 mg per day to 2000 mg per day, or to 1000 mg per day, or even to 750 mg per day, in order to see if the same results may be obtained at lower dosage levels.

---

## **UA29000**

### **METHOD FOR REJUVENATION OF FACE AND NECK**

A method for rejuvenation of the face and the neck comprises the application of the oil followed by the successive massage procedures according to the specified massaging techniques. The method comprises five steps. At the first step, the kernel oil of the cold press is applied to the face and the neck followed by the classic manual massage of the face, the neck, and the alveolar area. At the second step, acupressure of the points 16M, 16B, 11M, 11B, 12M, 9B, 7, 10M, 14M, JB10, JB8, 34, 51, 14B, 15M, JB9 is performed. The third step comprises the manual massage of the problem areas in the cheek-bones and the chin followed by the circular and vertical smoothing of the lymph-containing capsules, subcutaneous fluid and the fibrous fat. At the fourth step, the face and the neck are wiped with the serviette and treated with 3% solution of hydrogen peroxide. The nutritive pack is applied. Finally, the bioenergetic massage of the face and the neck is performed.

---

## **UA15158**

### **DEVICE FOR BIOENERGETIC EXPOSURE OF HUMAN BODY**

The device for the bioenergetic exposure of human body comprises the electrodes made as



the regular hexahedral hollow rods of the same width, one rod made of the foil of the nonferrous metal (copper for example) and another rod made of the iron coated by zinc outside. The honeycombs are used as the filler lining inside six internal metal sides of the electrode hexahedron with their axes running in perpendicular to the lateral sides and the heights falling into the ascending series of the golden proportion 1; 2; 3; 5; 8.

---


## **RU2045290** **METHOD OF BIOENERGETIC TREATMENT**

A method of treating patients with hypertension I-II degree, and vegetative-vascular dystonia, the essence of which is the individual Therapeutic Touch to the patient simultaneously three physical factors, namely 8-14 micron infrared radiation, sverhchastotnym radiation in the range 8-30 cm, and an alternating electric field with a frequency of 10 Hz, while the radiation source using the hands of the operator (biodonora).


---

## **SI21904** **BED OVERPAD WITH BIOENERGETIC EFFECT**

A bed overpad with bioenergetic effect is carried out from a basic part (1) designed as a cushion with a core (2) and a fabric lining (3), where in the interior of the core (2), at least two oblong strip-shape magnetic belts (5) are inserted, whose magnetic poles at the ends of each respective belt (5) are arranged ones against others in a manner, that nearby magnetic poles of adjacent belts (5) located on the same side of the core (2) have the same polarity, and that in the interior of the core (2), namely in the area of its longitudinal axis of symmetry, several bioenergy receiving/emitting elements (6) are installed

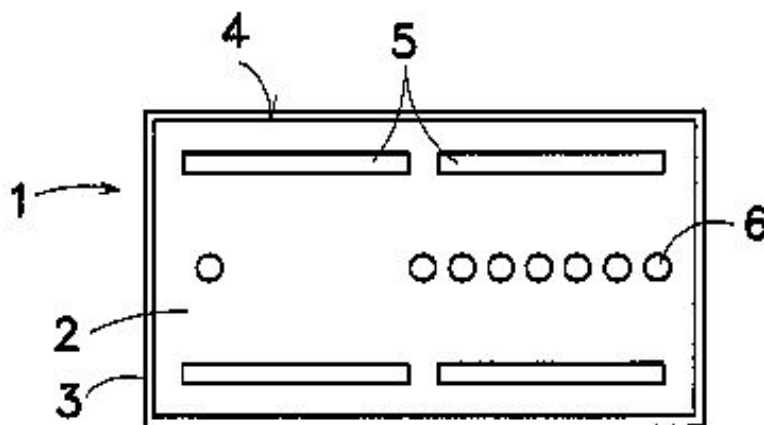

Sl.1

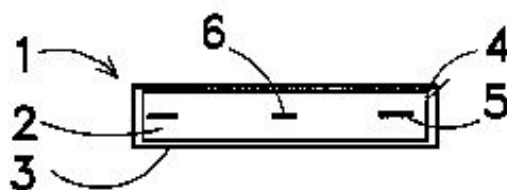

Sl.2

---

**RU2157707**  
**VALASHVESH METHOD FOR BUILDING AND SETTING HUMAN**  
**BIOENERGETIC MECHANISM IN ACTION FOR RECEIVING, PROCESSING**  
**AND IMPLEMENTING IT AS NEW INFORMATION PRODUCT FROM**  
**INFORMATION-ENERGY SPACE**

SUBSTANCE: method involves stimulating human active bioenergy zones linked to brain structures responsible for operation of three psychic levels in strictly defined succession order. To do it, the patient must perform the corresponding breathing actions, movements and sounding until synchronism and harmony is achieved in brain operation with subcortical structures and the right hemisphere cooperation with the left one. EFFECT: achieved nirvana state characterized by mental and spiritual rather than sensual processes to take place.

---

**RU2143290 // WO0069519**  
**METHOD OF BIOENERGETIC INFORMATION INTERACTION OF TEACHER-**  
**SENSITIVE AND PUPIL ..**

FIELD: medicine. SUBSTANCE: method includes performance of diagnostics of pupil's energetic envelope by teacher-sensitive in order to reveal its sizes and form, teaching of pupil to feel energy flux between his palms by teacher's feelings and to manipulate it. In this case, teacher directs energy flux of his own to space between pupil's palms to enlarge pupil's energetic field. Then teacher and pupil establish energetic contact between their palms for correction of pupil's energetic envelope. Teacher activates pupil's energy flux till pupil has feelings of prickling or chill, warmth or humming, to create single magnetic field. This done, teacher moves energy flux along pupil's body by passes of his hands, with pupil checking his feelings of energy flux, after which pupil starts moving his energy flux over his body mentally at the same time checking its movement by his feelings at different points of body. In this case, teacher checks continuously energy flux movement by pupil with feelings of his own. Then teacher takes position of pupil, and pupil takes position of teacher and performs the same manipulations of teacher's energetic field for correction of the latter. In addition, teacher and pupil may exchange their positions many times to enhance correction efficiency. EFFECT: enhanced efficiency of correction.

[0001]

The invention concerns medicine and can be used for mutual influence and correction of the functional state of the patient and the student-teacher-the sensitive, in which there is harmonization of the body, the development of its functions and systems of both parties bio energy cooperation.

[0002]

It is known that for the correction of the functional state of the biological object using a variety of methods, including non-traditional.

Each of the known methods include a preliminary diagnosis of the biological object.

For example, a method of correcting the functional state of the biological object, in which diagnosis is carried out as the energy shell (RU, 2083239, 1997, A 61 N 2/00).

[0003]

It is known as a method for correcting the functional state of the body, which carries out the diagnosis psychic healer (M. Frolov.

"Your health - in your hands."

Phoenix, 1996, S.35-102).

[0004]

There is a method of correcting the functional state of the organism, is the impact of the operator's hand on the first series of the projection area of ??the thyroid and thymus, and then on the projection area of ??the pituitary gland several times over each projection in a circular motion in a clockwise direction at a distance from the skin surface, sufficient for the perception of the physical effects of the operator's hand to run periodically shakes movements (SU 1764509, 1985).

[0005]

The disadvantage of the known methods of correcting the functional state is the low efficiency of energy harmonization of the entire human body, so that these methods can be applied to the correction of the impact of energy in a particular area of the body. In addition, the known methods are based on the unilateral action of the sensitive between operator and patient-student, do not make the task of mastering the technique autokorreksii patient functional status and transfer of new knowledge and skills to the next patient-pupil to achieve bioenergoobmena and mutual correction of the body.

[0006]

However, it is known that non-traditional methods of correction of the functional state of the body can be based on cooperation through the exchange of bioenergy (RU, 96100536, 1997).

[0007]

Analogues of the invention solves the same problem in the available scientific, technical and patent literature have been found.

[0008]

The technical result achieved the present invention is to provide a method for the mutual correction of the functional state of the two persons within a single energy fields, each of which can be located in the pupil-position of the patient, and the position of the teacher operator.

[0009]

The essence of the invention is to achieve said technical result means the bio energy of interaction of the sensitive teacher and student in a single bio-field for the mutual correction of the body to its harmonization and development of functions and systems is the fact that the teacher previously taught student, focusing on their feelings, to feel the energy flow between the hands and manipulate it, for what the teacher directs the space between the arms student own energy flow, thereby increasing the energy field of the student and closing the latter with its own energy field to create a single energy field of bio energy cooperation between the parties, then under the control of the teacher pupil sensation energy flow in the form of tingling, heat, cold, buzz moves the energy flow through the body with the help of student passes his hands, and then goes to the student movement of their own mental energy flow through the body, controlling the movement of your own feelings energy field at different points of the body, while the teacher constantly monitors the movement of the energy flow of the pupil's own feelings, followed by treatment energy field on the student teachers and teacher movement control energy flow disciple of his own body and the subsequent change of the multiple positions teachers and students as participants in the bio energy cooperation.

[0010]

The method is as follows.

[0011]

First teacher diagnoses the sensitive energy shell patient learner to identify its size and shape, and the student is placed in the teacher more than 7 meters. In the diagnosis of the patient's energy shell-student should not cross arms, legs. Teacher-Sensitive activates its own energy exchange, rubbing his hands together until they sensible heat or other sensations in the form of buzz, tingling, pressure, raises his arm bent at the elbow, palm facing to the diagnosed patient pupil. Slightly shaking his hand back and forth, gradually approaching the teacher to the student until the background in the palm (buzzing, tingling, crushing) the feeling that testifies to capture the sensitive energy flow coming from the student, and then - before the first boundary of the energy dense shell. Thus defined the boundaries of the energy shell and shape in front and behind the pupil. Field of the distance from the palm of the teacher to the student should be OK 7 meters or more (at any age and growth) thick, active, uniform, regular round shape.

[0012]

To determine the vertical boundaries of the energy shell teacher stands in front or to the side of the student on the platform or lifting his hand high over his head. The patient should not cower. Similarly to the above define the boundary energy shell top. Normally, it should be more than 60 cm.

[0013]

Next, the operator conducts teacher with a student exercise to capture their own energy flow. For this student rubs his hands together, and focuses on the feelings arising in his hands in the form of tingling, heat, cold, pressure, buzz. To better capture those feelings and remove the patient brings the palm provides a team of experience between your hands, "ball", its elasticity, its rotating the changing position of the hands. Then the pupil spreads palms on the distance at which caused sensations do not disappear, manipulating energy flows passing between the hands without losing his feeling. At the same time the patient is approaching and departing the palm as it creates a compressive and tensile energy flow - "energy accordion"; give yourself a mental command, spreading his hands at a distance of 15-20 cm, about that from one palm to another send and return the energy flow; the index finger of one hand rotates the opposite palm of the other hand, sends a beam of energy and feels it in the palm of the rotation, while it is advisable to carry out not only the rotation, but also to "draw" an energy ray square, rectangle, triangle, etc. In carrying out this exercise, the patient-student should clearly feel the energy contact and constantly evaluate the strength of feelings and their ability to manage the energy flow.

[0014]

Then the teacher turns to the impact of the shell correction energy-patient student, which is carried out in two stages: I stage - for the correction of the external form; Stage II - for the correction of internal form. During the procedures the patient-student must stand steadily and quietly (without any unnecessary movements, attention is focused on their own feelings). The operator in the process of impact does not use any thought forms, the work is carried out only with energy. First, the teacher and the student establish contact between the energy of each other palms (hands in front of chest, elbows bent). The teacher makes a circular motion with his hands, activating the power of the patient. In the hands of the patient having different kind of feeling, similar to the above in the training of the patient's own sensations capture the energy flow. To control the appearance of the power contacts of patients is constantly focusing on their own feelings. Over time, the further development of the sensitivity of feeling will occur in other parts of the body of the patient-pupil.

[0015]

In the event of the Sustainable Energy patient-student contact, focusing on their feelings, she says "there" and slowly fades into 7 meters from the teacher, hands down. Both hands remain through energokontakt, "stretching" the energy field. Next, the operator begins to correct the effects of the external form, which includes three procedures: first - the teacher swirls smooth hand movements raises energy flow from the bottom up, as if whipping featherbed, creating waves in the combined field and patient teacher. From the top position, arms to the side, making flowing motion with his hands, hands down. Repetitive motion 10-12 times; the second - the pupil is rotated clockwise 180 back to the master, and slowly lowers his hands down. The teacher repeats the above movement "whipping featherbeds" 10-12 times; third - student rotates clockwise facing the teacher and the teacher makes the same movements 2-3.

[0016]

The teacher then conducts exposure to correct internal form, for which the patient-student is standing still with his hands down, the teacher approaches him and gets behind him (all the teachers move around the patient are produced only in a clockwise direction). Impact includes six procedures for stored energy contact between teacher and student, which is controlled by the above feelings student: first - hand movements to drag the teacher directs the energy flow from the feet to the coccyx and spine up to the head of the patient, making the flowing movements with his hands over his head and along the sides of the patient, palms facing down to the floor and repeat the movement 5-6 times; the second - a teacher standing on the left side of the patient and placing the right hand rear, left (screen) - Front pupil at a distance of 10-15 cm from the body, the right hand does splashing movement, pushing energy flow through the body of the patient and reflecting left-handed (TV) energy flow . After each stroke the teacher consistently raises both hands up to 15-20 cm, and repeats the motion splashing. Movement is carried out from the bottom up, and when he reached the patient's head, the teacher takes the right arm forward and slowly lowers his hands down. Movement repeated 5-6 times; third - the teacher, standing face-to-patient, jumping movements palms moves energy flow along the sides of the pupil from the bottom up, gets his hands behind his neck and drops them down movement is repeated 5-6 times; Fourth - as in the second, only the teacher has changed hands in places, is on the right side of the patient, working behind the left hand, right in front - "screen"; fifth - standing behind the student, the teacher, setting the stage hands forward of the patient at the level of the neck moves the energy flow to the back of the head and carries it through the patient's head forward and down, forming an analogy helmet. It also checks the correct shape and density of the field around the patient's head; sixth - a teacher standing in front of a pupil moves the energy flow in a circular motion for 2-3 clockwise circle above his head, slowly lowering your hands down. Those movements are carried out before the eyes of the patient.

[0017]

All the procedures for correcting the effects of the energy shell held at energokontakte between teacher-sensitives and patient-pupil, which is controlled by the patient's feelings arising in his own perception of teaching energy flow.

[0018]

Next, the teacher offers the student repeat the previous movements of the energy flow, which is held in the body of the student teacher, do yourself. At the same time the teacher constantly monitors the movement of the energy flow of the student and, if necessary, helps him with the same passes hands, reminding problem mentally "push" energy flow.

[0019]

After mastering the technique of self-disciple move the energy flow of your own body, the

teacher becomes the position of the pupil and a new teacher (ie the pupils) is doing the same manipulation of the energy field of a new student (ie, previously trained teachers), described above. Next, the teacher and student, as participants in the bio energy cooperation, repeatedly changing the positions of teacher and student.

[0020]

In this lesson, one of the partners does not lose energy as first teacher produces enhanced "exhale" energy to enhance energy flow and simplify the pupil sensitive energy flow, and then the disciple carries out energy "breath", while in the position of teacher.

[0021]

In principle, the method of moving the energy flow through the body can learn on their own, with appropriate instructions. But, firstly, it is not always possible, and secondly, the process is, in practice, very long. Education is such a movement with a partner, the sensitive rezultativen in 100% of cases, and ten times faster than with learning.

[0022]

The method is illustrated by the following examples.

[0023]

Example 1. Nadia P., born in 1985 In a class by the method according to the invention has led her mother, because the daughter was always sluggish, inactive behavior in school and at home. In addition, constant pain in the stomach during the examination revealed intestinal dyskinesia (often at very strong pains had to call an ambulance). Nadi condition was confirmed by medical findings.

[0024]

In the method according to the invention with Nadia became engaged two "teachers" - VB and NB Three sessions were held on the principle of "teacher" - "student" when the "teacher" is only as energy donors. The fourth lesson, Nadia felt energy flow, the fifth NB I felt a strong energy flow from Nadi, and the impact has been powerful, dramatically noticeable, if the accumulated number of first employment grew dramatically in quality.

[0025]

Mastering the technique autokorrektzii allowed Nadia to normalize all systems of the body's own, harmonizing the it: Nadia stopped tired of schoolwork, began to maintain clarity of thought into the evening, got stronger physically stopped the pain in the gut. According to Nadia, she began to feel the lightness in the body and in the head. Medical institutions confirm the changes in the body, health Nadi.

[0026]

Mastering the same procedure to the second party vzaimokorrektzii energy cooperation has led to the fact that Nagy was the correct functional state of the sisters, who suffer from chronic angina. Nadia also warns sciatica and low back pain in the mother helps with headaches and high blood pressure at a friend's, which was confirmed surveys.

[0027]

Example 2. Katja R., born in 1985 I became involved in the process according to the invention at 11 years of age. At this point: 12 tiperstnoj inflammation intestine, cholecystitis, which is confirmed by the medical reports. Appeal to traditional medicine does not help. Katya involved two teachers who stated that at the first lesson, Kate was able to manage their own energy flow by moving his body. At the first lesson, the teacher felt the reverse flow of energy. Functional and organic changes in the body of Katie disappeared, which was

confirmed by the medical reports. After mastering the technique vzaimokorreksii Katya herself moved to the status of teachers, and currently successfully working with the students, giving them their experience, as well as helping them to autokorreksii body.

[0028]

Example 3. TK Brothers (born 1984) and EK (born 1985). Tired at school, often sick: TK - Pancreatitis, gastrointestinal disease, constant runny nose; EK - Obstruction of the left iliac artery, intermittent claudication, persistent colds (diagnosis confirmed in the Children's Clinical Hospital. Filatov children's polyclinic N 19). Classes are conducted with the teacher VG, which is already on the 2nd and 3rd class felt the energy exchange with the brothers. For family reasons brothers were engaged in accordance with the invention only once a week, while the rest of the students engaged in group 3 times a week. After explanations and even primary influence teacher brothers are successfully and quickly, keeping up with the other students have mastered the procedure of energy groups, as continued employment at home with each other, where they were constantly changing position of the teacher - student. As a result, at the moment vzaimokorreksii healthy brothers, as evidenced by extracts from medical institutions.

[0029]

Example 4. P. Family - husband, wife and daughter. Husband (AN) - a disease of the thyroid gland (autoimmune tereoidit), gastritis, liver hypotheses. AN She became engaged in the procedure of the invention, together with his wife and daughter. The first lesson the teacher did not bring any result, become annoying. However, at home with their homework with the help of his wife suddenly I felt the flow of energy, that further helped to successfully master the technique. The family at the moment everyone is healthy, continue to engage in energy exchange teacher - student when changing positions constantly. An additional effect was that the improved visual acuity and color vision acuity in both eyes.

[0030]

Below are details of the conduct of activities in groups engaged by the method according to the invention: the group consisted of 5 children and 5 parents after 1st class all the children began to feel the energy flow, the parents - after the 2nd, control the energy after the children were 2 th class, the parents - after the 4th. Classes are held not only in the group but also individually at home between parent and child, which gave good results in the development of methodology. With chronic diseases (such as parents, and children) were quickly offset by a skills energy exchange.

[0031]

As seen from the above examples, the method according to the invention allows to adjust the status of the body of both participants of energy that is constantly changing its position of teacher and student. This condition is corrected not only the individual organs and systems, but also the whole organism.

[0032]

Studies have shown that the method of Bronnikov allows thanks to the connection between the bio energy of interaction of the participants quickly master the movement of energy flow of the body's own, allowing normal function of organs and systems of both participants in this process.

[0033]

The method has been successfully tested in clinical institutions in Moscow, Kiev, Tver and other cities. Below are the results of several studies that demonstrate not only a health effect of the method, but also further developed with the help of some of the functions of the body.

[0034]

The Research Institute of traditional treatments (Mr. Moscow) was carried out: 1. Comparative analysis of the intellectual and personal characteristics of the two groups of adolescents: the past and have not undergone training method of Bronnikov.

[0035]

2. Comparative study of characteristics of brain activity of teenagers, and the impact on the dynamics of Bronnikov method of these functions.

---

**RU2151618**

**BIOENERGETIC DEVICE FOR PROTECTING HUMAN BEINGS AND LIVING ORGANISMS**

**SUBSTANCE:** device has cylindrical volume resonator manufactured from magnetic material having internal mirror surface, vertically spaced openings and ring-shaped cylindrical magnet near the base. Magnetic screen, wave emitter and absorber are mounted inside the resonator sequentially from top to down in vertical direction. The device attracts charged particles into the openings of volume resonator and deflects harmful fields to itself and absorbs their energy. Range of harmful fields absorption can reach 5-7 m depending on power and spectrum of formed rotating magnetic field inside of the volume resonator. **EFFECT:** enhanced effectiveness in protecting people from harmful influence of radioelectronic devices, human biological fields and the like factors.

**DESCRIPTION**

[0001]

**TECHNICAL FIELD**

The present invention relates to medical engineering and is intended for the protection of human and living organisms from harmful anthropogenic origin fields.

[0002]

**BACKGROUND.**

[0003]

The concept of the field in modern physics is defined as a form of existence of matter, transmission interference. Status of atoms and molecules, living cells correspond to transitions between the different energy states of their own. These states correspond to well-defined internal motion of atoms or molecules. So in an atom can only motion of electrons. The molecules have a further field of vibrational and rotational motion. Influence of molecular vibrational fields hardly evident in everyday life. However, the rotational motion of molecules and groups of atoms create a field rotation, which at certain frequencies can enter into resonance with the field of human interaction or a living organism.

[0004]

A characteristic feature of the field of rotation is the property of imprinting, the Transfer of the main characteristics of the material object on the field without mass transfer. Due to the proximity of the physical nature of fields of rotation and gravitational fields of the field considered almost escaped natural and built environments and can travel considerable distances with an abnormally low attenuation. This in turn leads to permanent effects on



humans and other living organisms are an enormous amount of harmful fields of technological origin. Influence of technological fields, and rotation on human organisms can be very different, ranging from the termination of life before the appearance of mutants with unusual properties. The physical parameters of the field due to the rotational motion of the molecules is different from the field of the electromagnetic wave generated by various vibrators, the presence of divergent spiral Poynting vector from the point of generation in the molecule in the presence of the rotating components of the electric and magnetic field component. **The most harmful to human health and living organisms are man-made rotating field in the wavelength range of 100 ... 900 nm, which coincide with the spectrum of the functioning of cells.**

[0005]

According to the fundamental law of the material world physical field it can be absorbed, offset or rejected just such a field, or its individual components having the same nature background close vzaimokorreliiruyuschie frequency spectra and interaction in space. Airspace is inherently linear space, t. E. There is no transformation of spectra and fields. In this connection any person bioenergetic protection and living organisms is possible only on the basis of correlated or fields based on nonlinear spaces and environments.

[0006]

A device protect living organisms from adverse effects of electromagnetic fields and others (see. U.S., A 61 B 19/00, N WO 9608207 A1), which generates electromagnetic fields. These fields are superimposed in opposition to the external field, offsetting their negative effects. Since this device generates a transverse electromagnetic wave, offset rotary field it can not in principle due to the lack of correlation parameters.

[0007]

Known radiation protection device (see. Patent of the Russian Federation N 2033200, cl. A 61 N 1/16, Patent of Russian Federation N 2071366, cl. A 61 N 1/16), ensure the protection of personnel working in the area of the electromagnetic radiation through the formation of local area by receiving compensation and reflection in the opposite harmful electromagnetic field. By virtue of a constructive solution on the basis of the resonant coil and a silver plate these devices can not form a compensating field for technological fields with the quantum wave nature.

[0008]

A device for forming a protective energy field (see. Patent of the Russian Federation N 2057552, cl. A 61 N 1/16, Patent of Russian Federation N 2033200, cl. A 61 N 1/16), thus providing a biological screen due to excitation of a discharge lamp and an oscillatory circuit. In essence gas-discharge device it is a variant of the nonlinear plasma antenna, forming a spherical quantum wave and electromagnetic fields. Together, these fields simultaneously emitted into space, creating a biological screen large enough area simultaneously irradiated to protect biological objects in range of the device, which in some cases is undesirable.

[0009]

Known useful model of the device for protection against the energy field (see. The certificate for a utility model N 0002741, cl. A 61 H 39/00), in which the biological shield is formed by IR source of electromagnetic energy and the divergent optical radiation. The device in question is designed to protect the bio-energetic doctors Follistim by IR fields of sick people. The effective protection of people from most of the fields of technological origin of rotation the device in question can not provide because of limited width and power spectrum, and the lack of correlation structure of physical interaction with the fields generated by rotational motion of molecules.

[0010]

## SUMMARY

The Irresistible technological progress has led to the fact that today the military equipment, research laboratories, production facilities, many residential and office buildings full of different electronic equipment that is in addition to the usual for all of  $\alpha$ ,  $\beta$ , &  $\gamma$  radiation, X-rays TVs and PC monitors emit field level before rotation (10-16 J / s) or more. Together, these fields are absorbed by the human body, to compensate for that organism consumes a significant amount of internal energy, and the person gets tired quickly, he can develop various diseases. For example, a survey of the operators PC company VTsIOM showed Russia (Savelyev IV Karmaenergeticheskie vampires. Dubna. 1997): 74% of respondents said that they have tired eyes, among them 31% responded that they are visually impaired; 30% feel after working on the PC irritability; many operators torment, depression, headache, insomnia, skin irritation, and chronic fatigue.

[0011]

Protection of technological fields rotation plays an important role in conducting biological experiments in laboratories. The technical result of the invention is to provide a flat vertical screen protective bioenergy, energy-absorbing man-made field rotation with a level of 10-16 J / s or more.

[0012]

To do this, the basis of the physical principle of the device bioenergetic protection of human and living organisms from the rotation fields of technological origin laid quantum correlations properties of spatially separated quantum interacting systems. The nature of quantum correlations provides almost instant effect on the beams of particles and fields, it does not depend on the distance and extends to interacting quantum systems having the same emission and absorption spectra.

[0013]

Creating a flat vertical protective screen bioenergetic energy absorbing technological fields rotation is performed by space-energy and magnetic field of the earth in the apparatus comprising a cylindrical resonator volume made of magnetic material, with vertically arranged holes, inside of which are placed in series: the magnetic shield, the wave emitter absorber. The cavity resonator is made of a ferromagnetic material and has at the bottom an annular cylindrical magnet that provides a vertical cavity surface forming a magnetic pole "S", and at the base of the pole "N". To reduce losses during the formation of the quantum-field interacting inside the cavity inner surface of the latter is made of mirror to multiple reflection of electromagnetic fields and electron beams with a spectrum of up to 1015 Hz. Magnetic screen made of steel mesh, provides closure of magnetic field lines of the upper air space of the cavity resonator, and also serves as a magnetic mirror for vertical flow of cosmic energy by passing it just inside the resonator. Formation of the necessary correlation of the field is carried out in a wave emitter due to bremsstrahlung and the precession of the composition of inorganic ions crystals  $\text{Na}_2\text{B}_2\text{O}_4$ ,  $\text{CaCl}$ ,  $\text{KMnO}_4$ , having the desired (100 ... 900 nm) radiation range.


[0014]

To improve the efficiency of the device at the bottom of the cavity is placed an absorber made based on the composition of inorganic ions crystals  $\text{KMnO}_4$ ,  $\text{SiO}_2$ , dipoles of carbon filaments and having a broad absorption band.

[0015]

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated by the drawing where Fig. 1 is a perspective view of the apparatus of FIG. 2 views form a protective field.

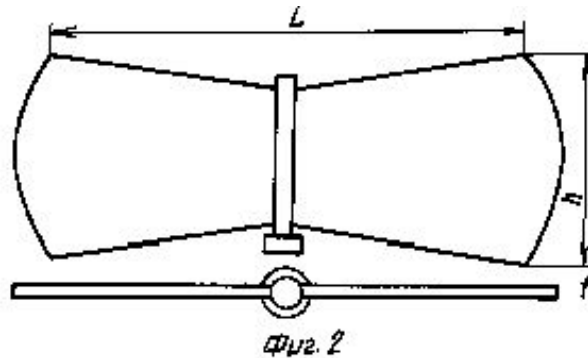

[0016]

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The device 1 comprises a cavity 1 formed by a ferromagnetic material having a relative permeability  $\mu$ ; two magnetic shield formed by a magnetized steel mesh wave transmitter 3, comprising a set inorganic ions crystals  $\text{Na}_2\text{B}_2\text{O}_4$ ,  $\text{CaCl}$ ,  $\text{KMnO}_4$ , having emission bands of precession and in the region of 100 ... 900 nm absorber 4 is made on the basis of composition of inorganic ions crystals  $\text{KMnO}_4$ ,  $\text{SiO}_2$ , dipoles of carbon filaments and having absorption in the range of 100 ... 1000 nm, annular cylindrical magnet 5.

[0017]

The device operates as follows.

[0018]

The cavity resonator 1 and the magnetic shield 2 is concentrated magnetic flux  $B$  land within its scope (in the thickness of the walls of a ferromagnetic material and in the air).

[0019]

When excited by the wave emitter 3 Earth's magnetic field  $B$ , cosmic flow of energy and charged particles formed by the precession of the components of the radiator 3, the brake light and the vertical flow of electrons that are in motion along the magnetic field lines in a spiral downwards inside the cavity formed vortex quantum-wave and magnetic fields. These fields, in turn, is formed in the area outside the openings of the cavity resonator complex spanning one quantum-wave and magnetic vortex field which covers an area of about 80o ... 85o vertically and a width equal to the width of the hole.

The magnetic field due to the action of the Lorentz force deflects all moving charged particles perpendicular to the field, or at a certain angle, which are then tightened by a magnetic field in the interior of the device through the openings surround the cylindrical resonator 1. Power lines rotation fields deflected towards the holes and tightened into the interior of the quantum wave field of the resonator 1.

[0020]

For the purpose of the additional resonance absorption of the energy of the field of rotation and moving charges inside the cavity resonator mounted sink 4, the range of molecular absorption coincides with the range of rotation of the wave field and moving particles. The annular cylindrical magnet 5 acts as a magnetization body cavity 1.

[0021]

The height  $h$  and the width  $t$  of the field generated, FIG. 2 can be changed by changing the height of the cavity resonator 1 and the width of its apertures. The length field  $L$  generated depends on the magnetic induction  $B$  and  $\mu$ ; the magnetic material of the cavity resonator 1, and the power flow space type ions the chemical components of the wave transmitter 3 and may reach 5 ... 7 m. The more  $B$  &  $\mu$  ;, and the greater the absorbed power and the length of the generated field. The wavelength range of the absorbed fields is governed by the type of chemical and crystal diameter cavity.

[0022]

Protective device properties bioenergetic protection lies in the fact that when exposed to external harmful anthropogenic emissions similar properties and structure of the field generated within the cavity, the device absorbs and prevents their entry into the protected zone. In addition, the device provides absorption of charged particles moving perpendicular to the field, or at some angle to the energy of motion to 10-16 J / s or more.

[0023]

Generated field also protects against unauthorized psychic impact, and by imprinting diseases of the sick person and other biological objects surrounding people and other living organisms.

---

#### **RU2161996** **METHOD AND DEVICE FOR ACTING UPON HUMAN ORGANISM**

SUBSTANCE: method involves exposing minerals to irradiation increasing their activity. The minerals are ball-shaped or polyhedral with at least five facets. Ball diameter or circumscribed sphere diameter of polyhedron varies from 1.7 to 14 cm. Operator biological field is applied as radiation. The minerals are arranged on supporting stand and the operator assumes standing position above them so that the stand is located between the legs. Another method involves applying the same action of operator upon a mineral with its immersing in water or water-containing medium and holding there at least 14 min long during the following time period. Then, the water or water-containing medium is used in treatment. The device has ball-shaped or polyhedral mineral with at least five facets exposed to operator biological field radiation. Ball diameter or circumscribed sphere diameter of polyhedron varies from 1.7 to 14 cm. Another device has minerals treated with human biological field radiation. The minerals are ball-shaped or polyhedral. Their number is 1 to 14. They are fixed on supporting stand. The stand is optionally made as one-piece structure from single kind of wood or composite structure manufactured from different kinds of wood. EFFECT: enhanced effectiveness of treatment; increased human bioenergetic potential.

---

#### **RU2148421** **METHOD FOR REPAIRING FUNCTIONAL STATE OF HUMAN GROUP UNITED BY COMMON WORK DONE TOGETHER WITH THE HELP OF BIONERGETICS EXPERT**

SUBSTANCE: method involves carrying out diagnostic bioenergetic examination of human group state with help of bionergetics expert. The expert builds a coordinate system on left hand, develops spatial mental image corresponding to the functional state of the group and draws its projection upon the coordinate system. The mental image is examined by doing passes with the right hand to detect deviations in form and arrangement of the mental image

from that corresponding to the normal reference state of the group, represented as a spiral climbing upwards along the vertical axis starting in the origin. Mental image deviation is interpreted for determining the cause of group functional state disorder and mentally removed by the bionergetics expert. The newly detected mental image is superimposed over the normal functional reference state of the group and the expert has a talk to the group or its leader concerning required changes in their approach to how the things are to achieve stabilization of form and arrangement of the mental image and the functional state of the group. EFFECT: enhanced effectiveness of method; finding the source of disorders and removing their cause; rebuilding optimum image of normal development mode

[0001]

The invention relates to the field of psychology and can be used for diagnosis with subsequent correction of the functional state of the group of people united by a common implementation of the work.

[0002]

The present invention is devoted to the development of a new approach to the correction of the functional state of the team, A group of people united by a common implementation of the work, based on the influence of causality on the processes occurring in the team, taking into account the interaction between group members with external factors affecting the operation of this group of biological objects.

[0003]

It is known that for the correction of the functional state of a biological object using a variety of methods, including non-traditional. Each of the known methods include a preliminary diagnosis of the biological object. For example, a method of correcting the functional state of the biological object, in which diagnosis is carried out as the energy shell (RU, 2083239, 1997, A 61 N 2/00).

[0004]

It is known as a method for correcting the functional state of the body, which carries out the diagnosis psychic healer (M. Frolov. Your health - in your hands. 1996, p. 35-102).

[0005]

In the available literature sources were found, illustrating the correction of functional state of a group of people united by a common implementation of the work.

[0006]

The concept is based on the authors that the most delicate information up being a world of causes. In the causal image recorded spiritual and physical condition of any object, group of objects, and the quality of his or their interaction with the environment, with a group of people united by a common implementation of the work can be considered as a single biological object. On the basis of the causal impact of the structure and mechanisms of transport phenomena in chains of causality carried out all kinds of creation, transmission, storage, processing and use of information technology devices, the individual biological objects, groups of people, ie, collectives. The causal approach allows to perceive the causes of outgoing as a place of gathering information, fields and forces. The image of the reason interacts with time and space, creates a spinor field, which is informative and becomes a power factor manifested through causal relationships. The reason, condensing and creating, through the following stages: information, in the form of an image recording in the spinor field, the implementation and the effect on the gross material physical plane.

[0007]

Spinor field is purely informational (GI Shipov. The theory of the physical vacuum. Science, 1997), but the interaction with the energy fields in the structure of their energy-twist occur which cause the distortion of space and time components of the ongoing process, and on the physical plane manifest adverse events and situations. The homogeneous structure of the spinor field is the harmonious development of people, ie, Social bioobject.

[0008]

The authors found that the starting point for the correction of Energy twists mental images is a perfect development of any group of people united by a common implementation of the work for the realization of any problems. This mental images and corrects the functional state of people.

[0009]

The technical result achieved by the invention is to find the causes of disturbances in the functioning of people and eliminate the reason to recreate the optimal group of normally developing individuals.

[0010]


The essence of the invention is to achieve the said technical result in the correction method bioenergospetsialistom functional state of a group of people united by a common implementation of the work lies in the fact that bioenergospetsialist conducting diagnostic examinations bioenergy group, mentally builds the coordinate system on the left hand, takes the bulk of mental images corresponding to the functional state groups and projects it on the coordinate system passes explores the mental images of his right hand, reveals the feelings in her deviations of form and position of the group of mental images mental images of the functional group status is normal, is a spiral, expanding and rising along the vertical axis from the origin, determines the reasons for the rejection of mental images violation of the functional state of the group and mentally eliminates it, then re-combines with mental images mental images shown by the functional state of the group is normal, and then conducts a conversation with the head of the group or the need for change of approach to the state of affairs in order to stabilize the shape and location and fancies the functional state of the group.


[0011]

The invention is illustrated by drawings, where

**Figure 1 illustrates the method used for the coordinate system on the left hand;**

**Figure 2 - harmoniously developing mental images - the norm of the functional state - collective; FIG. 3-4 - Examples of mental images of the functional state groups surveyed by the method according to the invention.**



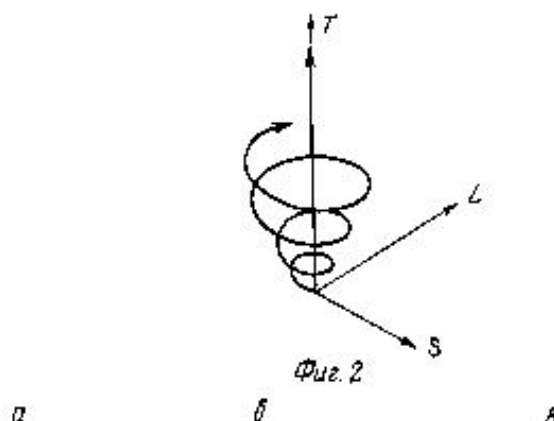


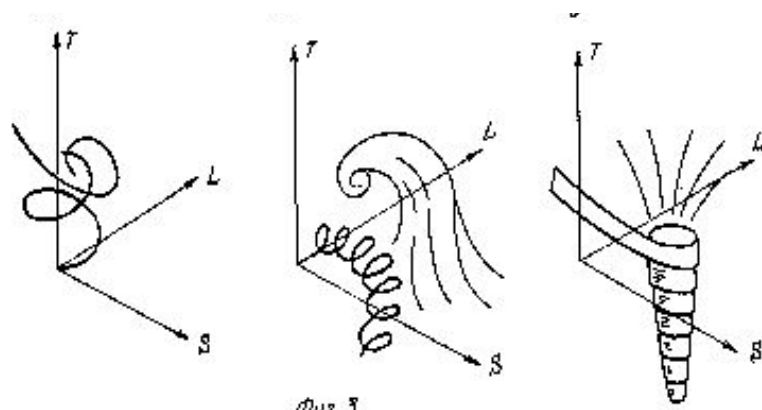



Фиг. 3

Кандидаты в  
руководители  
№1

Ситуация  
развития  
формы



№2



Фиг. 4

[0012]

The method consists of three phases: a survey group of people united by a common implementation of the work by finding the causes of the violations, the effect to eliminate the cause, it is as follows.

[0013]

Working with a group of people united by a common implementation of the work requires bioenergospetsialista more subtle perception of attitude than the average person, which is achieved by practice and exercise hands and sensitivity setting of consciousness prior to the examination. This comprehensive approach by the authors called "tonkouchuvstvitelnogo perception." Screening and diagnosis is direct access to the causes of deviations in the normal functioning of the group of people who are seen in the form of bulk bioenergospetsialistom fancies.

[0014]

As the worsening perception bioenergospetsialista that it is possible in the presence of a certain experience, it is possible to see (feel) more subtle threads of causality and to conduct a deeper analysis of the team.

[0015]

Bioenergospetsialist first a left hand, palm up, and mentally builds on it a coordinate system that is the basis on which rests fancies. Palm has a horizontal thumb maximum allotted from the other four, contiguous. Mentally, carried in the palm of the axes, which from a point in the center of the palmar surface, carried out perpendicular to the line up, the other - down. Also through this point is performed mentally two intersecting at right angles in the same plane in the palm lines, with one line extending between the third and fourth contacting fingers through a point near the middle of the palm and wrist, and the other - it perpendicularly through the center of the palm.

[0016]

The need to introduce the coordinate system for fixing the mental images caused by that change (does not meet the norm) fancies strives for self-preservation and restoration. Mental images, which sees bioenergospetsialist in a three-dimensional coordinate system, the authors called the matrix. When working with this template changes the negative image and the formation of the optimal harmonious way, is correct.

[0017]

The coordinate system TSL contains axis: T - time, S - interaction, L - space. In each case, the condition of these components is used, the topological scheme sketched the general condition of people and analyzes the process of its interaction with external factors. The projection of any image on the dynamic coordinate system is static, stationary and respond well to the hand. Fixing mental images, dynamic coordinate system distorts his view of the image is identical to the image, and make the appropriate changes in the way the changes in the functional state of the real group.

[0018]

Specialist at the beginning of the study a left hand, palm up, mentally builds on it a coordinate system and then by asking the question of the study group, shows fancies and projects it on dynamic coordinate system. All movements of Energy flows over the left hand (Fig. 1 - coordinate 1) show the rise of the spiritual, the harmonious development of the group. All movements under the palm (coordinate 2) - disharmony, drop weight of the past, dropping into the lower vibrations. Coordinate 3 shows the movement of the group and its development in the outer space, and coordinate 4 characterizes the interior of the group, that is, an operating time of creativity, which can occur at high creative rise to spiritual perfection or self-interest, the pursuit of profit by any means on the move following coordinates 4. Coordinates 5 and 6 include internal and external interaction, as manifested in the operating time of any good: it is spiritual achievements, knowledge, skill, ability and wealth. The further movement of energy-flow above the axis 5-6 from the origin, the greater the benefit. Failures at this point to the axis of the loss of a certain kind of good.

[0019]

In the chosen coordinate system dynamic matrix exploring right hand, using the property of hands catching energy-flows in the matrix space. The matrix is ??not limited to a plane, matrix space defined beyond the reach of the right hand.

[0020]

Location mental images in the dynamic coordinate system to determine the direction of the forces and their topology. The study of mental images produced with his right hand, which is making passes, explores the mental images, while constantly keeping specialist during mental images in your mind and in your hand the emergence of any sensations in any coordinate identifies abnormalities that cause finds violations of the functional state group and eliminates mental image of reasons. Then the group formed mental images in normal (Figure 2), and for the correction of mental images, characterizing the actual functional state, a



"normal" mental images is combined with the actual number of times, and with the group (or team leader) conduct a conversation about the need for change in this or that respect for stabilizing the shape and arrangement of mental images.

[0021]

In the process of removing the cause of functional disorders and combining "normal" mental images in the group subjected to the actual correction of the functional state of the group is as if "a manifestation of" the causes of violation, ie the link group (a particular member of the group or unit group) begins to falter, which confirms the correctness of the chosen tactic for correcting the functional state of the group.

[0022]

The "normal" mental images is as follows: expanding vertically rising along the axis T spiral with center at the origin.

[0023]

In the study of different groups of people were analyzed groups involved in different businesses at the same time as mental images, which characterizes the actual condition of the group, most often occurs in the twisting of space different time forms (the tube, corridor, etc.), which shows the limitations of the case or manifested in the space rising wave interaction, reaching both the inner world, as well as from outside interference, showing a "roll forward" group on outer space, fouling the environment, the use of any methods in the pursuit of profit. Various dips and folds characterize passion only external interactions to the detriment of internal development that results in loss of benefits in any form - both material and spiritual.

[0024]

Depending on the set during the formation of mental images, you can explore the different question of the matrix, "the idea of ??creating the company", "management and state management", "overall business", "financial condition". For large groups, you can also explore the matrix "pre-production", "state of the main production", "state of the implementation of the product", etc.

[0025]

To assess the participation of a new member in the functioning of the group and the influence of each member of the group on its functioning in the various aspects of the possible combination of the matrices with matrix topology of the entire group as a whole.

[0026]

The method is illustrated by the following examples.

[0027]

#### **EXAMPLE 1 (FIG. 3a).**

Wholesale company addressed the problem of the fall sales and reduced profits. The study showed bioenergospetsialist surround mental images located in the coordinate system from which revealed that the normal operation of a group of people united in the enterprise, affects energy-twisting going from internal communication, running along the axis of internal communication, which prevents the normal functioning group. After combining subjected to removal of the causes of the actual mental images mental images with the group in the group norm (spiral expands and rises through the vertical axis from the origin) appeared differences in the leadership group. Held with the leadership of the group due to violation of the functional state, causing one of the founders left the group. After that fancies normalized - a

good deal.

[0028]

Example 2 (Fig. 3b).

The team leader in the production and sale of sunflower oil is concerned failure group. A diagnostic survey of bioenergy bioenergospetsialistom. Manifesting mental images, is a spiral, twisted in an arc down the axis of the outgoing S (axis of interaction) and a wave from outside interference, which suggests that the group tends to get good by any means, giving the group a permanent loss of wealth and causing a wave of discontent partners. As a result of the correction of the functional state by removing the cause and combining "normal" and actual mental images revealed dissatisfaction with partners, which resulted in a decline in sales market and the reluctance of partners to work with the study group. Held with the leadership of the group, resulting in a change in policy regarding partners, mental images has stabilized, indicating the functional state of the normal group.

[0029]

**EXAMPLE 3 (FIG. 3c).**

Leaders of the group (JSC "Cossack woman") requested to diagnose and correct the functional state of one of the branches of the enterprise. Identified mental images along the axis of the well-being is of the form tightly twisted ribbon, leaving vertically downwards. Lowering fancies down indicates a loss of certain benefits. The combination of "normal" mental images with a valid revealed trouble in finance. In an interview with the management of the company was recommended to inspect all financial divisions of the branch that led to the identification of large shortages and more abuse management. After the adoption of the necessary measures actual mental images of the functional state of the branch has stabilized and adopted the "normal" view.

[0030]

**Example 4 (FIG. 4 a, b, c, d, e).**

Founders of the newly formed company for repair and maintenance of vehicles requested to give an opinion on the two candidates for the post of Director. In the course of identifying mental images of business qualities of the candidates with the mental images of the company revealed the following: Candidate 1, outwardly showing zeal in the work gradually begin to pay facilities and capabilities of the company for personal goals and a year later between the founder and director of the company arise deep divisions.

[0031]

Candidate 2 - capable of a deal to form a stable, hard-working staff, the firm will not have losses, while large profits are expected.

[0032]

Founders, having concluded bioenergospetsialista, decided to appoint the candidate for the post of Director 1. After 18 months, the firm, spending funds of the founders, was not able to develop the business, the team broke up, formed substantial losses.

[0033]

**Example 5.**

The bank, part of a system of banks "Menatep", addressed in August 1998 to conduct research and correction by the method according to the invention. As a result of the

recommendations bioenergospetsialista correction form mental images and the location of the bank was able to exit without losses from the "Metanep" successfully returned to depositors currency and ruble deposits made payments for obligations of customers.

[0034]

These examples demonstrate the effectiveness of using the invention for the correction of the functional state of the group of people united by a common implementation of the work.

---

## **RU2182800**

### **METHOD FOR INCREASING BIOENERGETIC VALUE OF FOOD**

**SUBSTANCE:** method involves exposing food to thermal treatment by permanent action of energy of natural mineral weighing 300-800 g and having positive field determined by biological detection method; attaching mineral by means of metal bracket to gas line or to power line, with the result that all consumers become connected to natural mineral energy since metal of power line or gas is power conductor. Food prepared by mentioned method possesses maximum power factor, which increases individual's working capacity, health and longevity. Method allows food energetic value to be increased during preparing, including during cooking, and adverse effect upon individual's organism of interaction rays created during water boiling and possessing negative fields to be eliminated. So food may be prepared on gas or electric stoves or any other facilities. **EFFECT:** simplified method and improved quality of food

[0001]

The invention relates to the field of human nutrition and can be used for heat treatment of food on gas or electric range, and any other devices.

[0002]

The food, which is used daily by all the inhabitants of the planet Earth people, plays a central role in life, aging and death of every human being. She paid special attention to Cooking methods are constantly improved depending on the material culture of human rights.

[0003]

Known method of cooking food cooking on gas and electric stoves such as cooking (BOGDANOVA MA et al. Catering equipment. M.: Economics, 1986, p.130, 181).

[0004]

Cooking is done in water, without which there can be no life on earth. It is known that each person on the day you want to 1.5-2 liters of water for drinking and 2-2.5 liters of water for cooking. But when boiling water is dead and acquiring a negative aura (determined in the process of boiling water by dowsing) communicates vertically with the Cosmos in any direction with the surrounding biological active substances (products). The man who had been drinking a glass of boiled water, loses some of its bioenergy its neutralization. Time dependent neutralization substance content in the stomach and is a few minutes (determined by dowsing near the stomach).

[0005]

In nature, all natural products that are used for cooking, have a positive field, and in the process of cooking a product of the energy is spent on neutralization of negative field of boiling water. Today, due to lack of bioenergy instrumentation loss of bioenergy products can be identified by the value of field cooked food in the usual way, and under the influence of a

natural mineral having the field. It should be noted that the performance of the field of the same product used may vary. It depends on the quality of the product itself, and the water, because Water - a very complicated matter, which is a mixture of many different substances and the end of another, as shown by studies carried out, it has not been studied.

[0006]

The technical result from the use of the invention is to improve bioenergy value of food in the cooking process, including cooking, and in the elimination of harmful influence on the human body ray interactions which occur during boiling water and have a negative pitch.

[0007]

This is solved in a method of cooking food when cooked on gas or electric stove, providing for a permanent impact energy of natural mineral weighing 300-800 grams, has a field defined by dowsing, by fixing it with a metal bracket to the gas network or to the electric wire, when This use one mineral on the gas network or one - to the mains.

[0008]

Exposure is carried out during cooking plates, for example, gas. Applicant as a result of special experimental studies have shown that the energy conductors are metal, water, ores, natural gas, oil, et al., Which during the transfer of energy from natural source fields (mineral) "excited" themselves are secondary radiation sources, acquiring a value of the mineral field, and also interact vertically with the Cosmos in any direction with the sources of the field opposite sign.

[0009]

From the foregoing, it follows that the pipeline and filling - gas environment - are conduits of energy from the natural mineral to consumers. Therefore, it suffices to a metal object gas network (gas cooker, gas pipeline, etc.), Fixed with metal brackets mineral weighing 300-800 grams, has a positive field is determined by dowsing, the entire gas network instantly becomes a secondary source of positive field and all that It is standing on the gas stove, instantly exposed to energy minerals, being charged to the value of its field, as evidenced by the applicant's experiments, which were carried out with the gas pipeline network in the Bukhara-Ural with the 18.08.1997 on 08.06.1998 in the city of Snezhinsk Chelyabinsk region and in Chelyabinsk.

[0010]

It is known that in nature there are positive and negative field sources (minerals). To determine the sign of the field, using the two L-shaped frames provided with springs. The springs are designed to return the frames to the initial state in the absence of a field and the sliding contact between the spring and the frame in the field of human interaction with the natural fields. Studies have shown that the field can be detected by only the framework is the man who is endowed with the nature of the specific abilities - such people on planet Earth of 5-8%, which is enough to use a natural field for good purposes. Sign of the natural source of the field (mineral), the applicant determined by the position in space frames (1, 2, 3): 1 - a parallel (original state) - the field is absent; 2 - frames intersect - the existence of a negative sign of the field; 3 - Expenditure Framework - the presence of the field of positive sign.

[0011]

This definition of sign of the field based on the results of personal research and intuition of the applicant.


[0012]

Natural minerals which have positive or negative fields, eternal, t. To. They are constantly

interacting with the cosmos and with each other. However, their physical destruction on the part they instantly neutralized.

[0013]

It should be noted that in their interaction under the earth, or on the air power advantage has negative margins, but their physical contact with the source of negative field immediately neutralized.

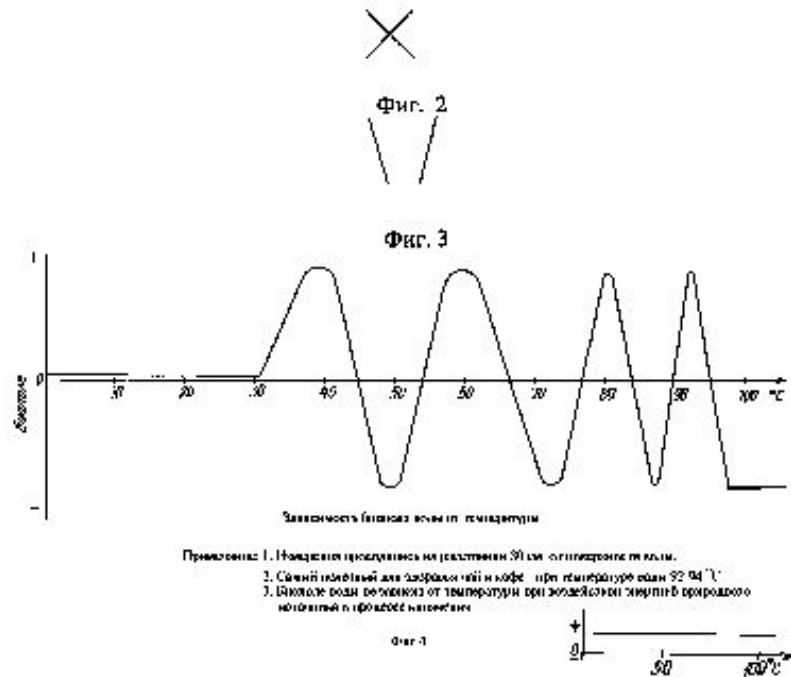

[0014]

Example.

[0015]

To neutralize the negative field of boiled water, it is enough to put in a bowl of boiling water a little tea or coffee, etc. and as a result of direct contact there is a complete neutralization of the negative field of boiled water. It is also possible to neutralize the negative field of boiled water at the touch of a fraction of a second container with boiling water with natural minerals with a positive field.

[0016]

Figure 4 shows the dependence of the field of water temperature.

[0017]

In nature, everything reacts on the energy level. From the foregoing, it follows that it is the most cost-efficient way to increase the bio-energetic value of food, as its basis is the energy of a priceless natural mineral. Cooked food is way above is useful for everyone - it's the way to health, health and active longevity.

**RU2143289**

**METHOD OF BIOENERGETIC CORRECTION OF MAN'S STATE BY MEANS OF  
EXTERNAL MECHANICAL GENERATOR**

SUBSTANCE: method includes performance of preliminary diagnostics of meridians by operator by means of biolocation methods for determination of energetic blocks. Diagnostics is performed by exposure of patient to sound, light, heat, and odor with simultaneous carrying out of physical exercises by using cylindrical spring. To this end, spring is first positioned on cervical section of vertebral column, and patient moves it along vertebral column, and then it is clamped in region of large-sized joints of upper and lower limbs, and patient strains muscles of limbs with subsequent change of position of joint surfaces. Physical exercises are performed in synchronism with respiration, and exposure to sound is performed at frequency and rhythm of systoles. In process of correction operator performs additional diagnostics repeatedly with aid of biolocation method for changing the exposure parameters and selecting the spring characteristics. He renders bioenergetic effect till energetic blocks are eliminated. Biolocation diagnostics of patient is performed by main energetic meridians and centers. Energetic blocks and external energetic ties are eliminated due to action of external bioenergetic field and resonant effect of external field on patient. Oscillatory external effect is produced by means of external mechanical generator along with external electromagnetic effect. EFFECT: enhanced efficiency of bioenergetic correction.

[0001]

The invention relates to medicine and can be used for the prevention of diseases of the musculoskeletal system, internal organs, improve efficiency and enhance the immune system without the use of drugs, as well as the elimination of the consequences of external biopathogenic energy impacts. The method can be used to restore normal metabolism and elimination action geopathic influences and aggressive action of environment.

[0002]

The method of the present invention is intended for sick people and patients at the stage of recovery and rehabilitation, after prolonged bedrest. In addition, the present method is intended for healthy people with a sedentary lifestyle, young men and women in the making, for certain professions (athletes, photo models, fashion models, actors, scientists, etc.). The method is also intended for rehabilitation of people affected by geopathic and biopathogenic influences.

[0003]

Known methods of disease prevention and healing of the human body based on the creation of conditions conducive to the isolation of the patient from the influence of external disturbances and the creation of sound effects, heat, light signals, bioenergetic field.

[0004]

In some prior art methods sometimes as an active factor added ionization environment to the patient further the influence of the smell, air currents, and the use biogenerator different design, concentrating the energy of the cosmos, bio environment and people.

[0005]

A method of treating diseases comprising bioenergetichsskom human exposure field frequency of **3 - 5 MHz at a distance of 1 - 2 m** and redistribution of energy in the body by impact study using hand passes a field frequency of **1 - 3 MHz for a distance of 30 - 100 cm** (see Fig. RF Patent 2030186, from 1994).

[0006]

Generally known methods provide relaxation problem of the patient, the treatment effect is insignificant and short term. The closest analogue bioenergetic method of disease prevention and health improvement of the present invention is a method in which the impact on the patient's heat, sound, light exposure and bioenergy field and perform a set of exercises with

the formation of the motivational component in the process of being committed (VI Dontsov, Bioenergy human encyclopedia folio, Moscow, 1994, p. 92 - 132).

[0007]

The disadvantages of the known method include: a low therapeutic effect with a short-term effect and the prevalence of the relaxation component, there is no comprehensive impact due to lack of understanding of the mechanism of action of various factors and their relationships, lack of funds, defining the parameters of external mechanical influences, the inability to eradicate the negative impact of external power channels (bindings).

[0008]

It is known that there is a category of people who have the ability to impact on information field of other people and objects that does not know about these abilities. In addition to this category of persons are deliberately acting on information and energy fields. Both groups have a pronounced ability to create bioenergetic connection with the fields of energy channels and facilities, and with the same probability of such bonds can be both negative and positive. When securing information links between these categories of persons and objects to certain permanent effects flipping the channels of energy influences - bindings that can be combined with equal probability and fields of biological objects (people), and the field of biological object with a significant object for him inanimate world or the emotional coloring of the situation.

[0009]

Bioenergy correction method of the human condition of the present invention eliminates these drawbacks due to the fact that it is to conduct a preliminary diagnosis of meridians operator using dowsing method for determining the energy blocks, the impact on the patient's sound, light, heat and odor while taking exercise with cylindrical springs spring, which spring is first placed on the cervical spine and the patient carries out its movement along the spine, then spring is clamped in the large joints of the upper and lower limbs and the patient is straining muscles of the limbs, followed by changing the position of the articular surfaces, and the exercise is carried out synchronously breathing sound effects performed with the frequency of heart rate and rhythm, and in percent

[0010]

The essence of the method according to the invention is as follows.

[0011]

The effect is achieved by using resonance-wave effects, based on the fact that human organs and tissues have a non-uniform density, and therefore respond differently to the resonant frequency response effects. This fact creates the conditions for a strictly selective action on any fabric and any body, not only in general, but also in its structural and functional elements and education.

[0012]

The reflected wave bioenergy allows continuous exercise dowsing diagnosis during the correction bioenergetic condition of the body by the presented method. Resonance-wave interaction in the present process produces cerebrospinal fluid and hemodynamic wave, which ensure the reconstruction of the dynamics of liquids brain while stimulating the recovery orientation disorganized cellular structures and the proper flow of energy processes in all systems and structural units of the organism as a whole and of the musculoskeletal system in Specifically. The most convincing proof of the effectiveness of the method used is to reduce muscle hypertonus and a significant improvement of peripheral functions that take place at such influences.

[0013]

Consider the mechanism of action of the present method for more. Sound, light, heat, bioenergy and the impact of odor impact by specifying the manipulation of spatial movements of individual parts of the spine and other segments of the musculoskeletal system of the patient, as well as vibrational and electromagnetic interference from external mechanical generator generate mechanical vibration waves in conducting media body. Dynamic change of parameters of influence by external mechanical generator and specific provisions of certain parts of the musculoskeletal system set the parameters of the waves, such as amplitude and intensity, propagation direction and frequency characteristics. Mezorgannye and intraorgan cavities and interstitial capillary gap provide an opportunity to form a vibrational wave is very complex configuration, the ability to penetrate any given part of the body or organ. Reaching the target, causing a wave of this section as if the local micro-explosion, shattering spikes, making razvoloknenie and separation of tissue, breaking the salt formed by eliminating blocks, plugs, power clamps, etc. This ensures continuity from procedure to procedure structuring and restore damaged tissue and replenish energy body or body part. Along with the destruction and elimination of pathological changes in the tissues occurs parallel restoration of their functional physical and energetic properties.

[0014]

When the bioenergetic exercises in accordance with the present process also occurs automatically massage the acupuncture points of the body, the effects of which improves skin tone and improves the immune system of the whole body, there is an independent editing position of the vertebrae and intervertebral discs.

[0015]

The first and main objective of this process is to eliminate the reasons, which do not allow the energy to circulate freely and uniformly in the body. These reasons include any factors that prevent a person to improve their energy state (salt deposits, deformation and displacement of the vertebrae and intervertebral discs, fear and other negative emotions). Given the current understanding of the power of perception and distribution of the electromagnetic energy in the meridians of the human body, the present method eliminates the following causes of disease: produce energy gap bindings and connections biopathogenic energy level OPRRNA field of human and fundamental energy meridians, eliminate energy clip - overlapping channel or meridian of energy, remove the physical unit - muscle paralysis, salt deposition, the formation of stones, sand, etc., to remove the energy binding the main channels and meridians person associated with biopathogenic and geopathic influence, relieve nerve blocks - a nervous breakdown, overvoltage, eliminate psychological block - stress , emotional breakdown, depression.

[0016]

Elimination of nervous and mental blocks and external energy gap bindings from the main meridians and OPRRNA field of human restores the continuity of energy feedback and integrity of the information field of the patient.

[0017]

Open feedback and education of energy binding occurs under the influence of earlier negative energies. Energy tube form blocks that, together with bindings cause impaired function of specific organs and further adversely affect the dynamics of the general state of the organism.

[0018]

The resulting blocks and binding energy and geopathic biopathogenic effects do not allow energy to circulate properly and evenly throughout the body and get it outside of any existing



sources of additional energy (music, flowers, plants, animals, etc.). The most effective way to eliminate the blocks and binding energy associated with such common diseases as sciatica, low back pain, nerve diseases, diseases of the immune system and a malfunction in the power unit of the body due to external pathogenic influences the nature of information and energy.

[0019]

One of the main achievements of this method is that each exercise will involve the maximum number of muscles and structures of the energy field, so harmful substances, products of metabolism and negative energy have nowhere to stay and they are actively removed from the body of the patient and OPRRNA field.

[0020]

The second advantage of the method according to the invention - cleansing the energy channels of the subtle bodies and structures, that subsequently leads to the purification of the body and its recovery. This is achieved by exposure to external mechanical oscillator and an external oscillator bioenergy field.

[0021]

Slagging and fouling the energy channels of the body takes place every day under the influence of food intake, thoughts, feelings and emotions in relation to the situation and the people coming into the verbal and energy contact. If such negative effects, the level of physical and chemical reactions in the body are formed toxic substance contaminating organism at the cellular level. The negative impact of the energy field of the person affected OPRRNA main channels and meridians and energy flow, which leads to the formation of the binding energy between the patient and the objects of the external world, the emergence of traffic jams and blocks in the way of flowing normally in the human body energy.

[0022]

Set of exercises together with other actions that are used in the present process, can actively excrete toxins and replacing contaminated clean energy. In addition, the work includes not work before or blocked energy centers. The body begins to consume no energy and radiate it outward. There is an internal harmonization of the body and the person begins to have a positive impact on the world around us.

[0023]

A third advantage of the process according to the invention - to achieve a uniform distribution of energy throughout the body. To do this, in many exercises used smooth and plastic movement with cylindrical springs spring, distributes energy in the human body and the effects of the external oscillator. The elimination of the binding energy associated with the adverse effects of geopathogenic zones and the environment, including humans, also leads to a uniform distribution of energy in the human aura and eliminates channel leakage power of OPRRNA field.

[0024]

The basis of the method consists of exercise, clearing the spine and almost all the major muscle groups: the back, chest, abdomen, neck, muscles of the upper and lower extremities. As a result, a complete study of the complex improves circulation and recharge the body's energy. The active work involved almost the entire skeleton and all joints, all parts of the spinal column. Exercise combined with breathing exercises, psihokontsentratsiey, the influence of external mechanical oscillator and bioenergy field normalize the process of excitation and inhibition in the cerebral cortex, thereby providing therapeutic and curative effect on the human body as a whole. Exercising without mental concentration and without synchronization with the respiration parameters and the impact of external generator does not

have the desired effect on the body.

[0025]

Synchronization with the parameters of breathing and the influence of external generators improves muscle tone, work vessels, normalization of the nervous system, reducing the cholesterol content in the blood, removes the negative energy from the body and nourishes it with positive energy. An important role in the implementation of the proposed ways to play pause of the respiratory cycle, during which by specifying certain spatial movements and the combination of tension and relaxation of certain muscle groups to saturate the body with energy and the partial elimination of the bindings.

[0026]

In addition to these influences an important role in removing negative energy factors and bringing the body back to normal energy state plays a range of colors, to the patient during the session, the health of the present process.


[0027]

In the muscular system positively influenced red on blood - green, airway corresponds to the color blue, the skeletal system - blue, orange acts on the sexual sphere, and genitourinary system, yellow - on the nervous system, purple - in the endocrine glands.

[0028]

**FIG. 1 is a block diagram of patient exposure step according to the present method of correcting human bioenergetic status,**

**FIG. 2 shows the circuit of the external effects on the mechanical generator of FIG. 3 - the appearance of the mechanical oscillator. FIG. 4 shows the types of vibrations caused by external mechanical oscillator.**

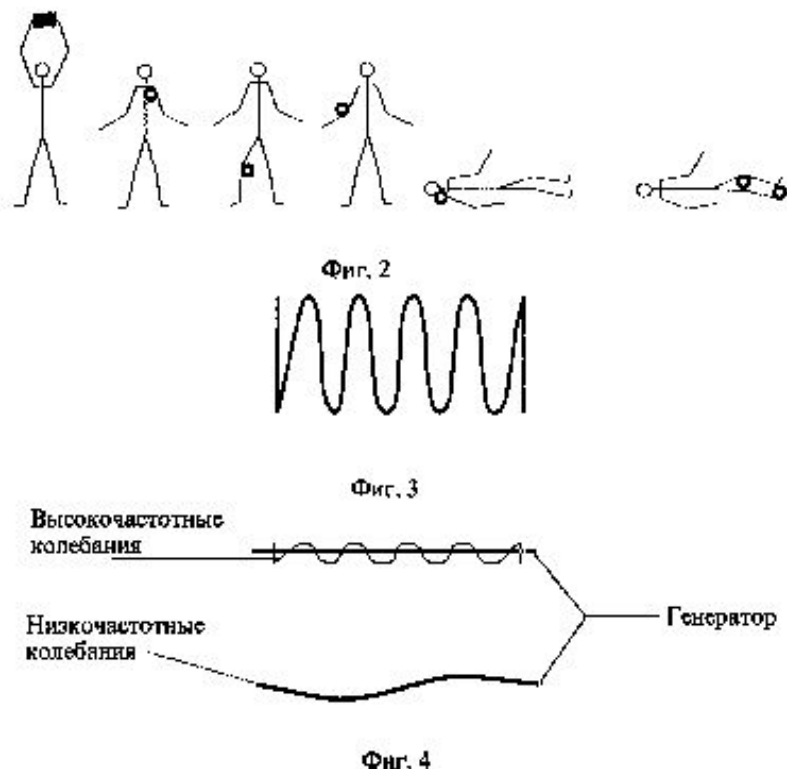

[0029]

Consider the mechanism of bio-energetic way of prevention and healing of the human body

according to the invention.

[0030]

According to the present method on the patient affect the resonant wave action by defining the spatial movements of the individual segments of the spine and other parts of the musculoskeletal system. The patient is affected simultaneously and oscillating electromagnetic field from external mechanical oscillator is constructed as a cylindrical spring the spring. The length of the coil spring 20 - 60 cm, diameter - 5 - 30 cm diameter spiral - 2 - 10 mm, the number of turns is 5 - 20. The coil spring may be made of any metal, such as steel, copper. External mechanical generator in conjunction with the patient forms a complex oscillatory system. When the spatial movements of the cylindrical coil spring makes microvibrations that at certain joints come for the entire musculoskeletal system and its individual segments.

FIG. 4 shows graphs of oscillation modes created by external mechanical oscillator. These vibrations are composed of low-frequency vibrations, high-frequency and high-frequency oscillations superimposed. Thus it is able to achieve resonance-wave effects on the human body, and the individual segments of the musculoskeletal system of the patient under the influence of other external disturbances. Selecting and setting the mode effects due to resonant wave action, you can remove the obstacles in the form of disturbances and blocks in the body, preventing the normal and proper dissemination of energy in the meridians.

[0031]

The complex exercise set so as to influence them and the impact of external mechanical generator in resonance. In addition to the vibrational effects of external mechanical oscillator has on the patient's electromagnetic effects due to the concentration of electromagnetic environmental studies, including the energy of the cosmos. And this electromagnetic effect on the patient overlaps the committed action of complex rhythmic exercises and the impact of well-defined external vibrations in the form of color, heat, sound, odor influences. These effects give rise to the primary mechanical waves in conducting media of the body, providing revitalizing effect. Parameters external oscillator are selected in such a manner that due to its elastic properties can be formed of different oscillatory motions of frequency and amplitude.

[0032]

The method is applied as follows.

[0033]

At the beginning of diagnosing a patient with the help of dowsing using the framework of conventional construction on major bioenergy meridians, with fixed places of education power plugs, power and continuity of energy ties, as well as places of education energy bindings.

[0034]

Thereafter, the patient cervical spine located on the external mechanical generator, made in the form of a coil spring. Ask the movement of the generator along the longitudinal axis of the patient. Then, a cylindrical spring spring clamped in the large joints of the upper and lower extremities. When the friction spring on the skin massage is performed periarticular tissues, for example, at the level of the spinal column. Straining certain muscle groups, the patient presses the coil spring to the body, thereby acting plunging deep into the soft tissue elements and carrying their stimulation and correction of surrounding joints. This results in relaxation of spastic muscles and ligaments, blood vessels to dilate, increasing the conductivity of nerve fibers to the surrounding tissues. Cyclically repeating the above-described movement, the patient rhythmically massages the periarticular tissue, alternating

massage with position correction of the articular surfaces. In the present method retains the traditional types of wave action - sound, light, heat, odor impacts.

[0035]

Since the spine is the foundation of the energy of our body, the main parameters of the resonant wave action define a set of exercises using a cylindrical spring spring. At the same time from an external generator receives the mechanical oscillations whose frequency and amplitude are also dependent on the applied set of exercises and the inner resonating frequency and amplitude of the metal itself. During the exercise seeking to achieve synchronization of the parameters of breathing. This synchronization (duration, depth of breathing, rhythm, etc..) Allows you to create the most favorable conditions for the occurrence of resonance-wave processes in the body of the patient in general and the cardiovascular system in particular. Along with the resonant wave action on the body of the patient from an external mechanical generator receives electromagnetic influence due to the accumulation of electromagnetic fields of the environment, including the energy of the cosmos.

[0036]

In contrast to the stimuli for the perception that there are specialized receptors alternating magnetic field, having a large penetrating action can simultaneously affect different tissues. However, due to the sensitivity of different tissues and organs, and also due to the inclusion of reparative processes, the overall response of the body changes at different stages of the impact. But in all phases of it involved the central nervous system as the main regulator of the central link of the chain response.

[0037]

The electromagnetic field, causing a variety of sensations, changing the electrical activity of the brain (particularly the hypothalamus and the cortex), affects the process of formation of skills, information storage and its playback, it changes the emotional and volitional violates cerebral function devices, vascular regulation, changes hematological and biochemical parameters. Therefore necessary to optimize the electromagnetic characteristics of the environment with parameters corresponding to the needs of the body in the performance of an activity, ie, You need some kind of electromagnetic comfort.

[0038]

According to the present method, the patient is affected mild irritant nature of bioenergy, the intensity of which varies from 10-12 to 10-15 W / cm<sup>2</sup>. For this purpose the external bioenergetic field generator, which is under the same environmental conditions as the patient. Options impacts that come from an external oscillator bioenergy, change to ensure resonance with all other influences.

[0039]

Bioenergy effect eliminates those blocks and binding energy, which can not be removed by other types of impacts. In the process of the method is carried out biolocation of the main energy channels, meridians and change the parameters of the external generator bioenergy field, its frequency and amplitude until the fixing using dowsing separation energy bindings and eliminate blocks in various parts of the body and the patient OPRRNA field.

[0040]

As decision block that controls assignment modes effects generator may be used with the computer. In its absence, this function can be performed by the operator. The source forming light, heat, sound effects and smell generators are used widely applied, for example such as in the analogs. The mechanism of their effect is similar to the patient PA.

[0041]

Impact sound is selected according to the frequency and rhythm of heart contractions involved, with the result that anyone can do the exercises at their own pace. When the coincidence of human vibration and rhythm of music resonance occurs, at which the energy is added and there is an optimal selection of rhythmic effects. Using a variety of musical styles and genres, as well as the sounds of ritual character - the ringing bells, tambourine, tom-toms, etc. It allows you to choose the optimal resonance frequency corresponding to the organisms of different age groups involved. Here the music plays the role of an additional source of energy guide. Under the influence of the resonant effect of energy supply takes place internal organs, alteration of the nervous system and psychological perception of a person.

[0042]

The main influence in determining the rhythmic and wave effects on the body, is a complex exercise with external mechanical oscillator and the impact of external bioenergeticheskogo generator, the impact of which depends on the kind of violations in the human body and the localization of energy blocks and bindings in the information and energy field of the patient.

[0043]

The preventive effect and improvement of the body of this method is provided by the participation of all the biochemical and psychological processes - namely, memory, sensation, perception, attention, representation, imagination, thought and emotion. Although these aspects of human activity are manifested only in the aggregate, the optimal conditions during the process of prevention and healing the body as a whole depends on the specific conditions of flow and formation of each of these processes. However, the determining influence on the formation and management of these processes has a rhythm, because the rhythm is inseparable from the person who is the conductor of the rhythmic manifestations in all aspects of biological, psychological and social life and self-synchronization of oscillating systems and organs.

[0044]

Hence the rhythm should be considered as the material basis of two components of human activity - the knowledge and actions with indirect effects on respiration, circulation and internal secretion, which in turn will create a field of activity of emotions, as well as exciting, supports and enriches the association, causing a pleasant feeling of regularity and general stabilization.

[0045]

The periodicity and rhythm are characteristic of all mental processes, then in solving optimization problems of prevention and healing the body there is a need in a meaningful change in this frequency, ie, in its management. The sound of music and the rhythm of the different rhythmically composed phrases and phrases (conspiracies, prayers), the perceived audio analyzer has a strong and direct impact on the process of formation and organization of the rhythmic characteristics of the body, including the permit to reprogram certain abnormal rhythms and lead them to the rhythmic manifestations ozdoravlivayuschim .

[0046]

Visual rhythm perceived visually is embodied in a linear space and in a plane in a uniform alternation of certain forms, their interconnections in various optical phenomena. Linear thrust rhythm is embodied in the schedule. This method involves the use of signs and graphic constructions for the selection and inclusion of certain visual rhythmic direction.

[0047]

Touch specifies the impression of rhythm and affects perception is stronger than the rhythm perceived auditory or visual analyzer. The sense of touch is activating factor for the perception of rhythm and his way of direct transfer to humans. In practicing the method of the present invention, the construction of rhythmic tactile feedback is carried out via a cylindrical spring spring which carries in its structure laid via the number of turns, their frequency and the diameter of the tactile rhythm.

[0048]

These examples clearly shows that factors synchronizing biological processes may make light, temperature, electromagnetic and bioenergetic field, music, poetry, the influence of external mechanical generators, the rhythm of graphic images, etc.

[0049]

We can say that the study point to the fact legitimate biopotentials restructuring, which resulted in the application of all these factors establishes certain ritmoobrazuyuschih tuned to the rhythm of recovery of the central nervous system and brain. To do this set of exercises, visual, auditory, olfactory factors and the influence of electromagnetic and bioenergetic fields, coupled with the restoration of the state of the energy body can be likened to a presentation of the positive potential of great power, causing processes in different parts of the cortex begin to flow is similar, that is, the combination of synchronized actions results in effect of a mechanism, in turn clock rhythmic activity of the cortex, and this ability has only a positive signal.

[0050]

All of the above suggests that the need for and effectiveness of complex clock influences the organization of disease prevention and health improvement is not currently in doubt.

[0051]

Above the mechanism of action of certain influences. The high efficiency of the method of correction bioenergetic state of the person of the present invention is achieved by compliance with the general principles of the known interaction of systems: the principle of resonance, the principle of self-synchronization of oscillating systems.

[0052]

At present, mechanisms of action of individual disturbances sufficiently substantiated. However, an integrated management and the impact of this exposure with sufficient efficacy is lacking. Therefore, the novelty of the proposed method differs from previously known. High efficiency is achieved by way of the following characterizing method of the invention: the complex of exercises corresponding to specific diseases and disorders bioenergy defining spatial movement of certain segments of the musculoskeletal system using cylindrical springs spring, which in combination with the rhythmic sound and wave effects, light, heat, electromagnetic and bioenergetic resonance effects is salutary effect on the human body as a whole and the individual organs and tissues, the optimal system is designed to eliminate the external radiation on the human biofield by removing blocks in the energy meridians and pathological fracture energy human binding to specific objects and biopathogenic geopathogenic characterthe process of learning the spatial movements of the musculoskeletal system, the implementation process of movement is brought to automaticity, to achieve sustainable resonant wave action that is by focusing on the patient's morbid thoughts organ or body part comes in these parts of the body, causing a therapeutic and prophylactic effect.

[0053]

As a result of the invention: heals the physical body, its organs and systems, there is a cleansing energy meridians of the blocks, which leads to the correct flow of energy processes

and interactions of organs and tissues, the human energy field is released from the external energy bindings that allows you to direct the released energy in recovery organism and the optimization of the brain, through the application of external mechanical oscillator going optimization of the muscular system and joints, eliminates external pathogenic effects on the human body, its energy field and physical body by reprogramming the rhythmic characteristics of the cerebral cortex and the autonomic nervous system to achieve positive agreed perception and evaluation of reality.

[0054]

The application describes a method of disease prevention and health improvement allows already after the first session to increase the mobility of the skeleton, to feel the positive effects of reprogramming rhythm perception of the situation, bring the body into a state of heightened tone and rapid self-healing.

---

## **RU2144380**

### **METHOD OF HOMEOPATHIC PREPARATION SELECTION**

FIELD: medicine, homeopathy. SUBSTANCE: patient keeps glass filled with physiological solution in palm. Then solution sample is applied and distributed uniformly on slide, dried and crystallographic pattern is estimated under microscope. For distinction of crystalline picture from the normal one that fills light snow flakes with centered clear crystal and light concentric circles the central matured crystals show increased turbidity and concentric circles are more "heavy", mineralized. Patient keeps glass filled with physiological solution in one hand and homeopathic preparation to be tested in another hand. Then crystals are isolated from physiological solution by indicated method and the homeopathic preparation is considered to be useful for treatment of this patient if crystalline picture is normalized. Method is based on bioenergetic principle. EFFECT: objectivity of method.

[0001]

The invention relates to medicine and concerns the selection of homeopathic drugs in the treatment of various diseases.

[0002]

At different times, different theories were proposed to explain the mechanisms of homeopathy. The first was Hahnemann. He was one of those thinkers who spoke of the existence of a fine substance, called them "vital force", which organizes and animates all forms of matter. Goethe also wrote about "the life-giving forces of nature", according to these views the world as a whole and all its parts are imbued with some kind of matter, subtle enough to grasp and inaccessible. Hahnemann believed that all drugs containing this kind of power, but in the natural form in which they are found in nature, this delicate matter related more or less active. Seeing the increased activity of the drug as a result of successive dilutions Hahnemann suggested that this "life force" medicine more relieved. The same kind of matter - the life force - there are in man. It was she, for Hahnemann, weakened, and this is the essence of the disease. The vital force of the body is the point of application of homeopathic medicines.

[0003]

With the advent of information theory and the concept of the concept were considering homeopathic treatment, as information impacts under which influence the body's self-regulating cybernetic systems independently restore the disturbed equilibrium. This opinion is in itself is true, but questions about the current beginning, the point of application, the

mechanisms of interaction and the first link of the healing process remains open to this day.

[0004]

Currently, the standard is an information-energetic hologram theory of homeopathy (NK Simeonova, 1993), based on the concept of homeopathic medicine and the human body as a hologram and resonance between them.

[0005]

The general form of medicine known that drugs should be used, focusing on the individual sensitivity of the patient, but in practice this is not happening. The fact that a drug for this patient was helpful, harmful or useless, learn later, is not rare at great cost to the patient and the authority of medicine.

[0006]

You must have a clear direction and know in advance the sensitivity of the patient to the drug.

[0007]

The annotations to the use of allopathic drugs are no indications of the type of patients who have a risk of side effects. Abstract contains a list of indications, contraindications and side effects. By contrast, in classical homeopathy medicines response begins with a description of the type of sensitive people, then - reading. There are no contraindications and side effects is not - another type of medication the patient will not act at all. However, there are certain difficulties in determining the constitutional types and homeopaths, that is, from our point of view, a deterrent to the development of homeopathy among general practitioners.

[0008]

In order to overcome these difficulties - namely the definition of the patient's constitution and selection of appropriate drugs, and objective monitoring of their performance, now there are several ways. It is the creation of computer programs, allowing for a relatively short time to interview patients and give advice on the appointment of the preparations, the reception of which is appropriate in this case. Broad popular method of diagnosis by Voll. Various methods and techniques that help homeopathic preparation of recipes, such as iridology (Mikheyev AV). There are known methods of selection of drugs on the energy principle (Yu.M.Zalesskaya RU 2074637 C1, 10/03/97). All of these approaches are informative, some are standardized and greatly enhance the efficiency of the homeopath.

[0009]

The effectiveness of all existing auxiliary methods in homeopathy should be assessed according to their ability to combine the account the individual characteristics of a particular patient at a particular time on the one hand, and objective assessment - on the other. The object of the present invention is to provide such a test which would be highly effective, it has been given objective and quick results.

[0010]

The invention is based crystallographic method.

[0011]

This method was elaborated Pfeiffer in 1935 and called "sensitive crystallisation". This is not about quantity, but about qualitative methods. The principle of the method is comparable to the visualization of the magnetic field. It is known that if a piece of paper with crumbled iron filings put the magnet, the filings on paper form a characteristic pattern corresponding to the direction of the magnetic field strength. So, if in a supersaturated solution of salt to add a few drops of extract of living substance, we see that the crystals precipitated from solution also



give a certain picture, which reflects not only the properties of inorganic salts (crystals themselves), but also a modification of the action of the etheric forces studied organic substance. The similarity with the method of imaging the magnetic field is only external analogy. Figure magnetic field is always the same, whereas the sensitive crystallization gives a virtually infinite variety of patterns. However, with some experience, can find crystalline structure essentially similar patterns, allowing to use this method to practical needs.

[0012]

Crystallographic method is used in pharmacology and forensic medicine. Known for its use to detect changes in food (MP Kuzmin, NV Galkin, 1964). In the 80s the method is widely used in medicine, but it was considered only as an auxiliary diagnostic physical and chemical test. As a result, cerebrospinal fluid, urine, sputum, saliva, ascites, tumor pieces were attempts to differentiate the nature of the pathological process (tumor, inflammatory, allergic). In the most accessible form of this method was used in the MONICA them. Vladimir (LA Frost et al, 1981).

[0013]

In the traditional version of the method used to obtain crystals of copper chloride ( $\text{CuCl}_2$ ). In 1985, in order to simplify the method of crystallography IL Theodore and colleagues began to use saline solution (0,9% NaCl). The results obtained by the author, is very informative, but their interpretation was limited solely to the search for geometric differences in crystallographic patterns in patients with different pathologies.

[0014]

The closest analogue is the way of selection of homeopathic remedies for the bioenergy principle, for example, the sample "ring" test "key power" and so on, based on the change in muscle tone in his hands when dealing with the test drug or the appearance paresthesia contactless tests. The main disadvantage of these methods - a subjective assessment of both doctors and patient test results. The objective of the present invention - to overcome this drawback, an objective diagnosis of information and the human energy field and selecting the appropriate homeopathic remedies that restore normal crystallographic picture, respectively age norm.

[0015]

To solve the problem of selection of homeopathic drugs, the patient stands in the palm of a glass cup with saline, then saline sample applied on a slide, dried, and evaluated microscopically crystallographic pattern. The patient stands in one hand beaker of saline, and the other - with a test drug, more crystals were isolated from the saline solution by the above method and in the normalization pattern crystal homeopathic preparation suitable for the treatment of a given patient.

[0016]

Thus saline employed in an amount of 20-30 ml of room temperature saline, the patient stands and the drug in the palm for 10 minutes. In addition, the sample was dried for 20 - 27 minutes at room temperature and incubated for 5 - 7 minutes at 37 - 41°C.

[0017]

Evaluation crystallographic pattern is performed under the light microscope at a magnification of 56 times.

[0018]

The subject takes in hand and compresses it glass cup with 20-30 ml of saline at room temperature. After a 10-minute exposure with a laboratory pipette is taken a few drops of

saline solution from said cup and applied onto a clean glass slide on which the saline solution is distributed uniformly, after which the glass remains dry at room temperature (about 25 minutes) and placed in an oven ( temperature from 37 to 41oC) for 5-7 minutes. Qualification crystallographic pattern is made under a light microscope at a magnification of 56 times.

[0019]

It is found that physically healthy people young and middle age have information energy field capable absolutely certain, characteristically contactlessly affect the salt solution so that its crystals are oriented in space, form a typical pattern resembling a snowflake with light transparent crystal in the center and light concentric circles. In people more mature central crystals tend to be more cloudy and more concentric circles "heavy" mineralized. At the corpses of people who have been tested for 3 days from the date of death, the central crystals found muddy and rough, rezkoocherchennye concentric circles, indicating that the sharp weakening of the clearing-energy field, or by using an esoteric terminology, we can talk about the separation of the etheric body physical.

[0020]

They were examined patients with various pathological conditions. In all cases, the presence of physical illness crystallographic pattern different from normal. The regularities in crystallograms, lets talk about the typical crystallographic manifestations of pathological processes.

[0021]

Selection of drugs is as follows. After initial studies crystallogram, the subject takes a cup in one hand with saline, as described above, and the other - with the test drug vial. After 10 minutes of saline crystals are prepared by the above program and evaluated. In cases where there is a normalization of the crystal under the influence of the drug picture, the conclusion about the necessity of his appointment to the patient. In the absence of the effect of the drug on crystallograms need for the appointment of the drug there. This test can also be used in cases where it is necessary to answer the question whether further needs the drug, or its impact is over. In accordance with the information and energy hologram theory this effect is due to the occurrence of resonance between the body and medicine. If there is no response, no drug has no action and crystallograms not changed.

[0022]

Thus, the proposed crystallographic test is simple to perform. For its implementation does not require a special long-term training. To test requires the use of conventional light microscope slides, pipettes, glass and saline. In the absence of a thermostat glass can be dried at room temperature, which takes 15-20 minutes longer. Glass crystals are stored for a long time, which allows complex or controversial cases to review them, consult with colleagues to compile a rare, interesting observations, etc

---

## **RU2164127**

### **METHOD FOR PRODUCING HOMEOPATHIC BIOENERGETIC MEDICAL REMEDY**

**SUBSTANCE:** method involves applying electric acupuncture diagnosis techniques, taking energetic information properties from patient extremities using surface electrodes and transferring them using device for saving information properties on inert carrier during 30-90 s. The transfer is carried out under corresponding potency until primary values are normalized in medicamentous test under the influence of the produced remedy. **EFFECT:**

simplified method; enhanced effectiveness of treatment.

---

**RU2153896**

**METHOD FOR PROTECTION OF BIOENERGETIC ECOLOGY IN BUILDING**

**SUBSTANCE:** method consists in the fact that before the construction of building on the country determined are the direction of the geographic poles, magnitude and direction of the earth's magnetic field, location of geopathogenic zones, blocking of the geopathogenic zones is accomplished in the place of the supposed construction, selected are the place for building construction, its location, arrangement of partitions inside the building, building and finishing materials, items of interior and furniture with due account for psychophysiologic state of people, who will live or work in the building. The psychophysiologic state of people is determined due to finding of the integral index of intensity by measuring the respiration rate, pulse rate and indices of cutaneogalvanic reaction with the aid of the methods of biolocation, analysis of birth gyroscopes. At construction selected are the relation of the geometric dimensions of the building, story jobs are carried out with due account for the lunar month, and on completion of construction the purpose of the rooms is determined with the aid of the methods of biolocation. On the territory adjacent to the building the effect of the geopathogenic zones is blocked by implantation in their center of trees of the species accumulating the natural energy, or by covering of their location by mineral energy concentrators, for example, granite crushed rock or white sand with a pad thickness up to 0.8 m, and on the adjacent territory arranged are plants and landscape object accumulating the cosmic energy and providing for weakening of negative effects of the geomagnetic field on the building and space around it. **EFFECT:** enhanced safety

[0001]

The present invention relates to a bio-energy and medicine and can be used for bioenergy environmental inside the building and adjacent to the building site with the energy and psycho-physiological point of view. The invention can be used both in the construction of a new building and renovation of the old, in order to protect people from the effects of living the negative energy fields of various origins, including negative margins of biological objects.

[0002]

Known methods of providing bioenergetic ecology of detecting geopathic zones Earth's magnetic field, in the blocking effects of these zones through the use of protective screens made of metals (aluminum, copper) from minerals and indoor use generators that create opposing electromagnetic fields (see. USSR Author's Certificate 1311740, A 61 N 1/16).

[0003]

However, the known methods have the following disadvantages: not intended for use over large areas of residential buildings, as they allow to provide the necessary level of protection only in limited quantities; intended only for use in the medical purposes and are used in the medical and research institutions; They are expensive, making them difficult to use on a large scale in the individual housing and industrial construction; do not eliminate the harmful effects of certain energy fields, especially acting on the psycho-physiological state of a person; have low efficiency associated with a short stay in a shielded room; It has a limited time to achieve a healthy, protective effect is due to the impossibility of permanent human conditions created in a protective environment; do not consider the possibility of providing bioenergy environmental protection by creating OPRRNA field of plants and animals inside the building and the adjacent territory.

[0004]

The disadvantages of the known methods also include the inability to provide the following tasks bioenergy Ecology: plan the most favorable location of the structure of energy for living and working people; plan the most advantageous internal structure and architecture of the building, depending on its location, the function and nature living or working people in it; to plan the structure of the most beneficial way for the energy of the best performance of its functions, pledged during the construction; choose suitable for the start of construction time, provide further energozaschischennost home or structure and its durability; choose the best time to start construction and repair of premises, laying the biorhythms favorable for living in the house of a man or group of people; choose energy-friendly materials for construction, repair and finishing of finished housing, buildings, apartments; choose the best combination of materials in the construction and interior decoration of the house to provide psycho-physiological comfort in the home, energy security from the negative impact of the world; to eliminate the effect of geopathogenic zones on the plot; use methods cosmobiology to create comfort and safe living conditions and human life; energy intelligently distribute purpose rooms inside the house and outbuildings; choose for the individual energy-fueling and revealing his aura: tree, plant, stone, animal or other significant object energetically; pick up the energy and psychophysiological favorable to the interior structure of the home; select the most favorable to the psychophysiological, energy and medical point of view colors and decoration of premises; restore the integrity of finished energy facilities; restore the lost natural energy capacity minerals Natural materials and finishing of the finished building; use of incense and aromatherapy to restore favorable for living and recreation areas of human aura; use color therapy for the prevention of chronic fatigue syndrome and restore the integrity of the energy of the human body; pick up the comfortable rhythms of time for each individual; energosovmestimost raise different species of trees and plants in the garden; protect housing from the effects of negative energy; pick up the materials and methods to restore positive energy existing facilities (including the apartments) for major repairs; to block the possible negative energy flows in the finished housing or apartment during the repair.

[0005]

The present invention overcomes these disadvantages by the fact that the way to ensure that bioenergy environmental building is characterized in that before the construction of the building on the ground determine the direction of the geographic poles, the magnitude and direction of the magnetic field of the Earth, the location of geopathogenic zones of geopathic zones to lock in place of the proposed construction, choose a place for the construction of the building and its location, placement of partitions inside the building, construction and decoration materials, furnishings and furniture with the psycho-physiological state of people who will live or work in the building; psychophysiological state of people is determined by finding the integral index of tension by measuring respiration rate, pulse rate and performance galvanic skin response; psychophysiological state of people is determined by dowsing techniques; psychophysiological state of people is determined by analysis of the horoscope of birth; selected aspect ratio of the building, its length to width, based on a ratio of 2: 3 to 10:10 meters; floor work is carried out taking into account the period of the lunar month; on completion using dowsing techniques determine the intended use of the premises; on the territory adjacent to the building block the effects of geopathic zones by planting them in the center of tree species, accumulating the natural energy, or backfilling their locations mineral concentrators of energy, such as granite rubble or white sand cushion thickness of up to 0.8 meters; placed at a location nearby plants and landscape items, accumulating cosmic

[0006]

The main objective of this process is to eliminate the reasons, which do not allow the energy to circulate freely and uniformly in humans. These reasons include any impediments to the

normal flow of energy flows (salt deposits, fear, negative emotions, weakened immune system, etc.) and cause breakage of the reverse energy ties. Open inverse energy ties also occurs under the influence of the previously obtained the natural background and artificially induced negative energy species. Power plugs cause dysfunction of specific organs in the future adversely affect the condition of the body as a whole, not allowing energy to circulate evenly throughout the body and to the body - get energy from other sources. Given the current understanding of the distribution of the electromagnetic and biological energy in the human body, the present method eliminates the following causes of disease and deterioration of mental and emotional background (remove the "blocks" in the body): Energy - overlapping channel (meridian) flowing energy, physical block - paralysis or muscle contracture, salt deposits, the formation of stones, sand and other diseases related to slugging of the body, the mental block - stress factor, emotional breakdown, depression, nerve blocks - exhaustion of the nervous system in general, fatigue, insomnia, etc. condition

[0007]

Elimination of nervous and mental blocks ensures the recovery of dangling power feedback. Most effectively, this method eliminates the lock associated with nervous stress, exhaustion of the nervous system, chronic fatigue syndrome, psychosomatic diseases of internal organs.

[0008]

Another advantage of the present method of the invention is the purification of the energy channels of the subtle bodies and structures, which leads to a complex cleansing effect on the body's energy, and then to the improvement of the human body at the level of thin components, and at the level of the physical body.

[0009]

Under the influence of high-frequency components of the magnetic field of the Earth, cosmic rays, geopathic zones at the level of physical and chemical reactions in the body produces toxic substances that carry the body and contaminating it on the cellular and energetic level. Perform the steps for this method allows you to actively remove toxins from the body and replace contaminated clean energy. In addition, the work includes not functioning or previously blocked energy centers. The body begins to consume no energy and radiate it outward. There is an internal harmonization of the body and the person begins to have a positive impact on the world around us.

[0010]

A third advantage of the process according to the invention - to achieve a uniform distribution of energy throughout the body.

[0011]

Electromagnetic fields have the following biotropic indicators: intensity gradient vector, frequency, pulse shape, localization. Analysis of the impact of electromagnetic fields should be divided on the impact analysis of the magnetic and electric components. The non-uniform electromagnetic fields have a more pronounced biological activity than the homogeneous, and the vertical direction of the lines of force is more effective horizontal. Variable magnetic fields induce nonspecific reactions which are detected at the level of the whole organism, and at the level of the central nervous system and neuronal cell formation in particular. In contrast to the stimuli for the perception that there are specialized receptors alternating magnetic field, having a large penetrating action can simultaneously affect different tissues. However, due to the different sensitivity of tissues and organs, and also due to the inclusion of reparative processes that change the overall response of the body at different stages of exposure.

[0012]

But at every stage it has been actively involved the central nervous system as a central regulator of the main link of the chain of responses. Considering the confining effects, such as the brain, it may be noted that in addition to the nerve cells in response to the electromagnetic field are switched on and glial elements, which part causes the appearance of slow oscillations in the electrical activity of the brain. Characteristically, these changes arise with long latent period continues for a long time after the end of exposure, and often accompanied by a predominance of inhibition in the central nervous system.

[0013]

The electromagnetic field changes the electrical activity of the brain, particularly the hypothalamus and the cortex, affects the processes of formation of skills, processes, information storage in brain structures and its reproduction, change emotional and volitional, dysfunction of the cerebral apparatus, it causes restoration and connecting dysfunction, hematological and biochemical changes indicators. Therefore necessary to optimize the electromagnetic characteristics of the environment with parameters corresponding to one or other activity depending on the person or embedded in the acquired interactions with energy fields, that is a kind of bio-energetic approach is needed in the planning of the impact of electromagnetic fields on the human body and its biological field (bioenergetic environment ).

[0014]

The method takes into account the organization of optimum parameters based on the environment of human influence on its body different stimuli any energy nature, including bioenergy effects of low intensity. The highest biological activity have electromagnetic fields (bio-energy impact), the intensity of which varies from  $10^{-2}$  to  $10^{-16}$  W / cm<sup>2</sup>.

[0015]

The method takes into account the electromagnetic fields that are divided into natural, which in turn are divided into external - the cosmic, geophysical, biological and internal generated by different structural levels of the body, and artificial electromagnetic fields that now led to the possible threat of a kind of " electromagnetic pollution ".

[0016]

Preventive effect and improvement of the human body by this method ensures the participation of all the biochemical and psychological processes, namely, sensation, perception, attention, memory, representation, imagination, thought and emotion. And although some of these questions do not appear and are found only in certain of its population, optimal conditions for disease prevention and health improvement in general depend on the specific conditions of the formation and flow of each of these processes.

[0017]

Recently developed quite a number of ways to protect and insulate people from the impact of external factors and energy field. At present known methods of protection against some of the most powerful sources of pathogenic effects on humans, leading to the destruction of his subtle physical fields with very unpleasant consequences for him. These are: 1. Cosmic radiation 2. Geopathic Zone 3. Socio-pathogenic effects 4. Technopathogenic radiation Today city dwellers are exposed at the same time exposed to all these pathological types of radiation.

[0018]

According to the proposed method of human body - is a balanced self-regulating biological system, which is itself in a position to get rid of the disease, if you create the conditions that correspond to the laws of nature and not contrary to human ecology.

[0019]

Known methods can solve the problem of providing bioenergy environment, taking into account only the impact of individual factors above. It does not take into account the effect of other components of the total energy field and their impact on human and biological field together. In addition, the known methods provide bioenergy environment in small volumes and, most importantly, do not allow you to control the bioenergetic state of the environment. Basically they are aimed at reducing the impact of harmful effects to the body by counteracting the external pathogenic factors when other measures can not reduce their effect on the human body.

[0020]

Summary of a method for providing bioenergetic ecology of the present invention is as follows.

[0021]

FIG. 1 shows a picture of the effects of electromagnetic radiation on the earth's land surface.

FIG. 2 shows a plot with a separate building located on it.

Таблица 1

Уровень интегральной оценки напряженности (безразмерная)	Угол разворота здания (градусы)	Уровень ЭМ поля в заштрихованной зоне мВ/М	Уровень ЭМ поля в не заштрихованной зоне мВ/М	Назначение помещения
0,2-0,5	5-15	1,2	12	Предназначено для длительного проживания
0,5-0,8	16-25	3,1	11	Для длительного проживания
0,8-0,9	26-35	1,05	10,5	Для длительного проживания
0,9-1,0	36-45	1	10	Для длительного проживания

Таблица 2

Угол разворота здания (градусы)	Угол разворота здания (градусы)	Потенциальное воздействие (напряженность)	Назначение помещения
0-20	5-15	стрессовое	для длительного проживания
21-43	16-25	возбуждающее	для длительного проживания
44-67	26-35	понижающее стрессовое	для длительного проживания
68-90	36-45	спокойное	для длительного проживания


Таблица 3

Напряженность электромагнитного поля (мВ/М)	Потенциальное воздействие (напряженность)	Угол разворота здания для минимизации отрицательных влияний (градусы)
0,2	Высокая	38-43
0,5	Высокая	5-15
0,8	Средняя	28-33
1,0	Средняя	15-21
1,2	Повышенная	34-37
1,5	Повышенная	14-17
2,0	Средняя	23-27
2,5	Средняя	24-27

Таблица 4

Размеры строения, м	Напряженность электромагнитного поля	Действие электромагнитного поля на организм	Влияние электромагнитного поля на организм
2 : 3	кроссборный	нулевое	минимальное
3 : 5	ЧС	нулевое	минимальное
5 : 8	хвостик	нулевое	минимальное
10 : 9	хвостик	нулевое	минимальное
10 : 10	хвостик	нулевое	минимальное
8 : 10	хвостик	положительное	среднее
7 : 10	хвостик	положительное	среднее
7 : 9	хвостик	положительное	среднее
6 : 7	ЧС	положительное	минимальное
7 : 7	ЧС	положительное	среднее
7 : 8	ЧС	положительное	минимальное
7 : 4	ЧС	положительное	минимальное
6 : 4	ЛЧС	положительное	минимальное

4:4	ЧС	положительное	максимальное
5:5	ЧС	положительное	максимальное
4:4	ЧС	положительное	среднее
3:3	ЧС	положительное	максимальное
5:6	клеточно	положительное	минимальное
5:8	клеточно	положительное	минимальное
2,5:4	продольно ДС	положительное	среднее
2,5:3,5	клеточно	положительное	минимальное
5:7	ЧС	положительное	минимальное
9:10	клеточно	положительное	максимальное
8:8	клеточно	положительное	среднее
6:6	ПЧ	отрицательное	максимальное
2:2,5	продольно ДС	отрицательное	минимальное
2:2,5	ПЧ	отрицательное	максимальное
1:6	клеточно	отрицательное	минимальное
6:9	ЧС	отрицательное	максимальное
6:8	клеточно	отрицательное	минимальное

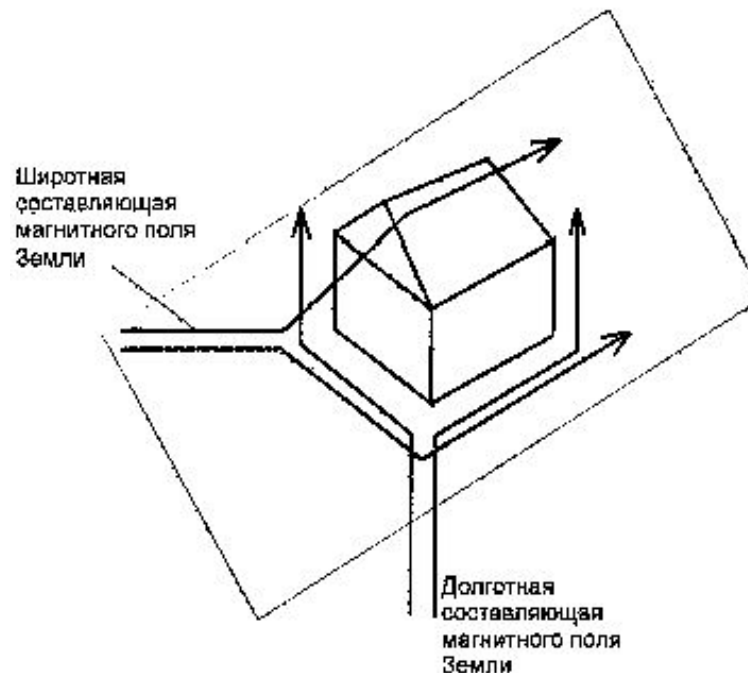

ФИГ. 2

In every part of the earth's surface by cosmic radiation, geomagnetic field, geopathic fields. According to the present method of providing bioenergy ecology to the building on the ground determine the direction of the geographic poles, the magnitude and direction of the magnetic field of the Earth, the location of the geopathic zones, to lock geopathic zones in the proposed construction site, choose a place for the construction of the building and its location, placement of partitions inside the building, construction and decoration materials, furnishings and furniture with the psycho-physiological state of people who will live or work in the building. Psycho-physiological state of people is determined by finding the integral index of tension by measuring respiration rate, heart rate and indicators of galvanic skin response, and using dowsing techniques and by analysis of the horoscope of birth. Select the aspect ratio of the building, its length to width ratio, based on a ratio of 2: 3 to 10:10 meters, floor work is carried out taking into account the period of the lunar month, on completion using dowsing techniques determine the intended use of the premises, on the territory adjacent to the building block the effects of geopathic zones by planting them in the center of tree species, accumulating the natural energy, or backfilling their locations mineral concentrators of energy, such as **granite rubble or white sand cushion thickness of up to 0.8 meters** and is placed at a location nearby plants and landscape items accumulating cosmic energy and provides attenuation of the negative effects of the geomagnetic field of the building and the space around it.

[0022]

Integral estimates of the intensity of human use in the differential diagnosis of the functional



state of the person, the analysis of employment, with therapeutic relaxation and esthete-therapeutic effect in the evaluation of psycho-physiological tension, to assess stress (see. **Patent No. 2073484**, A 61 N 1/16, 1996). These factors allow the evaluation to adequately reflect the functional state in the time of the study due to the integration of local indicators of functional subsystems into a single assessment. Status of psychophysiological tension phylogenetically developed as a reaction to the mobilization of functional reserves of the body in response to stressful stimuli. This method uses integral estimates according to the procedure used in the Institute of Medical and Biological Problems.

[0023]

According to this method among functional systems under the influence of stressor are primarily at mobilizing: cardio-respiratory system, which provides the energy balance of the body and has a number of stable indicators, of which the simplest to consider are the duration of the cardiac and respiratory cycle. In the known method used reciprocals: heart rate (HR) and respiratory rate (BH); eksretornaya sweating system, which is an indicator of the state of galvanic skin response (GSR). The selected indicators mainly provide a reliable estimate.

[0024]

As the assessment of the state of the human body can be used integrated assessment of tension that characterizes the psychophysiological tension, depending on the value of the respiratory rate, heart rate and indicators of galvanic skin response. For people who are in good psycho-physiological and emotional state, the composite indicator is in the range 0.2-0.5. The angle of rotation of the building is 50-230. In this corner of the geomagnetic field reversal partially penetrates into separate premises, which allows not to violate the biorhythms of the body and maintain the relationship with the environment, while reducing the effect of electromagnetic fields on the human body to a safe limit (about 1.2 mV / m in the electrical component and 12 uA / M in the magnetic component, the oscillation period of from 50 s to 650 s). For people irritable, with a weakened immune system and suffering from diseases of the level of the electromagnetic field should be a minimum of the order of 1 mV / m in electrical components and 10 uA / M in a magnetic component, the oscillation period of 1 to 600, in order to avoid disrupt biological rhythms of the body and the biochemical processes occurring in the normal state. The angle of rotation of the building in this case is 24-430.

[0025]

For people who are calm and balanced, to improve their health, increase immunity is necessary to increase the level of penetration of the electromagnetic field and cosmic radiation in the building in a range not exceeding the required level of security.

[0026]

Table. 1 shows the relationship between the levels of psycho-physiological state of people and levels of electromagnetic radiation to determine the internal layout of the building received an experimental way.

[0027]

Premises indicators which exceed the level of the electromagnetic field in the table are not intended for long-term stay in them as people, and can be used for household purposes: as a utility room, storage rooms, toilets, etc.

[0028]

Considering that the integral estimates of tension residing in the house of people over time may change under the influence of various factors, using them to achieve the goals set in the present invention, only roughly to determine the position of a building under construction.

More consistent results are obtained when applying to assess the psycho-physiological state of human bioenergetic characteristics, obtained by a known method using dowsing pendulums framework or conventional design.

[0029]

Table. 2 shows exemplary values of rotation angles frames corresponding to different levels of psycho-physiological state of people and the corners of the building with respect to the azimuth rotation, depending on the derived parameters obtained an experimental way.

[0030]

The most permanent in its effect voltage parameters of mental and emotional energy fields and human, almost independent of external stress conditions, can be considered a predisposition of the body and its systems to specific reactions to external stressors, which is calculated on the basis of a person's birth astrological chart (horoscope) with using known techniques. The planets of the solar system projecting its power and influence of electromagnetic radiation in the range of ultra-low on the surface of the earth and living organisms. Resulting in the birth of human influence of planets and distant stars, considered in astrology, exert their effect on the state of the human body, its characteristics and bio-energy for life processes in general, at all stages of the life cycle. Temporal changes in the characteristics of human bio-field superimposed on the influence obtained at birth, and thus lead to certain changes in a psychophysiological state, which can be calculated from the analysis of a person's birth astrological chart (horoscope). This way you can determine the adaptive capacity of human rights in general and to properly assess the ability of the organism to protect against environmental influences the field and calculate the direction in azimuth, which allows a person to restore the integrity of the field after OPRRNA of negative energy factors.

[0031]

Table. 3 shows the relationship indicators horoscope birthday person with a total strength of the electromagnetic field and the corresponding angles of these states turn a building under construction in the azimuthal projection obtained an experimental way.

[0032]

Matched from the astrological point of view, the position of the structure, finishes, colors and furnishings attracted favorable influence of the planets and other astrological factors considered necessary for the body proportions, thus providing a person a unique revitalizing effect.

[0033]

Construction of a new facility or reconstruction of old most effectively carried out subject to certain phases of the moon, which has a significant impact on the flow of energy and physical processes in the world in general and in the human body and his mental health in particular. Despite the fact that the influence of the moon - only part of the total energy of cosmic influences of nature, the high importance of this influence is self-explanatory and evidence. The moon causes the tides of the oceans, makes the crust to rise. The moon affects the entire mass of plasma in the body and nervous activity. An even more pronounced effect it has on the energy potential of man. So, during the full moon intensity of weak electromagnetic fields of man becomes the most visible, and therefore exerted on him bioenergetic impact should wear calming nature. During the new moon of the field characteristics of the aura appreciably reduced and the field strength falls - it is necessary to hold a tonic effect on the body to increase vitality and strengthen the adaptive capacity of the individual. This impacts on biological human energy field on the first day of the lunar month should be minimal, gradually accruing in the next few days before the full moon. Then, the impact should be

proportional to the decrease, reaching a minimum at the end of the lunar month, on the border of the next new moon.

[0034]

Thus, the period of the lunar month, lasting about 29.5 solar days, can be divided into several periods, the carrier independent power characteristics. In this regard, the construction works are also divided into several stages, depending on the characteristics of the lunar energy influences on the surface of our planet and flowing individual or mass energy interactions. Getting construction determine specific lunar day and the value of the electromagnetic field on that day in a given area development. In carrying out operations to ensure bioenergy ecology, see to it that the true value of the electromagnetic field is between the value corresponding to the period of the new moon, and the value attributable to the middle of the lunar month. The minimum value corresponds to the minimum acceptable in terms of maintaining the body's normal biorhythmic action and the magnitude of the electromagnetic field in the middle of the lunar month should not exceed the maximum value allowed for the proper operation of the organs and body systems. In this case, according to the present invention, there is no violation of the effect of the monthly lunar rhythms on human biological field and the values ??of the electromagnetic field levels are within safe limits.

[0035]

Based on the above calculation of the building at the time it is advisable to carry out the following: the markup in the nature house plan and device obnosok, assistive devices for excavation produce favorable lunar days before the full moon; excavation and installation of foundations, as well as the construction of the underground part of the future structure (basements, cellars, underground garages, etc.) produced in the second half of the lunar month. By the second half of the lunar month is also desirable to tie the end of any stage of construction works, followed by a change of technology should be further work (for example, complete the construction of walls and floors, complete interior finishing, etc.); the beginning of the construction and erection of walls necessarily tied to the first half of the lunar month, it is advisable to start this work in the first quarter of the moon; at crucial for its energy and electromagnetic characteristics of the lunar days (9, 15, 23, 29 days of the lunar calendar) it is better not to produce serious works and restrict the removal of defects, removal of debris, etc. types of work.

[0036]

The geometrical dimensions of the building has a direct effect on the bioenergy situation in the building by setting a certain direction of the electromagnetic field, resulting in the appearance of stable energy flows inside the building, the formation of so-called "energy draft" that affect energy facilities and are in them. Chronic exposure to energy in one direction relative to the geomagnetic field and the interior adversely affect the stability of the energy field of biological objects, and can lead to poor health of man, lower body defenses and therefore disrupt bioenergetic environmental conditions created in the building. Table. 4 shows the experimentally obtained by dowsing based distribution of the energy potential of existing fields on the geometry of the building (the ratio of the transverse dimension of the building to its length).

[0037]

Abbreviations: TO - the long axis of the building, emergency - a circle clockwise PSP - a circle counterclockwise.

[0038]

The table above shows that the best relationships, provides the most favorable bioenergy effects on people inside the building are the following aspect ratio: 8:10, 7:10, 5: 6, 5: 8, 9:10,

[0039]

Pick up the building materials to be used in the construction of a residential building on the principle of maximum protection of the interior space of the building against the penetration of harmful electromagnetic radiation. As a building material using conventional materials used in civil construction: brick, wood, sand, etc. with regard to their interaction with electromagnetic fields.

[0040]

Then calculated the position of the internal walls of the building and determine the layout of the building storey levels, guided by the psycho-physiological and emotional state of the people, the level of electromagnetic fields and the time of finding the people in these areas.

[0041]

After determining the layout inside the building shall assess the decoration of the building inside and out in terms of the possible protective effect of finishing materials. The exterior may be faced with mineral and wood products, bioactive materials (for example, with the addition of hard rubber) and others. Natural materials, by allowing accumulation of cosmic energy to create a field, opposing destructive external fields. Interior decoration of the building is carried out on the basis of calculating the parameters of the mutual influence of the materials used on the human body and its subtle energy components. Due to the decision and the careful selection of materials for every room in terms of its purpose, energy and electromagnetic fields inside the building are aligned to the optimal settings for living people. At the same time there is an alignment of their own human energy field with the subsequent optimization of psycho-physiological status. Indoors strength of the constant electric field is zero, and useful to the body low-frequency pulsations of the geomagnetic field from 1 to 600 to achieve a sufficiently low level of radiation, providing a positive effect on the human body. It should be noted that this method provides individual furnish Improvement both outside and inside for efficiency improvement of the person. To do this in separate rooms can be used for finishing various tree species with a favorable living for the electromagnetic potential (birch, oak, pine, lime, apple, etc.). The tree has a protective effect on the flow of harmful energies that permeate the room. On the other hand, it serves as a source of favorable energy by accumulating it from outer space. Therefore, by way of furniture for the rooms is individually made of natural wood and is in the form of an additional barrier to the direction of the geomagnetic field of the Earth. The interior requires the use of natural minerals as accumulators of cosmic radiation favorable range.

[0042]

Given the significance of the cosmic radiation of a particular type on the formation of electromagnetic fields inside and outside the building, in this way highlights the most important for the functioning of the body radiation spectra corresponding to the planets of the solar system. Each planet in the solar system has a predominant influence on the nature of its own mineral and vegetable kingdoms, respectively, on the organs and systems of the human body, which also serve as the basis for mineral and vegetable elements. Matched cosmobiological laws minerals and materials coming into contact with the body, attracts beneficial influence of the planets in the required proportion to the body, thus exerting a person a unique revitalizing effect.

[0043]

To ensure ecological purity bioenergetic on adjacent areas having a direct impact on bio-energy state of the building, comprising the steps that characterize the method of the invention: the locking geopathic zones around the structure; the use of the topography,

planting plants as protection against the adverse effects of electromagnetic fields; the redistribution of power in the area of geopathic zones, safe for people, through the use of different building materials.

[0044]

At the last stage, the selection of combinations of colors interior and interior arrangement of premises, taking into account the impact of certain colors, symbols and plants on the human body.

[0045]

On the muscle and blood system has a positive effect red; on the cardiovascular system - green; airways - blue; skeletal system - blue; in the sexual sphere, gynecology, urology - orange; the nervous system and general state of the immune system - yellow; on the system of endocrine glands - purple, etc.

[0046]

It is desirable that the windows were located on the south or east side. Location mirrors also chosen in a special way to the mirror surface to an even distribution of energy in the room, focusing it in a given direction and in any case was not conducive to the formation of "energy corridor" that could become a conduit for hard negative electromagnetic radiation in the room, breaking the outer protection of the premises.

[0047]

With a cloth or other. Materials is desirable to create a classic color rainbow where each color brings its own frequency of vibration and resonates with certain organs and systems of the human body, creating conditions for disease prevention and healing of the human body. Visual rhythm perceived visually is embodied in a linear space and in a plane through a uniform alternation of certain forms and their relationship to different optical phenomena. Rhythm, which is realized on a plane can be represented as a combination of colors and repetition, in the dynamics of their relationship and transitions. Linear thrust rhythm manifested in painting, drawing, etc. By selecting certain combinations of color and rhythmic palette of graphic elements created electromagnetic background directing body for internal recovery, purification of toxins and negative energy. The method of this invention determines the correct orientation relative to the magnetic field lines and cosmic radiation interior furniture. Energy fields interior items, furniture should have expressed energoblokiruyuschimi properties against the negative components of the electromagnetic field. Placing certain types of plants should create a favorable background for recovery of energy lost per day by the body forces and quickly restore normal energy structure of the human biofield. Placing species with well-defined location possible in order to use their energy potential to create a favorable health situation of bioenergy.

[0048]

Currently, the mechanisms of influence on the bioenergy situation around individual human factors considered are well known and well documented. However, an integrated management and the impact of this exposure with sufficient efficacy is lacking. No comprehensive approach in the application of these methods in civil and industrial construction, planning, redevelopment and major repairs of buildings. Therefore, the novelty of the proposed method differs from previously known. The high efficiency of the method is achieved by the following actions, which characterize the present method as the invention: Provides bioenergy environmental cleanliness in the building housing due to the choice of building space by finding and blocking the action of geopathic zones, forecasting their impact on the energy environment, reduce the influence of the magnetic field of the Earth and Space radiation due to the special orientation of the building relative geographical poles with the

psycho-physiological and emotional state of people living in it, select the optimum from the energy point of view, the aspect ratio of the structure, selection energetically favorable protect or reveal human aura building and finishing materials, as well as the basic combinations of colors Interior, full respect in the energy space planning and building structures, the correct orientation with respect to the magnetic lines of force and space radiation interior items, furniture, etc .; ensure environmental cleanliness of bioenergy in the surrounding area through the use of protective action items landscape, planting plants and placement of certain species on the protected site; the timing for the start of construction, providing energozaschischennost house and its durability.

[0049]

The proposed method allows you to create optimal conditions for bioenergy environmental aimed at disease prevention and health improvement of the human body, increase efficiency and improve the immune system without the use of medicines and pharmaceutical products.

---

## SU1311740 APPARATUS FOR MAGNETOTHERAPY

[0002]

The invention relates to medical devices, and is intended for the prevention of acute diseases, such as cardiovascular, psychiatric, by stabilizing the geomagnetic field during magnetic storms.

[0003]

The purpose of the invention - increase comfort during treatment by creating a uniform magnetic field over the entire working volume.

[0004]

**FIG. 1** It is a functional diagram of the device;


**Figure 2** - the expansion of the vector of the geomagnetic field on the three components in the rectangular coordinate system;






**FIG.3** - horizontal component (Z-system) of the magnetic system, covering, for example, three adjacent chambers;


**Fig 4 and 5** - the vertical components (X- and Y-system) of the magnetic system;

**Fig 6** - the distribution of magnetic field components generated by Z-system in the central zone of the working volume along the axes X and Y at the level of the human head;


**Fig. 7 - 9** - distribution, respectively constituting N. H) ( $H_y$  in the working volume in the horizontal plane XOY level of the human head.

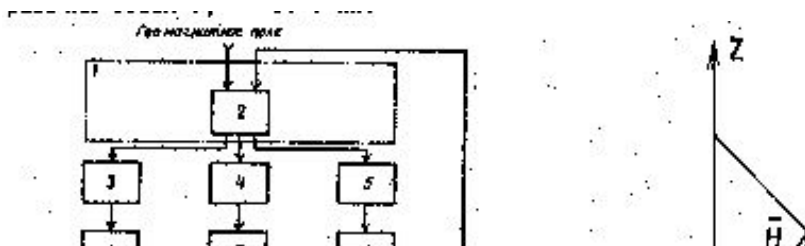

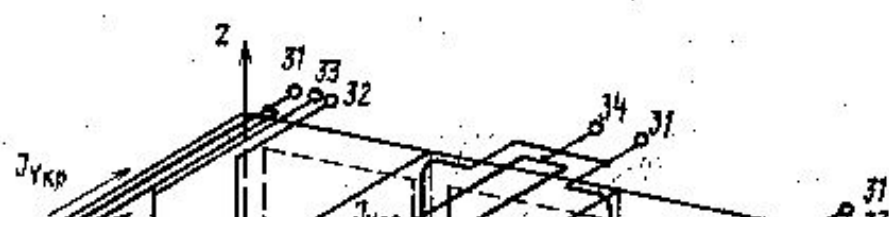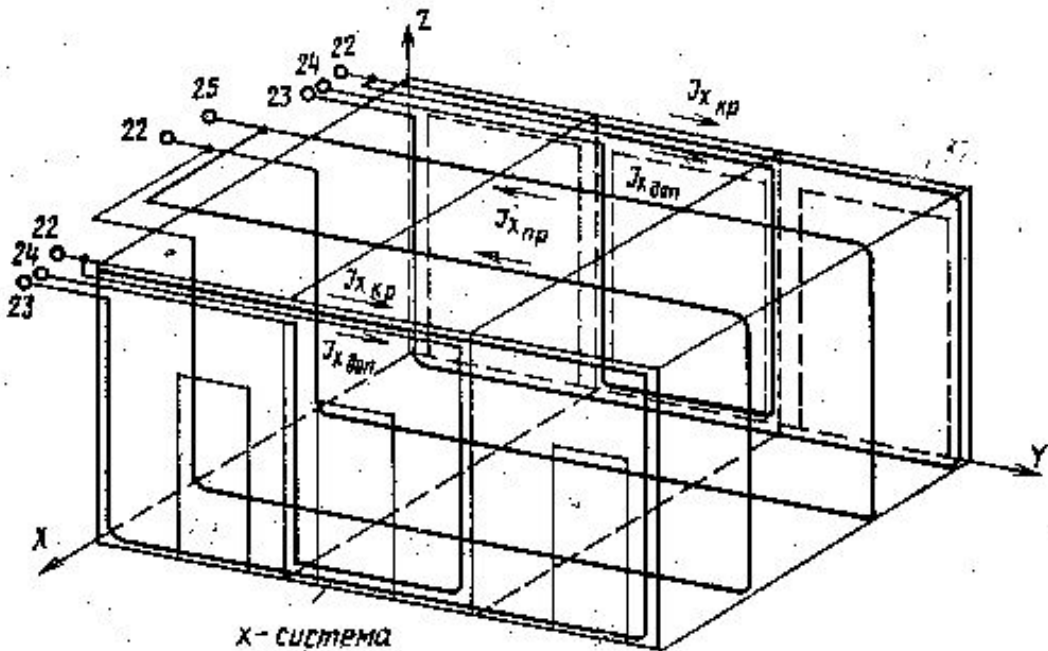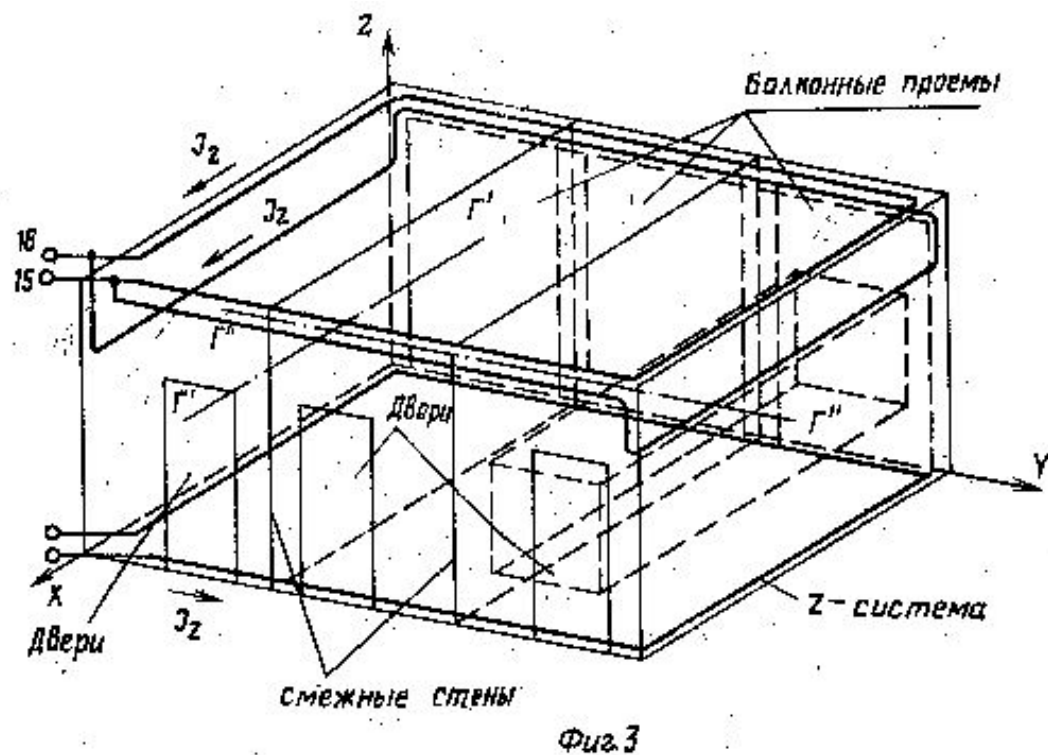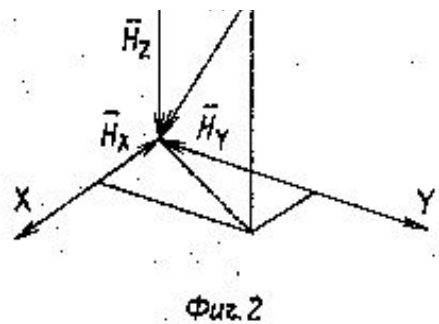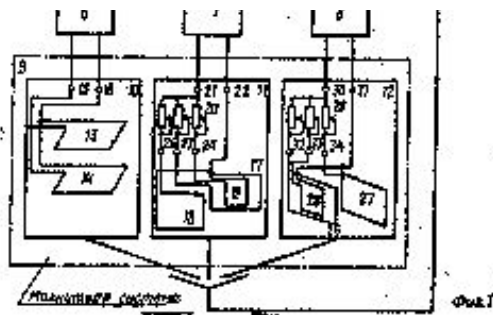


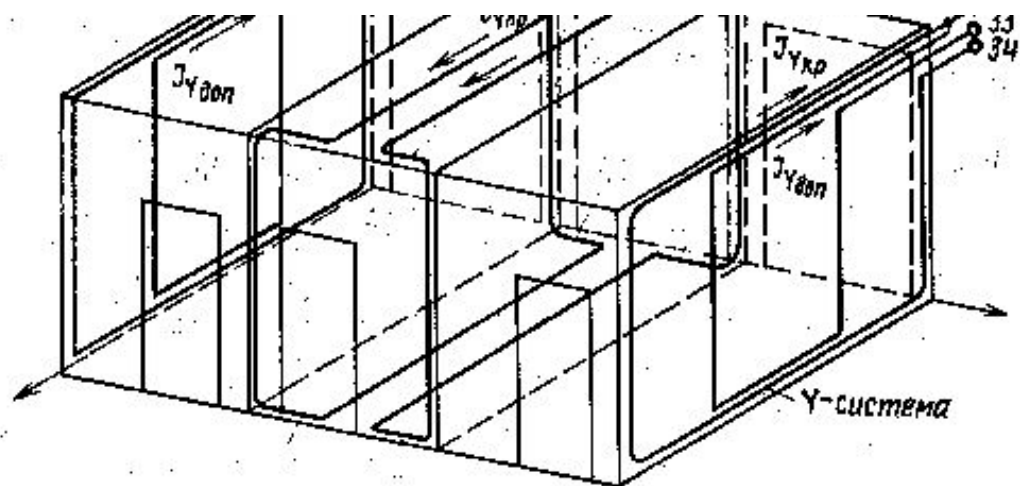

Фиг. 5

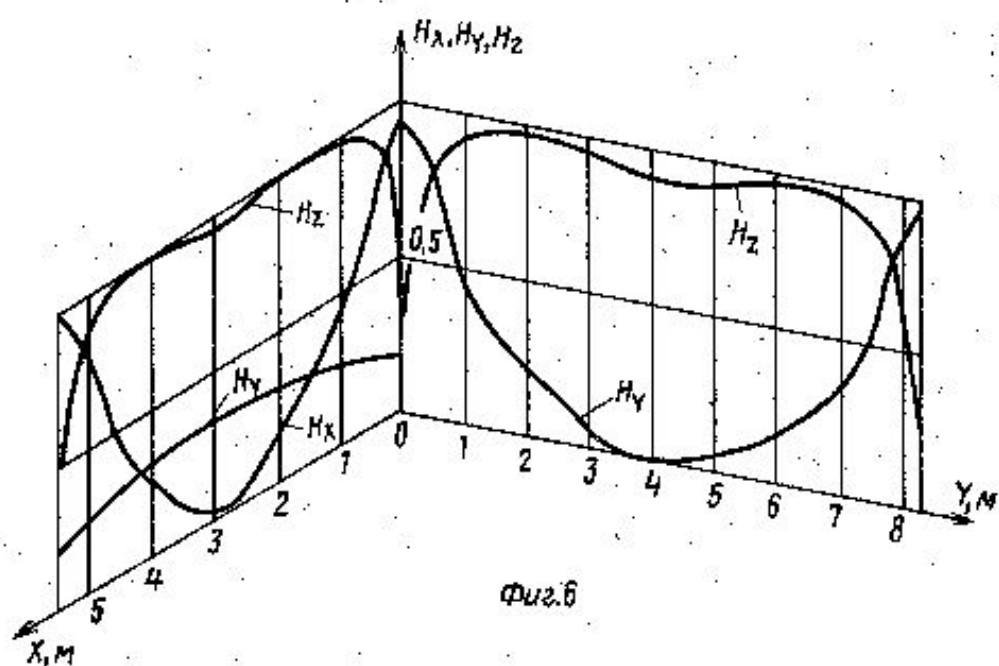



Фиг. 6

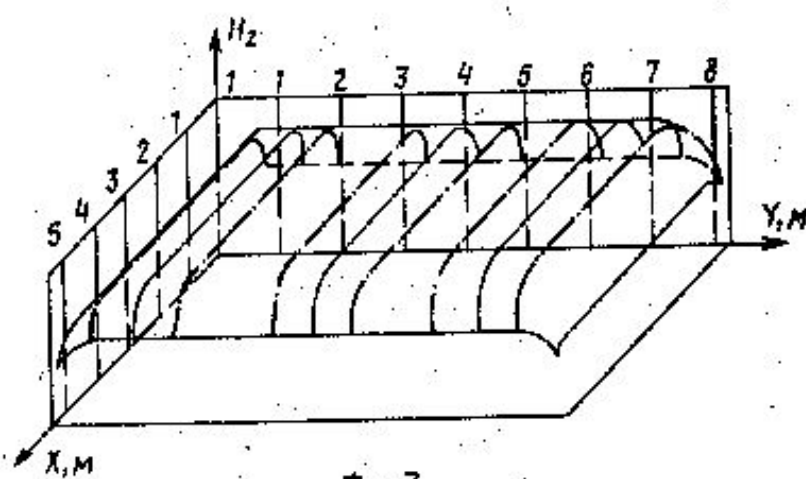

Фиг. 7





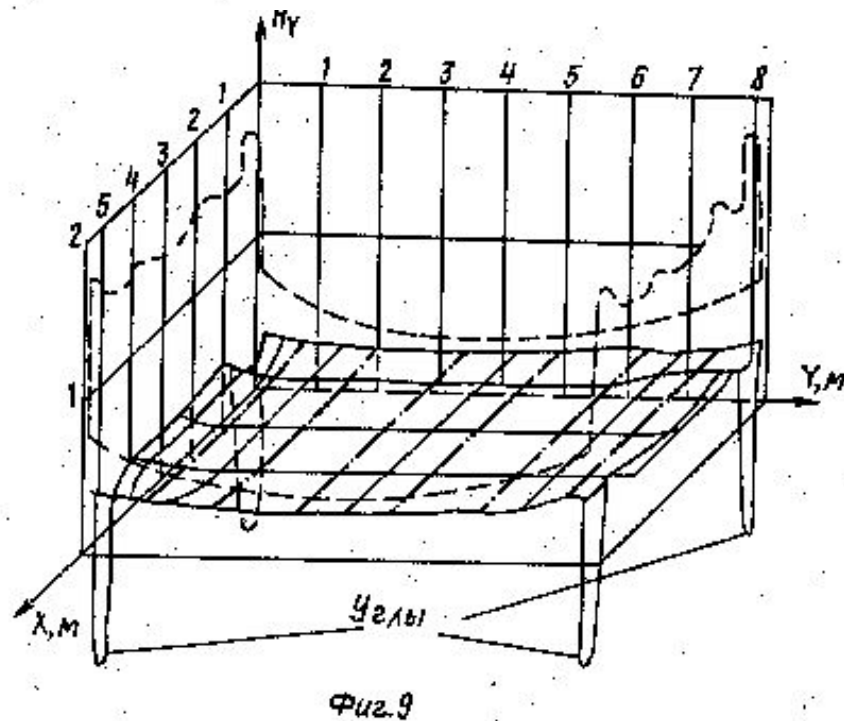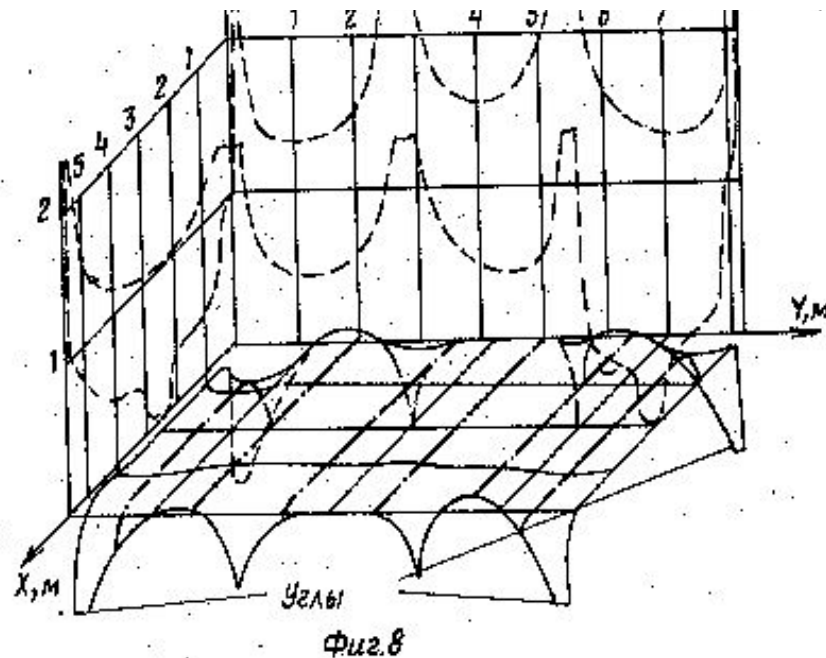

[0005]

The apparatus comprises (1) a working volume 1 as the chambers of health care setting, three-component magnetometer 2, located in the working volume and the associated through filters 3 - 5 amps and 6 - 8 with three-component system 9, covering the working volume 1, The magnetic system consists of three orthogonal components: horizontal 10, (Z-system) and two vertical 11 (A-system) and 12 (Y-system). The system provides basic IO 13 and kompensig. ating circuits 14 connected to the terminals in concert 15 and 16 output of the amplifier 6. System 11 comprises a main 17, 18 and additional compensating circuits 19 connected via trimmer 20 to terminals 21 and 22 output amplifier 7, wherein the core 17 and the additional circuits 19 are connected, respectively, via terminals 23 and 24 anti-phase compensating circuits 18 ( terminal 25). System 12 comprises a main 26, 27 and additional compensating circuits 28 connected via resistors 29 to trim

[0006]

[0007]

terminals 30, 31 in the amplifier 8, and 26 main and additional circuits 28 are connected, respectively, via terminals 32 and 33 in antiphase compensating circuits 27 (terminal 34).

[0008]

The device operates as follows.

[0009]

The vector of the geomagnetic field in the general

[0010]

if directed at an angle to the surface (magnetic inclination) and in the Cartesian coordinate system can be resolved into three orthogonal components - vertical  $H$

[0011]

and two horizontal  $H_x$ ,  $H_y$ .

[0012]

Geomagnetic field affects three-magnetometer 2 (1), the magnetometer output signals to the filter 3-5 which emit signals corresponding to the perturbed geomagnetic field variations (frequency range of 0.01 to 20. Hz). These signals are amplified by amplifiers. The amplifiers have a dead zone corresponding to the limits of normal geomagnetic field variations (about  $\pm 30\text{v}$ ), and amplify only signals proportional to anomalous variations of the geomagnetic field (magnetic storms). The amplified signals are fed to the components 10 - 12, the magnet system 9, to reproduce, respectively, field components  $H$ ,  $H_x$ ,  $H_y$ ,

[0013]

antiphase vector magnetic storm. The most sensitive to perturbations of the geomagnetic field central and autonomic nervous system, so it is important to ensure uniformity

[0014]

field in the bottom half of the working volume and in the central space along the axis  $X$  (FIG. B) vs the floor 0.4-0.5 m (Fig. W, this area in one of the chambers is delineated by a dotted line).

[0015]

Each component of the magnetic system, we have created a (axial) component, be accorded only along the axis of symmetry. In all other points the displacement volume it creates other orthogonal

[0016]

components. As an example, Figure 6 shows the distribution of components - 1TSIHPOLYA created Z-system along the lines  $r$  -  $r$  and  $(c \parallel dr, B)$  at the level of the human head. The amplitude of reflected in

[0017]

conventional units. As you can see, it creates a large absolute value and strongly varying values  $H$  "Well. In turn, the X-system creates

[0018]

a relatively large value  $H$ , where  $LH$ ,  $LY$ ,  $dZ$  -differential

[0019]

XO, YJJ, Zg - coordinates of the point in kot- Roy calculated field strength;

[0020]

and (Ho,

[0021]

Y-system - large and strongly varying values ??of N.

[0022]

To equalize the distribution of A in the working volume (increasing homogeneity) through extreme and additional circuits X- and Y-systems -in current is passed, the current opposition in the intermediate circuit, ie, they create a negative with respect to the intermediate circuit 10 and the entire magnetic system values, respectively CTBeHHO, Hj (Well, and, in addition, supplementary contours X- and Y-systems, offset by an increase napryazhennoe- 15 minute field, what is happening in the field at the vertical edges of the intermediate circuits, respectively, Y- and X-systems.

[0023]

YJ,, Zo) - scalar magnetic potential of the circuit, which is divided into a finite number of triangular loops with a common vertex one of the vertices of the original circuit. The scalar magnetic potential circuit is computed as a result of superposition Therefore; potentials generated triangular contours.

[0024]

I -5j |, f ..

[0025]

(4)

[0026]

where I - ampere-turns; g, - telesnBY angle subtended by the circuit number of the observation point, and f rasschi l

[0027]

u k-ZZ

[0028]

UJ. I,

[0029]

J

[0030]

(5)

[0031]

The ratio between H and y. Well eavi- Tuva on analytic formulas screens on the latitude 20 deposits geometry in space arrangement medical facility. The relationship between H and Well depends on the orientation of the chambers (magnetic system) in the Earth's magnetic field. The values ??of ampere-turns in the contours pax magnetic system depends on these factors and the size of the working volume.

The field strength at various points in the working volume is calculated on a computer

program based on the formulas (1) - (3), the distribution schitshaetsya once complete magnetic system ( $X + Y + Z$ ), the scalar magnetic potential ( $A$ ) is calculated by the formula (5).

[0032]

Submit CorrectionsClose The number of intermediate loops, their relative positions and the number of ampere-turns of the circuit is based on the requirements of the maximum magnetic field homogeneity in the working-obe 2,75x5x3 40 m from the balcony openings on the size of IU given formulas You are a whole end wall, oriented

[0033]

thirty

[0034]

35

[0035]

where  $m$  is the number of loops;  $I$ ; - The value of ampere-turns  $J$ -ro circuit.

[0036]

If the resulting calculated field homogeneity does not satisfy the predetermined value, changing the number and position of the compensating circuit and the value of ampere-turns and loops calculation is carried out anew.

[0037]

The value of the current in the loop are installed Trimmer 20 and 29.

[0038]

Examples 7 - 9 show the distribution of the field components in the form of the surfaces in the XOY plane at the level of the human head for measuring chambers adjacent .treh

[0039]

compute the orthogonal components of the magnetic field piecewise linear circuit with a current (2), for example, by numerical of differentiating:

[0040]

HX

[0041]

$U(XO,)$  and  $g(x + nx, YO, ZO)$  LH:

[0042]

.(I)

[0043]

HyCi

[0044]

tr, Zo) - $U(Xo, Yo, Zo + 4Z)$

[0045]

1

[0046]  
& Z

[0047]  
(3)

[0048]  
and (Ho,

[0049]  
YJ,, Zo) - scalar magnetic potential of the circuit, which is divided into a finite number of triangular loops with a common vertex one of the vertices of the original circuit. The scalar magnetic potential circuit is computed as a result of superposition Therefore; potentials generated triangular contours.

[0050]  
I -5j |, f ..

[0051]  
(4)

[0052]  
where I - ampere-turns; g, - telesnBY angle subtended by the circuit number of the observation point, and f rasschi1

[0053]  
u k-ZZ

[0054]  
UJ. I,

[0055]  
J

[0056]  
(5)

[0057]  
by the formula in the space of analytic etrii

[0058]  
into account the formulas of analytic geometry in space

[0059]  
2,75x5x3 m with balcony openings on the entire end wall, oriented

[0060]  
where m is the number of loops; I; - The value of ampere-turns J-ro circuit.

[0061]  
If the resulting calculated field homogeneity does not satisfy the predetermined value, changing the number and position of the compensating circuit and the value of ampere-turns and loops calculation is carried out anew.

[0062]

The value of the current in the loop are installed Trimmer 20 and 29.

[0063]

Examples 7 - 9 show the distribution of the field components in the form of the surfaces in the XOY plane at the level of the human head for measuring chambers adjacent .treh

[0065]

0

[0066]

governmental Y-axis of the magnetic meridian (ou o) and located in the middle latitudes (NU Luo, 4 H). Areas highlighted human movement shtryushukk- Tierney line. The value of ampere-turns in kontzfah allocated as follows.

[0067]

If we take 1 January the IX nfu .4,. -. xL I.

[0068]

-1.8, 1x, "" 0,6, I

[0069]

(SDI

[0070]

Aon

[0071]

-0.7,

[0072]

axis

[0073]

IY.OM- 0.5, I

[0074]

0.6 where I y - ampere turns bases

[0075]

axis

[0076]

contours X system; 1;

[0077]

Yflon: and

[0078]

- Kom5

[0079]

contours; 1; DOS -

[0080]

- Dopolpensiruyuschih

[0081]

enforcement circuits; YkoMrf

[0082]

IY "- Y-system, respectively.

[0083]

For comparison, the dotted line marked contours -surfaces distribution

[0084]

5 .

1

[0085]

field components of the magnetic system without additional circuits off each kov number of ampere-turns and the direction of current in the circuits of the X-system and, similarly, in the Y-system. As can be seen, the components  $H$  and  $H_y$  generated by this system are much higher than the value of  $H_2$  and distributed in pa / - boch?m volume is extremely uneven. 1

[0086]

The invention Formula

[0087]

Device for magnetotherapy, comprising: a magnetometer connected through amplifiers with three pairs of mutually orthogonal contours of  $m$  and  $n$  sponding that, in order to increase comfort during treatment

[0088]

117406

[0089]

by creating a uniform magnetic field over the entire working volume, the device is equipped with a number of additional circuits and kompensiruyul'tsih g connected to the amplifier output through the current controllers respectively simfazno and opposite phase with basic, and additional circuits are placed evenly over the working volume 10 and the configuration of seats montazhaj while working part of each circuit is located in a plane parallel to the respective main circuit and the parallel portion ztih

[0090]

f5 loops lying in orthogonal. plane) s installed compensating circuits.

---

**RU2104718**

**METHOD OF PERFORMING PSYCHOTHERAPEUTIC AND BIOENERGETIC  
ACTION ON HUMANS TO IMPROVE THEIR PSYCHOSOMATIC CONDITION**

FIELD: psychotherapy. SUBSTANCE: preliminarily, correlation between symptoms of

disease and psychotramatic situation as well as situations provoking live positive emotions in patient are revealed. Patient is then brought into trance state with psychological stress features, which are further strengthened. At that time, healer places the palm of working hand in the region of seventh chakra (at the top of skull) and performs passes suggesting disappearance of negative emotions and associated signs of disease resulting from removal of negative energy. Once emotional state of patient normalized, healer brings him(her)self into autogenous immersion state, concentrates him(her)self on information useful for patient, and positions palm of working hand at distance 10-15 cm from projection of seventh chakra with fingers directed to its center. For 3.5-4.5 min, healer stays in the same position sending mentally commands oriented to improve organism functions. Then, for further 4-5 min, healer repeats the same information aloud suggesting trust in positive effect of healing. Finally, healer calls up situations and sensations associated with live positive emotions in the memory of patient suggesting their connection with improvement of total state. EFFECT: achieved psychosomatic correction of patient's state.

[0001]

The invention relates to medicine, in particular psychotherapy bioenergetic influence on the human body and can be used for the correction of his psychosomatic condition. Communication mental and physical processes in the body now has no one in doubt. Peptic ulcer and duodenal ulcer, ischemic heart disease, neuro-circulatory dystonia, hypertension, metabolic diseases, and many other human diseases occur against a background of failure of compensatory-adaptive reactions of the organism, which certainly involved, and mental processes. It is well known administration of psychotropic drugs in treatment of such large.

[0002]

Widespread current methods of human exposure, aimed at correcting the disturbed functions of the organism and representing essentially unspecific general effect on the body as a whole. In these methods, the most important component is the psychotherapy and autogenic training (RF Patent N 2-31665, cl. A 61 M 21 / GS, 1963, H. Aliyev key to him. MM: The Young Guard, 1990). At the same time, autogenous training, in turn, requires the cost of mental effort and time a patient defined his attitude to this method of treatment that is not available to all.

[0003]

Widespread in our country and abroad have been the methods of so-called "alternative medicine", which is an important component of bioenergy effects on man (YM Levinson et al. Basics bioenergetic diagnosis and treatment. M., 1991).

[0004]

Theoretical and practical studies in biophysics, Biocybernetics genetics showed that vital functions of any biological system, including human is accompanied by weak electromagnetic radiation in a wide range of wavelengths, which are the source of cells, tissues, organs, systems or whole organism (Biophysics 1989 m. 34, N 2, p. 339-348), the bulk of information between all levels of biological objects is transmitted by means of electromagnetic oscillations ultra low intensity.

[0005]

Obviously, functional and organic pathological state of tissues or organs to modify the characteristics of these radiations.

[0006]

The method is based bioenergy effects closely linked to human mental activity, it puts the specified known fact, and the task of the healer is to eliminate the energy imbalance in the



body of the patient and remove the abnormal high-frequency oscillations. At the same time when any contact with the patient's healer there are always elements of psychotherapy, which is due to an inherent presence of many purely psychological nuances. It enhances the effect of the actual impact of bioenergy, so the art of healing can not be divided into purely psychic and psychotherapeutic purely, as they are closely interrelated and are in fact common roots, namely the impact of one person to another through the transfer of certain information. The author believes that the basis of psychotherapy is also bio-energy program is embedded in the floor and the mental image that is embedded in the patient's bioenergy.

[0007]

Biophysical research abilities healers revealed dependence of the effect on the state of the impact of bio-energy systems: the chakras and acupuncture points, while the measurement of electromagnetic radiation in the areas corresponding to the projections of the chakras, revealed high levels of electromagnetic activity in these areas and the real possibility of them psychic energy and its further transformation in various kinds of fields and energy, as well as its further communication with bioelectric processes in the body and the nervous system. (Dubrov A. Theoretical basis, AURA - Z, Vol. 2, N W-1U, 1996).

[0008]

The closest analogue of the invention is a method for the combined effects of a person to improve his psychosomatic condition, which includes elements of psychotherapy and bioenergy correction described in the book of J. Levinson and Levinson M. Healing. Ways and possibilities. - M.: Avery, 1993, p. 158-171, 231-243.

[0009]

The most important stage of work with the patient in the known method is to receive both rational and hypnotic psychotherapy, the ability of the healer go into a state of autologous immersion and maximum effort of will, accompanied by internal stress and certain mental images provide targeted, including bio-energy impact on the patient.

[0010]

The book describes the technique of biopower influence, which the authors believe is universal enough, called the combined effects of individual techniques targeting the associative links by simulating a healer at the very strong negative emotional arousal inherent conflict in the patient.

[0011]

The author's experience in working with patients known to be formed before the appearance of references and has the features and approaches. Results of this work indicate the possibility of exposure of training methodology. At the same time, the degree of therapeutic effect depends largely on the state of bio-energy healer and the ability to manage power flows.

[0012]

Method effects on the psychosomatic condition of the person comprises administering to a patient in a state autoheterosuggestivnogo dive identify stressful situations, psychotherapy and bioenergy effects on the psycho-emotional sphere, targeting the associative links.

[0013]

Difference method is that the session is performed in three stages. During the first stage the relationship of symptoms with the traumatic situation, as well as the situation causing the patient bright positive emotions. In the second stage, introducing a patient into a state of trance, causing him psychological stress condition, reinforcing its unpleasant tactile, or

auditory or visual stimuli. The healer, having a hand working hand in the seventh chakra of the patient and making circular passes counterclockwise inspire the disappearance of negative emotions and related manifestations of the disease due to the removal of negative energy. By normalizing the emotional state of the patient's physician introduces himself in the state of autologous immersion, focuses on information useful to the patient, a hand on the palm of the working distance of 10-15 cm from the projection of the seventh chakra fingers towards its center and within 3.5-4, 5 min remains in this position, mentally sending orders to improve the functions of the body. Then, without changing the position of your hands for 4-5 minutes, repeating aloud the same information, it inspires faith in the positive effect of the impact, and calls to mind the patient's situation and feelings associated with bright positive emotions, suggesting their association with the improvement of the general condition.

[0014]

The proposed method is as follows.

[0015]

At the preparatory stage, the healer performs the dual nature of the program. During confidential conversation with the patient in each case, the healer tries to reveal himself to his individual peculiarities. In particular, on the one hand notes and highlights those that relate to specific situations or things that cause a patient in a life of strongest feelings of fear, anxiety or fear of something that will continue to be a healer used as leverage to create desperately tense psychological (stressful) situations. On the other hand allocated to the other part of himself situations and moments associated with extremely positive emotions of the patient, ie, the individual program used by the healer with further exposure.

[0016]

Using known techniques, the patient is administered a state autoheterosuggestivnogo dive, during which it is advisable to convince him of the possibilities of bioenergy healer demonstrating Kirlian effect or other effects - bioenergetic healer fingerprints on the screen, heat or other sensations. All this sets the patient in a certain way, strengthening his faith in healing. Next, the patient psychological stress conditions are simulated using previously obtained medical history, reinforcing his pronunciation of individually selected formula suggestion, all sorts of unpleasant tactile, acoustic or auditory stimuli. This could be splashing in the face of a patient with cold water, or the sudden jerky sound, very loud sound, or a demonstration of the fragment pattern generating patient visually horrifying impression.

[0017]

The variant in which a complex effect on auditory, visual, and other analyzers, which allows to achieve the maximum stress for the patient situation, providing aggravation of the negative effect and cause a state of maximum emotional energy and excitement, in fact revealing the defect energy balance.

[0018]

Healer, while providing some protection techniques, working hand in a circular motion produces passes counterclockwise on the seventh chakra of the patient (sahasrara) at the same time pronounces the prepared formula suggestion about improving the state due to the removal of negative energy. As soon as the patient's emotional state is normalized, the healer goes to the next stage of exposure. By introducing themselves into a state of autologous immersion and focus on information that is useful to the individual patient, the healer has a working palm of the hand at a distance of 10-15 cm from the projection of the 7th chakra in the patient's head with your fingers in the direction toward the center and within 3.5 4.5 min remains in this position, mentally sending orders to improve a particular organ or function of the body as a whole. Then, without changing the position of the hands healer for 4-5 minutes,

repeat aloud the same information, inspiring confidence in a mandatory patient positive effect of the whole. Healer after the session goes out of their own autologous immersion and any known methods displays the patient from a state of trance.

[0019]

The above-described method, the steps of representing a session to the patient in a specific sequence, a new combined effect on the psychosomatic condition of the patient.

[0020]

Example 1. Patient S. 22. The diagnosis: paranoid, continuously progressive schizophrenia, delusional type. Sick for 5 years. The patient noted compulsive phenomena delusions, isolation. Subsequently, the clinical picture was dominated by a paranoid-hallucinatory syndrome with delusional disorder. Provoking moment was rape. Repeatedly treated permanently with psychotropic drugs (stelazin to 30 mg daily, haloperidol 15 mg per day), insulin - 10 courses. There was in remission for up to 2-3 months. After 6 sessions of treatment by the method of PG Nikitin - remission of up to 3 years.

[0021]

Example 2. Patient B. 45 years. For 16 years, suffering from duodenal ulcer chronic relapsing course of the disease with acute exacerbation of 2-3 times a year. Before the start of the session complained of pain in the epigastric region, occurring at night on an empty stomach, heartburn, unstable stool, weight loss. In a study of changes in blood and urine were found. Fecal occult blood test - negative. At esophagogastroduodenoscopy revealed chronic gastritis, peptic ulcer defect measuring 0.5 cm in diameter in the area of ??small curvature duodenal ulcer, chronic duodenitis, moderately severe scar deformation of the duodenal bulb. Outpatient basic therapy, including diet (Table 1 N), antacids, anticholinergic agents, vitamin (B1, B6) in a day, sedatives without apparent feeling better.

[0022]

After 10 sessions the re-examination of ulcerative defect healed, disappeared dyspeptic phenomena. Remission for 3 years.

---

## **RU2132204**

### **ACTIVE PROTECTION DEVICE**

FIELD: medical engineering; electromagnetic therapy. SUBSTANCE: device is used for active protection against weak bioenergetic electromagnetic fields of different origin. Device has screen in the form of grid made of "golden twist" and transmitting antenna. To remove "Faraday cage" effect, antenna is positioned between screen and man's body. Electromagnetic oscillations of extra-low intensity excited in antenna circuit by means of generator of audio frequency modulated by frequency of 10 Hz from electric pulse generator through modulator stimulate man's organism. EFFECT: enhanced efficiency of protection.

### **DESCRIPTION**

[0001]

The invention relates to the field of medical equipment, namely to electromagnetic therapy and may be used for the active protection of bioenergy weak electromagnetic fields of different origin.

[0002]

This device is a logical continuation of the work in the field of low-frequency relaxation therapy (NRT), based on the effects of short electrical pulses (0.1 ms to 100 ms) with a current of 0.1 mA to 100 mA through the electrodes of different shapes on biologically active points (BAP) of the human body or biologically active zones of the human body (BAZ). In most cases, BAT coincide with the classical acupuncture points (acupuncture) various schools of traditional oriental medicine.

[0003]

Known low-frequency relaxation therapy method of Dr. R. Voll [1], [2], which is the most tested in practice, contraindications are well understood and justified, a bibliography has dozens of names.

[0004]

Structurally, the apparatus for implementing HPT presented and formed as a small-sized device, the power supply through the regulator connected to the generator of electric pulses in the frequency range from 0.2 to 10 Hz, with control of frequency and amplitude control device and displaying the pulse repetition frequency on the display, the output generator via a matching device (usually up transformer) connected to the electrodes.

[0005]

Electronic control the frequency and amplitude of pulses during the NRT allows stimulating effect on the BAP and BAZ of skin.

[0006]

The disadvantage of NRT is a contact exposure through the skin into the BAP and BAZ, exposure to only one meridian or the so-called "quadrant" through electrodes.

[0007]

A device for electromagnetic protection - shielding metal grille (net) [3], [4]. The screens are performed for multilayer circuit itself (on its surface in the form of eddy currents) electromagnetic fields of different frequencies. Thus, low-frequency, up to 1000 Hz field shield steel screen tens or hundreds of kilohertz - permalloy, microwave - fine copper mesh coated with gold and silver. For strong fields in the heat shielding is important only for the weak - low resistance of the surface layer, the absence of oxide on the surface, or grid cells do not form a loop in which there is self-induction EMF with electromagnetic flow compensating shielded electromagnetic field.

[0008]

Long-term studies of people working inside the shielded room, drivers, conductors, drivers and so on. N. Have shown that screening reduces efficiency, depresses and weakens the body.

[0009]

With the advent of millions of personal computers was a question of protection from radiation computer (strong electromagnetic fields from 50 Hz to 40 kHz, a weak X-rays, magnetic field deflecting systems and display field in the tens of megahertz from the processing unit). The use of protective clothing with stitched metal grids showed that screening has the effect of "Faraday cage", ie that apart from "harmful" radiation escaped and "useful" bio-energy radiation, when the living entity in the screen gets all the necessities of life, in addition to electromagnetic field, and dies.

[0010]

The technical result obtained by the implementation of the invention is to protect the organism from weak electromagnetic and bioenergetic technical fields replacing them with


weak electromagnetic field audio frequency modulated low frequency selected by the method of Dr. R. Voll contactless influence on the organism as a whole.

[0011]

This technical result is achieved due to the fact that the device is designed as a two-layer-covered apron covering the biologically active zones of the human body (chakras), and the upper layer shield enclosing mesh material (alloy) "Golden kruchenka." "Gold kruchenka" has a small thickness (0.09 mm), high strength (can be sewn on the sewing machine), flexibility, resistance to oxidation (not tarnish decades, gives a film on the surface and thus screens the field Superweak). "Gold kruchenka" traditionally used in religious garb during the sacrament of confession (protection biopathogenic fields professed). To eliminate the effect of "Faraday cage" of the second layer is in the form of fabric sewn on the antenna of a copper wire in a spiral shape with a pitch of 10 mm to obtain a uniform electromagnetic field, for simultaneous exposure via bases on the whole body. The antenna via a matching device (the transformer) connected to the tone generator configured such that the shape of the pulses in the antenna close to the delta-function (narrow pulse of large amplitude having at expansion in Fourier series of infinite spectrum), wherein the signal generator is modulated by low frequency pulses. The modulation frequency is selected by the method of Dr. R. Voll and is equal to 10 Hz.

[0012]

The invention is illustrated a block diagram and drawing of FIGS. 1.

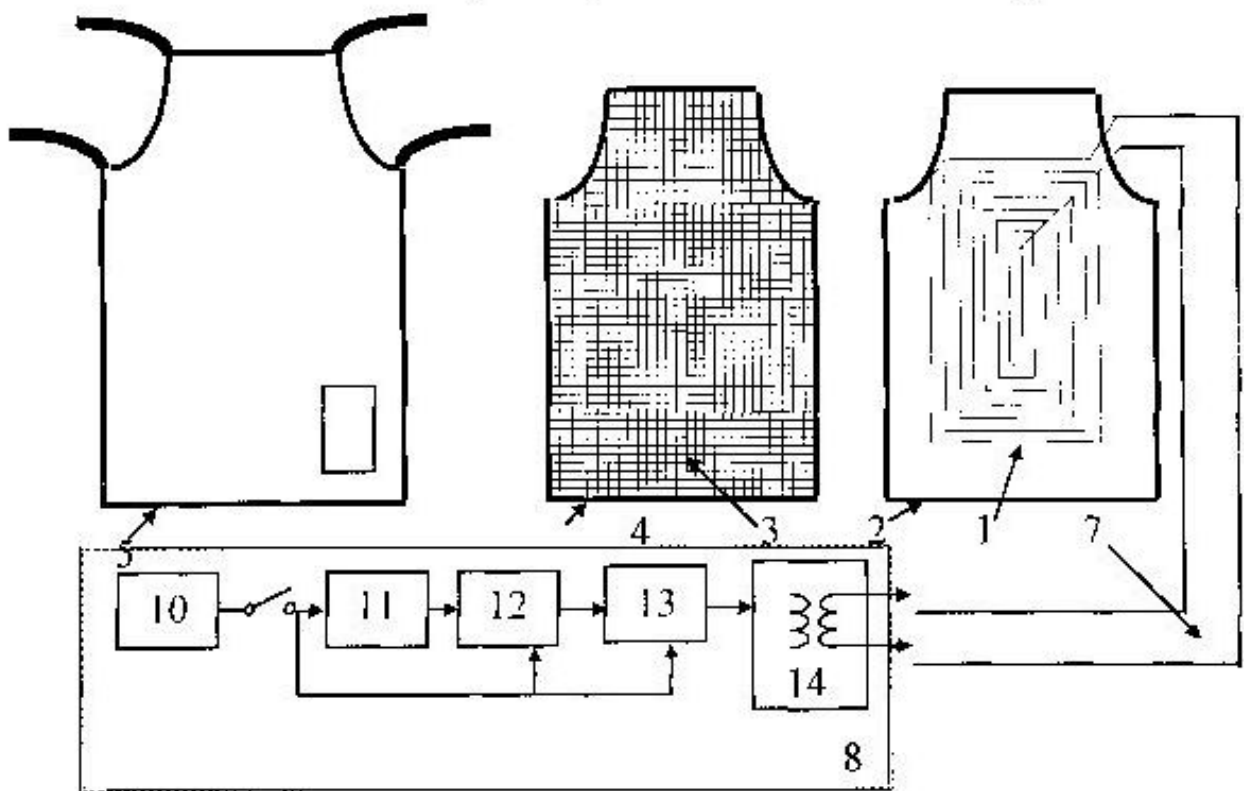

[0013]

The apparatus consists of two structural components: a protective cover, the apron (covers) (5) to which are attached stitched together two layers of screen "golden kruchenki" (3) on the cloth substrate (4) and the antenna (1) on a cloth substrate (2) and, in case (5) is designed in such a way that is easily separated from the inner layer for washing (for "sticky" buttons or buttons) and has a pocket for housing (8) which is connected via a connector (6) to (7) with

an antenna (1).

[0014]

The housing (8) contains: power supply (two batteries 316) (10) which through a switch (9) connected to a generator of electrical pulses at 10 Hz as determined by the method of Dr. R. Voll (11), a modulator (12) and Audio signal generators (13). The generator of electrical pulses at 10 Hz (11) is connected via a modulator (12) with an audio frequency generator (13). Output audio oscillator (13) via a matching device (14) is connected via a connector (6) to (7) with an antenna (1).

[0015]

The device operates as follows.

[0016]

Apron (5) worn on a person's back or chest, turns the switch (9), powered by a source (10) is supplied to the generator of electrical pulses at 10 Hz (11), a modulator (12) and the tone generator (13). Oscillations from the oscillator (13), modulated by a modulator (12) from a generator of electrical pulses at 10 Hz (11) in the form of pulse trains are supplied to a matching device (14) and the connector (6) through the wire (7) is fed to the antenna (1), stirring in the antenna circuit ultralow intensity electromagnetic waves that stimulate the human body is protected from external fields screen (3).

[0017]

Information sources.

[0018]

1. Samokhin AV, JV Gotovsky Electro diagnosis and therapy by the method of R. Voll. - M.: IMEDIS, 1995. - 448 p., Ill. - ISBN5- 87359-003-6 2. F. Kramer Tutorial electroacupuncture. V.1. - M.: IMEDIS, 1995. -192 pp., Ill. - ISBN5-87359-005-2 3. Krylov VA, Yuchenkova TV Protection against electromagnetic radiation. -M.: Soviet Radio, 1972. -216 p.

[0019]

4. GOST 50414-92 Screen Camera. Classes, basic parameters. Technical requirements and test methods.

---

## **RU2100008**

### **BIOENERGETIC HELMET**

[0001]

The invention relates to medicine, namely to psychoneurology.

[0002]

We know the impact of bio-energy one person to another through a variety of psychic techniques and hypnosis.

[0003]

However, these methods can not locate the object concentrated exposure to the brain, and thus, most of the bioenergy doctor does not reach the pathological centers in the brain of the patient.

[0004]

It is also known from elementary physics that, if a generator of electromagnetic waves of any frequency (in this case, such a generator is the human brain) to install metallic conductor in a spiral or grid, then the conductor will induce electromagnetic oscillations. On this basis found that the room of the head of an animal (a monkey) in a cylindrical metal cavity, powered by a generator, has a strong effect on the brain of the animal, up to cardiac arrest and respiratory activity (Baldwin M. Bach SA Lewis SA Effects of radio-frequency energy on primate cerebral activity. Neurology, 1960, 10, 2, 178).

[0005]

Similar studies on the effects of different electromagnetic oscillations in the brain of animals held Yu.A.Holodov (The reactions of the nervous system to electromagnetic fields. M. 1975).

[0006]


The aim of the invention is to increase the impact of bioenergy local doctor on the brain of the patient for therapeutic purposes.

[0007]

The purpose is achieved thanks to a special helmet of the bioenergy metal plates. Such helmets, apparatus for other purposes known. Zernov stereotactic apparatus having a circular base and a hemispherical ribs, giving the whole structure view of the helmet and is designed to determine the spatial position of the structures of the brain (IM Irger Neurosurgery, M. 1971).

[0008]

The drawing shows a helmet proposed, made of thin plates.

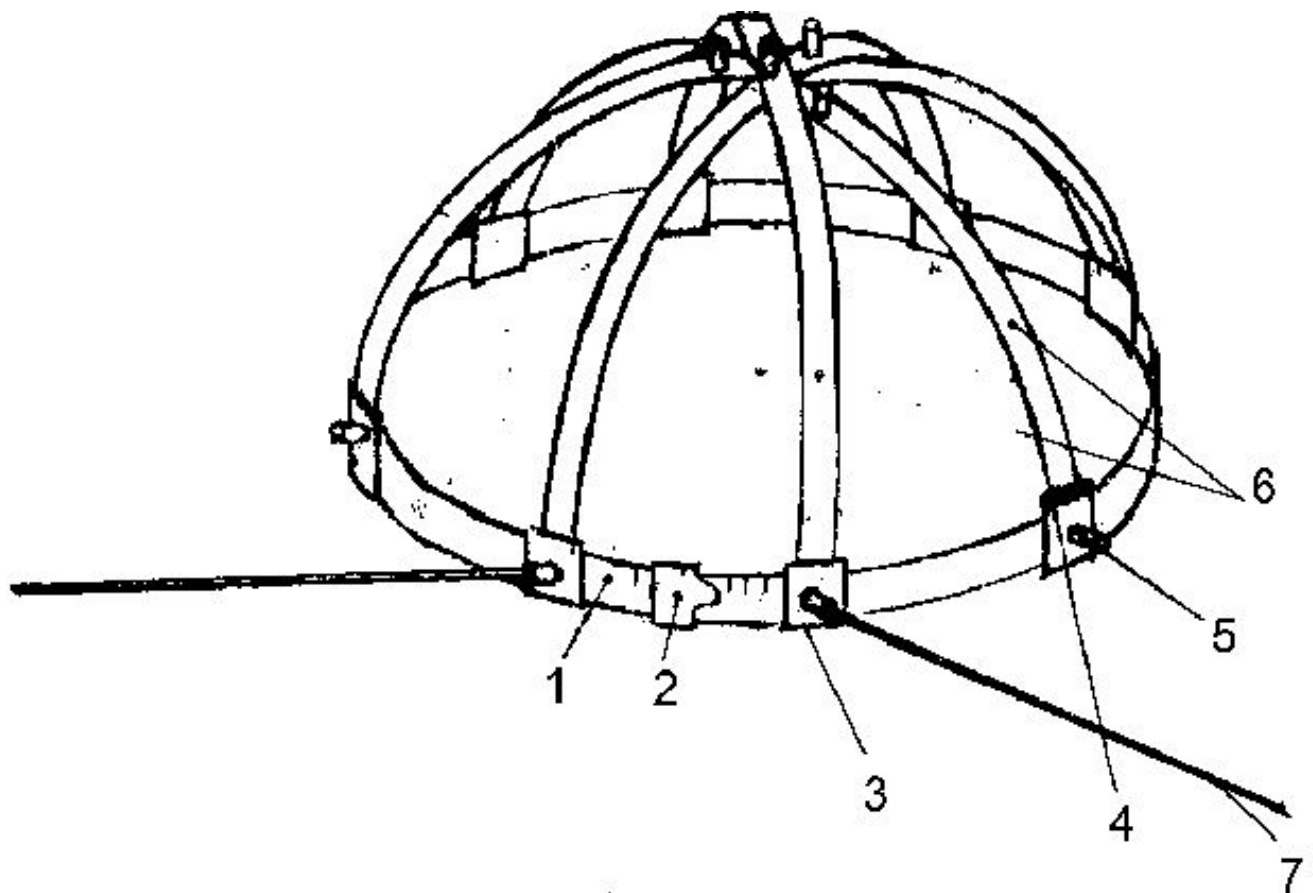

[0009]

The helmet consists of a base plate 1, connected mobile lock 2, regulating the basic plate of

the size of the patient's head. Plate width 13 mm, length 580 mm. Along the perimeter of the plate there are eight plates attached 3 10x10 mm with slots 4 and 5 slots arranged through the 58 mm, which is necessary for even distribution of bioenergy on the brain.

[0010]

In each of the slits 4 plates 3 are inserted thin plate 6 hemispherical width 6 mm, thickness 0.3 mm, length 330 mm. The basal plate 1, folded wrap, cover mobile lock 2. Plate 6 is bent and fixed to the two ends of the slots 4, because of this they form a semicircle. In riveted plates 3 and in the middle of the plates 6 are hemispherical socket 5 with a diameter of 3 mm thread for screwing the needle electrodes 7 and a length of 130 mm, a thickness of 1 mm with a thread at the base.

[0011]

Putting on the helmet on the head of the patient provides the adaptation of the brain from the environment and increases the patient's perception of bioenergy doctor.

[0012]

Method of use of the helmet.

[0013]

After donning a helmet on the head physician of the patient begins to search for "target", that is, the alleged pathological focus. This manipulation is carried out as follows. The doctor takes two fingers at the base of the needle electrode needle and injected it into the slot 5 of the attached plate 3 starts twisting movements of the fingers in sequence around the perimeter of the base plate 1 to find the zone the pathological focus - "target." At the time of entering the patient feels boring traffic light at this point, and considerable relief, which gives reason to believe that the "target" is found. Thereafter, the electrode is screwed into the socket 5 attached plate 3 projected above the target. Thus, over the pathological area, if it is expanded, it can have multiple electrodes.

[0014]

After installation of the "target" of needle electrodes doctor begins another electrode electrostatically charged electrodes placed on the helmet of the patient, thereby inducing its own bio-energy into the brain of the patient, thus korregiruya pathological focus.

[0015]

Before the session, the doctor finds out a patient's ability to respond to the doctor's aura and positive response directly appointed treatment sessions.

[0016]

Expected scope of clinical application of bioenergy helmet and techniques: different stress, suicide attempts and various forms of phobias, legonevroz, depression, phantom pain, insomnia, diseases of the internal organs of central origin (such as stress ulcers of the stomach and duodenum, cardioneurosis).

[0017]

Proposed helmet used in some patients with different pathologies: two children with logoneurosis held for 7 sessions get good immediate results; patients with severe asthma attacks, after five sessions to get a good clinical effect and mild asthma (observation period 1 year); patients in the stress associated with the murder of his son. After the session, the patient noted a significant improvement in the state have been thinking about suicide, there was confidence. The currently running.



Proposed Helmet has full safety for the patient, bloodless method of treatment, the effect on brain structures made bioenergy doctor remotely via amplifying helmet

## METHOD OF CORRECTING MAN'S BIOENERGETIC FIELD TOPOLOGY

[0001]

[0002]

However, this method has the following disadvantages: professionals with psychic abilities, a small amount; t. e. the diagnosis of functional disorders and, therefore, their treatment is a little sick; the impact of bioenergy own psychic field on a number of factors / example: the health of the healer, his slight density containment and others. / may cause harm to patients; the inability to correct the patient's bio-field at the end of treatment at the psychic.

[0003]













Known method of treating a variety of diseases / hypertension, myocardial infarction, thrombophlebitis, liver and kidney disease / using leech - hirudotherapy / 3, 4 /. Statement of medicinal leeches is done on a "closer to the body of the patient." Medical leeches are allowed to use the drug - FS 42-702-73.

[0004]










The aim of the present invention is to provide a more accessible and simplified method of prevention and correction of functional disorders caused by various disorders of normal human bioenergetic field topology that excludes part-psychic healer.

[0005]

The goal is achieved by the fact that the medicinal leech puts in the region of the bioenergy centers: the parietal region of the head, between the eyebrows, the base of the throat, the level of the heart, the solar plexus, the pubis and coccyx.

		образы		
Прототип				
конфигурация биополя				
размер, см		5±3	40±5	27±3
плотность		1	2	3
# 1				
конфигурация биополя				
размер, см		до 3	35	45
плотность		1	1+2	2+3
# 2				
конфигурация биополя				
размер, см		до 5	45	45
плотность		1	2	3
# 3				
конфигурация биополя				
размер, см		до 3	15	16
плотность		1	1	1

Продолжение таблицы

		1	2	3	4	5
# 4						
конфигурация биополя						
размер, см		10	10	15		
плотность		1	1	1		
# 5						
конфигурация биополя						
размер, см		до 5	35	35		
плотность		1	2	1		
Норик *						
конфигурация биополя						
размер, см		40±5	40±5	40±5		
плотность		2+3	3	3		

\* - в графе "НОРИК" приведен пример построения медицинских линий на семь биоэнергетических центров взрослого человека.

РАЗМЕР биополя определен в см. по длине участка от локоточности тела пациента до границы биополя по осямкости на уровне бокового сплетения.

ПЛОТНОСТЬ определена по трехбалльной шкале: 1 - рыхлая кожа, 2 - средняя плотность и 3 - плотная кожа.

The method is as follows.

[0007]

Example 1.

With the use of the L-shaped bent metal spokes define the configuration and density of the patient's bio-field.

[0008]

Take seven medicinal leeches corresponding pharmacopoeia articles 42-702-73. Subject to all rules hirudotherapy leech puts one piece on top of the head, between the eyebrows, the base of the throat, the level of the heart, the solar plexus, the pubis and coccyx. Upon termination of the session and girudoterapii after 7 days via T-curved spokes define the configuration and density of the patient's bio-field (see. Table).

[0009]

Example 2.

All procedures were carried out as described in Example 1, except that at each point give 2 leech (see. Table).

[0010]

Example 3.

All procedures were carried out as described in Example 1, except for leeches crown, bridge of the nose and base of the throat (see. Table).

[0011]

Example 4.

All procedures were carried out as described in Example 1, except leeches give pubis and the tip (see. Table).

[0012]

Example 5.

All procedures were carried out as described in Example 1, except leeches put on the solar plexus, heart rate (see. Table).

[0013]

The results obtained in the course of work, and in the table indicate that the formulation of medicinal leeches in the crown of the head, between the eyebrows, the base of the throat, solar plexus, heart rate, pubis and coccyx, ie all the seven energy center of the human body / Examples 1 and 2 / leads and bio-field correction of the patient, i.e. increase the size, shape and fullness of normalization.

This marked the removal of subjective pain symptoms, improve mood and health, normalization of sleep and appetite.

[0014]

Local staging of leeches / Example 3, 4 and 5 / leads to a local increase in the size and fullness of the biofield of the patient, whereas the untapped energy centers hirudotherapy show only a slight change in the bio-field in this area.

[0015]

Thus, the formulation of seven leeches all the energy centers / chakras / person: the crown, between the eyebrows, the base of the throat, solar plexus, heart rate, pubis and coccyx leads to a sustainable correction of the impaired as a result of various factors / disease, dysfunction, stress, etc. ./ human bioenergy field. This method can be used without the psychic / bioenergy


/ for the prevention of diseases, to enhance the physiological and psychological resistance of the organism. And as any disease is a violation of the configuration of the field, the use of medicinal leeches can be seen as the first stage of medical and others. Treatments. Lack of psychic ability is not an obstacle in the implementation of the present invention.

---

**WO03072494**

**LIQUID CONSISTING OF ELECTRONICALLY EXCITED MOLECULES AND  
HAVING ENERGY STORAGE, ENERGY CARRIER AND CATALYST  
PROPERTIES**

The inventive liquid consisting of electronically excited molecules comprises two components which contain oxygen and hydrogen atoms. In one component, hydrogen atoms are disposed symmetrically with respect to the oxygen atom at distances equal to or higher than  $1 \cdot 10^{-10} \text{m}$  and equal to or less than  $6 \cdot 10^{-10} \text{m}$ , in another component said hydrogen atoms being disposed asymmetrically with respect to said oxygen atom at distances which are equal to or less than  $5 \cdot 10^{-10} \text{m}$  and less than  $8 \cdot 10^{-10} \text{m}$ . Said liquid has energy storage and energy carrier properties and the properties of the catalyst for energetic and bioenergetic processes. The method for producing the inventive liquid, the variants of the embodiments and the justification of the industrial usability thereof are also disclosed.

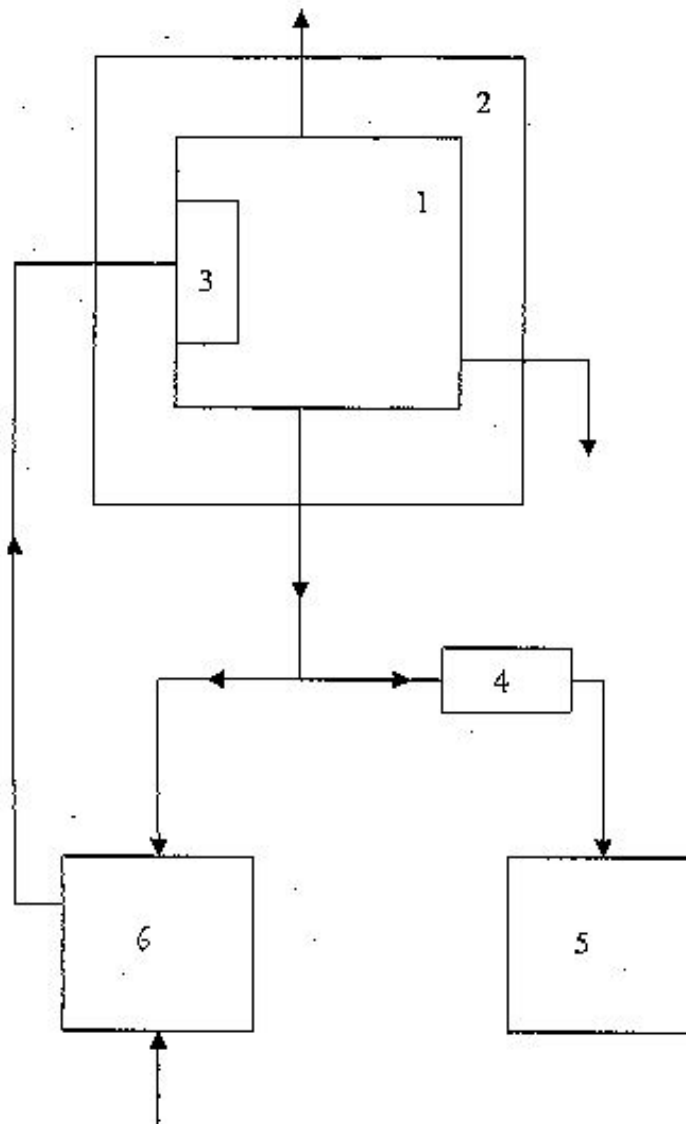

ES2125785

**Pyramidal bioenergetic magnetizer which produces rest with absence of voluntary movement except in the eyes, but with the senses active**

It consists of pyramid similar to the Cheops pyramid 20, made with aluminium-coated steel wire, with two magnets located inside it in a position similar to the King's Chamber and the Queen's Chamber, being connected by copper cables to two pairs of gloves which cover the hands and feet, with a fibre cap covering the head to which are connected an Imantdol plate, a mechanical clock, a compass, two pairs of scissors and a veil, with a massage belt, with a cassette, with a transformer which supplies electricity of a charge to the entire assembly, and with a transparent Isis pyramid. To this are added the light from a desk lamp 114 and a flexible magnetic tube 147, which goes apart from the pyramid similar to the Cheops pyramid.




FIG. 56




FIG. 57




FIG. 58

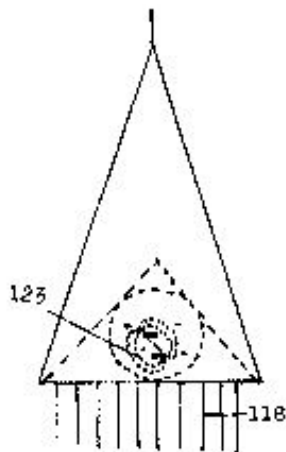


FIG. 59




FIG. 60

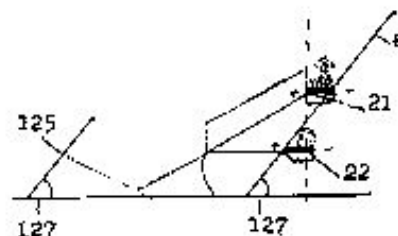



FIG. 61

FIG. 62

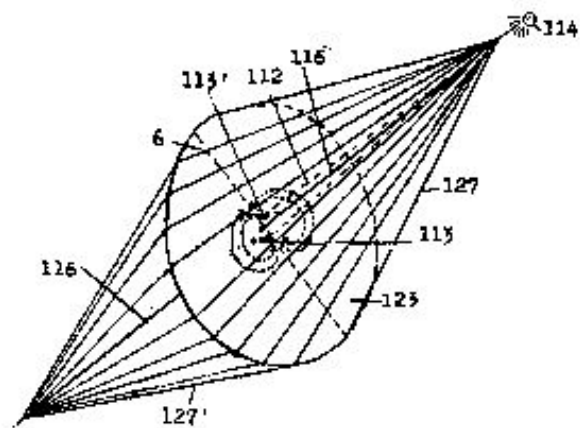


FIG. 63

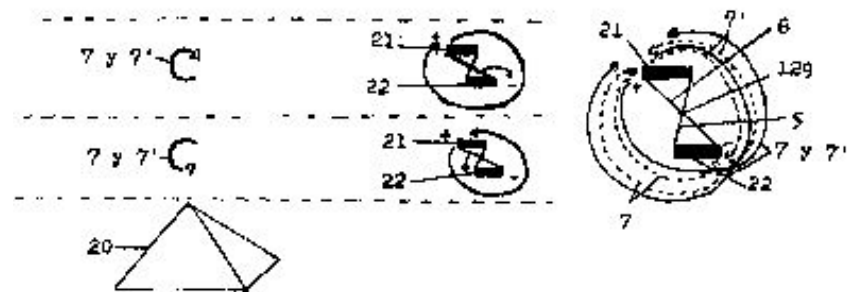


FIG. 64

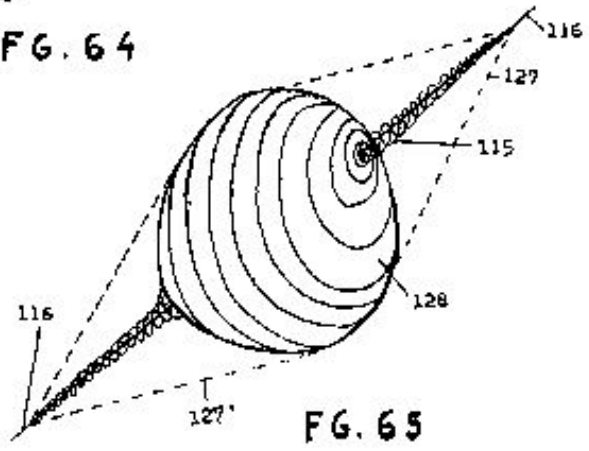
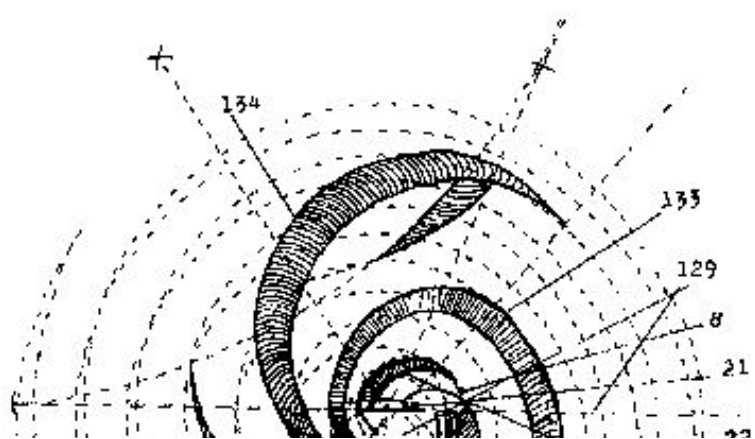


FIG. 65



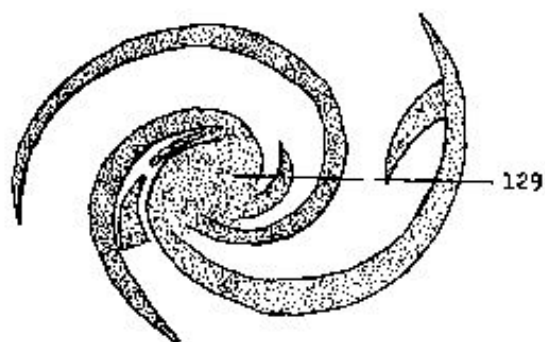
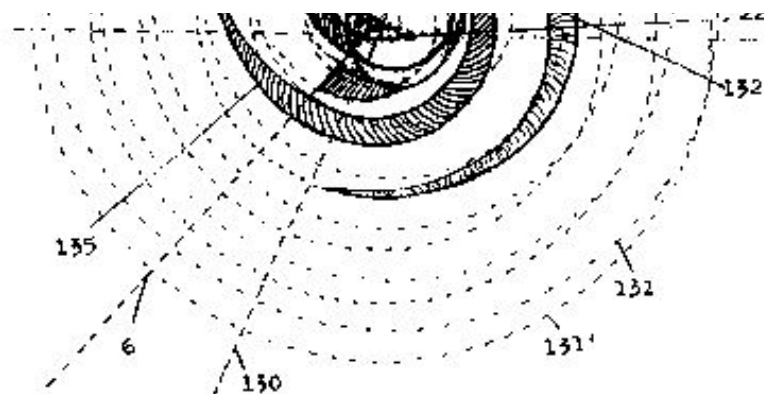


FIG. 66



FIG. 70



FIG. 71







FIG. 72

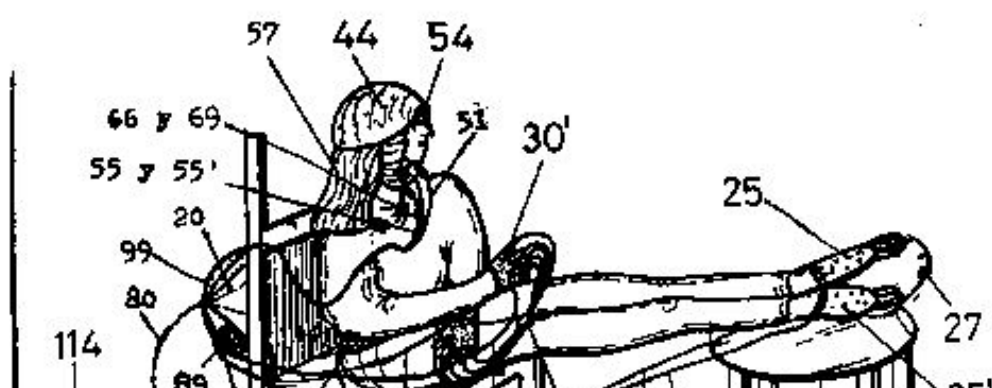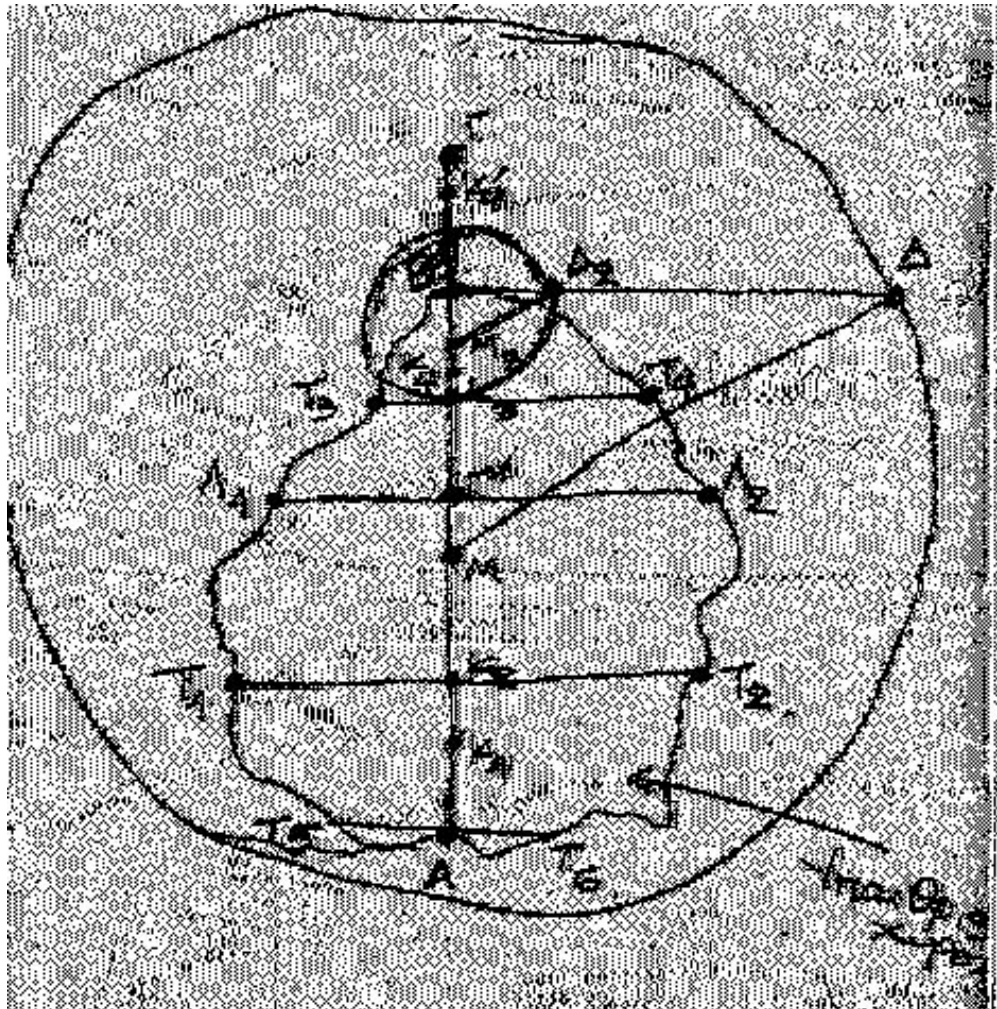

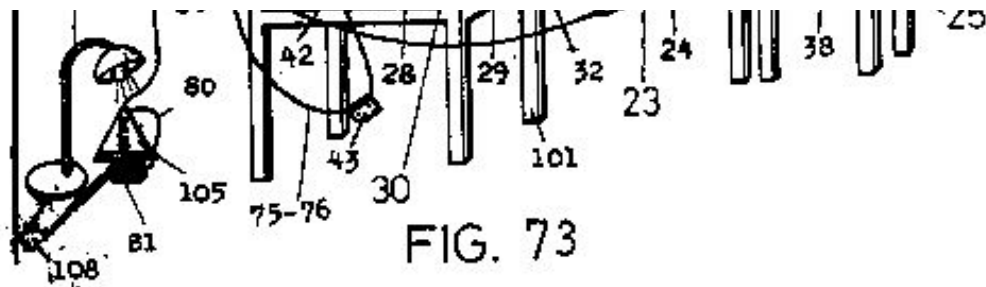

**EP0469661**

**Method for the identification of frequency and bioenergetic activities in waters and their use.**

Process for identifying bioenergetic and biological frequency activity properties in waters, especially comprising the phases of: placing a small quantity of water to be investigated in a container of inert material, transparent to light, projecting towards said water a suitable electromagnetic radiation of predetermined wavelength, observation by said operator or by anyone present of a variation in intensity of the stationary wave of the pulsation, the presence of such variation indicating the active response to said frequency. c

This invention relates to a method of identifying, in a water, the existence of particular frequency properties or bioenergetic and biological activities, and to the use of the waters



having such properties.

For many types of waters, from various sources, there has been recognized a particular biological activity or therapeutic effectiveness that differs from one type to another of said waters, and which therefore makes them recommendable for many applications, for example for therapeutic purposes and purposes of ecological equilibrium. Such activity cannot normally be correlated with the chemical composition of the water and the substances present in solution in it, nor with its physico-chemical characteristics, and therefore cannot be singled out in analytical chemical terms or detected by common physical methodologies. The efficacy of such waters, hereinafter termed for brevity "active" waters, in relation to particular types of pathologies, biological changes or the like, has usually been identified solely by empirical means and has been based upon tradition or upon prolonged clinical trials and the like.

This did not, however, make it possible to verify directly, on a small quantity of water under investigation, of unknown or undocumented origin, its possible efficacy or "activity", as it frequently was not possible to have recourse to extensive experimentation, which would have required long periods of time and availability of sufficient quantities of such water.

On the other hand, persons skilled in the art are familiar with the fundamental principles of resonance and of microinformation, elements of the frequency study that characterizes auricular medicine. These principles constitute the basic element of the relevant research, in that as a result of them every aspect of life is considered in its vibratory reality. The starting point is a simple scheme, which attributes a specific frequency to each human biological tissue, which leads to the possibility of knowledge of and investigation into every vegetable or animal biological tissue.

The term "resonance" is to be understood as meaning the physical condition which occurs when two waves of equal amplitude and length encounter each other. With regard to microinformation, this is the technique by which there is supplied, to the frequently modified tissue, the information of the frequency which induces the correction, for example by means of the cutaneous receptors. Microinformation in reality can be interpreted as a much broader mechanism, inherent in nature; it daily demonstrates its receptivity to cosmic information, by which moreover it is moulded and nourished for the purpose of realizing the biorhythmic ciclicity. It is known that frequency is defined as the vibratory activity inherent in every element. By physics, such vibratory activity proper to each elementary particle is expressed by greater and lesser intensity according to whether substances of an aerial, liquid or solid nature are considered. Such intensity is the resultant of two fundamental parameters: the wavelength and wave amplitude. Therefore a solid body, for example, subjected more to gravitational force, will have vibratory frequencies that are slower than a liquid body, less subject to the same force, measureable in Hertz. Frequency investigation into organisms makes use, however, of the technique known as VAS, by means of which a variation in the stationary sphygmocardi wave on the radial artery is detected each time a changed frequency approaches the ear, and therefore the energy field of the organism.

In relation to said possibility, it is necessary to carry out a thorough and detailed investigation into the vibratory equilibrium of the various organs and tissues which make up the individual, in such a way as to detect the energy links which run between the various levels, which determine the various passages of the conversion of energy into matter. For this purpose, the use of the hydrofrequency technique is envisaged, which consists of two successive moments:

- 1) Frequency investigation by means of the resonance test.

2) Energy re-equilibrium therapy by the use in microinformation of the frequencies which can correct the change.

1) Frequency investigation consists of

a) positioning the patient in the north-south (head-feet) direction,

b) isolating his energy field from any external interference including that of the therapist with 27 drops of Acqua 7FL (or definitively active water on all seven frequencies that resonate on the fifth level), placed around his energy field,

c) in bringing towards his energy field, preferably at the height of the ear, because this is the organ specialized for receiving stimuli, frequencies of varying wavelengths, coloured filters, or fabrics, or chemical substances which, by interfering with the corresponding ones of the organism under examination, will become resonant or dissonant. These two characteristics are linked in the

d) VAS: automatic vascular signal, which consists in the variation in the intensity of the stationary wave which can be detected at the height of the medial radial artery.

e) the frequency investigation, once the organism to be analysed has been positioned according to the points described above, consists in an energy check-up, according to the following clinical procedure.

I - N-S orientation

II - frequency isolation

III - activation of the Chakras with the information of 3 drops of "Acqua di luce" with specific resonant frequencies with each chakra (or point of meeting of the various energies positioned along the axial line of the vertebral column).

IV - measurement of the level of change in PAO (1-9) and in the harmonic (1-9); (where PAO represents the conventional abbreviation which associates the energy level of the type of water considered with an identifying number: for example, PA05 = H2O with the vibratory intensity at the fifth octave of the physical one).

V - measurement of the change in the elements (AG-earth; BF-water; CE-air; D-fire (which correspond in the basic scheme to the frequencies A = 2.5 Hz, B = 5Hz, C=10Hz, D = 20Hz, E=40Hz, f = 80Hz);

VI - measurement of the change in the fundamental energies: polarized, electrical, magnetic 44A-58-B25 (indicated respectively by the numbers Kodak<R> for identification of coloured glasses with the type of frequency: with polarized energy = blue = 44; with electrical energy = green = 58; with magnetic energy = red = B25).

VII - measurement of the adaptation to the seasons and hours of the day (indicated by the respective colours Kodak<R>: winter=87=virtually black, h 21-3; spring=59=green3 h 3-9; summer = 26 = magenta, h 9-15; autumn = 78 = violet, h 15-21).

VIII - measurement of the changes in the DNA and RNA and of their bases: adenine, cytosine, guanine, thymine, uracil.

IX - measurement of the changes in the axes of adaptation: epiphysis, hypophysis, hypothalamus, acth, cortisol, suprarenal cortex.

Points numbered 1 to 7 are applicable to every biological organism and to the ambient. Points 8 and 9 more specifically concern man.

2) Energy re-equilibrium therapy by means of the resonance test and the technique of microinformation consists: for man

f) positioning, in microinformation, on the skin of the right arm (periphery), of the solar plexus and of the forehead (centre), the frequencies which must be received for removing the change,

g) in illuminating with white light (heine lamp) the filters placed in microinformation, so as to amplify the frequency stimulus conducted by the filter and to make it more suitable for reception.

h) in substituting the action of the microlaser (laser apparatus with monochromatic rays

used in the school of Glem di Lione for frequential investigation and therapy) by filters containing waters at various frequencies; these filters, operated by the hand of the therapist in rotary movement, describe elliptical paths around precise localizations of important energy sites of the organism: around the umbilicus, they touch the points of the liver, spleen, left kidney, right ovary, which constitute the coincident basic rhomboidal quadrilateral of the two energy pyramids of earth and water; then around the pharynx they touch the corresponding points which form the rhomboidal quadrilateral of the coincident base of the two energy pyramids of air and fire. The number of these rotations is given by the number of altered levels which emerges from the analysis of the patient, and the direction of the rotation is opposite to that which has generated the pathology. In this way it is desired to give to the solid, liquid, aerial and caloric whole which constitutes the living organism the information of a balanced conformation, that is to say a harmonic between the greater and the lesser, between the right-hand and left-hand elements, as it occurs in the elementary atomic structures.

i) in the administration over 28 days (one lunar cycle) of a mixture of waters prepared in relation to the requirement emerging from the frequential investigation, and therefore containing the frequencies necessary for the alteration of the organism. These waters, administered daily during the fundamental rhythms of the day, lead to the provision of those light frequencies that are suitable for catalysing the absorption of the cosmic frequencies.

The requirement therefore arises for providing a method of identifying the bioenergetic and biological frequential activity or efficacy of the water under investigation, which it shall be possible to execute in short times and on small specimens of said water, thus making it possible to distinguish "active" waters from non-active waters, and which furthermore shall enable different characteristics or possibilities of application to be singled out between various types of "active" waters.

Said results are achieved by a process for the identification of bioenergetic and biological frequential properties in waters, according to the present invention, comprising the phases of placing a small quantity of water under investigation in a container of inert material, transparent to light and preferably vitreous, such as a test tube or the like, or even open water, of projecting towards said water, from an operator present, a coherent electromagnetic radiation of predetermined wavelength within the visible range, and of measuring in the medial position on the radial artery of the operator and/or of other person present, a variation in the intensity of the stationary wave of the pulsation, the presence of said variation indicating the active response of the water ("activity" of the water at said frequency), of repeating the test for several different frequencies within the visible or resonant radiation range. The variation in intensity of the stationary pulsation wave of the subject present at different test frequencies, appropriately selected between seven frequencies uniformly spaced apart within the visible or resonant range, makes it possible to find out at what frequencies said variation occurs, said frequencies being characteristic of the water investigated.

An appropriate apparatus for the emission of a suitable radiation is composed of a laser beam emitter of very low intensity having several selectable frequencies. The presence of the alteration in the stationary wave of the pulsation of the operator, in correspondence with particular frequencies of the incident radiation emitted by the emitter apparatus, can be established on waters of known origin and can be placed in relationship with the existence of bioenergetic and biological frequential "activities" of said waters, already known in advance as a consequence of clinical experiments or the like, statistically analysed, or with knowledge of another type (so as to extract direct correlation data between each type), of water liable to induce alteration in the pulsation if it contains particular frequencies that may be used for pathologies or biological alterations, thus identifying specific fields of application of each.

In contrast, waters that are known to be inert or inactive from the point of view of bioenergetic or biological frequency have not provided, with any incident wavelength, pulsation alterations. On the other hand, waters which have demonstrated the existence of alterations in pulsation of the operator, in the test described above, at one or more frequencies, have been shown, by subsequent clinical experimentation, to be biologically "active" and provided with therapeutic properties.

"Active" waters, which have demonstrated a response to seven different frequencies uniformly spaced apart in the visible or resonant radiation range, can be reproduced by imparting their properties to a new mass of water, previously inactive, by the method forming the subject of Patent Application number 22.929 A/88 of the same Patent Proprietor.

More specifically, the present invention relates to a process for activating, through a chain of successive dilutions, medicinal substances for oral use, dissolved in standard waters with the addition of waters having particular properties which have already been therapeutically tested. The activated drug has given better results from the curative aspect and a reduction in possible harmful effects, compared with its traditional administration.

The invention relates also to a process for activating, through a chain of successive dilutions, extractive solutions of medicinal plants in normal water, by means of the additions of "various" waters according to the plant, having special properties already therapeutically tested. A simple herbal remedy (mallow, mint, camomile and others) can take on an increased therapeutic action if a specific resonant water is added to it. An infusion of mallow plus active water in white light, when subjected to the gold salts test, provides active response. The mallow does not absorb the frequency of light but strengthens the response thereof in the test. (Registered trademark).

Further explanations of the invention are provided by the following examples, in which abbreviations of the various waters used in the tests are employed.

#### **EXAMPLE 1:**

A solution of ZANTAC<R> (a synthetic drug, a tablet of ZANTAC<R> 150 in 500 ml of mains water) plus white light water is subjected to the gold salts test (Ansaloni A. Vecchi P., publication "Rassegna Chimica" ("Chemical Review") No. 6, Nov.-Dec. 1986, page 359) without having an active response, the light frequencies are absorbed by the ZANTAC<R>.

An active response is, in contrast, obtained by subjecting to the gold salts test a solution of ZANTAC<R> plus a particular mixture of waters, water ZANTAC<R> + white light water ("Acqua a Luce Bianca") or a mixture of waters of various frequencies mixed together to obtain the right-handed resonance to the vibrations of the chemically left-handed ZANTAC<R> and of a sample of definitely active water having all the seven frequencies which resonate in the fifth level. The passage through the white light water takes place without loss of frequencies.

The example reported above has demonstrated that only the solution containing the tablet of ZANTAC<R> 150 has destroyed the activity of the white light water and has interrupted the chain of successive activations.

#### **EXAMPLE 2:**

40 g of alpine yarrow (also known as achillea millefolium) are heated in one litre of water. Before boiling point is reached, the heat is extinguished and the vessel covered and allowed

to cool.

The liquid is filtered and 48 drops of PA02-AG6-44A are added, which represents the right-handed energy formula of the yarrow. The infusion is stored in the refrigerator and is warmed each time before being drunk. The dose is one-half of a table tumbler, away from mealtimes, three times per day. The infusion is used in colitis, enterocolitis, cystitis, prostatitis, but especially for regulating menstrual flow.

### **EXAMPLE 3:**

A mixture is prepared with the following ingredients:

Each evening, a dose of 3-4 teaspoons in 1/4 litres of water is taken: this is heated and just before boiling the saucepan is removed from the flame and the drops of PAO are added, a funnel is fitted as lid and inhalation is commenced and continued for 10 minutes. Afterwards, the liquid is poured off and one half is drunk hot (in the evening) and the other half is drunk in the morning on an empty stomach.

Using 46 drops of PAO (Nos. 1-2-3-4) and 18 drops of PA03, a soothing effect of the respiratory passages is obtained (in rhinitis).

### **EXAMPLE 4:**

The ingredients indicated below are placed in one litre of water:

The liquid is boiled for at least 5 minutes, is poured off and 12 droplets of water of Nos. 1-2-3-4 are added, in that order. At a dose of two cupfuls per day, preferably on an empty stomach, for one month, this is used for treating gallstones.

### **EXAMPLE 5:**

In the treatment of epilepsy, two simultaneous reliefs are used, prepared as in the following example: Tisane 1 = half a litre of water:

20 g of green sage,

20 g of green rosemary,

well washed and chopped fine. This is heated and when it is just about to boil the flame is extinguished and there are added:

3 drops of 7F.L. 9 drops of PA02-CE-58-B25

3 drops of 7F.MT. or more

3 drops of 7F.MJ. 9 drops of PA02-CE-44A

Tisane 2 = one litre of water:

30 g of oak mistletoe.

The liquid is heated, and the flame extinguished just before it boils and then there are added: 8 drops of 7F.MT4 or 24 drops of PA04-BF2-44A  
the mixture is covered and is allowed to cool and is filtered.

In therapeutic doses suitable for paediatric applications, the preparation is used in the treatment of epilepsy in children.

From these examples, the importance of the invention is evident for its applications for any pathology. In the frequent investigation and therapy, the quiet attention of the patient enables the remote or near causes of his state of alteration to be decoded from his vibratory

language. This altered frequency is responsible for all the disequilibriums which, from the plane in which it shows itself, form in the underlying planes, that is to say it is responsible for all the innumerable aspects of pathology as far as the chemico- physical aspect.

In the 28 days which follow the re-equilibrium, the taking of specific resonant waters catalyses, in the organism, the possibility of re-establishing order in the various altered weft planes; in fact, the introduction of these active waters stimulates, in the organism, the absorption of those correct frequencies which the atmosphere daily and cyclically supplies to us and which our waters frequently cannot any longer absorb.

---

### **DE4308523**

#### **Method for permanent optimisation of bioenergetic states**

The invention described above relates to a method for reliably detecting and eliminating positive or negative bioenergetic rays in the human environment and, furthermore, for reliable detection and elimination of positive or negative, in particular also of positive or negative bioenergetic states of high degree of an individual person on the basis of radionic measurement methods by using the "Copen Radionic Analytical Computer Mk5", as specified in detail in the description of the method. The method according to the invention is based partly on the findings which have led to the German Patent Application P 4204709.9, and partly on new findings as set forth in the present patent description. The aim of these measures is to avoid specific states of illness which would otherwise possibly or even necessarily occur when the method is not used.

Below described procedure relates to the combination of various measures for the permanent compliance with the normal values ??of bioenergetic states in humans. It is partly based on the findings that resulted from 17.02.1992 on the procedure according to German patent application P 42 04 709.9.

This method according to German Patent Application P 42 04 709.9 describes a discontinuous process for the normalization of bioenergetic states and is characterized in that. In the 1 Level with the "Copen Radionic Analytical Computer Mk 5" or another, this comparable Radionic computer of each degree of deviation of bioenergetic values ??of the set states in the human or animal body, referred to as "over-function" (OF) values ??respectively. as "sub-function" (UF) values, is determined numerically, and that then by introduction of oppositely polarized, precisely defined bioenergetic radiation, for example, the bio-energetic radiation from a selected, previously well-defined in terms of its energy content Erdstrahlstreifen, these inflated actual values be "zero" brought, the exposure time must be determined precisely in accordance with the amount of previously established baseline and corresponding to the energy content of the bio-energetic radiation used by the operator in the body to the setpoint  $OF = UF =$ . Because of this success is not achieved with a single such measure according to experience, this process must be repeated until the desired bioenergetic state, characterized by the achievement of OF- resp. the UF value of approximately "zero", has set permanently. In this German Patent Application P 42 04 709.9 is argued that the increased mentioned, especially the greatly increased bioenergetic states in the body of the following environmental factors are generated:

- Longer linger on negative resp. on positive Erdstrahlzonen of exactly determinable intensity, especially during sleep during the night or during the hours of sitting on this Erdstrahlzonen during the day (eg. school, office etc.
- Longer stay in the field of in-use electrical equipment, in particular incandescent lamps,

electric blankets or electric drying equipment, mostly negatively polarized energy emit.

- Prolonged stay in the sun, in the field of high-voltage lines or electric railway lines; here is positive proof polarized bioenergy. The above information is to be extended according to the invention decisively now through the meantime, due to the results of further targeted experiments and the thus obtained test results and insights from these results.

Specifically, these are the following results and insights:

- The existence of the field of "bioenergetic status" in animals is far more extensive than that described in the aforementioned patent application.

There in negatively polarized region inventively values  $UF = 1248$  and according to the invention in the positively polarized range values  $OF = 480$  were measured.

- The impact of the use of electricity in all areas of human life is much larger in terms of their bio-energetic effect, as in the preparatory work for the Patent Application P 42 04 709.9 was determined after the then state of the relevant research.

- In particular, the effect of illumination with electric bulbs and / or fluorescent tubes a significant proportion of the quantitative deviations from bioenergetic setpoint.

- Targeted experiments on the changes in the bio-energetic values with those respectively in moving motor vehicles. were in electrically powered cars, showed that the various transport a very crucial roles with respect to their influence on the bioenergetic happening when people play.

- Due to the constantly changing throughout the day influences the aforementioned "bio-energetic radiation sources" changing analytical values were determined continuously at the value determination with said Radionic Computer. This ever-changing analysis values are referred to the clear characterization hereinafter referred to as "fluctuating bioenergetic values".

- The balancing of lying outside their desired state bioenergetic states can also (and indeed lighter and labor-saving as this was described in the earlier application P 42 04 709.9 with the use of earth radiation), according to the invention with the use of bio-energetic radiation from certain, because of their shaft structure suitable for these purposes and radiesthetically tested, fully operational galvanic elements (vulgar: "button cell"), such as "Duracell TM alkaline Px 825 / LR 53 1.5 V", alternatively respectively in special cases with the bioenergetic radiation of electric bulbs, be carried out by electronic light bulbs. These results suggest important implications for the process of the invention yielded.

To understand the findings and results, which are described below, of the finding in the experiments carried out must be presented first, after which is going on the human and plant life within certain "bioenergetic" limits.

This statement is, however, only really understood when they are "bio-energetic" states qualitatively and quantitatively the same time "detectable" and especially measurable. It has been 04 709.9 already mentioned in the said German Patent Application P 42 an essential diesbezüglicher state factor, namely the "bioenergetic normal" (= target state) of healthy human, animal or plant body: for the characterization of this state has been there from the inventor, the Number indication "+120 BEE" (BEE = bionergetische units) suggested. This specification includes both a qualitative and a quantitative characterization of this condition. This value has been obtained for a variety of experiments, considerations and Erkenntnissen that are not the subject of Patent Application P 42 04 709.9 and also not the patent application described above. These findings should be therefore only mentioned here also because they are important for the understanding of the inventive method.

It was 42 04 709.9 as a result of the carried out special experiments theorized in the meantime, since the filing date of German Patent Application P that the above-mentioned bio-energetic boundaries in relation to the "bioenergetic target state" of "+120 BEE" apparently at "+180 BEE" on the one hand and "-180 BEE" are on the other.

Outside these "bioenergetic limits" no life is apparently possible. Based on this assumption was one of the objectives of the work to improve the process described in German Patent Application P 42 04 709.9, to determine which characterized by apparatus metrics limits the "bioenergetic status" in humans in order to arrive at a universal applicability of the method. To make this determination the radionic instrument "Copen Analytical Computer Mk 5" was selected (8), which had proved their worth in the preparatory work for the German Patent Application P 42 04 709.9 as suitable and proven.

As described in this patent application, the value  $OP = UF = \text{"zero"}$  of this computer the above-mentioned value of "+120 BEE"; He characterizes the normal state of the human body. Option A -- In the case of determining a state value in positively polarized field according to the German Patent Application P 42 04 709.9 has been a top led to the filing date with the Copen Radionic computer Mk 5 detected value of OF 29.5 in the description of the process. To determine this value with the OF-selector had, as described there, two to "10" asked dials the actual code prepended resp. be readjusted because until that time point from the instruction manual for the computer only mentioned Radionic readings until  $OF = 10$  were known. However, it was established on the basis of tests carried out subsequently, that still may occur far higher positive values, caused by random and unconscious excessive impingement of the human body with very strong positive "bioenergetic" radiation.

The described hereinafter inventive variant of the method of use for the Copen Radionic Computer Mk 5 has made it possible, even with this instrument in the human, animal or plant body "bioenergetic" at random, excessivem influx of high positive radiation, eg. by the irradiation with the full sun, or by long staying at a very strong strip of positive Erdstrahlungsfeldes, or in strong positive, of certain forms of application of the electricity generated positively polarized radiation fields much higher positive values ??as the above-mentioned value of OF 29.5 metrologically capture computer with said Radionic.

It has been found according to the invention that is obtained immediately after stopping the excessiven positive stress in the extreme case, a value of " $OF = 480$ " when the selected measurement "Copen-rate" for having said Radionic computer to be measured body part a special ballast-code for this step, namely "131 226" is prefixed and the OF-dial to the "0" remains.

It was according to the invention further found that will leave generally after stopping the excessiven load with high positive bioenergetic radiation of extreme value of " $OF + 480$ " again, whereby the steps given below through, for according to the invention given below special ballast Root were developed:

- for the stage OF 480: Additional index 131 226
- for the stage OF 360: Additional index 122 369
- for the stage OF 240: Additional index 301 246
- for the stage OF 180: Additional index 741 369
- for the stage OF 120: Additional index 830 137

The to the subsequent stages: necessary OF 60 OF 30 OF 15 indicators for the said Radionic computers (as in German Patent Application P 42 04 709.9 already described), by series of 6, respectively. 3, resp. Get 1 10-dials before (or after) the Copen-rate for the body to be measured part. It was further found that in general, the above-mentioned high OF values, the very strong positive bioenergetic states in the body represent, after stopping the positive radiation source again relatively quickly disappear (due to radiation from the body outwards) when the influence of the highly positive radiation had been relatively short and the body against this strain in "normal state" ( $OF = UF = \text{zero}$ ) was. However, if the influence of the highly positive radiation a long time and repeatedly carried



out, these "natural normalization" is only partially possible: in these cases are then referred to the Radionic Computer highly positive persistent states measured on any of the aforementioned steps.

## Variant B

In the case of determining a bioenergetic status in negatively polarized region has been in the description of process 42 04 709.9 a highest listed according to the German Patent Application P until the time of this application with the Copen Radionic Computer Mk 5 detected value of "UF 156".

To determine this value had, as described in the aforementioned patent application, respectively 15 prefixed with "10" set the dials each Copen rate. to be readjusted, as only readings to UF = 10 were known to at the time of the instruction manual for the said Radionic Computer.

The described hereinafter inventive variant of the method of work for the Copen Radionic Computer Mk 5 it was now possible with this instrument also according to of excessive loading of the human body with high-negative bioenergy radiation (eg. For example, by long duration stay on strong negative earth rays - or by prolonged and especially by frequently stay at bioenergetic radiation range of powered-on, in-service electric light bulbs, and other electrical equipment, eg. heaters, or to capture during your stay in traveling motor vehicles), also significantly higher UF values ??as "UF 156" metrologically with said Radionic Computer. It has been found according to the invention that is obtained immediately after stopping the excessive impingement in extreme cases, a maximum value of "UF 1248" when the time selected for the measurement "Copen-rate" for the said with the Copen Radionic Analytical computer to be measured body part ( glands, organs, systems like) a special ballast-code for this step, namely, is "324 924" prefix, followed by the UF-selector is set to the number "8".

It was according to the invention further found that is left after stopping the excessive applying again with high negative bio-energetic radiation of the extreme value of UF in 1248, the steps given below will go through, for the present invention have been developed that indicated below special ballast Root: for Stage UF 1248: ballast code "324 924"

for stage UF 936: ballast code "211 248"

for stage UF 624: ballast code "731 237"

for stage UF 312: ballast code "135 913"

for stage UF 156: ballast code "376 379"

The indicators required for the subsequent stages UF 156, UF 78, UF 39, UF 19.5 be - as already described in the aforementioned advance notification - by connecting from 15, respectively. 7, resp. 3, resp. Get 1 10-dials before Copen rate for the body to be measured part. Then a switch on the last digit of the respective UF value on the UF-selector is still required for the realization. It was further found that in general, the aforementioned UF values ??which represent very strong negative bioenergetic status in the body, after stopping the negative radiation source again relatively rapidly (due to radiation from the body outwards) disappear ("fluctuating bioenergetic state values") if this negative resp. high negative radiation was only a short time available. Was this action of the negative resp. the high negative radiation but longer periods are, these "natural normalization" without additional measures is only partially or not at all possible: in these cases are then referred to the Radionic Computer negative resp. highly negative duration states (= persistent bioenergetic values) measured. A major problem in determining the bio-energetic states in humans is the precise determination of their polarization.

However, this provision must be absolutely correct with regard to the measures that are taken

for the adjustment to normal values.

With the above-described novel finding of the true in individual cases state value from the OF- set forth above, respectively. the UF series is automatically also the determination of each relevant polarization, since the scale values ??in UF area clear and characteristically different from those in the OF portion. The scale values ??in UF area then represent inventively values ??in the negative range of bioenergetic states (to the vicinity of the aforementioned hypothetical limit of "BEE -180), in the alternative case, representing the scale values ??in the OF portion inventively values ??in the positive range of bioenergetic states (to the vicinity of the aforementioned hypothetical limit of "BEE +180").

Postscript: As is apparent from the procedure examples, it is likely that in addition to said stages respectively in the UF range. the OF-range intermediate values ??resp exactly in the middle between two of said UF. OF-levels may exist. If no persistent value is found for this reason in the state analysis, as would have to be determined whether such an intermediate value exists persistent.

### **Description of the present process**

The invention described below has the goal from 17/02/1992 to improve the method according to German Patent Application P 42 04 709.9 critical to ensure that the progress achieved after the successful completion of this process normalization of bioenergetic state values ??in each individual case remains permanently at this level.

According to this objective, the invention provides the possibility that even highly negative resp. highly positive bioenergetic states are reliably detected in animals, thus only fully meet the necessary measures to eliminate them (= equivalent to the normalization of their bioenergetic states) may be taken.

The invention further has the goal that the relevant environmental conditions in individual cases with a view to largely permanent consistency of the thus obtained ideal bioenergetic state values ??are designed in accordance with the circumstances largely optimal. In accordance with this objective, the inventive method consists of three steps, namely: Level 1 -- Implementation of inventive measures to substantially reduce certain environmental impacts, which would make the success of the below performed at Level 2 and 3 measures canceled out if they would continue to exist. As has already been pointed out, are negative resp. positive bioenergetic factors in the current environment of the people, especially that created by the various types of applications of electricity and the motorized road, rail and air transport bioenergetic radiation hitherto remained undetected. The detectable in these cases negative, respectively. positively polarized bioenergetic "accompanying radiation" is the main reason for the fact that with the inventive method currently widely highly negative, but also highly positive bioenergetic states are found in humans (in addition to the existing has always been "earth radiation"). This highly negative (resp. High positive) bioenergetic duration states lead over time to malfunctions of various glands, organs and other body parts and as a result the formation of certain diseases. Of particular importance here is the state of the immune system.

As according to the invention was determined, the immune system is much more negative changes by negative, especially strong negative bioenergetic radiation than other body parts. This can be seen from the following exemplary description: will a person with ideal bioenergetic values ??(OF = UF = zero) in a multi-electric light bulbs or fluorescent tubes strongly lit room, so you can already after 2 hours with said Copen Analytical Radionic Computer determine the aforementioned maximum value in the UF-region, namely UF in 1248, while other body parts have substantially lower UF values ??(equivalent to negative bioenergetic state values) for the immune system ("Copen-rate 5327").

The high significance of this observation for the health of humans is obvious, especially when one considers that (as stated at the outset) by prolonged and / or oftener in this regard the action of this radiation forming persistent negative or highly negative conditions that disappear either after some time ( = tansitorisch persistent negative bioenergetic state values), or persist over long periods, if not the above be performed in stage 3 mentioned measures.

In the case of transitory persistent negative bioenergetic states are then also for example with said Radionic computer (parallel to the existence of high negative persistent state values ??in the immune system) the formation of measured values in the analysis of the condition value for "virus infection", Copen-code 70 064 , determined, and indeed at a very early stage.

If a person in such a loaded additionally every night is now on a strong negative Erdstrahlader so advised the thus irradiated body organs and glands in a highly negative bioenergetic steady-state, from which evolve according to experience certain disease states.

The above statement made also applies vice versa to the positive bio-energetic overload of the body, but with the passage of time can develop disease states which are fundamentally different from the damage caused by negative overload. The invention has to eliminate the target, the effects of various environmental factors described below. The necessary steps to keep the present invention the subtle equilibrium state, which is achieved with the correct implementation of the inventive method, largely constant.

In accordance with these objectives, it is according to the invention required to take the following measures to substantially avoiding said bioenergetic fault conditions:

a) Optimization (= "normalization") of bioenergetic environment conditions during the illumination of rooms and seats

In accompanying procedures Example 1 is found that when the illumination with electric bulbs, as well as in some of the commercially available fluorescent tubes as a "byproduct" a very strong negative polarized bioenergetic radiation is emitted.

The intensity of this radiation depending on the power consumption and the distance of each lamp to lit subject can inventively by test exposures with different lamps on a subject (which was located in front of this experiment in the bioenergetic balance) depending on the duration of this radiation and are determined by the distance of the light source indirectly by the fact that in certain time intervals corresponding test samples (for example, fingerprints on the subject) is taken; these are then evaluated with the Radionic computer aforementioned. With negative polarized radiation UF values ??must then be obtained in this case.

It was further stated in the procedure in Example 1, that in electronic energy saving lamps and in another part of the tubes due to design positive bioenergetic radiation is emitted. The quantity of these positive radiation, in the analogous manner as described above, are determined, with the difference that this radiation to the formation of positively polarized bioenergetic states in the subject leads. This positively polarized states are in relation to the OF-values ??which are determined in this case with said Radionic computer.

The experiments described in Example 1 method that the high UF values ??that can be determined in a large part of the population currently, obviously must be blamed for most of the illumination with electric bulbs and fluorescent tubes with negative radiative. The same statement is true, consequently, for the above-described formation of persistent negative bioenergetic states. The present invention has, eliminate this influence primarily the subject.

This invention occurs when negative radiant light bulbs with positive radiative electronic

energy saving lamps, or alternatively negative radiant fluorescent tubes are sequentially mounted with positive radiative electronic power saving tubes under purposeful coordination of their consumption values ??that at start of the electric current in the respective area of ?? this combination a reasonably neutral bioenergetic field results. The result of such a combination can be determined accurately by measuring the Radionic computer above, namely the achievement of a measured value of about "OF = UF = zero" at a person who was staying in the radiation area of ??this combination.

So a reasonably neutral bioenergetic field is exemplified in the following combinations obtained:

- An electric light bulb 15 watts plus an electronic energy-saving lamp "Osram Dulux" 7 Watt;
- An electric light bulb, 25 watts, plus an electronic energy-saving lamp "Osram Dulux", 11 Watt;
- An electric light bulb, 40 watts, plus an electronic energy-saving lamp "Osram Dulux", 7 watts, plus an additional electronic power saving bulb "Osram Dulux", 11 Watt;
- A 120 cm long fluorescent tube "Philips TL 40W", plus a 60 cm long electronic power-saving tube "Lampi" 18 Watt.

b) eliminating by earth radiation bioenergetically adverse environments

(Completion of made in (1) relevant information)

From the extensive literature on earth rays and geopathy is known that the emergence of certain diseases is explained by the contact of the people so concerned with earth radiation. The scientific evidence for this claim could not yet be supplied (4), (5), (6).

The reason is mainly the fact that the earth radiation previously could not be quantitatively measured with commercially available measuring instruments.

By exemplary work of Reinhard Schneider (2), (3), of the revealing of various Erdstrahltypen the calibrated dowsing ("V-antenna") and developed the Lecher Antenna TM, it was possible to prove the wave nature of earth radiation.

My research showed that all earth radiation is absorbed in water, therefore also in the human body, which contains about 80% water.

This makes them lose their different levels of intensity (= "kinetic energy"), but they have still their "basic substance", which was referred to in the above advance notification (1) as "bioenergy", and described speculation already in the previous literature has been.

In this quasi largely "dormant" state, this energy can indirectly, in particular in the human body, with said Radionic computer - as described above and in the aforementioned advance notification - be determined quantitatively.

When a person lingers on such zones take namely with increasing exposure time the OF- resp. the UF values, see the relevant quantitative information in the methods in Examples 2 and 3. FIG.

Although the body radiates an increasing extent some of these recorded bioenergy from again; However, the verbeibende in body proportion leads to a further increase in OF- resp. the UF values, the aforementioned scale values ??reached or passed are.

From the measured values ??obtained in this way then draw conclusions about the quantity of radiation of this relevant Erdstrahlern can be taken.

According to the invention this effect of Earth rays be eliminated, that the respective dormitory or seat body through an "artificial aquifer" consisting respectively for example, from a sufficient number of coverage under each bed. the seat body adjacent water-filled canister against these bioenergetic radiation "stripped" is.

The success of such a measure can respectively by determining the UF.

OF values ??to said Radionic Computer at the person who dwelt on this lying or sitting position for several hours, to be determined.

These values ??must then at "OF = UF = zero" are when the above measure was carried out correctly.

It has been found that these artificial "water layer" enriched with the so absorbed bioenergetic radiation up to a certain limit at which the continuously supplied by the Earth Radiation Bioenergy holds off the scale with the radiation from the canister surface. The radiation intensity from the canister surface is in this case, however, - relatively to the intensity of the field lines - is substantially lower, so that at a 15-20 cm distance amounting to the canister surface of the body the latter is not affected by such "mild" bioenergetic radiation. This operation will be described in greater detail in the accompanying Examples 2 and 3 process.

Apart from the above-described method for eliminating the earth radiation in the sleeping-places by absorption in water according to the invention has yet developed an alternative, namely the "method of localized compensate for the negative, resp. Positively polarized earth radiation".

This method is characterized in that in the radiation area of ??negative, respectively. positively polarized earth rays are taken at specific places measures to generate oppositely polarized bioenergetic radiation, in a targeted quantity, so that at this point an "annihilation" of the existing terrestrial radiation takes place, which is no longer carried out an otherwise occurred radiation exposure of persons concerned can.

This inventive measure is described in more detail in the procedures of Examples 2 and 3. In order to carry out the described in such a novel process for the elimination of the unfavorable influence of earth rays bioenergetically on the human body without any problems, it is necessary for safety's sake, the heavily irradiated places respectively by a relevantly trained dowsers in each apartment for a bedroom.

Exclude seat. The success of such a measure can be determined respectively by a seat Liege test recommended by the dowsers place (duration 3 minutes) with Radionic computer analysis followed one after each 1/2, 1, 2 and 3 minutes, respectively seat. Hospital stay-built fingerprint sample on a clean transparent platelets.

c) optimization (= "normalization") of the bioenergetic conditions when driving in cars (passenger cars), which are operated with petrol engines In driving cars with petrol engines has been always a very strong negative polarized bioenergetic radiation, caused by the motor in operation, found. Since it can not be ruled out that positive bioenergetic polarized radiation is emitted due bauartiger differences in some cars, the polarization of this radiation must consequently be determined in the manner already described in each individual case.

As described in Example 4 method, can already after about 12 minutes driving time with the two of them located on the front seats of the people above in "Variant B" mentioned "step value" of "UF = 156" Setting. As mentioned in the introduction, can at long linger in a milieu in which this level value is determined to set a persistent bio-energetic state, which can be made to disappear only with the inventive measures again.

It was determined according to the invention and described in Example incoming method that when driving in cars with petrol engines through the strategic use of battery-powered small fluorescent tubes that z.

B. from the car battery (12 volts) are fed, the described negatively polarized bioenergetic radiation is partially removed so that the occupants are no longer affected by the radiation emitted by Auto Motor radiation. The success of such a measure carried out can be confirmed with said Radionic computer, characterized by the determination of the already repeatedly described "normal state" when the person concerned ("OF = UF = zero").

d) Other sources for the emission of positive, resp. negative bioenergetic radiation

d1) televisions (positive radiation): see Example 5;

d2) high-voltage lines (positive radiation): see Example 6;

d3) Catenary E-train routes (positive radiation): see Example 7;

d4) Microwave ovens (positive radiation): see Example 8;

d5) electric motors (both polarizations possible);

d6) transformers (generally positive radiation): see Example 9;

d7) Electric heating plates (eg.

B. for cooking): negative radiation, therefore, very negative state of the food to be cooked;

d8) Electric heating pads, respectively. electric blankets for Bettwärmung (negative radiation): See Example 10;

D9) Electronic devices;

d10) electric furnaces in the industry (polarization of this radiation must be determined in each individual case).

In summary it can be said that virtually polarized at each conversion of energy into heat or in power or in visible light bioenergetic radiation, either positively or negatively, as a "by-product" is obtained, which differ in scope owns and of living beings because of their high content is absorbed in the cell water.

Increase the bioenergetic absorbed radiation - as I said - the numerically determinable when analyzing the Radionic computer aforementioned OF-values ??resp.

UF values. Persistent bioenergetic state values ??measured - then Prolonged unilateral irradiation with either positive or negative bioenergetic radiation also - as described.

## **Step 2 of the inventive process**

### **Determination of persistent bio-energetic states**

#### **Level 2a**

Elimination of fluctuating bioenergetic state values ??by 30 minutes criss-crossing-walking outdoors without sunlight. Here, the effects of the above must be avoided in "Stage 1" described environmental influences. The proper implementation of this measure is necessary because otherwise the detection of persistent bio-energetic states is not guaranteed in step 2b, and thus the overall process according to the invention can not take place.

#### **Stage 2b**

Inventive finding of persistent located outside their normal values ??state values ??with the "Copen Radionic Analytical Computer Mk 5" or another, this comparable Radionic Computer. The novel process is carried out similarly as described in the earlier application P 42 04 709.9 at this stage 2b, wherein for determining the bioenergetic states above "UF 156" respectively. above "OF 120" nor the respectively in the foregoing on the "Variant A". about the "Variant B" mentioned indicators for the tested level of the relevant "Copen-rate" must be prefixed. Then set the last number of each additional code on the UF, respectively. on the OF-dial, in order to achieve the coincidence of this with a number of stages. After evaluation of the values ??necessary to decide what additional indicators have yet to be tested in order to achieve sufficient clarification of the situation.

### **Stage 3 of the inventive method**

"Normalization" (= "optimization") lying the aforementioned, on the outskirts of the setpoint "OF = UF = zero" values

The following measures come into consideration for this operation:

3a) normalization with specific, precisely defined Erdstrahlstreifen The relevant measures have already been described in the patent application P 42 04 709.9. The conditions for the proper execution of this method are:

- Exact determination of the required Erdstrahlqualität;
- Precise selection of options for specific application in each individual case;
- Exact implementation of each required evaluation of the actions undertaken with said Radionic computer.
- Meaningful and accurate selection of options for the normalization of their outside setpoints

lying, obtained with said Radionic device OF- resp.

UF values ??in each normalization stage.

- The polarization of the individual, obtained with said Radionic device from the target state ("OF = UF = null") deviating values must be equal. A simultaneous reduction of UF values ??and OF-values ??as they can occasionally occur in practice, is not feasible in the direct use of earth radiation. In such cases the procedure in the description of the aforementioned patent application, namely in section '7.

Step, variant A, paragraph d "procedure described are applied, namely (simultaneously) combined with the in '7.

Step, variant B "procedure described - precisely controlled with said Radionic computer.

3b) normalization with negative radiant electric bulbs (with positive overload, so at elevated OF-values), respectively. with positive radiative electronic energy saving lamps (with negative overload, so at elevated UF values) The necessary measures are different from case to case, they must each means of testing sessions under the aforementioned lamps

Considering be developed experiment consisting of their electricity consumption and given the polarization of the emitted by them bioenergetic radiation, remains each the result of carried out measures with said Radionic- to identify computers on which, if necessary, to take corrections for the next measure (cf..

### Examples 1f, 13 and 14

Also in this method, it is required that the polarization of the individual obtained with said Radionic device, deviates from the desired state values ??is equal.

3c) normalization with fully operational galvanic small elements

For example, "Duracell alkaline Px 825 / LR 53, 1.5 V" or "Kodak Photo Life Photo / Electronic Battery Alkaline KA 825, 1.5 V", either - in the case of negative or highly negative bioenergetic states - by supporting the Plus side of this small element to an appropriate skin site (for example on the forearm, or specifically on the area of ??skin over a highly negative body region), wherein the support side is optionally covered with a suitably tailored Leukoplaststreifen or with several layers of such strips, if such lesser duty of positive is influencing energy required or - in the case of positive or highly positive bioenergetic states - by supporting the minus side of such a small element to a skin site via a positive resp. highly positive body zone in an analogous manner.

The duration of the measure is respectively dependent on the level of OF-. the UF value before the edition of small element (resp = height of the target-OF-value. the target UF value immediately after removing the small element) on the number of successive adhered to the support page Leukoplast Strip and from the objective pursued ; generally intended when exposed to positive bioenergy radiation the value OF = 25 to 30 do not respectively in the relevant part of the body. be exceeded only in exceptional cases, when acted upon by negative bioenergetic radiation a value of UF = 25 to 30 should not, resp. be exceeded only in exceptional cases.

After about 20 minutes checking whether the value OF = UF = "zero" was achieved permanently if not, the measure must be repeated until this is the case.

This 3c described in Section inventive normalization method is based on the surprising fact that the direct contact of said small element with the human skin bioenergetic radiation is emitted to this, where they spontaneously spreads to the whole body, but in this case, certain areas, such as blood (rate 409) or Sympathisches nervous system (rate 739) or parasympathetic nervous system (73910) always higher OF-, respectively. UF values. Further details on this can be seen from the method of Examples 11 and 12.

3c may normalization method described above can be applied at various points of the body with simultaneous existence of positive and negative areas. Such cases have already been observed several times.

3d) normalization with the plus side, respectively. the minus side of permanent MagNeten. This method is carried out analogously to the procedure described in 3c. However, since there are numerous different magnets have the appropriate normalization methods to be worked (with subsequent analysis by said Radionic computer) when you select this method by selecting the appropriate test series. Therefore, the above is carried out much easier and safer in 3c-called operation. Said normalization measures should be only on instructions to trained professionals, especially doctors, and under strict control by such persons carried out.

## Example 1

Alteration of bioenergetic states of people under the influence of the lighting; Ways to solve this problem

### a) Electric bulbs

It was established already in the German patent application mentioned that electric bulbs emit negative bioenergetic radiation. According to the invention has made it possible now on the basis of targeted attempts to make quantitative statements in this regard.

a1) change of bio-energetic states of a male person (72 kg) in the radiation area of ??a 40 watt bulb (initial state = OF 0.2). The distance between the head of the subject of the bulb was here (45 ° angle from above): 40 cm

The listed values indicate a very high negative polarized state of these areas of the body upon exposure to an electric bulb 40 watts.

Noticeable here is also the big difference between the respective values ??for rate 739 and rate 73910, so that this can be concluded upon irradiation with negative bioenergy on a skew of the function of the autonomic nervous system. As can be seen, the 40 watt bulb for Council 29, 409, 98 and 739 stood the test in each case, an equilibrium state of UF 312 a.

This value is one of the above in "Variant B" mentioned stage numbers in UF range, as found in the present invention even when of excessive exposure to high-quality bio-energetic radiation as "persistent" bioenergetic status values. The value of UF 468 is exactly in the middle between the UF values ??312 and 624, both of which were listed in "Variant B" as persistent bioenergetic values. Due to this fact it is advisable to search for a state analysis necessary even after this UF value.

a2) A further experiment under the same conditions as in A1, but with two bulbs with 40 Watt found: The figures can be much higher equilibrium values ??with respect to the demonstration experiment described in section A1) expected.

a3) with increasing distance from a 40 watt bulb remove the UF values; Here distance for the Copen-rate 29 after 1 minute exposure time was measured namely only UF 4.0 at 1 m.

A4) In a further experiment with a 25 watt light bulb in 40 cm distance has been determined:

b) Electronic energy saving lamps . Unlike electric incandescent lamps, emit negative bioenergy, produce electronic energy saving lamps, for example, the various types of "Osram Dulux EL TM" or "Philips SL" or "Philips PLC Electronic" positive bioenergetic radiation. So following OF-values ??were at a person who (DEG angle obliquely from above in 45) was illuminated by an electronic energy-saving lamp "Osram Dulux 20W" 20 cm, determined when analyzing the Radionic computer mentioned:

The observed here equilibrium values ??of OF 360 (for 29 rate) respectively. OF 480 (for rate 73910) have already been mentioned at the outset of this specification; as described there, it can also be determined as a "persistent" values ??during prolonged exposure to positively polarized bioenergetic radiation.

c) Inventive measures to prevent the above-described exceptionally strong influence of electric bulbs, respectively. electronic energy saving lamps on the bioenergetic equilibrium of man It was determined according to the invention that an optimization of the bioenergetic conditions while staying in lit rooms is achieved by the fact that electric light bulbs on the one hand, and electronic energy-saving lamps on the other hand to one another so installed in



close proximity to each other and purposeful coordination of their bioenergetic radiation properties that when you switch the electric current in the ideal case, results in a substantially optimum bio-energy radiation field, characterized by the avoidance of high OF-, resp. UF values ??in the analysis of a person who resided in the radiation field of this combination, with the Radionic computer aforementioned. Ideally, can be achieved with precise and proper operation of the "setpoint" of  $OF = UF = \text{zero}$  .

So, for example by combining a standard 25-watt incandescent bulb with an electronic 11-watt energy-saving lamp "Osram Dulux SL" at a horizontal distance of 20 cm between two lamps and at a distance of these lamps from the head of a subject of about 40 cm (45 ° down) after 3 minutes exposure time the following values ??with the initially described Radionic-computer calculated: for rates 29: OF 0.2

for rate 409: OF 0.2

for rate 73910: OF 0.2

The same result was achieved by combining an electric 40-watt incandescent with a 11 watt energy-saving lamp "Osram Dulux SL" plus an additional one 7-watt energy-saving lamp "Osram Dulux SL" in a 3armigen hanging lamp above a table (removal of the individual Lamps from the head of the subject zwischen 40 and 60 cm). Prerequisite for this result was of course that the subject was in the ideal bioenergetic state even before the said irradiation experiment. A particular embodiment of problem solving outlined in the present case is that the combination described (for achieving a neutral environment in the area of bio-energy lamp types mentioned) is producing technically realized in each one unit with a socket.

d) fluorescent tubes

d1) fluorescent "old style" generally send out a very strong negative bioenergetic radiation considerably wider than the radiation of light bulbs.

So when a person who is located in the radiation field of a fluorescent tube "Philips TL 20 W / 29" a UF value of 66.9 (60 cm long), and staying true 200 cm away from this, after 1 minute was measured.

The bioenergetic radiation of fluorescent tube also goes through walls and ceilings virtually unrestrained therethrough; this fact should not be forgotten for staying in such rooms.

In a large department store, which was also evident during the day from the ceiling with a large number of fluorescent tubes (about 10 clock in the morning) were about 1.70 away at a under a fluorescent tube double aggregate subject (from the head of the subject ) following bioenergetic values ??when evaluating the Radionic computer aforementioned ermititelt: These figures show the extraordinarily great influence of negative radiant fluorescent in the mentioned conditions, particularly in terms of the operating personnel of the department store, which has to remain under these conditions for many hours a day.

d2) It was further found that in the market also positive bioenergetic radiation emitting light tubes are available, some of which are referred to as "energy-saving tubes", but on the other hand, have no special marking. Consequently, the polarization of its radiation in each individual case must be determined by using a fluorescent tube.

In a 200 cm of an in-service fluorescent lamp "Lampi", Type 1318 (18 Watt), remote test subject was after 1 minute irradiation time for Rate 29 (brain) of the value  $OF = 22.1$  determines the Radionic computer aforementioned.

described e) Inventive measures to prevent the above in section d) exceptionally strong influence of fluorescent tubes on the bio-energetic equilibrium of the human being It was determined according to the invention that an optimization of the bioenergetic conditions during their stay in rooms that are lit by fluorescent tubes, is achieved, on the one hand each have a negative bioenergy emanating when in any room to be illuminated part as a byproduct fluorescent tube and on the other hand a positive bioenergy emitting byproduct fluorescent tube preferably in parallel arrangement to each other is mounted (for example, at a distance of about 10 cm) on the ceiling or on a workplace where this installation is in purposeful coordination of their quantitative bioenergetic radiation characteristics, so that as a result of this targeted action with the involvement of the electric current about bioenergetically neutral

radiation field results. In this case, when a person who was in the radiation field itself, with a Radionic analysis of value  $OF = UF = \text{"zero"}$  or a value determined in close proximity to this ideal value. A specific embodiment of the invention set out problem solving is that the combination of the two fluorescent tubes types described above is producing excessively realized in an aggregate with guaranteed optimal bioenergetic radiation quality.

f) Example of a moderate positive bioenergetic radiation

An electronic energy-saving lamp "Dulux" 7 Watt has been placed on a table, that the distance was exactly 95 cm at a distance at the other end of the table seated person (at head height).

After switching on the electric current after 1 minute following OF-values ??were determined: The figures show that in this way only a moderate positive irradiation takes place, as, where appropriate, as described in "Stage 2 of the inventive method" inventive method to normalize negative persistent state values ??comes into question. However, in this case the distance of the body is precisely observed by the lamp.

## Example 2

Alteration of bioenergetic states while lying on a positively polarized Erdstrahlenfeld; inventive measures to solve this problem

For the demonstration of inventive measures described in this example, a 15stufiges positive polarized, linearly extending Erdstrahlfeld was selected.

This Erdstrahlfeld is part of a north-south / east-west oriented electromagnetic radiation latticed system with a width of each (linearly extending) single field of 6.4 m and having a mesh size of the mesh grid of approximately 40 meters; it is the main artery of a so-called "geomancy Zone", which is described in (3) p 143 and in (6) pp 86-88, induced.

Every single box has a 80 cm wide middle section with 5 very thin radiation strips each have a distance of 20 cm and a very high irradiance.

After both sides of this central panel, depending 7 fields close to each 40 cm wide, in each field each 2 radiating strips are spaced evenly graded intensity.

A bedstead of length was removed exactly 140 cm from the middle of the field described by asked about the radiation strip located there, so that this accurately irradiated the longitudinal center back one located on the deck person. Partially even the two 20 cm distant neighboring strips were thereby detected. After 1 to 2 minutes then a fingerprint on a transparent film was made in each case.

These fingerprints were analyzed with the computer Radionic mentioned. Result in the setting 409 for "blood": 1 minute time spent:  $OF = 31.5$

2 minutes time spent:  $OF = 62.6$  As noted, the OF-value should after one minute at most  $OF = 2.0$  to the formation of very high values ??OF prolonged time spent, during the night or to be avoided in an even longer stay during an illness, as would otherwise be expected to occur the aforementioned "persistent bioenergetic state values". Following this test, the lying area was comprehensively "stripped" by closely spaced on the floor water-filled plastic canister against the positive earth rays. The water level in the canisters lying was 15 cm.

After a waiting period of 6 hours (within which the positively polarized radiation energy of located under the canisters earth rays had accumulated in the water that was in the canisters, until saturation) of the above-deck experiment described was repeated, then again removed a fingerprint and this is evaluated in the manner described; Result:  $OF = UF = \text{zero}$ .

The deck with the plastic canisters underneath was then left for 24 hours in the same position and repeat the aforementioned sun trial.

Result:  $OF = UF = \text{zero}$  in the subject. An alternative to the above-described demonstration experiment: After removal of the water-filled canister used for the "stripping" two 15-watt light bulbs were placed in the basement beneath the bedstead so that a 45 cm below the shoulder region, the second 45 cm below the belly area was. Evaluation of a further experiment with the sun Radionic computers also yielded " $OF = UF = \text{zero}$ ". This result is

surprising, as at this point, given the very high positive radiation, a far higher use of negative bioenergetic radiation was to be expected for a "compensation".

The reason for this lies in the fact that it (ie only to a localized compensation) acted in this case to a "blocking" of relevance here strong positive radiation.

In another sun attempt a subject, on the central artery of the above-described 80 cm wide middle part (this vein has - determined by radiesthetic methods - the highest radiation intensity of Erdstrahlfeldes described), after 1 to 2 minutes time spent in the subject following OF-values determined:

### **Example 3**

Alteration of bioenergetic states while lying on a negatively polarized Erdstrahlfeld; inventive measures to solve this problem For the demonstration of inventive measures described in this example, a zone of a negatively polarized Erdstrahlfeldes was selected, namely a zone of so-called "Wasserader- grid system". Such a system is induced by the bioenergetic radiation energy contained an underground water vein.

A 21 minutes lasting test deck on this Erdstrahlzone (see detailed description below) resulted in the evaluation of made in this experiment fingerprint samples to the aforementioned Radionic computer:

As can be seen, the UF values ??strive both for blood as well as for the brain to the limit  $UF = 156$ , although the initial values ??for blood is about 20% higher than those for the brain. This value of  $UF = 156$  characterizes the state of equilibrium between the radiated and the bioenergetic emitted radiation; He is one of the negative bioenergetic scale values ??that were "Variant B" described at the beginning of the process description in section. He is also one of the eventualities "persistent" negative bioenergetic state values, how they can be set at negative endurance.

Detailed description of the present Example 3 experimental conditions:

The used for the demonstration experiment described above "water vein-grid system" is a north-south / east-west oriented; The individual strips of this grid are each composed of a central core and 2 beleitenden secondary veins, each with about 16 cm away from the central core. These funds can artery after thorough radiaesthetischer training with the K antenna by Reinhard Schneider, Wertheim, and indeed at the set "Handle length" 24.5 cm, DEG - Peilverfahren be found in 45. A bed was made precisely with its longitudinal central axis in such a water-lattice midvein; then a subject laid lengthwise on the bed so that on the one hand the central artery, on the other hand, the right adrenal vein irradiated head, the left half of the body and the left leg, the right half of the body and the right leg. The subject was at this time in the "bioenergetic balance" (" $OF = UF = \text{null}$ ") when analyzing the aforementioned Radionic computer. Approximately 1 hour after the aforementioned sun trial the lying surface, in the same manner as described in Example 2, comprehensively stripped with water-filled canisters against the negative bioenergetic radiation, the distance of the body of the canister surface was about 30 cm. The experiment was carried out 8 hours (overnight) and the next morning performed Radionic computer analysis: Result: " $OF = UF = \text{zero}$ " in the subject. Subsequently, the water-cans were removed and then carried out a second sun trial under the following conditions: First, it was in the basement under the bedstead a positive bioenergetic radiation emitting fluorescent tube ("Lampi" Type 1318, 220/230 V, 18 Watt) approximately mounted 80 cm from the body surface of the subject removed, and then kept for 2 hours in operation. The evaluation of a fingerprint of the subject with said Radionic computer showed again:  $OF = UF = \text{zero}$  ".

### **Example 4**

Alteration of bioenergetic states while driving in automobiles that are powered by gasoline engines; inventive measure to solve this problem It was a test drive in a BMW 525e over 23 minutes out; every minute was taken off a fingerprint sample the passenger. The analysis of these samples revealed:

When a person in the back seat was after 4 minutes traveling time of the aforementioned scale value "UF 19.75" measured. From this it can be seen:

- 1) The increase of the UF values ??with increasing duration of exposure is a little steeper than for the conditions described in Example 3 in this example.
- 2) As with the experimental results according to Example 3 is in the brain and in the blood, a limit of UF = 156 achieved, but at an earlier stage than with the conditions according to Example 3. FIG.
- 3) This value of UF 156 is a negative bioenergetic level values, as they were initially called the procedure description in section "Variant B", and how they - may also exist in persistent state - as already outlined.
- 4) The UF values ??for the epiphysis are about 10% higher than those of the blood; the equilibrium value while charging is UF 234th This value is reached after a 20 minute drive. The Uf value of UF 234 is exactly in the middle between the aforementioned UF-stage UF values ??156.0 and UF 312; He is obviously a further step value. It can be expected that it can also occur in persistent state.
- 5) The Uf value of 'UF 234', in setting the aforementioned code of 15 dials (= "376379") and additional prescreening of 8 tens Wählschieben, each set to the number "10", and additional adjustment of the final number "4" to be realized on the UF-selector. It has been prepared according to the invention the following method to prevent the negatively polarized by Auto Motor generated bioenergetic radiation:

Before each of the two front seats each has a tubular small lamp "FL 1 Twin" (Hartig & Helling manufacturer), 6 volts, mounted. These two small lamps were turned on simultaneously with the starting of the car engine; thereby generated by the motor bioenergetic radiation before the persons present on these seats was largely blocked; it was surprising as the two persons there befndlichen as determined even at the present on the rear seat persons, practically no negative bioenergetic radiation more. The said two small lights can be connected in series connection to the vehicle's own lighting system (12 volts). Then said two small lights are switched on when the engine is started and switched off when shutting down the engine by an adapted circuit. Through this inventive measures it is ensured that the two small lamps in operation only during the lifetime of the engine. The above-described inventive operation applies only to the car engines which emit negative bioenergetic radiation.

Since it can not be excluded that also positively polarized radiation can be emitted as a result of construction-related difference of another motor car, it is necessary that before carrying out the inventive method, first, the polarization of the output from the respective motor bioenergetic radiation is determined. In the case of delivery of positive polarized bioenergetic radiation from the car engine, a local block the said radiation could then customized installation of electric bulbs 12 volts (as used for example for the interior lighting of cars) before the two front car seats can be achieved. Of course, the visible light should be largely eliminated by a suitable cover of this lamp.

## Example 5

Alteration of bioenergetic states in radiation field of a television set turned on; inventive measures to solve this problem It was found that in operation located TVs emit positive bioenergetic radiation.

This radiation can be partially or completely slowed down by negative Erdstrahlungsfelder that lie between the TV and the viewer. A basic numerical statement on this is therefore not possible.

To demonstrate the radiation of a TV, a seat test with a person 75 cm behind a turned-TV "Grundig Super Color, 220 volt, 50 Hz, GSC 600" was carried out. The bioenergetic radiation goes here kugelschalig to the TV around, the distances between the individual spherical shells are placed 20 cm apart. The radiation intensity decreases with increasing distance from the TV. Under the conditions mentioned below OF- were at a subject that was 75 cm behind the mentioned TV, values ??in the evaluation with the eingnags mentioned Radionic computer measured. The figures show the extraordinary large bioenergetic influence on people when he is too close to the switched-on TV. As is apparent from the table that OF-values ??strive different limit values ??to at 23minütigen duration of the experiment, namely for the brain (coPEN code 29) = CF 180 after 21 minutes and the blood (409) = CF 240 after 23 minutes. For the epiphysis (code 98 = pineal gland, pineal gland) was 360 not quite reached the expected limit of CF after this time, however, the tendency of these figures towards this limit is obvious.

For the above figures show that an audience should stop possible 4-5 m far away from the TV. This statement also applies to the spaces above or below or behind or next to the television set.

Since - as mentioned above - the positive radiation of the TV can be partially or completely eliminated by negative Erdstrahlfelder, located between the device and the audience, the remaining radiation for each individual case must be determined experimentally.

According to the invention, this residual radiation is compensated in that between the TV and observers a powered electric bulb (which - as mentioned in Example 1 - has negative bioenergetic radiance) is placed; this has from the operator the strength of the light bulb and the distance from the audience are chosen experimentally so that the viewer takes no more bioenergetic radiation, characterized by the achievement of bioenergetic Gleichgewichtswertes "by 1000 = about zero" in the analysis with said Radionic Computers.

### **Example 6**

#### **Impact of high-voltage lines on the bioenergetic state of the human being**

Under high voltage lines, there is a strong positive polarized field with great reach. Measurement tests in the manner as described several times showed that in individuals who are in the radiation field directly under the high voltage line, high-OF values ??(determined in the manner described above) are measured. So (about 4 m distance of the head of a subject from the second lead wire) after 1 minute residence time, a value of 34.5 OF (setting Copen-rate 29 = brain) was measured directly by a high-voltage cable with 6 wires; After 15 minutes of residence time of the equilibrium value is reached, namely, "OF 180".

When hiring rate 73 190 (for parasympathetic nervous system) was found as the equilibrium value "OF 240". Because these high-voltage lines passing through a residential area, is consequently to be expected with a corresponding burden on the people living in these apartments. As a countermeasure, the installation of negative radiation-emitting bulbs comes resp. fluorescent lamps (eg. on the ceiling or above the ceiling of the inhabited rooms) into consideration. The use of these lamps must be experimentally (in compliance with the undertaking given in Example 1 versions) so that people who are in such spaces, in the analysis with said Radionic computer the bioenergetic setpoint (OF = UF = approximately zero ") having, when these lamps are turned on. Other possible alternative: install an artificial layer of water in the attic similar to that described in Example 2.

### **Example 7**

#### **Determination of bioenergetic radiation of E train catenary**

One subject was a sideways E-railway line so posted, that the head of this person was about 3

meters from the catenary.

After exactly 1 minute and after exactly 3 minutes each fingerprint was taken at this person. The analysis of this fingerprint with said Radionic computer revealed when setting the rate 29 (brain) resp. the rate 73 910 (parasympathetic nervous system):

<Img class = "EMIRef" id = "021796016-00360001" />

These figures demonstrate a very high release of positive bioenergy radiation which consequently reigns in the interior of railway wagons.

As a solution to this problem is similar to that of Example 6, the installation of light bulbs and / or fluorescent tubes into consideration, so that then results in a neutral bioenergetic field in the passenger compartment after the commissioning of these lamps.

### **Example 8**

#### **Bioenergetic radiation of microwave ovens**

After the sample seats (duration 4 minutes) of a subject (70 kg) in front of a microwave oven "Siemens, 220 volt, 950 watt, 2450 MHz", namely 45 cm in front of the device on the person following positive charges with the were mentioned Radionic computer determines: after 1 minute: OF 36.4, after 4 minutes: OF 134.5.

Consequences of this test run:

1. The bioenergetic radiation generated in the interior of the microwave oven also penetrates through the oven door to the outside and can be found there on several occasions described as a high-OF-value at a person located there according to the invention.
- 2 Because - as described above - this bio-energetic radiation is water soluble, is therefore at a very high accumulation of this radiation can be expected in the food found there.
- 3 Since these foods are consumed immediately afterwards generally, thus this radiation then passes to the affected people, where it leads to the corresponding change in the bioenergetic measurements.

### **Example 9**

#### **Bioenergetic radiation of transformers**

For a person who was staying 4 minutes before a transformer station, approximately 2 meters from the wall of this cottage, following OF-values ??were determined with the Radionic computer mentioned:

after 1 minute: OF = 29.4, after 4 minutes: OF = 106.0. These figures show that also be released during the operation of transformers high quantities of positively polarized bioenergetic radiation.

### **Example 10**

#### **Bioenergetic radiation of heat pad**

The bioenergetic radiation of switched, so in operation heating pad was at start of highest heating stage (stage 3) is determined by placing a palm directly on the heating pad such that after 60 seconds a fingerprint was taken on a transparent test plate; This test plates was evaluated with the aforementioned Radionic computer.

Result: UF = 23.9 (for 29 rate).

This result proves the very high discharge of negatively polarized bioenergetic radiation during proximal linger on heating pads and electric blankets.

From this experiment results in the realization that electric heating pads and electric blankets cause unwanted gain of this negative state at negative polarized state of the body tissue.

### **Example 11**

Alteration of bioenergetic states when skin contact with the plus side of a "small battery" Px 875 Duracell For the demonstration of the emission of the plus side of this small battery the following experiment was conducted:

First, the plus side was completely covered with 3 layers Leukoplast. Then this small battery was glued to the negative side on a flexible watch band and then briefly attached with this bracelet below the right wrist, that good contact of the covered plus side was ensured with the inside of the forearm. After exactly 1/2, 1, 2, 6 and 30 minutes, respectively, a fingerprint was taken on a transparent sheet and these evaluated with said Radionic computer. The experimental results show that already after 2 minutes constant OF-values are achieved at a low level, namely for the brain (rate 29), for the blood (rate 409) and for the sympathetic nervous system OF 7.5 and the parasympathetic nervous system OF 11.25. The value "OF 7.5" was not mentioned above in "A variant of the inventive process," he, however, lies precisely in the middle between "OF = UF = zero" and the step value "OF 15" mentioned. As a persistent value is this "intermediate value" has not yet been observed, but it is due to the above finding does not rule out that it may exist persistent. The same applies to the found intermediate value "OF 11.25" for the parasympathetic nervous system. This figure is exactly in the middle between the level value specified in "Alternative A" "OF 15.0" and the above identified intermediate value "OF 7.5". Aforementioned demonstration experiment is not only quantitatively demonstrate and prove the voter with the support of Leukoplast Strip the plus side of said small battery positive bioenergy. This method also difficult to be measured persistent negative states are detected indirectly, since such areas are of course not yet reached after the 2-minute Auflegezeit on OF 7.5 because initially these negative states must be reduced slowly. In single or multiple repetition of the application of the covered with 3 layers Leukoplast Plus side of said small element described above in each case individually adapted interval but this is first elusive UF values come in a range of easily ascertainable. Based on this result, the inventive normalization may then be carried out in the manner described.

#### Example 12

Alteration of bioenergetic states when skin contact with the negative side of a "small battery" Px 825 Duracell

To demonstrate the influence of the radiation of the negative side of this small battery the following experiment was conducted:

First, the minus side with 2 layers of adhesive tape was completely covered.

The so-prepared small battery was then glued to the plus-side on a flexible watchband and then secured with the strap as in Example 11.

The evaluation of this custom built fingerprints revealed:

The resultant rate at 73,910 equilibrium value of UF 39 was called in "Variant B" beginning the process description.

He has been identified on several occasions as a "persistent" negative state value.

The equilibrium value found at rate 29, 409 and 739 of 24.35 is exactly at 25% of the difference value between the beginning in "Variant B" mentioned level values UF 19.5 and 39.0 UF, both identified as persistent bioenergetic values on several occasions were.

#### Example 13

Demonstration experiment for the use of a positive radiant small fluorescent tube "Lamp 5004" (3.9 W, 220/240 V) negative for a planned elimination of persistent polarized states

Removal of the subject from the small fluorescent tube: 40 cm

Bioenergy Start Condition: OF = 0.2 for rate 29 OF 30 (29 for rate and 739) has been mentioned above in "Alternative A" of the process description as a positive step value; OF 45 lies exactly in the middle between OF 60 OF 30, he has been, however, has not yet been

observed as a persistent value.

#### Example 14

Determination of the radiation of a 15 (13) -Watt bulb "Elite" at a distance of 70 cm to subject (with a view to possible use for the reduction of persistent OF-values)

#### Literature Directory

- (1) German Patent Application P 42 04 709.9 from the 17th. 2 1992
- (2) Reinhard Schneider, guide the pendulum Rod- and art; Introduction to Dowsing, Part I (1977); Oktogen- Verlag, Wertheim
- (3) Reinhard Schneider, guide the pendulum Rod- and Art, Part II (1984); HMX-Verlag, Wertheim
- (4) H. L. King and H. D. Betz: "Earth radiation? The Wünschelruten- Report "(Scientific Investigation Report; Munich 1989
- (5) O. Bergmann: "Risk Factor location: Scientific study on the problem of location influences on the people"; Facultas University publishing house, Vienna 1990
- (6) Schweitzer / force: Fundamentals of geopathy; 3. Edition 1988
- (7) Gustav Freiherr von Pohl: Earth rays as sickness and carcinogens; Progress-for-all-Verlag, 8501 wetland
- (8) Bruce Copen Laboratories, Highfield Dane Hill Haywards Heath; Sussex RH17 7EX. England: "Radiesthesia Radionics Electronic Equipment Homoeopathic", Services and Supplies; 43rd Anniversary Edition: page 46; "Radionic Analytical Computer Mk 5

---

### DE3741949

#### Arrangement with bioenergetic activity

In order reliably and conveniently to exert an influence over a prolonged period with reproducible repetition by substrates which have bioenergetic activity and are of various types on the points or regions, which can be influenced by bioenergy, on the surface of living bodies, in particular humans and animals, it is provided according to the invention that the substrates are applied to items surrounding the living bodies, e.g. clothing.

The invention relates to a bio-energetically to living beings, and in particular people effective arrangement and is based on the known fact that, for example, in humans, a variety of bio-energetically effective and impressionable points or Areas exist at various locations of the body or the body surface.

These points or Spaces on specific bioenergetic potentials or Set potential areas and are not only with the organs inside the body in conjunction, but also among themselves to a characteristic potential pattern reticulate interlinked.

It is made of different ancient teachings, such of acupuncture and chakra, known and detectable with today modern Analysgeräten that the well-being and the health of living creatures, especially human animal from a very correct, biologically optimal applied potential pattern, ie dependent on the adjustments in the bioenergetic points.

There are also a variety of methods known to influence by various influencing the impressionable bioenergetically points or regions whose participation impact on the health



setting or the wellbeing of the body.

For this purpose only, acupuncture, acupressure, Colorpuncture, reflexology, neural therapy, laying and rubbing of active substances, Homöopressur, Chakreneinwirkung be mentioned as some examples, such as Aids acupuncture needles, magnets, crystals, natural active ingredients and for some years also lasers are known.

A major drawback of these methods lies in the fact that their therapeutic application because of this acting extremely low energies and the biologically determined only very slow energy flow a certain treatment time and a regular rhythm of repetition single treatments needed in particular.

The fact that the working man nowadays it applies neither time nor patience, probably one of the reasons for an often alleged uncertain reproducibility of the results are healing.

In addition, due to the network-like linking the interaction of the points or areas within the characteristic potential pattern often the bioenergetic treatment at several places at the same time, which is difficult to achieve in the available time limits.

Especially the multiple stress stress today also makes it more and more often a certain duration or treatment Influencing the bioenergetisch effective points necessary.

The object of the invention is to provide an arrangement with which a frequent or permanent assignment of energetically effective substrates to the so impressionable points or areas on the body or the skin of the people as uniform as possible influence over a longer period and particularly in the simultaneous combination several spheres of influence can be ensured in the most comfortable manner.

Here this also each have different bioenergetic effective substrates can be assigned in combination.

Accordingly, the invention resides in the parent meaning that at the jurisdictions of the living creatures, eg. of man, energetically effective substrates through this sphere of influence locally assigned attachment surrounding objects are provided in particular to the people.

Such a specific association of active energy substrates to the individual body parts of the people according to the invention is possible with all objects, the man carries a continuous or a long time to be such garments, especially undergarments, Bekleidungsaccessoires ( gloves, headgear, wrist warmers, kneepads, headbands, wristbands or -hafeinlagen, eyeglasses, etc.).

Therefore, the substrates need not necessarily on the skin surface to rest, but can also be arranged overlying.

However, the substrates which points should be influenced in terms of area or Areas covered.

Other options such inevitable assignment, ie without the person concerned does not have to constantly think it is the attachment to other, surrounding people everyday objects such as blankets, table and bed sheets, sofa and pillows, furniture (Sesselarmstütze), chairs, table tops , floor coverings, etc., wherein the attachment of the active energy substrates may also be provided in more large-scale form.

Other inventively substrate excessively groomed items that get more sporadic, but often very intense in contact with the person who can machine parts or their controls (lever machines, steering wheel or

Its lever of cars, household appliances, etc.) or sports equipment (tennis rackets, bicycle handlebar grips and -Sattel etc.).

Essentially, the invention is also the fact that the known bioenergetically effective substrates to the objects, eg. Other example of body clothing in a simple manner and are removably mountable, and without that the substrates to be disturbing (or friction Chafing, pressure) are perceived.

This applies in particular when the substrates have to be mounted on the most intense contact manner, namely on the inner side of the body covering.

In particular, it comes to the use of such Velcro straps or Sticking or clamping question.

At least during the day acting permanent interference is to think about weaving, sewing or embroider.

In the aforementioned manner any kind of combination in terms of time and with respect to the local association as well as the type of substrate used can be selected and set, but also be easily modified.


You can choose between all available bioenergetically effective substrates, in particular color and shape icons (eg. helix pattern) and different materials are combined according to necessity.


The substrates, like the mentioned geometrical symbols or Figures are the associated local points respectively Areas (eg. a Chakrenzentrum) in size sufficient overlap area.

Ultimately, wallpaper, curtains and the like, surrounding the objects people can be equipped with appropriate substrates.

The invention is explained in more detail below in exemplary embodiments.

**FIG. 1 shows points of the human spine or the back of the head, for example, the combination 1a to 1c for the known acupuncture points GG 19 GG 13-L 5-S 1, and the points 2a to 2c in accordance with the acupuncture points Dü 9, Bl 51 and Bl 54th**

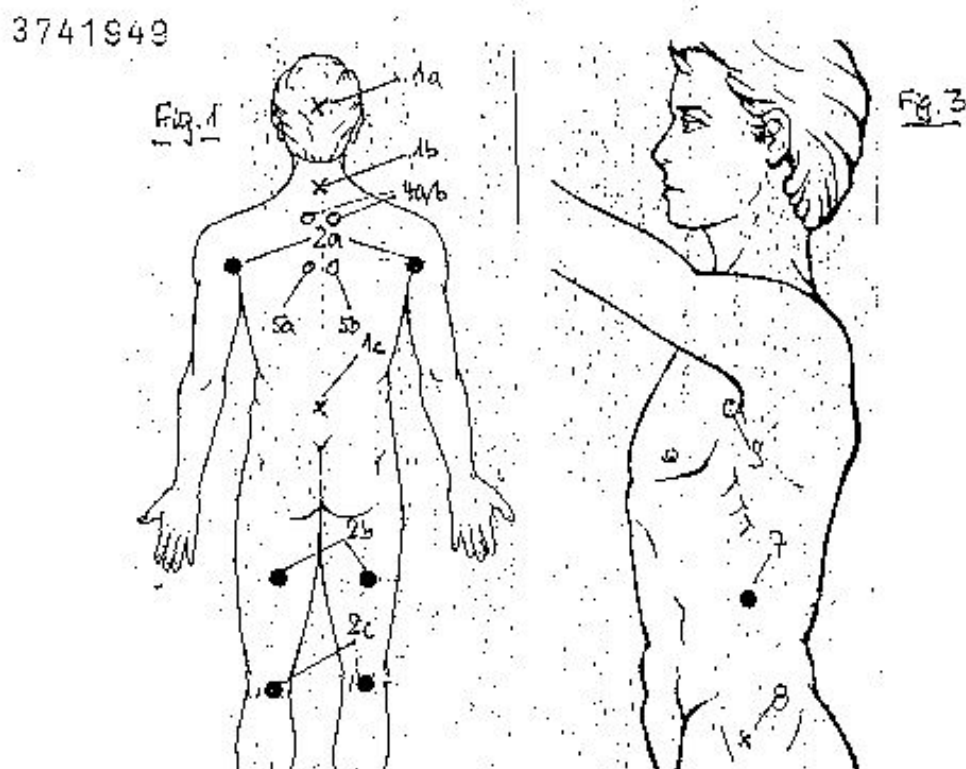

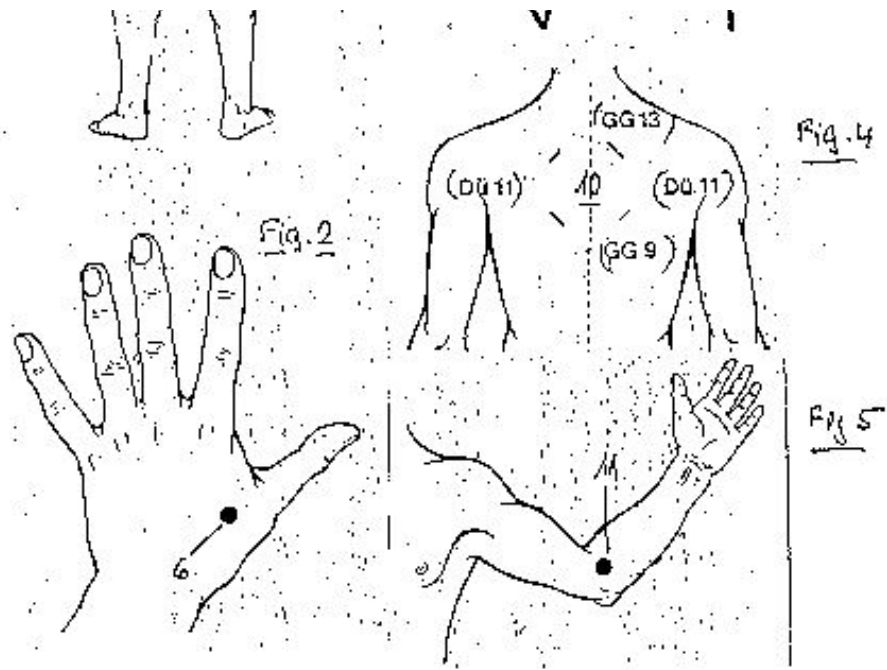

Of these, the points 2a, 1b and 1c 2b and 2c are coverable by substrates at a camisole, the point 2a by underarm sweat leaves the point 1a by a hat and points by a pair of underpants.

At an undershirt also substrates for the points 4a and 4b and 5a and 5b corresponding to the lung point Bl 13 and the little Yin-point Bl 14 are attachable.

**FIG. 2** shows on one hand, as measured by the substrate in a glove of colon point 6 (Tue 4) is to be treated.

According to **FIG. 3**, the points 7 (GBL 25) and 9 (above MP 21) substrates at a camisole and point 8 (GBL 30) covered by a substrate of a pair of underpants.

**Fig. 4** shows a combination of 10 points for treatment by means of a camisole and

**Fig. 5** a point 11 (3 HE), which can be covered with a substrate on the sleeve of a shirt. Even easier is the influence of points z. the portion of the lower leg (eg. point ST-36) and the foot (eg. genital zone points and MP 4) means mounted in stockings or shoes substrates.