


Work:

We have replaced this model, with newer blocks, and removed the redundant parts, like extra cam shafts

The integrated system was initialised and tested, and put under various responses or input and condition and observed results.

Testing:

The input to the system was tested by **Matlab** test codes.

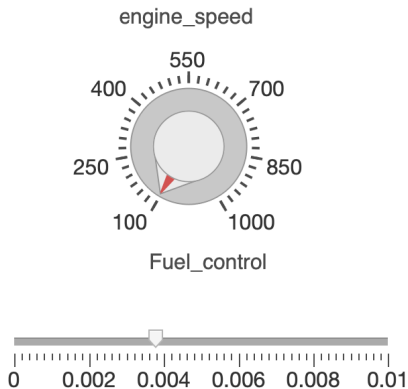



All the important parameters are extracted and given values, according to research paper, and made it easy to observe the results.

The main controllable params are preload pressure for the **lift pump, engine speed, fuel control, and diesel properties like temp and pressure at which fuel is kept.**

Made it easier to plot the graphs using Matlab by writing plot graphs by varying the input speed under various conditions, like comparing the flow at different input speeds, and acceleration plot.


Added a simple dashboard to control the **engine speed and fuel control.**

INPUT RESPONSE:

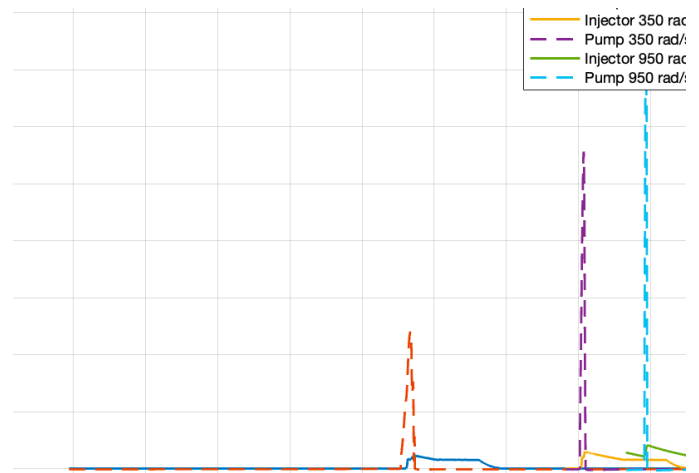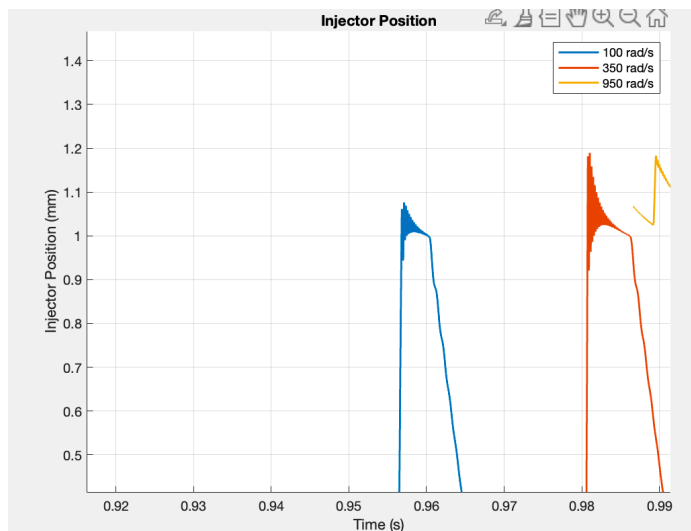


STEP INPUT RESPONSE:

Sudden jump at 0.5 from 100 to 500

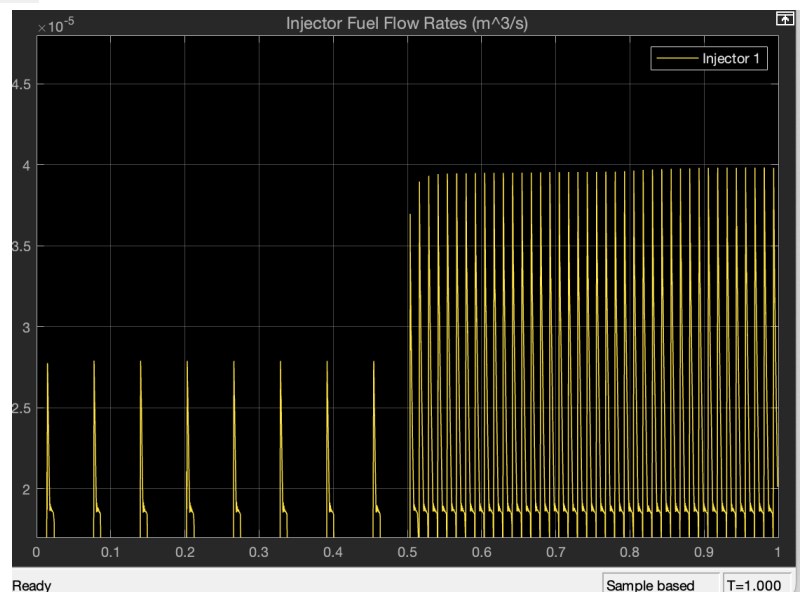




ACCELERATION RESPONSE :

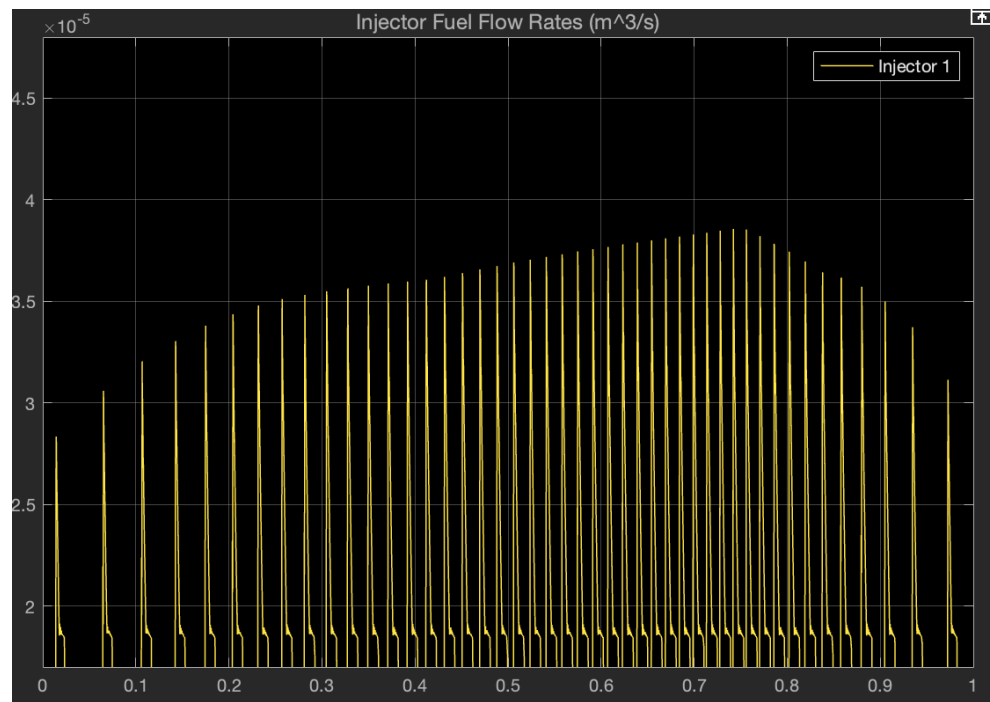


Design of parts: for $\omega = 100\text{rad/s}$

Air Fuel Ratio:

By receiving our fuel from the design, we tried the design to maintain a 14.2 to 14.4 air fuel ratio

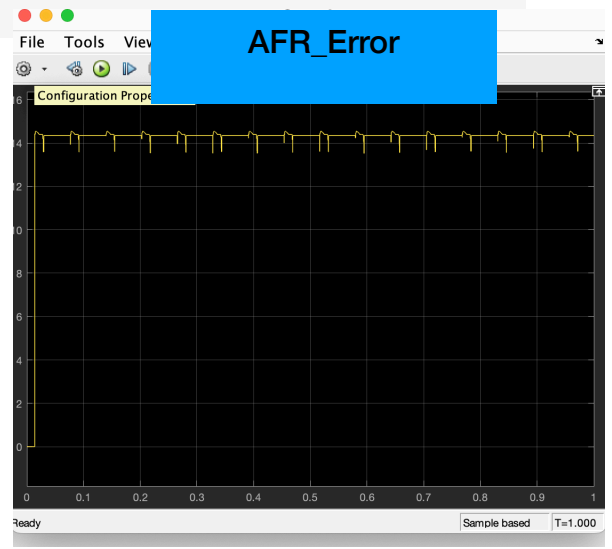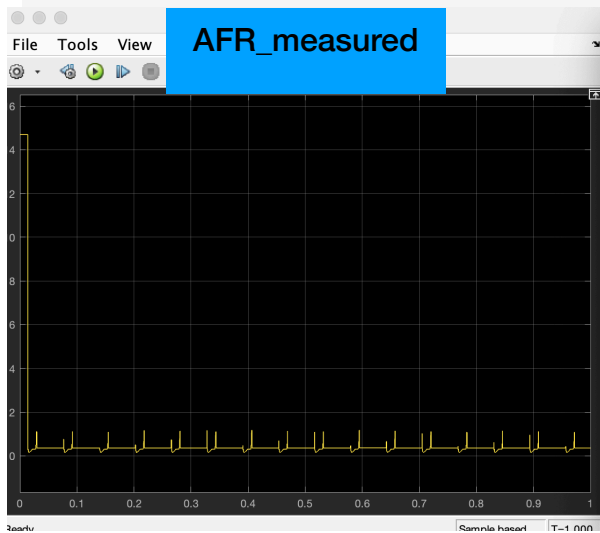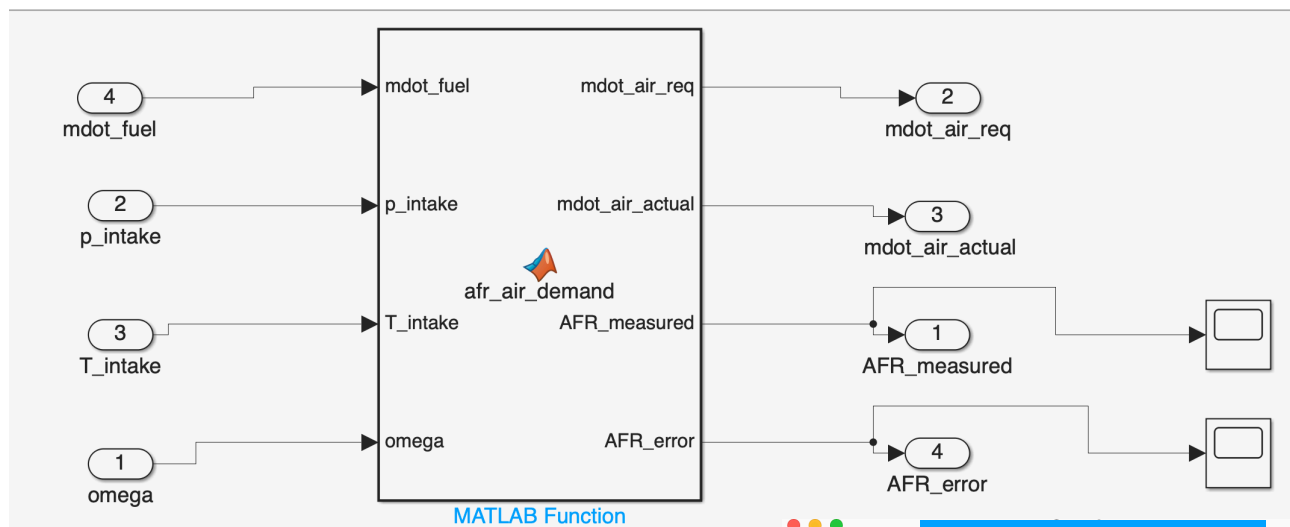

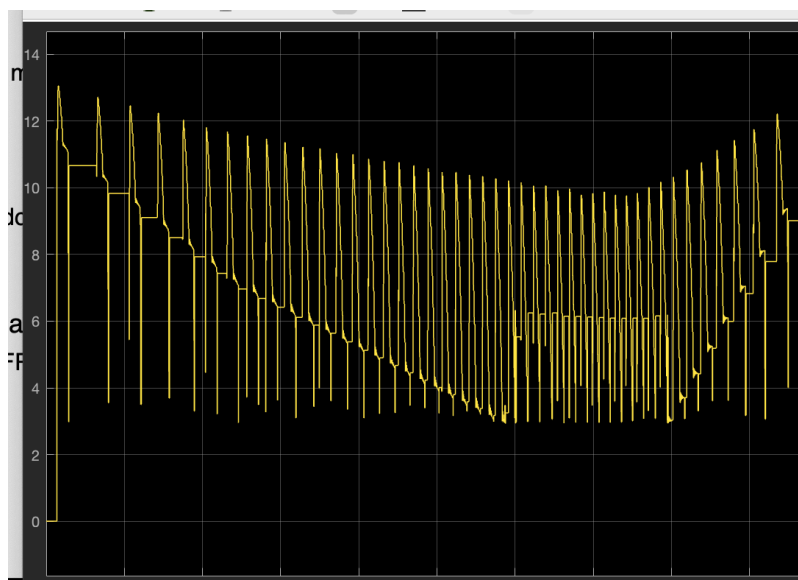

For an chasing omega.

