



SPACE CONCORDIA - ROCKETRY DIVISION

AURELIUS CR-2-4G - STRUCTURAL TEAM



Engineering Simulation for Rocket Flight Analysis

Author: Shawn Bulger
Contributor: Neil Woodcock

Coordinator: Dr. Ashok Kaushal
Supervisor: Dr. Mehdi Hojjati
EIR: Dominic Ng

March 30, 2016

Abstract

A team from the Space Concordia association at Concordia University is entering a submission into the International Rocket Engineering Competition run by the Experimental Sounding Rocket Association (ESRA). To complement the team's mechanical design process, an Engineering Simulation is required to validate the flight performance criteria set by the competition. Matlab Simulink was used as an environment to model the flight dynamics and output the results. Thorough unit and integration testing was performed, in addition to comparison with experimental data to validate the model. Significant areas beyond the scope of the project are explored, such as a thorough stability analysis, preliminary considerations of a 6DOF simulator based on quaternion rotations, stochastic parameter variation to determine simulation uncertainties, and a generally in-depth review of literature and theory relating to high-powered rocket flight. The primary flight performance criteria of the CR_2-4G rocket was confirmed to comply with all competition requirements and suggests the rocket is on course to maximize the team scores for performance. Future considerations are recommended for improvement and extension of the simulator.

Contents

List of Abbreviations	1
Engineering Simulation for Rocket Flight Analysis	2
Overview	2
Definition of the Problem	2
Requirements	2
Problem Solving Approach	2
Kinematics	2
Dynamics	3
Decoupling the Model	3
Assumptions	3
Input Parameters	3
Static Parameters	3
Dynamic Parameters	4
Force	4
Impulse	4
Thrust	4
Mass Flow Rate	4
Weight	6
Center of Gravity	8
Moments of Inertia	8
Model Referencing	10
Center of Pressure	11
The Barrowman Method	12
Stability Derivative	12
Nose Cone	12
Rocket Body	12
Fins	12
Nose Cone COP	13
LV-Haack Nose Cone COP	13
Von Karman Nose Cone COP	13
Rocket Body Lift Correction	14
Transonic Considerations	14
Simulink Implementation	15

Atmospheric Model	16
Introduction	16
Methodology	16
Aerodynamic Geometry	17
Overview	17
Surface Roughness	17
Fineness Ratio	17
Fins	18
Aerodynamic Chord Length of Fins	18
Areas	18
Nose Profile	18
Von Karman (Haack)	18
Aerodynamic Center	19
Drag Model	19
Mach Number	19
Mach Regions	20
Incompressible Flow	21
Compressible Flow Correction	21
Turbulent Effects	21
Stagnation Pressure	22
Reynolds Number	22
Critical Reynolds Number	22
Actual Reynolds Number	23
Drag Force and Coefficients	23
Viscous Drag Effects	23
Pressure (Form/Profile) Drag	24
Wave Drag	27
Boat-Tail Drag	27
Additional Drag at Angle of Attack	28
Rocket Body Drag at Angle of Attack	28
Alternatively	29
Matlab Implementation	29
Model Referencing	31
Matlab Validation	31
Point-Mass Flight Model	33
Weathercocking	34
Altitude accounting for flight angle	34
Drift accounting for flight angle	34

Rigid-Body Rotation (Pitch, Yaw) Stability Analysis	34
Overview	34
Longitudinal Static Stability Margin	35
Requirement	35
Assumptions	35
Definition of Terms	35
Rocket Normal Force	35
Corrective Moment Coefficient	36
Damping Moment Coefficient	36
Derivation of the Harmonic Motion Equation	37
Linearization Approximation	38
General Homogeneous Response	38
Complete Response to Step Input	40
Complete Response to Impulse Input	40
Delta-Dirac Function	40
Convolution Theorem	40
Steady State Response to Sinusoidal Forcing	40
Rocket Damping Ratio	40
Rocket Natural Frequency	41
Time Constants of the Response	41
Complete response to step input	41
Complete response to impulse input	41
AOA as a function of velocity	41
Corrections	41
Wind Disturbance	42
Impulse Disturbance	42
Constant Disturbance	42
More Reading	42
Model Referencing	43
Solver Algorithm	44
Validation	44
Unit Testing	44
Integration Testing	45
System Testing	46

Comparison with Experimental Data	46
ISA Model	46
Flight Validation	48
University of Louisville	48
Flight Details	48
Motor Details	49
Plots	50
Comparison with Arcturus Rocket	52
Summary of Comparison with Experimental Data	52
Simulation Execution	54
Simulation Configuration	54
Historical Weather Data for Green River, Utah	54
General Conditions	54
Best Case	54
Worst Case	54
Simulation Execution	55
Matlab	55
Observations	56
Simulation Summary	61
Discussion	62
Sources of Error	62
Conclusion	62
Future Enhancements	63
Hardware-in-the-loop	63
Porting to Python / OpenModelica	63
Plotting with Plot.ly	63
Robust Wind Model	63
ThrustCurve.org API Integration	63
Rocket Orientation	63
Rotations	65
Quaternions	65
Parameters needed for quaternion analysis	67
Rocket Moments	67
Pitch Moment	68
Pitch Moment Coefficient	68
Pitch Damping Moment	68
Stochastic Simulations	68

Conventions	69
Data Model	69
Static Parameters	69
Dynamic Parameters	69
Matlab Conventions	69
Matlab/Simulink Libraries	69
Overview	69
Creating a Library	69
Add to path	69
Add to Library Browser	69
Algebraic Loops	70
Importing Data	70
From File	70
Versioning for Matlab Files	70
Background	70
Versioning for Libraries	71
Unit Testing	71
Exporting Images	71
GhostScript	71
GhostScript and GIMP	71
Exporting Figures	72
Exporting Simulink Models	72
File Organization	72
data	72
documentation	72
Naming Conventions	73
Variables	73
Functions	73
Models	73
Libraries	73
Documentation Conventions	73
Markdown	73
Python	73
Pandoc	73
Haskell	74
LaTeX	74
Citations	74
Equations	74
Figures	74
Tables	74
References	75

List of Tables

2	List of Abbreviations	1
4	Sample Motor Data	5
6	Mach Regions	20
8	Prandtl-Glauert Compressible Flow Correction Factors	21
12	Summary of Comparison with Experimental Data	52
14	Historical Weather Conditions, Green River, Utah	54
16	General Simulation Conditions	54
18	Best Case Simulation Conditions	54
20	Worst Case Simulation Conditions	54

List of Figures

1	Sample Thrust Curve	5
2	Dynamic Weight Calculation Test Output	7
3	Dynamic Data - Model Referencing	10
4	COP, COG, and I ₁ as a function of time	11
5	Barrowman Method - Simulink Library	15
6	Rocket Drag Sources - Subsonic Flight	19
7	Matlab Implementation of Parasitic Drag Coefficient	26
8	Rocket Drag Forces - Axial vs. Normal Caption	28
9	Rocket Drag Model	29
10	Rocket Drag Coefficient Model	30
11	Drag System - Model Referencing - Simulink Library	31
12	Drag Force as a Function of Mach Number	32
13	Vertical Flight Model - Simplified	33
14	Angular Flight Model - Simplified	39
15	Rigid-Body Oscillation - Model Referencing - Simulink Library	43
16	Center of Pressure - Integration Test	45
17	All Integration Tests	46
18	Comparison of ISA Model with SLC Weather Balloon Data	47
19	Comparison of ISA Model with TUS Weather Balloon Data	47
20	Altitude Plot of Simulation Data vs Louisville Rocket Launches	50
21	Velocity Plot of Simulation Data vs Louisville Rocket Launches	51
22	Altitude Plot of Simulation Data vs Arcturus Rocket Launch	52
23	Velocity Plot of Simulation Data vs Arcturus Rocket Launch	53
24	Full Model in Simulink, angle-of- attack less than 15 degrees	55
25	Altitude as a Function of Time	56
26	Mach Number as a Function of Time	57
27	Stability (Calibers) as a Function of Time	58

28	Angle of Attack Stabilization	59
29	Natural Frequency	60
30	Simulation Summary	61
31	Forces and Moments Experienced by rocket in flight	64

List of Abbreviations

Abbreviation	Description	Function of	Units
AOA, α	Angle of Attack		radians
COP	Center of pressure		N/A
COG	Center of gravity	time	N/A
Re	Reynolds Number	ρ, μ, \vec{v}, L	dimensionless
Re_{crit}	Critical Reynolds Number	ρ, μ, \vec{v}, L	dimensionless
I_{zz}	Pitch/Yaw Moment of Inertia	time	m^4
D	Drag Force (combined)		N
W	Weight of the Rocket		N
R	Specific Gas Constant		$Jkg^{-1}K^{-1}$
T	Thrust of the Rocket		N
t_f	Fin thickness	distance	m
L_{cf}	Aerodynamic Chord Length of Fins	distance	m
c	Speed of sound	$\sqrt{\gamma RT}$	
R_a	Surface Finish	distance	microns
M	Mach Number	\vec{v}, c	dimensionless
D_{pa}, C_{pa}	Parasitic Drag Force, Coefficient		
D_{fb}, C_{fb}	Body Drag Force, Coefficient		
D_{fp}, C_{fp}	Fin Pressure Drag Force, Coefficient		
D_{pr}, C_{pr}	Pressure Drag Force, Coefficient		
D_{in}, C_{in}	Interference Drag Force, Coefficient		
D_{ba}, C_{ba}	Base Drag Force, Coefficient		
D_{sk}, C_{sk}	Skin Friction Drag Force, Coefficient		
D_{aoa}, C_{aoa}	Additional Angle of Attack Drag Force, Coefficient		
C_{MC}	Corrective Moment Coefficient		
C_{FN}	Normal Force Coefficient		
C_{PDM}	Propulsive Damping Moment Coefficient		
C_{ADM}	Aerodynamic Damping Moment Coefficient		
A_{wb}	Area of Wetted Body		m^2
A_{wf}	Area of Wetted Fins		m^2
A_{fr}	Frontal Reference Area		m^2
A_{fp}	Fin Planform Area		m^2
A_{fe}	Exposed Fin Planform Area		m^2
OD, ϕ_{bt}	Outer Diameter		m
L	Total Length of Rocket		m
h_n	Height of the nose cone		m
S_{fc}	Thrust Specific Fuel Consumption		$\frac{g}{s} \cdot \frac{1}{N} = \frac{s}{m}$
\dot{m}_{fc}	Mass Flow Rate due to Fuel Consumption		$\frac{g}{s} \cdot \frac{1}{N} = \frac{s}{m}$
T_{avg}	Average Thrust		N
t_{burn}	Burn Time		s
m_{m_t}	Total Motor Mass		g
W_{m_t}	Total Motor Weight		N
F_N	Aerodynamic Normal Force		N
F_A	Aerodynamic Axial Force		N
F_L	Aerodynamic Lift Force		N
S_{lm}	Longitudinal Stability Margin		Calibers
f_B	Fineness Ratio		dimensionless
μ	Dynamic Viscosity		Ns/m^2
ν	Kinematic Viscosity	μ, ρ	m^2/s
λ	Angular Acceleration		rad/s^2
ω	Angular Velocity		rad/s
θ	Angular Position		radians

Table 2: List of Abbreviations

Engineering Simulation for Rocket Flight Analysis

Overview

The goal of this project is to create an Engineering Simulation for Rocket Flight Analysis in Matlab. This is not exactly a flight simulator, which generally aims to train pilots and visually simulate aircraft flight. An engineering simulation tests the dynamics and behavior of a system, often employing a combination of analytic and empirical methods, in order to validate an engineering model before its deployment.

Such a simulation is driven by the requirements of the engineering project. This project is constrained by the flight requirements of an international rocketry competition, and as such, it is developed to validate them.

A modular development pattern is performed where possible, in order to support expansion for other simulation purposes. Unit and integration testing of simulator logic is undertaken where reasonable, and further validation is provided by testing the overall model against available 3rd party flight data.

Beyond the primary goal of validating the rocket flight performance through simulation, this project is an educational tool to enhance the knowledge and learning of the team members and of the *Space Concordia* society as a whole. Furthermore, it will serve as a starting point for future controls and simulations applications to come, many of which are discussed in the **Future Enhancements** section.

Definition of the Problem

An engineering simulation is needed to predict the flight performance of a high-powered rocket. A high-powered rocket is defined as having between 160 Ns and 40,960 Ns total impulse [1]. A team from the *Space Concordia* association at *Concordia University* is entering a submission into the *International Rocket Engineering Competition* (IREC) run by the *Experimental Sounding Rocket Association* (ESRA). The competition provides performance targets which must be met in order to be eligible to win. These targets are held as design requirements for performance, and are listed in the **Requirements** section below.

Requirements

The Performance Model must provide the maximum altitude and velocity of the rocket in subsonic flight under a known thrust curve and known dimensional parameters.

- 2a Static stability above 2 calibers
- 2b Dynamic stability above 0
- 2c Min velocity at launch rail 30.5 m/s
- 2d Vehicle max speed mach 0.9
- 2e Vehicle reaches 10,000 ft altitude (+1000 feet / - 0 feet)
- 2f Vehicle doesn't experience resonant pitching/yawing moment

[SCRD 2016 Specifications and Requirements]

Problem Solving Approach

Kinematics

Kinematics is the study of the motion without consideration of the forces in play. This analysis can be simplified by considering the entire mass of a body at a convenient point, for instance the *Center of Gravity*. We call this the point-mass system. Of particular interest are the position, velocity, and acceleration of the point [2].

Dynamics

Dynamics is the study of motion which considers the forces in play. It is useful to consider bodies as *rigid bodies* in order to simplify the forces that act on them (e.g. ruling out the stiffness of the body) [2]. Forces acting at a distance d from the center of gravity create a rotation about the center of gravity.

Decoupling the Model

If it can be said that the translation of the body at its center of gravity (kinematics) does not impact the rotation of the body about its center of gravity by a force applied at some other point (the *Center of Pressure*), the analysis can be greatly simplified. Such a *mutually independent system of equations* could be solved rather easily, as the translational model could be solved independently of the rotational model, and vice-versa [2]. Coupled systems of equations, on the other hand, would have to be solved simultaneously.

As it happens, the translational model of the rocket is not fully decoupled from the rotational model. As the rocket rotates while travelling through the air at an angle of attack, it presents a larger reference area and thus increases the drag force, causing a negative acceleration in the translational point-mass model. Likewise, an increase in the translational velocity of the rocket creates a larger lift force when the rocket is rotating at an angle of attack. This lift force, which is applied at the rocket's center of pressure, creates a rotation about the center of gravity.

However, it is possible to proceed with a decoupled analysis with the assistance of careful assumptions and approximations within acceptable accuracy. If accepted, this would imply a *weak coupling* between the translational model and the rotational model [2].

Assumptions

- subsonic flight
- axis-symmetric rigid body rocket
- single cylindrical body
- Von Karman nose shape
- three or four trapezoidal fins
- passively controlled (no active thrust or stability control)
- constant fuel expenditure rate
- the *Ideal Gas Law* applies throughout the flight
- steady-state irrotational flow around the body [3]
- fully aligned thrust [4]
- roll is ignored
- smooth transition between nose cone and body tube (no shoulder)
- rocket does not have a boattail
- rocket has a single rectangular launch lug

Input Parameters

Before beginning the modeling process, it is necessary to understand the inputs of the system.

Many parameters can be considered unchanging during flight, and are from this point referred to as *Static Parameters*. Other inputs change as a function of time or velocity, and must be carefully handled within the system - these parameters are herein referred to as *Dynamic Parameters*.

Static Parameters

Many rocket design parameters are considered to remain constant during flight.

These parameters are written in the parametric spreadsheet shared with the design team. The CAD software populates values related to the structural design, and others are entered manually.

The performance model reads them at the beginning of execution to simulate the latest design iteration.

Find the included file named 'Parametric_Model.xlsx'

Dynamic Parameters

Parameters listed as *dynamic* in the table above are provided as initial values which are then recalculated by the model throughout the simulated flight.

Force

Force is a change in momentum with time, and is related by Newton's Second Law

$$F = \frac{m\Delta\vec{v}}{\Delta t} = m\vec{a} \quad (1)$$

Impulse

Impulse is the product of force and integration of a differential (infinitesimal period) of time between the time periods in which it was applied.

$$J = \int_{t_1}^{t_2} F dt \quad (2)$$

This is also known as the *Total Impulse*, or the *total change in momentum*, and can be calculated as the average thrust over a given time period.

Thrust

Thrust is the mechanical force that drives the flight of the rocket. It is a vector quantity of magnitude and direction. *Thrust* is a reaction force in the opposite direction of accelerating fluid (exhaust gas) caused by the combustion of fuel, and is assumed to be aligned with the longitudinal axis of the rocket.

Mass Flow Rate

Mass Flow Rate is found by the product of fluid density, velocity, and cross-sectional area.

$$\dot{m} = \rho\vec{v}A \quad (3)$$

[5]

Thrust Equation

Thrust is a mechanical force created by a propulsion system which moves a vessel through a medium. In high-powered rocketry, it is typically created by the expulsion of hot gas generated during the ignition of a solid fuel motor. The acceleration of gases from the motor causes a thrust force in the opposite direction (according to Newton's 2nd law), which propels the rocket from the launch pad. The thrust force is the product of the mass flow rate of the hot gases and the change in velocity between the exit of the nozzle and the free stream.

$$T = \dot{m}\Delta\vec{v} \quad (4)$$

[5]

Thrust curves are provided by the manufacturer, based on static tests. The highest performing result from the batch of test motors is chosen for the curve. Therefore, the thrust curve represents the highest expected performance of the motor within the specified operating conditions

Table 4 shows an example of the motor data provided by ThrustCurve.org:

Parameter	Value
Manufacturer	Cesaroni Technology
Entered	May 20, 2009
Last Updated	Jun 26, 2014
Mfr. Designation	6819M1540-P
Common Name	M1540
Motor Type	reload
Delays	P
Diameter	75.0mm
Length	75.7cm
Total Weight	5906g
Prop. Weight	3624g
Cert. Org.	Canadian Association of Rocketry
Cert. Designation	6819-M1540-IM-P
Cert. Date	
Average Thrust	1537.0N
Maximum Thrust	2328.8N
Total impulse	6819.4Ns
Burn Time	4.4s
Case Info	Pro75-5G
Propellant Info	Imax
Availability	regular

Table 4: Sample Motor Data

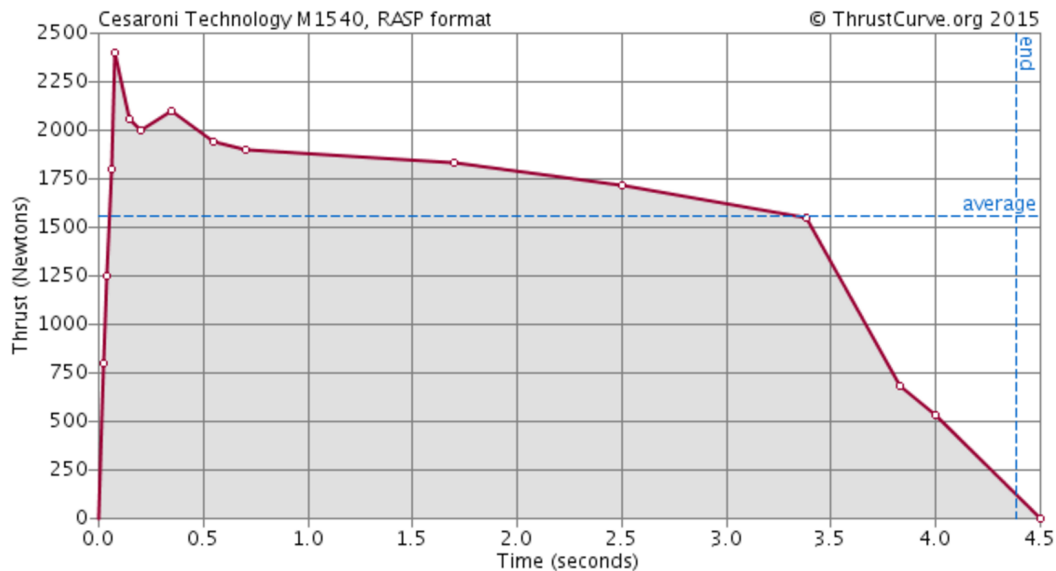


Figure 1: Sample Thrust Curve

Source: <http://www.thrustcurve.org/motorsearch.jsp?id=673>

Thrust Specific Fuel Consumption

Thrust Specific Fuel Consumption is how much fuel is burned for a given time.

$$S_{fg} = \frac{m}{t_{burn}} \cdot \frac{1}{T_{avg}} \quad (5)$$

$$\left[\frac{g}{s} \cdot \frac{1}{N} = \frac{s}{m} \right] \quad (6)$$

Since at the time of writing the S_{fc} was not provided by the manufacturer, the following calculations are used for a first approximation.

Assumptions

- all propellant is spent during the motor burn time
- final S_{fg} determined is constant during burn
- the motor info provided is accurate

It should be noted that a variance in thrust of $\pm 20\%$ is possible. This and other variance factors are taken into account in the *Statistical Analysis* section.

From the table above, the dry propellant weight is given as 3624 grams. The Average Thrust is given as 1537.0 Newtons, and the total burn time is given as 4.4 seconds.

Thus, the *Thrust Specific Fuel Consumption* can be determined as follows:

$$S_{fg} = \frac{3.624 \text{ kg}}{4.4 \text{ s}} \cdot \frac{1}{1537.0 \text{ N}} \approx 0.00053587 \frac{\text{kg}}{\text{N} \cdot \text{s}} = 5.3587 \times 10^{-4} \frac{\text{kg}}{\text{N} \cdot \text{s}} \quad (7)$$

This rate is considered constant.

Weight

As fuel is expended in generating thrust, the weight of the rocket is reduced. One assumption that can be made is that the change of mass with time is “proportional to the impulse of the motor up to that point” [4].

$$\Delta M_i = - \frac{M_f \int_0^i T dt}{\int_0^\infty T dt} \quad (8)$$

Where:

- M_f is the total mass of fuel
- T is the thrust
- ΔM_i is the change in mass of fuel between time i and t

[4]

We can also use the *Thrust Specific Fuel Consumption* to determine the corresponding reduction in weight during burn, if we assume that the mass flow rate of fuel during burn is constant.

First remove the Average Thrust term to isolate the mass flow rate:

$$\dot{m} = S_{fg} \cdot T_{avg} = 5.3587 \times 10^{-4} \frac{\text{kg}}{\text{N} \cdot \text{s}} \cdot 1537.0 \text{ N} = 0.8236 \text{ kg/s} \quad (9)$$

This equation can be expressed in terms of Weight through Newton's 2nd law: $F = m\vec{a}$

$$\dot{W}_m = \dot{m} \cdot \vec{g} = 0.8236 \text{ kg/s} \cdot 9.81 \text{ m/s}^2 \approx 8.0799 \text{ N/s} \quad (10)$$

To develop a relation for the change in weight as a function of S_{fc}

$$W_f(t) = (m_{f_i} kg - \Delta m(t)) \cdot \vec{g} \quad (11)$$

$$W_f(t) = (3.624 kg - \Delta m(t)) \cdot 9.81 m/s^2 \quad (12)$$

$$W_f(t) = W_{f_i} - \Delta W_f(t) \quad (13)$$

$$\Delta W_f(t) = \int \dot{W} dt = \dot{W} \cdot t \quad (14)$$

$$\Delta W_f(t) = \frac{\Delta m(t) \cdot \vec{g}}{t} \cdot t = \Delta m(t) \cdot g \quad (15)$$

$$\Delta m_f(t) = S_{fg} \cdot t \quad (16)$$

Finally, the motor weight as a function of time is

$$W_m(t) = W_{m_t} - \Delta W_f(t) = W_{m_t} - \dot{m}_{fc} \cdot t \quad (17)$$

As a further simplification, if we assume that the mass flow rate is constant, we can find it simply by dividing the mass propellant by the motor burn time. This results in only a slight error as shown in Figure 2 below.

Figure 2 shows the output of the dynamic weight calculation in Matlab. The Thrust and Weight curves produce output similar to OpenRocket as expected.

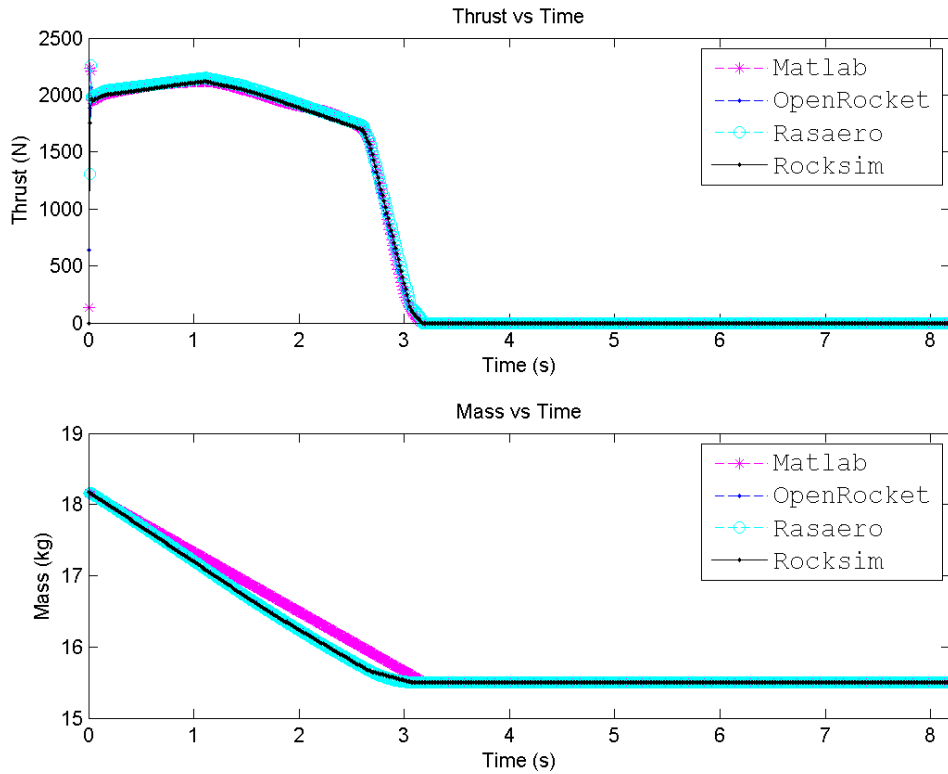


Figure 2: Dynamic Weight Calculation Test Output

Center of Gravity

The *Center of Gravity* is a location where we can consider the entire rocket mass to be concentrated in a point-mass system.

$$y_{cg} = \frac{m_1 y_1 + m_2 y_2 + \dots + m_n y_n}{\sum_{j=1}^n m_j} \quad (18)$$

$$COG(t) = \frac{m_1 y_1 + (m_2 - \Delta m) y_2}{m_1 + m_2 - \Delta m(t)} \quad (19)$$

Where $COG(t)$ is the Center of Gravity as a function of time, m_1 is the static mass (combination of nose cone, body tube, and fins), m_2 is the initial mass of the motor, and $\Delta m(t)$ is the change of mass as a function of time due to fuel expenditure.

We consider the motor as a point mass centered at the geometric center of the motor casing. This simplifies the calculation of the center of gravity of the rocket as fuel is expended, as only the mass of the motor is changing, and not the location of its particular center of mass.

Moments of Inertia

The instantaneous moment of inertia is determined by relating the moment of inertias of the static structure and the dynamic structure through the parallel axis theorem evaluated at the total center of gravity (COG).

The sum of moment of inertias evaluated through the *parallel axis theorem* nets the total rocket moment of inertia.

$$I_n = I_{cm(n)} + M_P d^2 \quad (20)$$

$$I_T(t) = \sum I_n \quad (21)$$

Where:

- $I_T(t)$ is the total moment of inertia of the rocket as a function of time
- I_n is the component vector (either static or dynamic moment of inertia)

[4]

Longitudinal Moment of Inertia

To the *Moment of Inertia* related to the pitch/yaw of the rocket is the *Longitudinal Moment of Inertia*.

$$I = \frac{mL^2}{12} \quad (22)$$

[TODO source dynamics textbook]

In keeping with the assumption of the motor as a point mass in the volumetric center of the motor casing, the dynamic *Longitudinal Moment of Inertia* is calculated as follows.

$$I_s + m_s r_{0 \rightarrow 1}^2 \quad (23)$$

Where $r_{0 \rightarrow 1}$ is the distance between the static center of gravity (the COG of the nose cone, body tube, and fins) and the instantaneous center of gravity of the rocket. I_s is provided by CATIA.

$$I_m = \frac{m_m L_m}{12} + m_m r_{0 \rightarrow 2}^2 \quad (24)$$

Where L_{motor} is the length of the motor casing, and $r_{0 \rightarrow 2}$ is the distance between the motor center of gravity and the rocket center of gravity.

Then, the rocket *Longitudinal Moment of Inertia* is the sum, shown as follows

$$I_r = I_m + I_s \quad (25)$$

Model Referencing

A high level view of all the test models for the preceding parameters is in the file *DYNAMIC_DATA_TESTING.slx*, and is shown in the Model Reference in Figure 3.

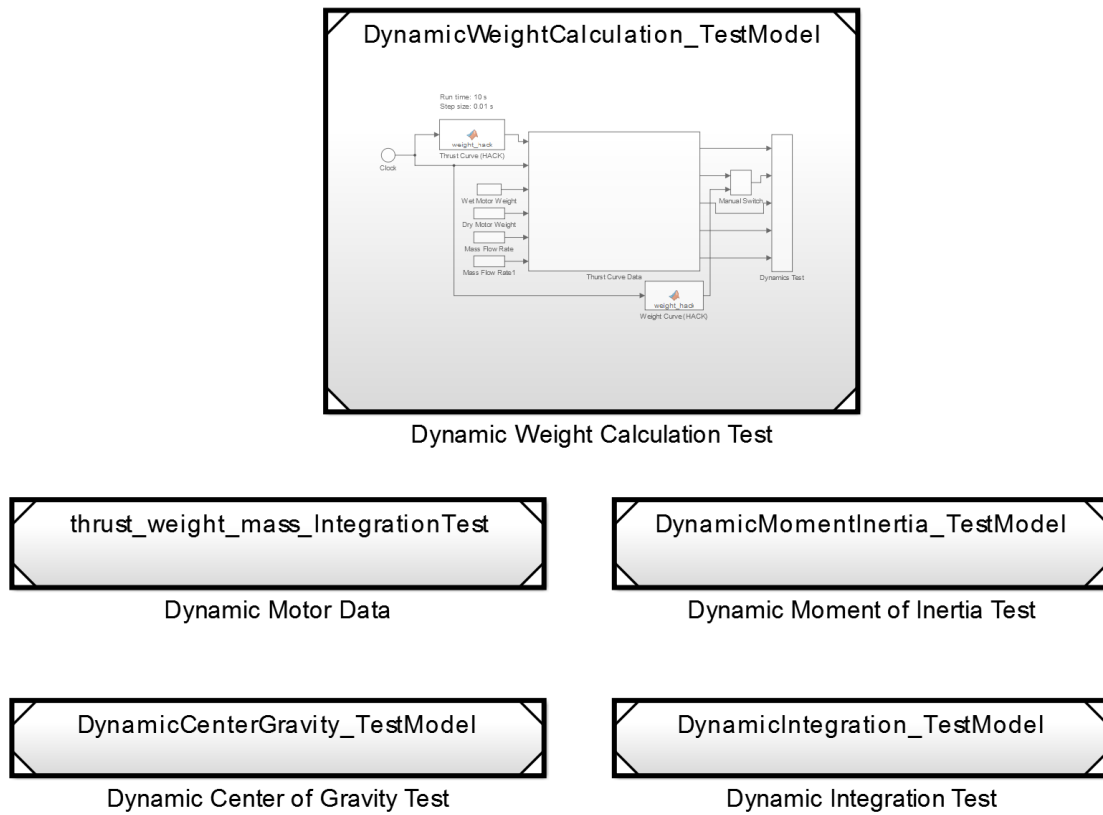


Figure 3: Dynamic Data - Model Referencing

Center of Pressure

The *Center of Pressure* (COP) is the location (point) where the aerodynamic forces can be said to be acting, simplifying the complex distribution of forces across the rocket and its features.

The *Center of Pressure* changes with the normal force distribution on the rocket, which is driven by *Angle of Attack* [6].

$$COP = COP(\alpha)$$

A wind tunnel is the best way to approximate this point, but an analytic method is available, discussed in detail in the next section.

Figure 4 shows how our determination of the COP , COG , and I_L compares with other simulation software.

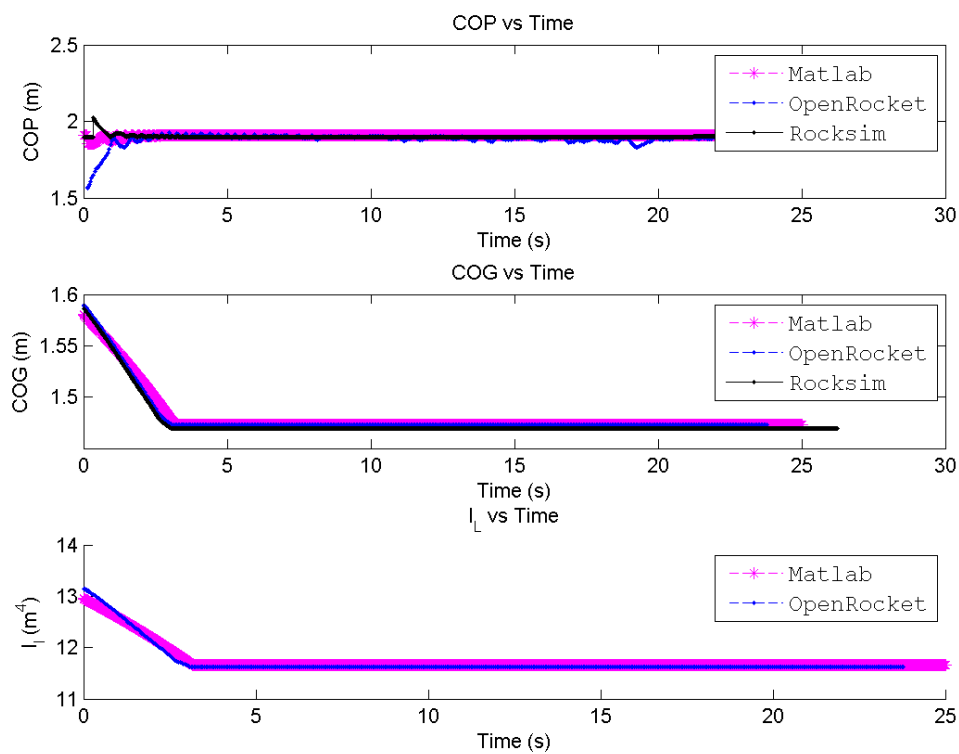


Figure 4: COP, COG, and I_L as a function of time

The Barrowman Method

In 1966, James Barrowman published a report called “The Theoretical Prediction of the Center of Pressure” [7]. Despite some modifications and additions since, it remains a fundamental method, ever present in modern high-powered rocketry.

Barrowman’s Method is principally used to determine the *Center of Pressure*.

$$\bar{X} = \frac{(C_{N\alpha})_n \bar{x}_n + (C_{N\alpha})_{cb} \bar{x}_{cb} + (C_{N\alpha})_{fb} \bar{x}_{fb}}{C_{N\alpha}} \quad (26)$$

Where:

- $C_{N\alpha}$ is the *Stability Derivative*
- subscript $_n$ refers to the nose cone
- subscript $_{cb}$ refers to the cylindrical body
- subscript $_{fb}$ refers to the fin set in the presence of the body
- \bar{x} refers to the component centroid

[6]

Stability Derivative

The *Stability Derivative* $C_{N\alpha}$ is a dimensionless parameter, used to calculate the force normal to the longitudinal axis, and is dependent on the shape of the component. It is the slope of the *Normal Force Coefficient* plotted against the angle-of-attack. For low angles of attack, it is nearly constant.

TODO show figure

[2]

The total *Stability Derivative* is the sum of all i rocket component stability derivatives

$$C_{N\alpha} = \sum C_{N\alpha(i)} \quad (27)$$

[4]

Nose Cone

$$C_{N\alpha(n)} = 2 \quad (28)$$

Rocket Body

The *Barrowman Method* considers the body lift at small angles of attack to be negligible.

$$C_{N\alpha(bt)} = 0 \quad (29)$$

Fins

The following solution for the fin set stability derivative applies only for identically shaped fins, in sets of 3, 4, or 6.

$$C_{N\alpha(f)} = C_{in} \frac{4n \left(\frac{s}{d}\right)^2}{1 + \sqrt{1 + \left(\frac{2l}{a+b}\right)^2}} \quad (30)$$

Where:

- a is the fin tip chord length
- b is the fin root chord length
- s is the fin height
- l is the distance between the root center and the tip center
- C_{in} is a coefficient for the interference effects of the air flow near the fin-body interface

[6]

$$C_{in} = 1 + \frac{OD/2}{OD/2 + s} \quad (31)$$

[6]

Nose Cone COP

LV-Haack Nose Cone COP

$$\bar{X}_n = 0.437h_n \quad (32)$$

[8]

Von Karman Nose Cone COP

$$\bar{X}_n = 0.500h_n \quad (33)$$

[8]

Fin Set COP

The location of the *Center of Pressure* for the fin set is as follows.

$$\bar{X}_{fb} = X_f + \frac{m(b+2a)}{3(b+a)} + \frac{1}{6} \left[b + a - \frac{ba}{b+a} \right] \quad (34)$$

[4]

Where:

- X_f is the distance from the tip of the nose cone to the point where the leading edge of the fin meets the body tube [4]
- a is the fin tip chord length
- b is the fin root chord length
- s is the fin height
- m is the fin sweep length

Also, see this [Center of Pressure Calculator online](#).

Cylindrical Body COP

The centroid of a cylindrical body will be half its length

$$\bar{x}_{ct} = \frac{1}{2}l_{cb} \quad (35)$$

Wind tunnel tests performed in 1918 and 1919 demonstrated that the normal force generated by a cylindrical body at an angle of attack of less than 10 degrees is negligible

[6].

Rocket Body Lift Correction

Barrowman's Method neglects the lift generated by the rocket body. Galejs [9] suggests the following adjustment to provide a compensated *Coefficient of Normal Force due to Body Lift*

$$C_{N(L)} = K \frac{A_p}{A_{ref}} \alpha^2 \quad (36)$$

Where:

- $K = 1$
- A_p is the rocket planform area excluding the fins
- A_{ref} is the reference area of the rocket

[4]

Equation 36 is divided by α to be added to $C_{N\alpha}$ calculated and used in Equation 26.

TODO All COP components must be modified by the lift coefficient

$$C_{N\alpha^2} = K \frac{A_p}{A_{ref}} \alpha \quad (37)$$

This correction is applied at the centroid of the planform area.

[4]

Transonic Considerations

Barrowman's Equations are based on assumptions that are only valid in subsonic flight. In the transonic and supersonic regions, what new effects are introduced that would affect the location of the *Center of Pressure*?

Simulink Implementation

Figure 5 shows the integration of the required parameters to perform the Barrowman Method.

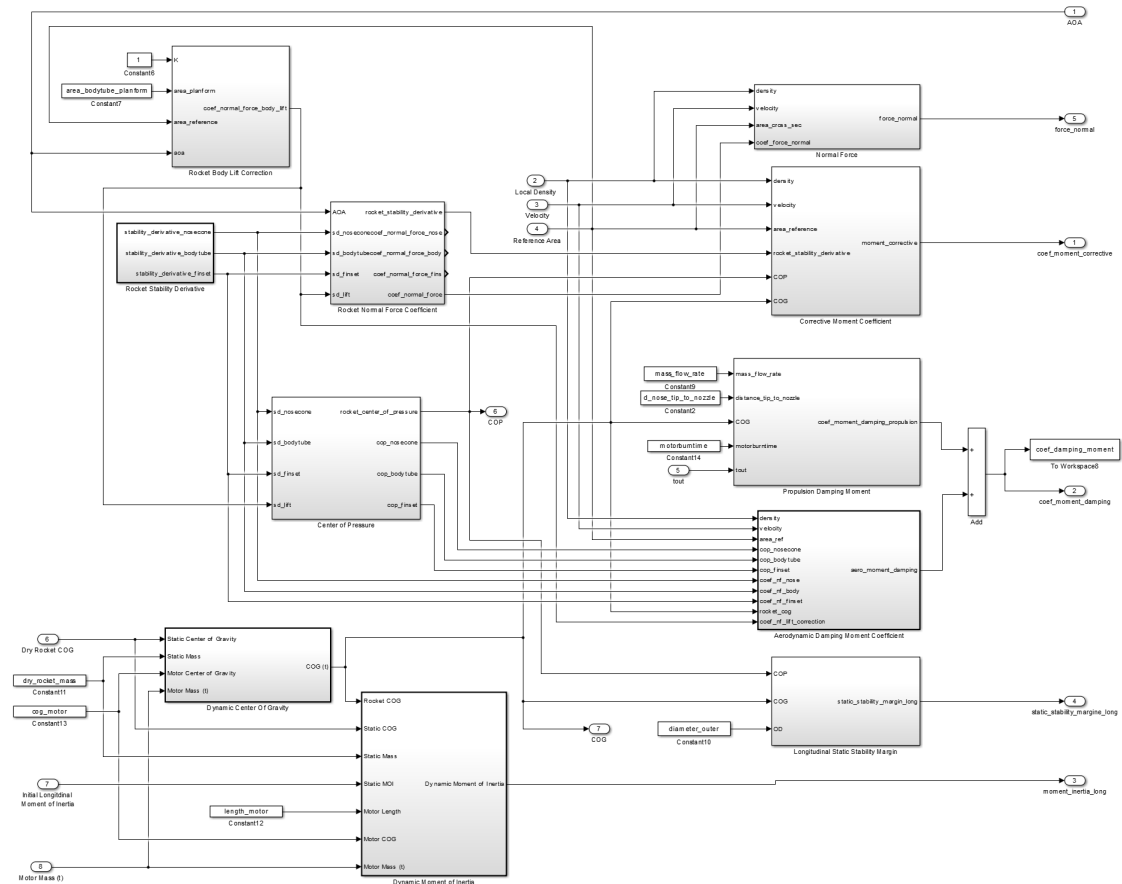


Figure 5: Barrowman Method - Simulink Library

Atmospheric Model

Introduction

The *International Standard Atmosphere* model is assumed to describe the pressure, temperature, density and viscosity conditions of the surrounding air during launch.

The International Standard Atmosphere (ISA) model was established to give scientists and engineers an easy way to find the conditions at a certain altitude in the air given the conditions at ground level. The ISA model is extremely useful in aerospace applications and, while it does not take into account the small changes which usually occur in the atmosphere or any wind, it is considered to be reasonably accurate.

Methodology

The model is created to output atmospheric density and the absolute and kinematic viscosities of the working fluid. To calculate these values, the model requires the launch temperature, launch pressure, the current altitude of the vehicle (a dynamic value over the course of the simulation) and the altitude of the launch site. For instance, the launch conditions for the Arcturus (IREC 2015) were 40 degrees Celsius, 99 *KPa* and 4300 feet. Of course, these inputs have the incorrect units. Temperature must be in Kelvin, pressure must be in Pascals and the altitude of the rocket must be in meters [10].

As well, when using the ISA model, initial ISA conditions of the model must also be defined. This includes the initial pressure (101325 Pascals), initial temperature (288.15 Kelvin or 15 degrees Celsius) and the gas constant. The ISA model uses these initial conditions to calculate the conditions at altitude assuming that the temperature varies linearly up until the Tropopause [10].

In terms of altitude, the model calculates the ISA deviations from an imaginary sea-level point. These deviations are the first values that are calculated in the simulation and are necessary to obtain correct values for density and viscosity at any altitude. The general equations that were used to find the deviations from standard ISA conditions are as follows:

$$T_{dev} = T_{in} - T_0 + 6.5 \times \frac{alt_{in}}{1000} \quad (38)$$

Where T_{dev} is the deviation temperature in Kelvin, T_{in} is the input temperature at the launch site in Kelvin, T_0 is the ISA standard temperature at sea level in Kelvin and alt_{in} is the launch site altitude in meters. For pressure:

$$P_{dev} = \left(\frac{P_{in}}{\left(1 - 0.0065 \times \frac{alt_{in}}{T_0 + T_{dev}} \right)^{5.2561}} \right) - P_0 \quad (39)$$

Where P_{dev} is the deviation pressure in Pascals, P_{in} is the input pressure in Pascals and P_0 is the ISA standard pressure in Pascals [10]. After having found the initial conditions, the conditions at the altitude at which the rocket is travelling need to be found. The first step to finding the essential properties of the working fluid is to first find the temperature and pressure at the rocket's current altitude. These calculations are executed assuming that the position in the simulation always starts at zero and that the launch site altitude is only taken into account in this script [10].

The temperature modeling equation is as follows

$$T_{act} = T_0 + T_{dev} - 6.5 \times \frac{alt_{in} + alt_{act}}{1000} \quad (40)$$

Where T_{act} is the actual temperature Kelvin at the rocket's current altitude and alt_{act} is the current altitude of the rocket in meters. The pressure modelling equation is as follows:

$$P_{act} = \left((P_0 + P_{dev}) \cdot \left(1 - 0.0065 \times \frac{alt_{in} + alt_{act}}{T_0 + T_{dev}} \right)^{5.2561} \right) - P_0 \quad (41)$$

Where P_{act} is the pressure in Pascals at the rocket's current altitude [10]. After having executed these calculations, the next thing that needs to be calculated are the essential properties of the working fluid. This means the pressure and dynamic and kinematic viscosities of the working fluid. To calculate the density, the following equation is used:

$$\rho = \frac{P_{act}}{RT_{act}} \quad (42)$$

Where ρ is the atmospheric density in Kg/m^3 , and R is the specific gas constant for air at regular temperatures, which is equal to $287.058 J/Kg - K$.

After calculating the density, the absolute viscosity is calculated using Sutherland's law. The expression is as follows:

$$\mu = \mu_{S0} \left(\frac{T_{act}}{T_{S0}} \right)^{3/2} \frac{T_{S0} + S}{T_{act} + S} \quad (43)$$

Where μ is the absolute viscosity in $Kg/m - s$, μ_{S0} is the reference viscosity, equal to $1.716 \times 10^{-5} Kg/m - s$, T_{S0} is the reference temperature, equal to $271.11 K$ and S is the Sutherland constant, equal to $110.56 K$. The constants are only applicable to air at regular temperatures and pressures. They will lose accuracy at extremely low or high temperatures and at very high or low pressures [11]. After having calculated the absolute viscosity, the kinematic viscosity is found using the following relationship:

$$\eta = \frac{\mu}{\rho} \quad (44)$$

Aerodynamic Geometry

Overview

Related to aerodynamic geometry of the rocket, the specific parameters of interest are the following:

- Outer Diameter of Rocket (OD)
- Total Length of Rocket (L)
- Height of Nose Cone (h_n)
- Thickness of Fins
- Number of Fins
- Width of Fins
- Surface Area of Nose

Surface Roughness

Surface Roughness is the deviation in the normal direction from a surface of its features. It contributes to *Skin Friction Drag*

Fineness Ratio

The *Fineness Ratio* is the ratio of the length to the outer diameter

$$f_B = \frac{L}{OD} \quad (45)$$

Fins

Aerodynamic Chord Length of Fins

Since there is no airfoil on the fin design, the *Aerodynamic Chord Length of the Fins* (L_{cf}) is equal to the height of the fins.

Areas

Reference areas are required to calculate the drag force.

Wetted Body Area

The *Wetted Body Area* is the combined area of all surfaces in contact with moving air.

Frontal Reference Area

The *Frontal Reference Area* is the projected area of the rocket perpendicular to the direction of air flow. For perfectly vertical flight and quiescent air conditions, this is the precise projection of the tip face of the rocket.

[TODO show figure]

Frontal Reference Area at Angle of Attack

When the rocket pitches into the free stream at an angle of attack, a greater portion of the rocket comprises the frontal reference area. We do not account for this, as it would be extremely complex to evaluate. We consider the frontal reference area does not change with angle-of-attack.

Planform Area

Nose Profile

Von Karman (Haack)

A *Von Karman* nose profile has been selected by the design team, other profiles will not be supported in the initial version of the model. The *Von Karman* nose profile is a *Haack Series* geometry, designed to minimize theoretical pressure drag [niskanen2013]. This profile excels in subsonic flow conditions, and performs well in transonic flow conditions [nassaNoseCone] - as such is it well suited for the current mission.

The equation for the *Haack Series* is

$$r(x) = \frac{R}{\sqrt{\pi}} \sqrt{\theta - \frac{1}{2} \sin(2\theta) + \kappa \sin^3 \theta} \quad (46)$$

Where

$$\theta = \cos^{-1} \left(1 - \frac{2x}{L} \right) \quad (47)$$

[8]

Aerodynamic Center

The *Aerodynamic Center* is the point where the *Pitching Moment* does not change with angle-of-attack

Sources:

- http://ocw.mit.edu/courses/aeronautics-and-astronautics/16-100-aerodynamics-fall-2005/lecture-notes/16100lectre10_cg.pdf
- http://www.digplanet.com/wiki/Aerodynamic_center

Drag Model

Rockets in flight experience multiple sources of drag. The total drag effect is the sum of all specific drag effects.

Figure 6 depicts the types of drag forces to be expected in subsonic flight at *zero-angle of attack*.

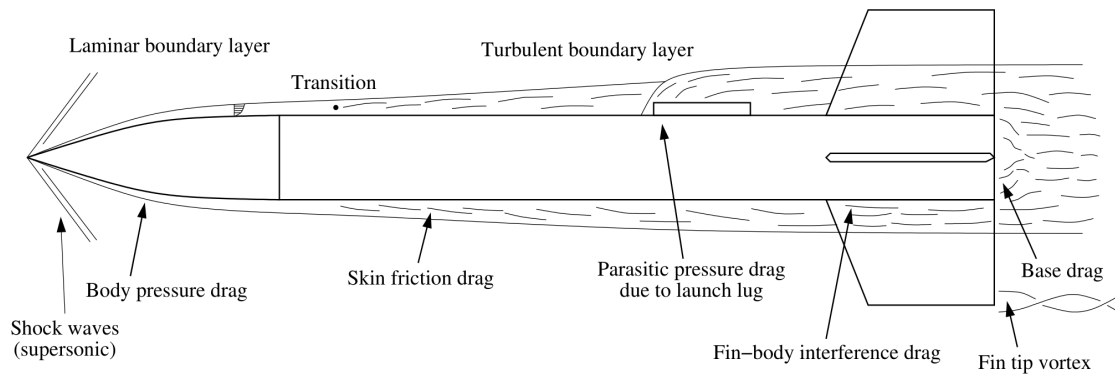


Figure 6: Rocket Drag Sources - Subsonic Flight

[3]

The two main contributing factors to *Drag Force* are *Skin Friction* and pressure distribution effects. Pressure distribution effects are broken down into body pressure and parasitic drag effects, among others [3]. These and other drag forces are detailed in this section.

The drag model must take the parametric design parameters and applicable dynamics parameters (see *Data Model*) to output the Drag Force and combined drag coefficient.

Mach Number

Mach Number (M) is the ratio of the airspeed to the speed of sound for air at a given temperature

The speed of sound (c) is calculated as follows

$$c = \sqrt{\gamma RT} \quad (48)$$

The *Ideal Gas Law* states that

$$P = \rho RT \quad (49)$$

We assume that the *Ideal Gas Law* applies, and use it to solve for RT using pressure and density.

$$RT = \frac{P}{\rho}$$

Thus we can calculate the speed of sound as follows

$$c = \sqrt{\gamma \frac{P}{\rho}} \quad (50)$$

Where p is the local pressure, ρ is the local density, and γ is the *adiabatic index*, known as the *isentropic expansion factor* - it is the ratio of the specific heats of a gas at constant pressure and constant volume.

[12]

The *Mach Number* is then the ratio of the air velocity to the sound speed of the local air

$$M = \frac{\vec{v}}{c} \quad (51)$$

Mach Regions

Velocity regions are defined, in which aerodynamic effects are known to vary considerably. The following velocity regions are established for further discussion.

Mach Region (M)	Classification
$0.3 < 0.8$	Subsonic
$0.8 < M < 1$	Transonic
$1 < M < \sim 5$	Supersonic
$M > \sim 5$	Hypersonic

Table 6: Mach Regions

[3]

As the rocket is constrained not to exceed Mach 0.9, much of the flight will be in the subsonic region, greatly simplifying much of the analysis. However, transonic effects cannot be ignored when at a Mach Number greater than 0.8.

Incompressible Flow

For Mach < 0.3 ,

In the incompressible flow regime the forces can be divided into pressure force and viscous force

Pressure Force is due to fluid stagnation on areas of the rocket, as well as due to the low pressure region created beyond the rocket as it passes quickly through the air.

Viscous Force is due to boundary layer effects and interactions of moving air with surfaces. These forces are highly dependent on Reynolds number. [4]

Compressible Flow Correction

Special considerations apply when compressibility effects are in play. These effects occur above Mach 0.3 [4], which will be easily exceeded by the transonic upper limit of Mach 0.9 mandated by the competition.

At low speeds (incompressible flow), the aerodynamic coefficients are functions of the angle of attack (α) and Reynolds number (Re).

$$C_i(M < 0.3) = C_i(\alpha, Re) \quad (52)$$

At higher speeds (compressible, $Ma \geq 0.4$) they are also a function of Mach number.

$$C_i(M \geq 0.3) = C_i(\alpha, Re, M) \quad (53)$$

Particular correction factors are recommended for ranges of Mach number

Mach Number	Correction Factor
$M < 0.3$	N/A
$0.3 < M < 0.8$	$C'_i = \frac{C_i}{\sqrt{1 - M^2}}$
$0.8 < M < 1.1$	$C'_i = \frac{C_i}{\sqrt{1 - (0.8)^2}}$
$M > 1.1$	$C'_i = \frac{C_i}{\sqrt{M^2 - 1}}$

Table 8: Prandtl-Glauert Compressible Flow Correction Factors

Where C_i is the incompressible drag coefficient and C'_i is the compressibility corrected drag coefficient [4].

Turbulent Effects

A turbulent boundary layer induces a notably larger skin friction drag than a laminar boundary layer

[3]

Stagnation Pressure

Stagnation Pressure is the pressure on the normal surfaces to airflow.

For a cylindrical rocket, it can be approximated as follows [3]

$$\frac{q_{stag}}{q} = \begin{cases} 1 + \frac{M^2}{4} + \frac{M^4}{40} & M < 1 \\ 1.84 - \frac{0.76}{M^2} + \frac{0.166}{M^4} + \frac{0.035}{M^6} & M > 1 \end{cases} \quad (54)$$

Where q_{stag} is and q is

Then, the *Pressure Drag Coefficient* can be expressed as a function of *Mach Number*

$$C_{pr} = 0.85 \frac{q_{stag}}{q} \quad (55)$$

Reynolds Number

The *Reynolds Number* is a dimensionless number which describes the ratio of the kinematic effects of a fluid to viscous effects.

$$Re = \frac{\rho \vec{v} d}{\mu} \quad (56)$$

[12]

Critical Reynolds Number

The *Critical Reynolds Number* (Re_{crit}) is the value of *Reynolds Number* where the flow changes from laminar to turbulent. This is greatly dependent on the surface roughness [munson2013].

[3] gives the *Critical Reynolds Number* as

$$R_{crit} = \frac{\vec{v} x}{\nu} \quad (57)$$

Where:

- \vec{v} is the free stream air velocity
- x is the distance along the body from the nose cone tip where turbulent flow begins
- ν is the kinematic viscosity of air

For $Re_{crit} = 5 \times 10^5$

- $\nu = 1.5 \times 10^{-5} m^2/s$
- $v_0 = 100 m/s$
- $x = 7 cm$ from the nose tip, where turbulent flow begins

[3]

Surface roughness has a considerable influence on *Critical Reynolds Number*. It can be determined as follows.

$$R_{crit} = 51 \left(\frac{R_s}{L} \right)^{-1.039} \quad (58)$$

[3]

Actual Reynolds Number

The *Actual Reynolds Number* can be expressed in the following form:

$$Re = \frac{\vec{v}L}{\nu} \quad (59)$$

Where:

- \vec{v} is the free stream velocity
- L is the length of the rocket
- ν is the kinematic viscosity of the air in free stream

Drag Force and Coefficients

The total drag force is a function of air velocity (relative to the rocket body) drag coefficient, reference area, and air density.

$$D_f = D_f(\vec{v}, C_d, A_{ref}, \rho) \quad (60)$$

The drag coefficient C_d is the sum of all component drag coefficients

$$C_d = \sum C_i = C_{pa} + C_{fo} + C_{pr} + C_{in} + C_{ba} + C_{sk} + C_{fp} + C_{wa} + C_{bt} + C_{aoa} \quad (61)$$

From Fluid Mechanics [source?]

$$D_f = \frac{1}{2} C_d A_{ref} \rho \vec{v}^2 \quad (62)$$

Viscous Drag Effects

Skin Friction Drag

Skin Friction Drag is due to viscous effects during flight, and is significantly influenced by surface roughness.

$$D_{sk} = \frac{1}{2} \rho \vec{v}^2 A_{wet} C_{sk} \quad (63)$$

[12]

Where

$$C_{sk}, (A_{wet}, M, \frac{\epsilon}{l}) \quad (64)$$

$\frac{\epsilon}{l}$ is the relative roughness of the surface

With the critical and actual Reynolds Numbers determined, the *Uncorrected Skin Friction Drag Coefficient* can now be conditionally determined

$$C_{sk_{uncorrected}} = \begin{cases} 0.0148 & Re < 10^4 \\ \frac{1}{(1.5 \ln Re - 5.6)^2} & 10^4 < Re < Re_{crit} \\ 0.032 \left(\frac{Re}{L} \right)^{0.2} & Re > Re_{crit} \end{cases} \quad (65)$$

[3]

Two other sources describe the cases for Skin Friction Drag Coefficient differently.

$$C_{sk_{uncorrected}} = \begin{cases} \frac{1.328}{\sqrt{Re}} & Re \leq Re_{crit} \\ \frac{0.074}{Re^{1/5}} & 10^4 < Re < Re_{crit} \end{cases} \quad (66)$$

[4] and [2] agree on the above.

The *Skin Drag Coefficient Corrected for Compressibility* is:

Conversely, Niskanen evaluates the corrected skin drag coefficient as follows

$$C_{sk_{corrected}} = C_{sk_{uncorrected}} \times \begin{cases} (1 - 0.1M^2) & \text{Subsonic} \\ [(1 + 0.15M^2)^{0.58}]^{-1} & \text{Supersonic} \\ (1 + 0.18M^2)^{-1} & \text{Roughness Limited} \end{cases} \quad (67)$$

Finally, the *Normalized and Corrected Skin Friction Drag Coefficient* is:

$$C_{sk} = \frac{C_{sk,c} \left[\left(1 + \frac{1}{2f_B}\right) \cdot A_{wb} + \left(1 + \frac{2t_f}{L_{cf}}\right) A_{wf} \right]}{A_{ref}} \quad (68)$$

Where f_b is the *Fineness Ratio*, the ratio of the length of the rocket divided by the outer diameter. L_{cf} is the aerodynamic chord length of the fins, and t_f is the thickness of the fins

[3]

$$Re_{crit} = 51 \left(\frac{R_a}{L} \right)^{-1.039} \quad (69)$$

Pressure (Form/Profile) Drag

This is the drag caused by the pressure exerted on the surface of an object as it moves through a free stream [12].

$$C_{pr}, D_{pr}(A_{ref}, M) \quad (70)$$

Body Drag

Body Drag is the drag on the rocket forebody (pressure drag?)

$$C_{fb} = \left[1 + \frac{60}{(l_{TR}/d_b)^3} + 0.0025 \frac{l_b}{d_b} \right] \left[2.7 \frac{l_n}{d_b} + 4 \frac{l_b}{d_b} 2 \left(1 - \frac{d_d}{d_b} \right) \frac{l_c}{d_b} \right] \cdot C_{f(fb)} \quad (71)$$

Where l_{TR} is the total length of the rocket body, l_c is the length of the boat tail, d_b is the maximum body diameter and d_d is the diameter of the rocket base. $C_{f(fb)}$ is the coefficient of viscous friction on the rocket forebody (defined later in (45))

Fin Pressure Drag

The *Fin Pressure Drag* depends on the fin profile. The current rocket will use a square (rectangular) profile, and can be determined as follows.

$$C_{fp}, D_{fp}(A_{ref}, M) \quad (72)$$

Leading Edge pressure drag

$$C_{D,LE} = C_{D,stag} = 0.85 \frac{q_{stag}}{q} \quad (73)$$

The *Body Base Drag Coefficient* is

$$C_{base} = \begin{cases} 0.12 + 0.13M^2 & M < 1 \\ \frac{0.25}{M} & M > 1 \end{cases} \quad (74)$$

For perpendicular orientation of the fin edges to air flow, the stagnation pressure defined in Equation 54 is used.

$$\frac{q_{stag}}{q} = \begin{cases} 1 + \frac{M^2}{4} + \frac{M^4}{40} & M < 1 \\ 1.84 - \frac{0.76}{M^2} + \frac{0.166}{M^4} + \frac{0.035}{M^6} & M > 1 \end{cases}$$

[3]

Von Karman Nose Pressure Drag

Most nose cone shapes can be approximated to produce zero pressure drag at subsonic velocities, however complications arise for transonic and supersonic velocities. The cause of this drag is slight flow separation, and as such cannot be corrected due to compressibility effects. A semi-empirical method can be employed, and is explored by [3].

Base Drag

Base drag is caused by a low pressure region generated behind the base of the rocket as it moves quickly through the atmosphere [3]. Specifically, it is due to boundary separation between the flow past the rocket and the surrounding air [4]. The flowing air attempts to make a sharp turn around the sudden geometry change at the base end of the rocket, however, viscous effects resist this change in direction. As a result, pressure cannot be equalized in the space directly behind the rocket and a low-pressure (vacuum) region forms [13]. This low-pressure region has an effect analogous to *pulling* the rocket against its direction of flight.

$$C_{ba}, D_{ba}((A_{ref}, M)) \quad (75)$$

$$C_{ba} = \begin{cases} 0.12 + 0.13M^2 & M < 1 \\ \frac{0.25}{M} & M > 1 \end{cases} \quad (76)$$

[3]

In reality, this low pressure region is disturbed by the thrust envelope from the motor. Thus, we would expect base drag to be different during the motor burn time than during the free flight after all fuel was exhausted. Considering the thrust envelope is at this moment beyond the scope of the project. Instead, an accepted approximation is to subtract the area of the motor from the area of the base when calculating drag force [3].

$$D_{ba} = \frac{1}{2} C_{ba} \rho (A_{tube,base} - A_{motor,base}) \vec{v}^2 \quad (77)$$

We can normalize the base drag coefficient to take this into account.

$$C_{ba,normalized} = C_{ba} * A_{tube,base} / A_{motor,base} \quad (78)$$

Shoulder Pressure Drag

The drag coefficient of the shoulder interfacing the body tube is assumed to be equal to that of the body tube itself, and also assumes a smooth interface. This is likely to be sufficient for subsonic velocities [3], and for the scope of this project it is neglected entirely.

Parasitic Drag

Parasitic drag is the drag due to body features not explicitly designed and/or imperfections not easily approximated. Examples include launch guides, ventilation holes, surface roughness, and any damage during flight.

PARASITIC DRAG IS CURRENTLY NEGLECTED IN THE MODEL

$$C_{pa}, D_{pa}(A_{ref}, M) \quad (79)$$

Where C_{stag} is the *Stagnation Drag Coefficient* [see equation from fin pressure drag section]

We consider the most significant source of *Parasitic Drag* to be the launch lug. If there is no significant airflow through the launch lug, we can approximate it as a cylinder next to the rocket body. *Niskanen* states that a launch lug with a length at least two times its width has a drag coefficient of 0.74, with its reference area being the frontal area. Stagnation pressure proportionally influences the drag coefficient [3].

The following equation relates the launch lug diameter ϕ_{lug} to the launch lug tube length l_{lug} .

$$C_{pa} = \left(1.3 - 0.3 \frac{l_{lug}}{\phi_{lug}}, 1 \right)_{max} \cdot C_{stagnation} \quad (80)$$

Where L is the rocket length, h_n is the height of the nose cone, OD is the outer diameter of the rocket, and $C_{stagnation}$ is the stagnation coefficient [3].

The reference area of the launch lug is given as follows

$$\pi \cdot (r_{ext,lug}^2 - r_{int,lug}^2) \cdot \left[1 - \left(\frac{l_{lug}}{\phi_{lug}} \right) \right]_{+ve} \quad (81)$$

The *Parasitic Drag Coefficient* can be normalized to the reference area of the launch lug.

$$C_{pa_{norm}} = C_{pa} \cdot \left(\pi \cdot (r_{ext}^2 - r_{int}^2) \cdot \left[1 - \left(\frac{L - h}{OD} \right) \right]_{+ve} \right) \quad (82)$$

[3]

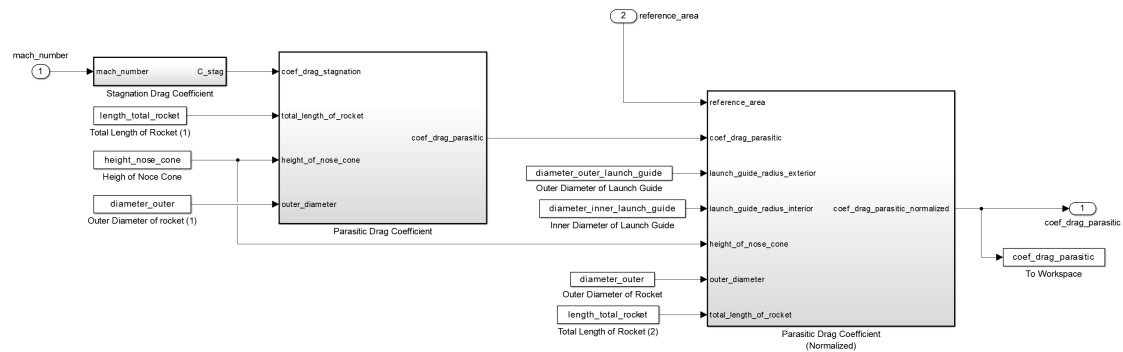


Figure 7: Matlab Implementation of Parasitic Drag Coefficient

Interference Drag

Interference Drag is caused due to effects of air flow at the interfaces of the fins and the body.

$$C_{in}, D_{in}(A_{ref}, M) \quad (83)$$

$$C_{in} = 2C_{sk, fins} \left(1 + 2\frac{T_f}{l_m} \right) \frac{4n(A_{f_p} - A_{f_e})}{\pi d_f^2} \quad (84)$$

Where:

- $C_{sk, fins}$ is the coefficient of skin friction (due to viscous effects) on the fins
- n is the number of fins
- A_{f_p} is the fin planform area

$$A_{f_p} = A_{f_e} + \frac{1}{2}d_f l_r \quad (85)$$

- A_{f_e} is the exposed planform area of the fin

$$A_{f_e} = \frac{1}{2}(l_r + l_t)l_s \quad (86)$$

[4]

Interference Drag effects are small in comparison to other drag effects [3], and are thus ignored at this stage of the project.

Wave Drag

Wave drag is drag associated with shock waves (independent of viscous effects).

At transonic speed, shock waves form at the nose tip and at the leading edge of the fins ... Momentum is transferred from the rocket to the surrounding air via these shockwaves

Boat-Tail Drag

A *boat-tail* is a reduction in diameter of the body tube towards the base of the rocket. Our rocket does not have a boat-tail, thus *Boat-Tail Drag* considerations are ignored.

Additional Drag at Angle of Attack

When the rocket flies at a non-zero angle of attack, additional drag considerations must be made. The reference area the rocket becomes larger as the rocket is pitched into the free stream, exposing more of the rocket body to pressure and stagnation effects.

In Figure 8, velocity \vec{v} is the apparent velocity of the center of pressure relative to the surrounding air.

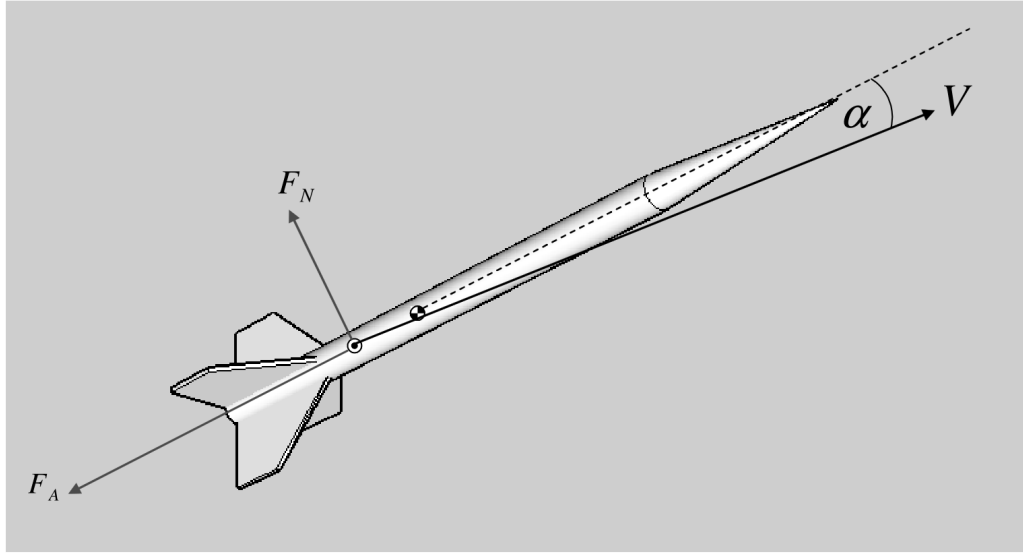


Figure 8: Rocket Drag Forces - Axial vs. Normal Caption

[4]

In the following analysis, additional rocket drag coefficients are determined to be added to the *zero angle of attack* drag coefficient. This analysis is derived with the aid of additional coefficients determined experimentally in wind tunnel tests on rocket models [4] [2].

$$C_{aoa} = C_{Db(\alpha)} + C_{Df(\alpha)} \quad (87)$$

Rocket Body Drag at Angle of Attack

$$C_{Db(\alpha)} = 2\delta\alpha^2 + \frac{3.6\eta(1.36L - 0.55h_n)}{\pi \cdot OD}\alpha^3 \quad (88)$$

Where:

- α is the angle of attack
- L is the total rocket length
- OD is the outer diameter of the rocket
- h_n is the height of the nose cone
- δ and ν are experimentally determined coefficients
- OD is the outer diameter of the rocket

[4]

Rocket Fin Drag at Angle of Attack

$$C_{Df(\alpha)} = \alpha^2 \left[1.2 \frac{A_{fp}^4}{\pi OD_f^2} + 3.12(k_{fb} + k_{bf} - 1) \left(\frac{A_{fe}^4}{\pi OD_f^2} \right) \right] \quad (89)$$

Where:

- k_{fb} is the fin-body coefficient

$$k_{fb} = 0.8065R_s^2 + 1.1553R_s \quad (90)$$

- k_{bf} is the body-fin coefficient

$$k_{bf} = 0.1935R_s^2 + 0.8174R_s + 1 \quad (91)$$

- R_s is the fin section ratio

$$R_s = \frac{l_{TS}}{d_f} \quad (92)$$

- l_{TS} is the total span of the fins
- OD_f is the diameter of the body tube at the base of the fin mount

[4]

Alternatively

[2] shares a function determined for *Total drag coefficient due to angle-of-attack*

$$C_d(\alpha) = 16.83\alpha^2 + 8.9\alpha^3 \quad (93)$$

Matlab Implementation

Figure 9 shows the *Simulink* implementation of the calculation of the drag model

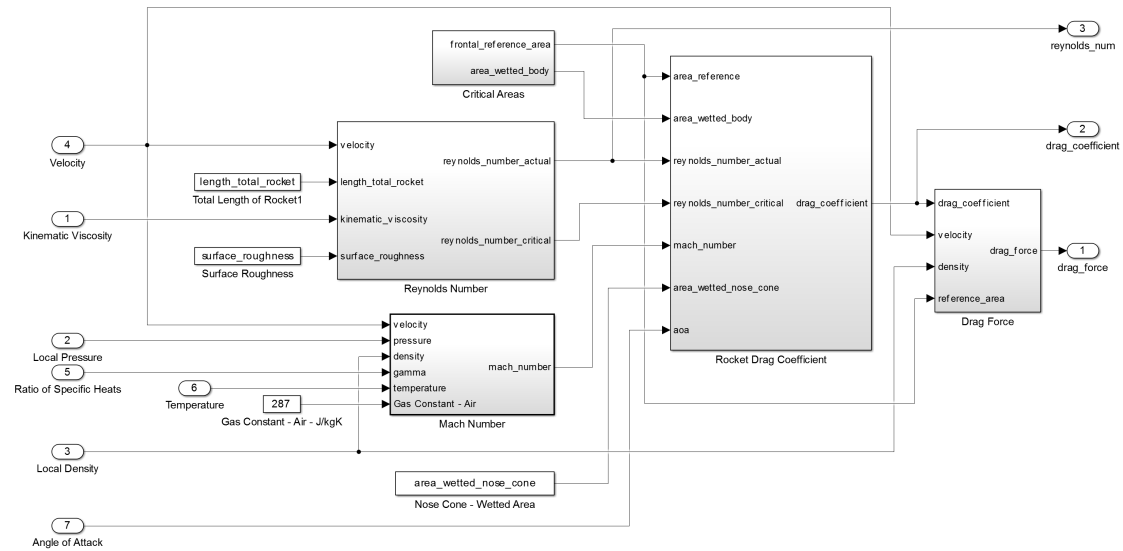


Figure 9: Rocket Drag Model

Figure 10 shows the *Simulink* implementation of the calculation of drag coefficient

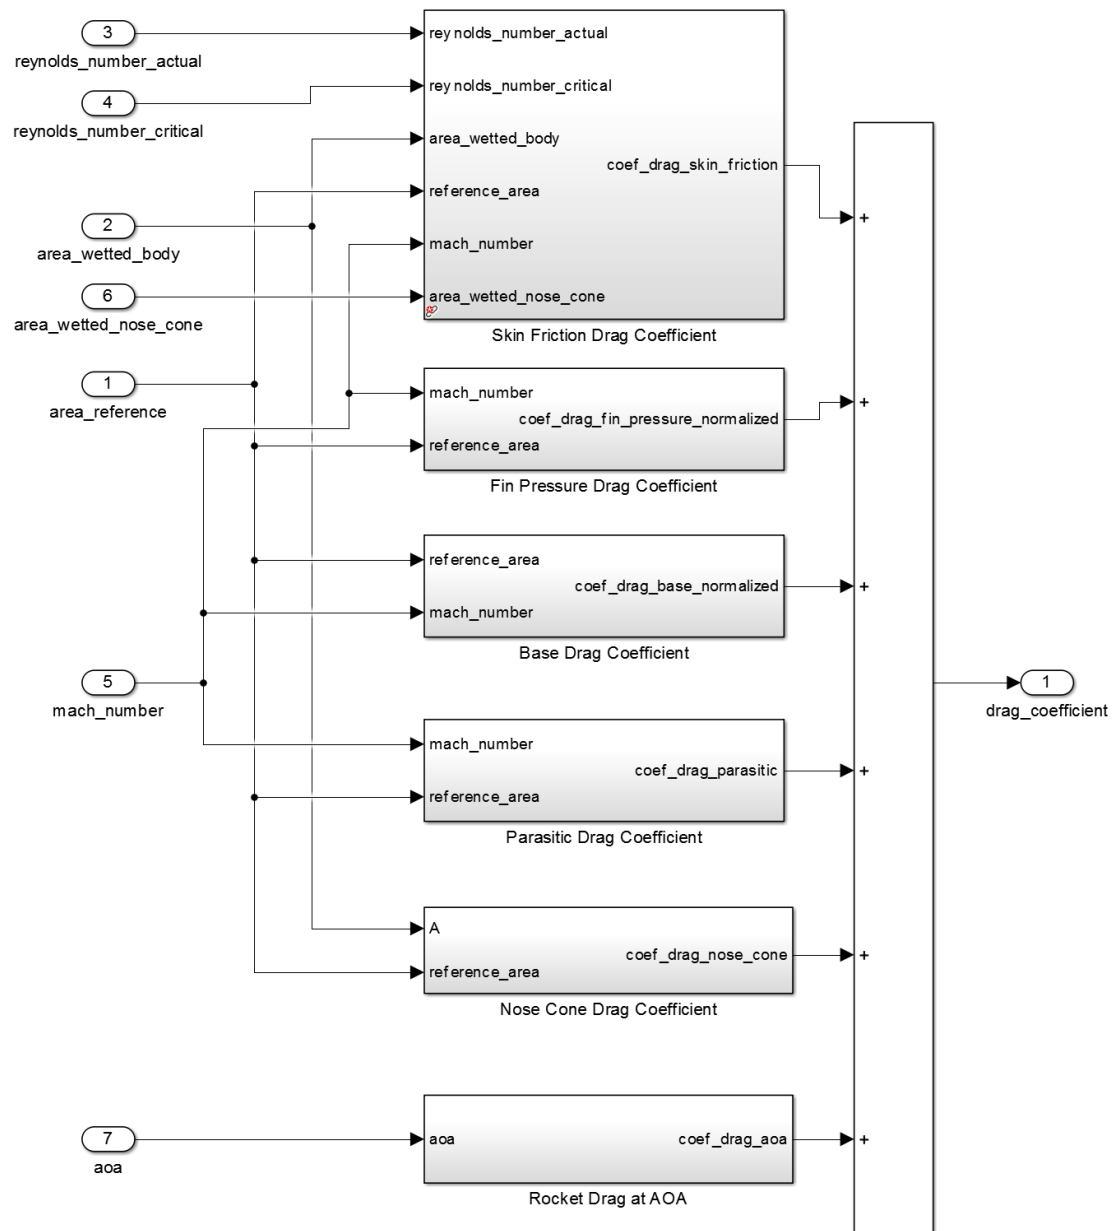


Figure 10: Rocket Drag Coefficient Model

Model Referencing

A high level view of all the test models is in the file *DRAG_TESTING.slx* and is shown in the Model Reference in Figure 11.

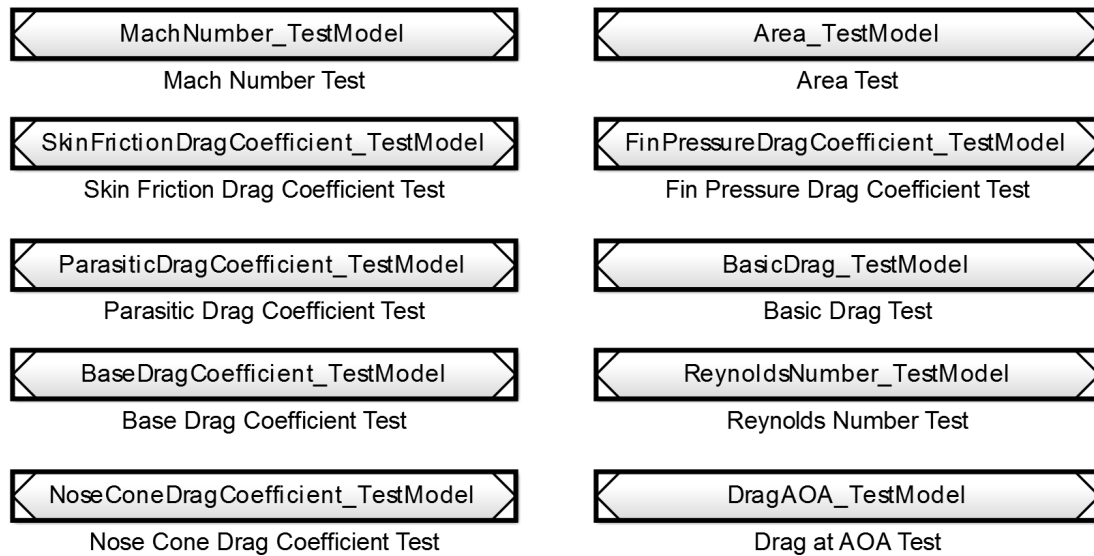
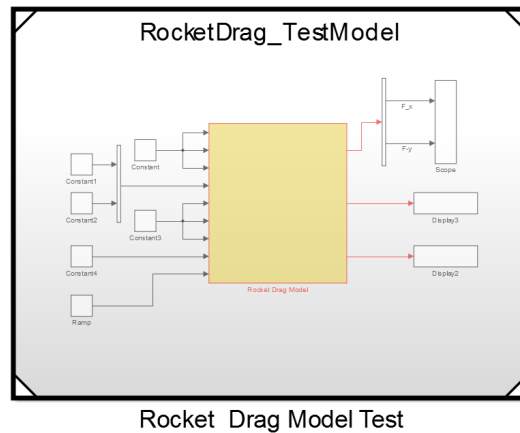


Figure 11: Drag System - Model Referencing - Simulink Library

Matlab Validation

The following plots show the Drag Model compared against OpenRocket, RASAero, and Rocksim. The differences between the commercial simulations are likely due to differing drag analysis methods which are not available due to their closed source nature. However, it can be seen that Matlab and OpenRocket are very close, which validates the Matlab model since it was closely following the methods performed in OpenRocket

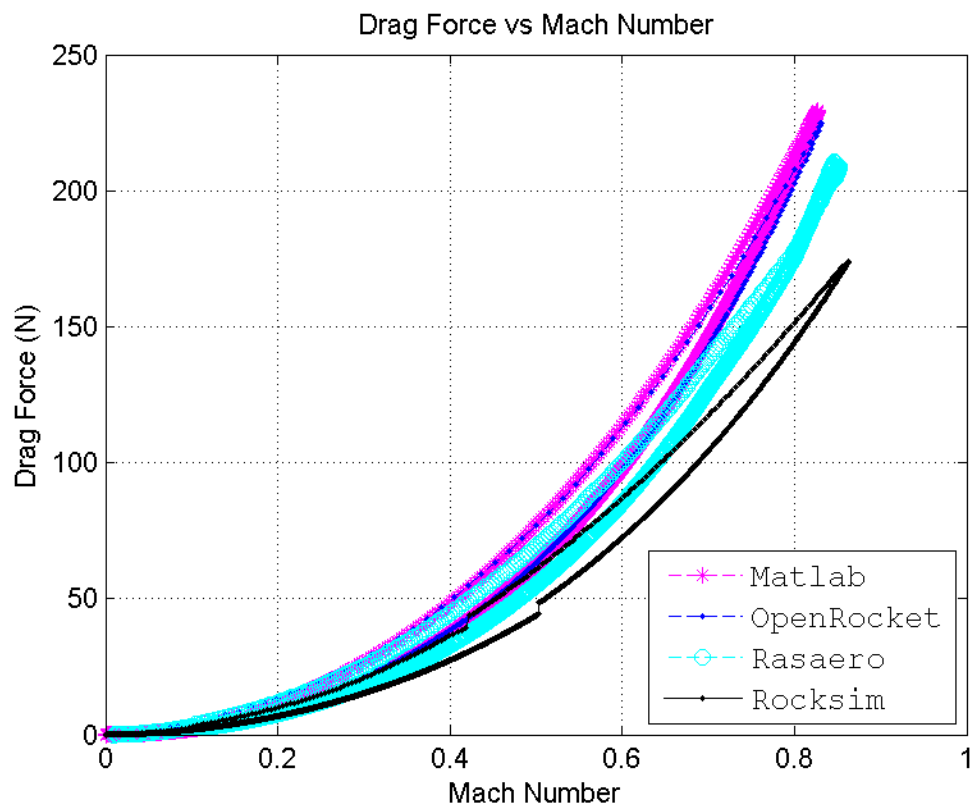


Figure 12: Drag Force as a Function of Mach Number

Point-Mass Flight Model

The analysis of the point-mass flight model can be simplified to a sum of forces.

Simplifying the rocket flight as ideally one-dimensional, with the positive z-direction being upwards from the launch pad, the impulse is equal to the thrust of the rocket minus the weight of the rocket and the drag forces of the rocket interacting with the surrounding air.

$$m(t)\ddot{z}(t) = T(t) - D(\dot{z}) - W(t) \quad (94)$$

Mass is a function of time, which is explained in the *Dynamic Parameters* section. Drag is a function of velocity, which is explained in *Drag Model* section. Acceleration can be expressed as the first derivative of velocity and also the second derivative of position, each with respect to time.

$$\vec{a} = \dot{v} = \ddot{z} \quad (95)$$

Each force component can be rearranged and expressed as follows:

$$\vec{a}_T = \frac{T(t)}{m(t)}, \vec{a}_W = \frac{W(t)}{m(t)}, \vec{a}_D = \frac{D(v)}{m(t)} \quad (96)$$

The net upward acceleration is: $\vec{a}_T - \vec{a}_W - \vec{a}_D$

The sum of forces can be rearranged and acceleration can be solved for:

$$\vec{a} = \ddot{z} = \frac{1}{m(t)}(T(t) - D(\dot{z}) - W(t)) \quad (97)$$

Acceleration can be integrated to find position and velocity.

$$\vec{v} = \int \vec{a} dz \quad (98)$$

$$z = \iint \vec{a} dz \quad (99)$$

Integration of equation (97) in the model is represented by the $\frac{1}{s}$ block. The model is pictured in Figure 13.

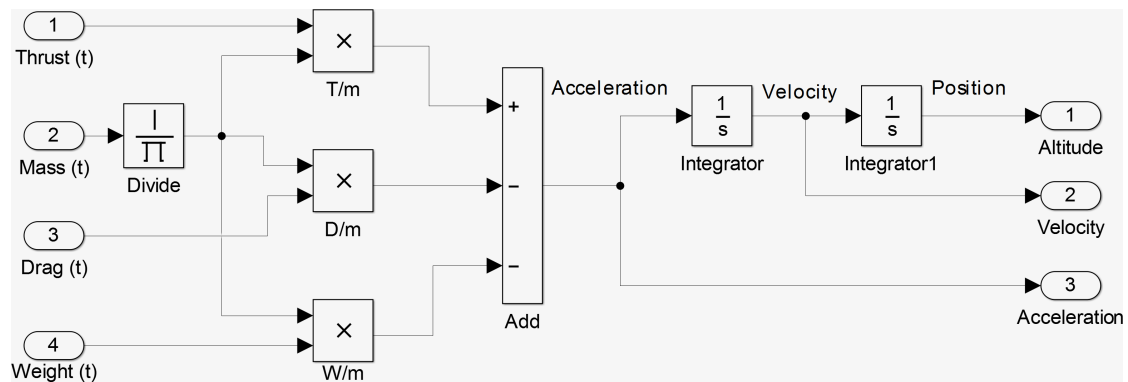


Figure 13: Vertical Flight Model - Simplified

Weathercocking

Weathercocking is a phenomenon when the rocket tends to alter its trajectory and fly into the wind. If the rocket is stable, and has a sufficiently high damping ratio, the rocket eventually reaches a near-zero angle-of-attack parallel to the velocity vector of the wind, only in the opposite direction.

If we apply a wind velocity in the drag calculation, we can then modify Equation 94 to account for weathercocking and provide the actual altitude reached, as well as the amount of drift experienced.

Altitude accounting for flight angle

$$m(t)\ddot{z}(t) = T(t) \cos \theta - D(\dot{z}) \cos \theta - W(t) \quad (100)$$

Where:

- z is the upward direction (normal from the ground)
- θ is the angle between the current rocket trajectory and the z-axis

Drift accounting for flight angle

$$m(t)\ddot{z}(t) = T(t) \sin \theta - D(\dot{z}) \sin \theta \quad (101)$$

Rigid-Body Rotation (Pitch, Yaw) Stability Analysis

Overview

Due to disturbances such as wind, and imperfections and imbalances in the construction, the rocket will tend to fly at an *Angle of Attack* into the free stream, wherein the velocity vector (taken from the *Center of Gravity*) is not parallel with the longitudinal axis. This will cause non-linear changes to the magnitude of the aerodynamic forces, which, as a further simplification, can be said to be acting on the *Center of Pressure*. In order for the aerodynamic forces to straighten the rocket in its forward motion, and to stabilize the oscillatory rotation about the COG, the COP must be located behind the COG.

The moment arm about the COG is the distance of the COP from the tip of the nose cone, minus the distance of the COG from the tip of the nose cone. Then, the sum of forces at the COP is the *Restoring Force* (F_R) minus the *Damping Force* (F_D), and the sum of the Moments about the COG is expressed as follows.

The *Moment* of a rigid body about its COG can be expressed as the product of the *Moment of Inertia* of the rigid body and the *Angular acceleration* of the body.

$$M = I\lambda \quad (102)$$

- λ is the *angular acceleration* of the rigid body, which is the second time derivative of the angular displacement

$$\lambda = \ddot{\alpha}$$

$$\omega = \dot{\alpha}$$

- ω is the *angular velocity*, which is the first time derivative of the angular displacement
- α is the *angle of attack*

Longitudinal Static Stability Margin

The *Longitudinal Static Stability Margin* (S_{lm}) is the distance between the *Center of Gravity* and the *Center of Pressure* divided by the outer diameter of the body tube when the rocket is positioned at an angle-of-attack (α) of zero [2].

$$S_{lm} = \frac{COP - COG}{OD}$$

When traveling under a non-zero angle of attack, the Stability Margin is adjusted using the body lift correction factor Equation ??.

The result is dimensionless, however the ratio determined is measured in the number of *calibers*.

2a - The static stability margin falls above 2 (but less than 3) calibers at launch

Requirement

- 2a - The static stability margin falls above 2 (but less than 3) calibers at launch
- 2b - The dynamic stability is greater than 0 even in winds up to 8.33 m/s
- 2f - The vehicle does not experience resonant pitching/yawing motion in flight

Assumptions

- small angle of attack (less than 10°)
- incompressible flow
- neglect viscous forces
- neglect compressibility effects [4]
- neglect lift force on the body tube [4]
- neglect the effect of roll due to having 3 fins vs 4

Definition of Terms

Rocket Normal Force

The *Rocket Normal Force* is the resultant force applied at the *Center of Pressure* perpendicular to the longitudinal axis of the rocket, when the rocket flies at an angle-of-attack.

$$F_N = \frac{1}{2} \rho \vec{v}^2 A_c C_N \quad (103)$$

[4]

Where A_c is the cross-sectional area of the body tube, and C_N is the *Normal Force Coefficient*, and is a function of angle-of-attack (α). The small angle approximation is applied, wherein small angles can be approximated as a linear function of the angle.

$$C_N = C_{N\alpha} \cdot \alpha \quad (104)$$

[4]

Corrective Moment Coefficient

The *Corrective Moment Coefficient* describes the reaction of the rocket against a disturbance about its longitudinal axis.

$$C_{MC} = \frac{1}{2} \rho \vec{v}^2 A_{ref} C_{N\alpha} (COP - COG) \quad (105)$$

Where:

- ρ is the local density of air
- \vec{v} is the velocity of the rocket
- A_{ref} is the reference area of the rocket flying into the free stream
- $C_{N\alpha}$ is the *Stability Derivative Normal Force Coefficient*
- $(COP - COG)$ is the distance between the *Center of Pressure* and *Center of Gravity*

Note: a rocket with a high *Corrective Moment Coefficient* is going to weathercock faster at lower velocities.

Corrective Moment Coefficient

Dimensional Analysis

$$\frac{kg}{m^3} \left[\frac{m}{s} \right]^2 m^2 m = \frac{kg \cdot m}{s^2} \cdot m \quad (106)$$

Damping Moment Coefficient

As the rocket responds to a disturbance, the *Corrective Moment* reactions forces act in an oscillating manner - weathercocking into the wind, then turning back towards the vertical direction. In order to reach dynamic stability, this oscillation must decay and settle to a reasonable response. The *Damping Moment Coefficient* represents how fast the response settles towards zero.

There are two *Damping Moment Coefficients* to consider, the *Aerodynamic Damping Moment Coefficient* and the *Propulsive Damping Moment Coefficient*.

Then the *Damping Moment Coefficient* is the sum of the two moment components coefficients.

$$C_{DM} = C_{ADM} + C_{PDM} \quad (107)$$

Aerodynamic Damping Moment Coefficient

Each rocket component contributes to the *Aerodynamic Damping Moment Coefficient*

$$C_{ADM} = \frac{1}{2} \rho \vec{v} A_{ref} \sum \left(C_{N\alpha, x} \cdot [COP_x - COG]^2 \right) \quad (108)$$

NOTE: Why isn't \vec{v} SQUARED? It might have something to with the fact that the ADM is a function of angular displacement, and DM is a function of angular velocity??

Where:

- ρ is the local density of air
- \vec{v} is the velocity of the rocket
- A_{ref} is the reference area of the rocket flying into the free stream
- $C_{NF, x}$ is the *Normal Force Coefficient Stability Derivative*
- COP_x is the distance of *Center of Pressure* of the rocket component to the nose cone tip
- COG is the distance between the rocket *Center of Gravity* to the nose cone tip

Dimensional Analysis

$$\frac{kg}{m^3} \frac{m}{s} m^2 m^2 = \frac{kg \cdot m}{s} \cdot m \quad (109)$$

Propulsive Damping Moment Coefficient

Also known as *Jet Damping*, as propulsion creates forward momentum, it resists rotation of the rocket.

$$C_{PDM} = \dot{m} (d_{tip, nozzle} - COG)^2 \quad (110)$$

Jet Damping - Dimensional Analysis

$$\dot{m} (d_{tip, nozzle} - COG)^2 : \left[\frac{kg}{s} \cdot m^2 \right]$$

$$M = fd : \left[\frac{kg \cdot m^2}{s^2} \right]$$

Note: why is the *Jet Damping Moment* missing a 1/t?

[Damping Moment Coefficient - Source](#)

Pitch Damping Moment

The *Pitch Damping Moment* is a moment opposing the *Rocket Restoring Moment* and dampens the oscillation.

$$0.55 \frac{l^4 r_t}{A_{ref} d} \frac{\omega^2}{v_0^2} \quad (111)$$

According to [3], the *Pitch Damping Moment* is essentially insignificant until near apogee. This is because it is proportional to $\frac{\omega^2}{v_0^2}$ (as seen in 111), which will be near zero until apogee due to very small angular velocities made smaller by squaring the ω term.

The *Pitch Damping Moment* of each rocket component must be calculated individually. For instance, the *Pitch Damping Moment* of a fin is as follows.

$$C_{damp} = 0.6 \frac{N A_{fin} d_{COP}^3}{A_{ref} d} \frac{\omega^2}{v_0^2} \quad (112)$$

Derivation of the Harmonic Motion Equation

Suppose a high-powered rocket is launched in quiescent air vertically, and flies straight without wobbling. Then, suppose a small and momentary disturbance (e.g. a short gust of wind) is experienced on the side of the rocket causing an angular deflection, . If the rocket is *stable*, a restoring force causes a *corrective moment* which will act in the opposite direction of the deflection. This *corrective moment* can be considered a function of angular displacement [2].

$$M_{corrective} = F(\alpha) \quad (113)$$

As the rocket gains velocity in the direction opposite the disturbance, a *damping moment* is generated as a result of the relative speed of the air, in the direction orthogonal to the longitudinal axis. As this *damping moment* opposes the angular velocity caused by the *corrective moment*, its sign is opposite to the angular velocity. The *damping moment* is also a function of angular velocity [2].

$$M_{damping} = G(\omega) \quad (114)$$

Then, taking a sum of Moments, the rotation of the rocket can be described as follows [2]

$$\begin{aligned} I\lambda &= -F(\alpha) - G(\omega) \\ I \left(\frac{d^2\alpha}{dt^2} \right) &= -F(\alpha) - G \left(\frac{d\alpha}{dt} \right) \\ I \left(\frac{d^2\alpha}{dt^2} \right) + F(\alpha) + G \left(\frac{d\alpha}{dt} \right) &= 0 \end{aligned} \quad (115)$$

This nonlinear, homogenous, differential equation can not be solved exactly [2].

Linearization Approximation

Linear Approximations of 115 are made considering small values of α and ω , known as the *small-perturbation theory* [2]. This linearization process provides ~~constant~~ coefficients, which we will denote C_1 for the *Corrective Moment Coefficient* and C_2 for the *Damping Moment Coefficient*.

$$\begin{aligned} F(\alpha) &\approx C_1 \cdot \alpha \\ G \left(\frac{d\alpha}{dt} \right) &\approx C_2 \cdot \frac{d\alpha}{dt} \\ I \left(\frac{d^2\alpha}{dt^2} \right) + C_1(\alpha) + C_2 \left(\frac{d\alpha}{dt} \right) &= 0 \end{aligned} \quad (116)$$

General Homogeneous Response

The characteristic, linearized, homogeneous yaw/pitch response is given as:

$$I_L \frac{d^2\alpha_x}{dt^2} + C_2 \frac{d\alpha_x}{dt} + C_1\alpha_x = 0 \quad (117)$$

[2]

A solution over a known range of acceptable values of the coefficients above is:

$$\alpha_x = Ae^{-Dt} \sin(\omega t + \phi) \quad (118)$$

Where:

- t is the time passed since the “observation of the dynamic response has begun, not the time elapsed since the rocket was launched” [2]
- ω is the *frequency of oscillation* (not literally the angular velocity of the rocket)

$$\omega = \sqrt{\frac{C_1}{I_L} - \frac{C_2^2}{4I_L^2}} \quad (119)$$

- ϕ is the *phase angle* in radians

$$\phi = \arctan \left(\frac{\alpha_{xo}\omega}{D\alpha_{xo} + \Omega_{xo}} \right) \quad (120)$$

- D is the *inverse time constant*

$$D = \frac{C_2}{2I_L} \quad (121)$$

- A is the *initial amplitude*

$$A = \frac{\alpha_{xo}}{\sin\phi} \quad (122)$$

- α_{xo} is the value of α_x at $t = 0$

[2]

The initial conditions for this solution are

- $\alpha_{xo} = \text{some non-zero angle-of-attack}$
- $\Omega_{xo} = 0$

This equation is represented in the model as follows

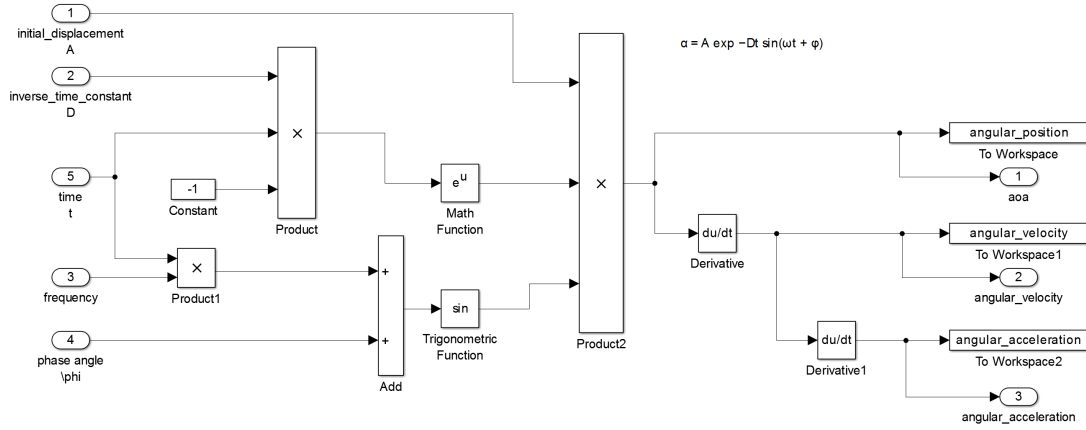


Figure 14: Angular Flight Model - Simplified

$$I_L(D^2 - \omega^2) - C_2D + C_1 = 0$$

$$-2I_LD + C_2 = 0$$

[2]

A rocket can be considered restored from a disturbance if the angle of attack decays to 5% of the initial amplitude [2].

[2]

The *Natural Frequency* of the rocket at the current air speed for the homogeneous solution is

$$\omega_n = \sqrt{\frac{C_1}{I_L}} \quad (123)$$

Note: it would appear that this response only reflects the physical system for non-decreasing values of C_2 , which would cause the exponential term to increase with time and cause the amplitude to grow. Although the damping coefficient remains relatively constant, the inverse time-constant is only a function of $\frac{C_2}{2I_L}$. As velocity decreases in the rocket coasting phase, C_2 drops proportional to the square of the velocity and thus the inverse-time constant decreases enough with respecting time, that Dt is decreasing and thus e^{-Dt} will begin to increase. This is accounted for by the drift velocity at apogee. While the rocket has a zero climbing velocity, it does still travel laterally and the total velocity contributes to the damping moment coefficient, maintaining stability.

Complete Response to Step Input

Complete Response to Impulse Input

Delta-Dirac Function

$$u(t) = \int_{-\infty}^{\infty} \delta(u - \tau) d\tau \quad (124)$$

Convolution Theorem

Steady State Response to Sinusoidal Forcing

Rocket Damping Ratio

The *Rocket Damping Ratio* is calculated as follows.

$$\zeta = \frac{C_2}{2 \cdot \sqrt{C_1 I_L}} \quad (125)$$

Where:

- C_1 is the *Corrective Moment Coefficient*
- C_2 is the *Damping Moment Coefficient*
- I_L is the *Longitudinal Moment of Inertia*

[2]

Underdamped Case

$$0 < \frac{C_2^2}{4I_L^2} < \frac{C_1}{I_L} \quad (126)$$

The fastest response is when $\zeta = \frac{\sqrt{2}}{2}$

Overdamped Case

$$\frac{C_2^2}{4I_L^2} > \frac{C_1}{I_L} \quad (127)$$

Critically Damped Case

$$\frac{C_1}{I_L} = \frac{C_2^2}{4I_L^2} \quad (128)$$

[2]

Rocket Natural Frequency

$$\omega_n = \sqrt{\frac{C_1}{I_L}} \quad (129)$$

Where:

- C_1 is the *Corrective Moment Coefficient*
- I_L is the *Longitudinal Moment of Inertia*

[2]

Time Constants of the Response

Complete response to step input

Complete response to impulse input

[2]

AOA as a function of velocity

In order to plot the real system behavior, it may be possible to solve Equation 115 where α_x is a function of velocity, and solve for α_x by twice integrating $\ddot{\alpha}_x$.

Since AOA is a function of total velocity through the *Corrective Moment Coefficient* and the *Damping Moment Coefficient*, it may be possible to solve the system by differentiating with respect to velocity, rather than by time.

$$I \left(\frac{d^2 \alpha}{dt^2} \right) + F(\alpha) + G \left(\frac{d\alpha}{dt} \right) = 0$$

$$\frac{\delta^2 \alpha_x}{\delta t^2} = \dot{v} = \ddot{x}$$

$$\frac{\delta \alpha_x}{\delta t} = v = \dot{x}$$

$$\frac{\delta \alpha_x}{\delta t} = v = \dot{x}$$

Eventually we get to:

$$\frac{d^2 \alpha_x}{dv^2} = \dots$$

Corrections

Compressibility Correction

Barrowman's Method neglects compressibility effects, however these effects cannot be neglected above Mach 0.3.

Wind Disturbance

We are interested in the damping ratio of the rocket as it stabilizes towards *zero angle of attack* in reaction to angular disturbances.

As we consider the rocket to have ideal dimensional accuracy, the main source of flight disturbance is wind.

Impulse Disturbance

We can test the ability of the rocket to stabilize due to an initial angular disturbance, by applying an initial angle of attack. This simulates a small gust of wind hitting the rocket just as it takes off.

Constant Disturbance

We can test the ability of the rocket to stabilize due to a constant disturbance force, as well as applying an initial *angle of attack*. This simulates a constant wind force coming from a single direction. As the density of air goes down with increases altitude, this assumes that the wind speed picks up at higher altitudes to maintain the constant wind force.

Alternatively, we could model a constant wind speed of 8.33m/s , and apply the ISA Model for the density as a function of altitude to determine the changing wind force as the rocket climbs.

More Reading

There are further resources on rocket flight stability here: - http://www.apogeerockets.com/Tech/Rocket_Stability

Model Referencing

A high level view of all the test models is in the file *ANGULAR_FLIGHT_TESTING.slx* and is shown in the Model Reference in Figure 15.

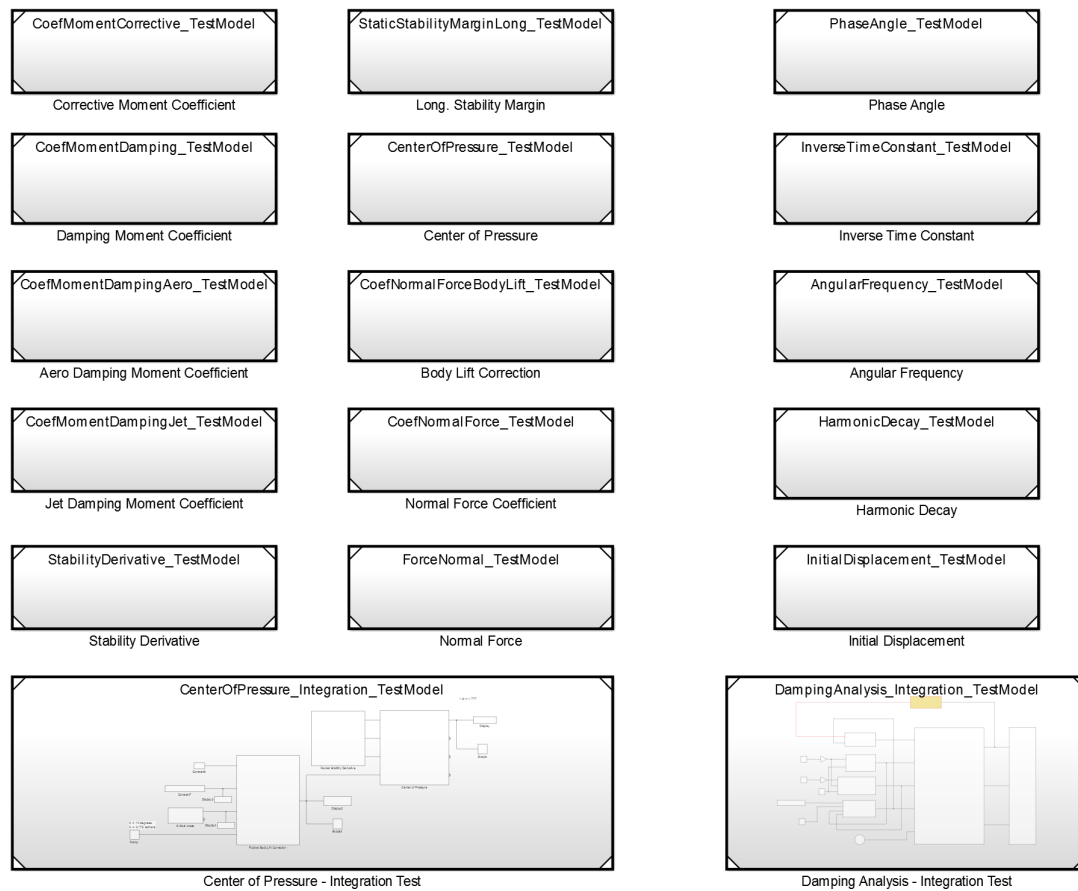


Figure 15: Rigid-Body Oscillation - Model Referencing - Simulink Library

Solver Algorithm

The numerical algorithm chosen for performing the simulation can impact the accuracy of the results.

ODE4 Runge-Kutta was used as the solver in the Simulink Model Configuration. Further review of solvers and their associated errors is recommended in the future.

Validation

The engineering flight simulation was tested comprehensively.

Unit Testing

It was ensured that individual Matlab functions provided the output expected, and that Simulink blocks employing the Matlab functions worked on a unit level - Reference Models were employed for this purpose.

Sample unit testing code is provided below:

ANGULAR_UNIT_TESTING.m

```
...

% make sure that coef_normal_force == 0 is captured and handled
actual = COPRocket([1,1,1,1,1,1,1,0]);
expected = 1;
assert( ...
    actual == expected, ...
    'COPRocket() \n actual = %d \n expected = %d ', actual, expected ...
)

actual = StabilityDerivativeFinSet([1.131536,3,0.095,0.118004,0.1,0.28,0.103]);
expected = 6.3371;
assert( ...
    actual == expected, ...
    'COPFinSet() \n actual = %d \n expected = %d ', actual, expected ...
)

actual = CoefFinBodyInterference([0.103,0.095]);
expected = 1.351536;
assert( ...
    actual == expected, ...
    'COPFinSet() \n actual = %d \n expected = %d ', actual, expected ...
)

disp('ALL ANGULAR_FLIGHT_UNIT_TESTING.m TESTS PASSED!');
```

And the output is as follows

ALL ANGULAR_FLIGHT_UNIT_TESTING.m TESTS PASSED!

Integration Testing

Where many Simulink blocks were combined from a higher-level function, they were tested with existing data from other simulators to verify functional correctness - Reference Models were again employed for this purpose.

At this point, the code and the models were tested against values known to be correct to confirm their functionality.

Figure 16 shows an example of an integration test model, used to verify the Center of Pressure calculation with the input *Stability Derivative* and *Rocket Body Lift Correction*.

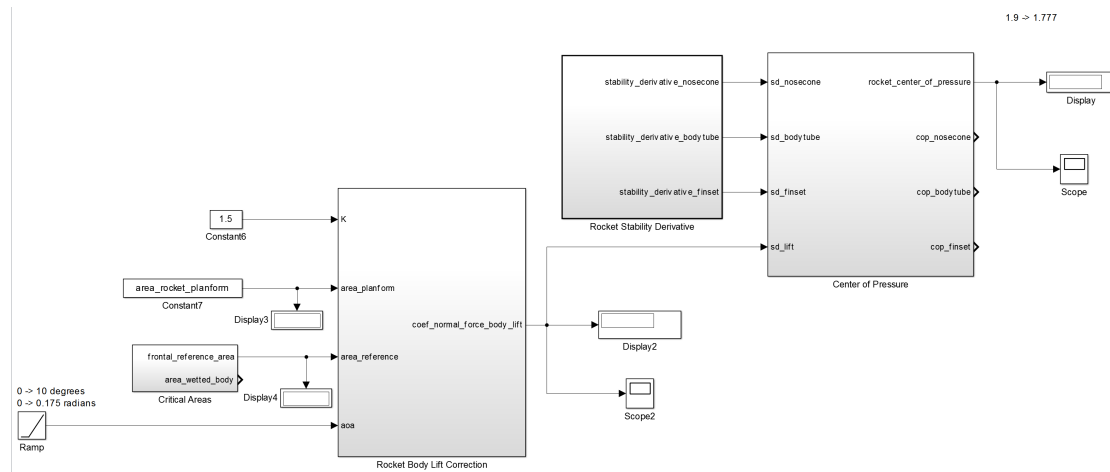


Figure 16: Center of Pressure - Integration Test

Figure 17 shows the high level Model Reference which contains all unit, integration, and system test models.



Figure 17: All Integration Tests

System Testing

The simulator was tested on a system level by simulating the CR_2-4G rocket flight on all available simulators and comparing all possible results. These results are discussed in detail in the *Simulation Execution* section.

Comparison with Experimental Data

So far, much of the analysis has relied on theory and comparison with other simulator output. It is important to compare our models with real data to provide the best measure of their accuracy. Without access to a wind tunnel, we determined that we could test our *ISA Model* implementation against weather balloon data, and the final flight performance with actual rocket launches where data is available.

ISA Model

Our ISA Model was compared to weather balloon data taken as close as possible to the launch site. The sites chosen were Salt Lake City, Utah (SLC) and Tuscon, Arizona (TUS), and data was provided by University of Wyoming Department of Atmospheric Science [14].

The figures show an extremely close alignment with real conditions, both falling below 1% error

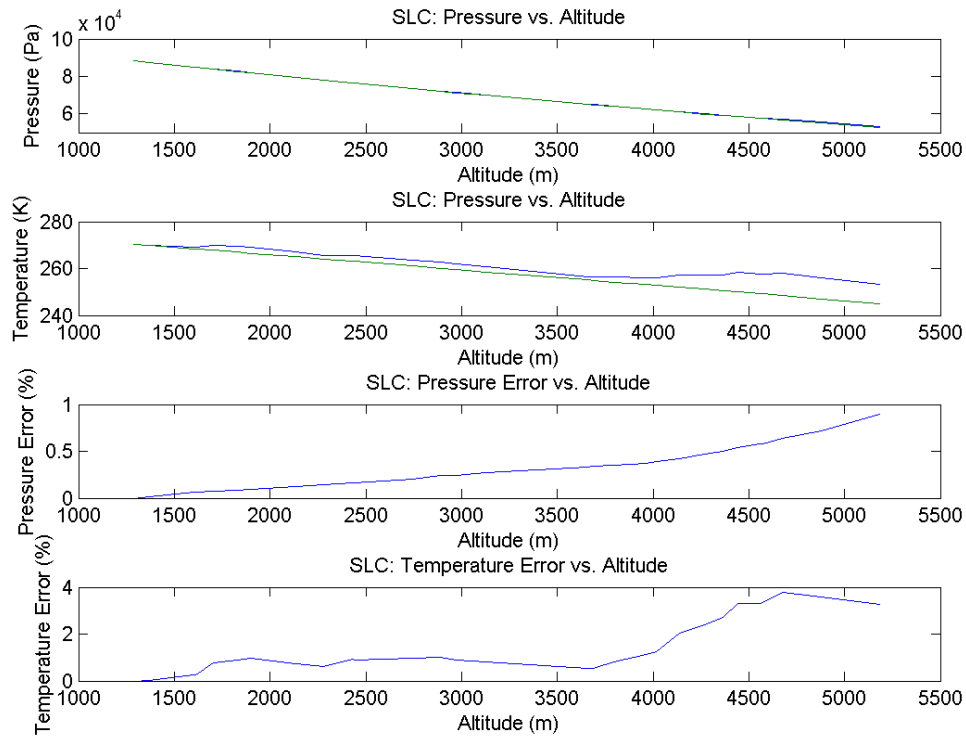


Figure 18: Comparison of ISA Model with SLC Weather Balloon Data

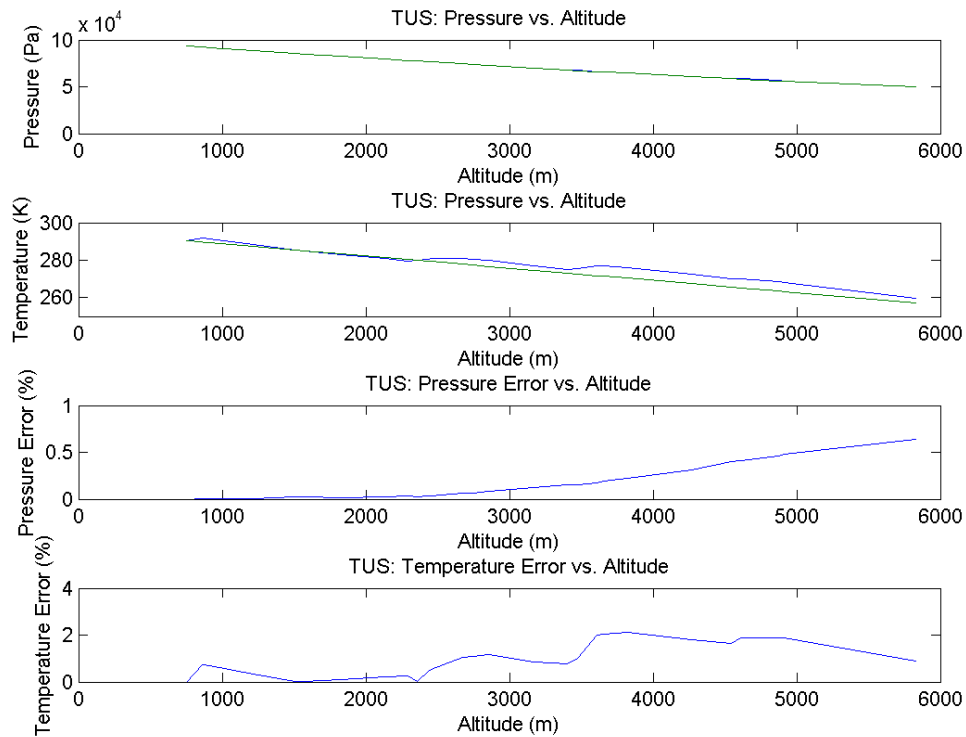


Figure 19: Comparison of ISA Model with TUS Weather Balloon Data

Flight Validation

University of Louisville

The University of Louisville was kind enough to share experimental rocket flight data, as well as their rocket dimensions so that our simulation could be compared to real-world experimental data.

Flight Details

March 29, 2015

Date	Elevation	Ground Temperature	Wind Speed	Humidity	Launch Guide Length
2015/03/29	405 ft (123.48 m)	289.26 K (61.00 °F)	14 km/h (3.89 m/s)	~39 %	3.05 m
2015/03/29	432 ft (131.71 m)	287.71 K (58.21 °F)	14 km/h (3.89 m/s)	~39 %	3.05 m
2015/03/29	410 ft (125.00 m)	294.70 K (70.79 °F)	14 km/h (3.89 m/s)	~39 %	3.05 m
2015/03/29	417 ft (127.13 m)	289.44 K (61.32 °F)	14 km/h (3.89 m/s)	~39 %	3.05 m
2015/03/29	446 ft (135.97 m)	289.54 K (61.50 °F)	14 km/h (3.89 m/s)	~39 %	3.05 m

Motor Details

Cesaroni L935

Parameter	Value
Manufacturer:	Cesaroni Technology
Entered:	Oct 6, 2009
Last Updated:	Jun 26, 2014
Mfr. Designation:	3147L935-P
Common Name:	L935
Motor Type:	reload
Diameter:	54.0mm
Length:	64.9cm
Total Weight:	2542g
Prop. Weight:	1567g
Cert. Org.:	Canadian Association of Rocketry
Cert. Date:	Aug 27, 2009
Average Thrust:	933.8N
Maximum Thrust:	1585.6N
Total impulse:	3146.8Ns
Burn Time:	3.4s
Isp:	205s
Case Info:	Pro54-6GXL
Propellant Info:	Imax
Data Sheet:	link
Availability:	regularCesaroni L935

Plots

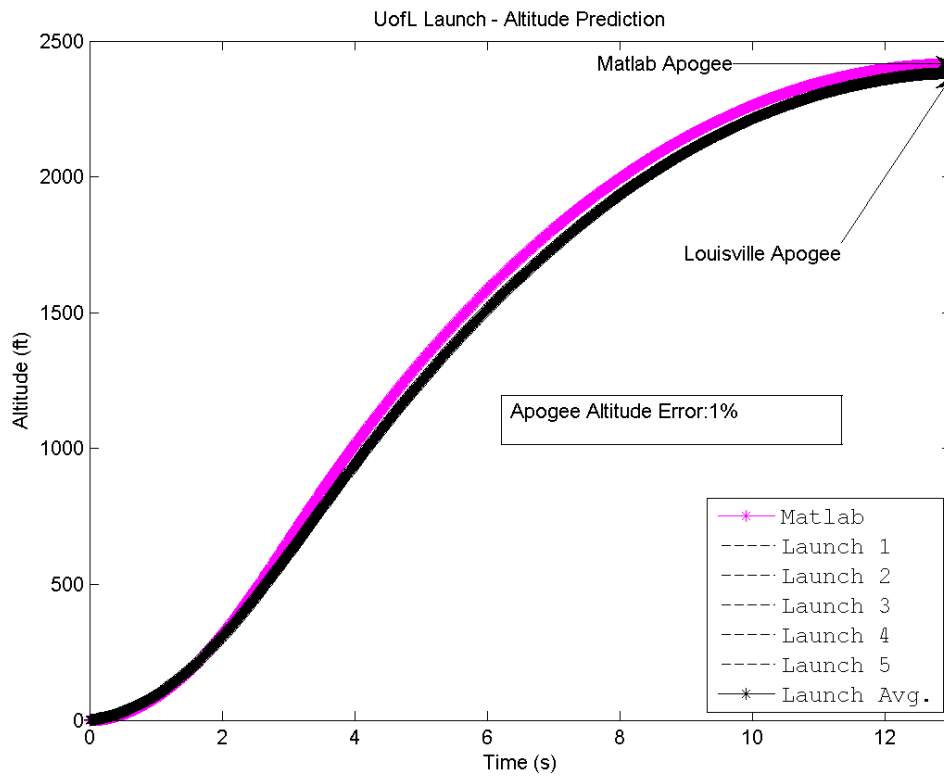


Figure 20: Altitude Plot of Simulation Data vs Louisville Rocket Launches

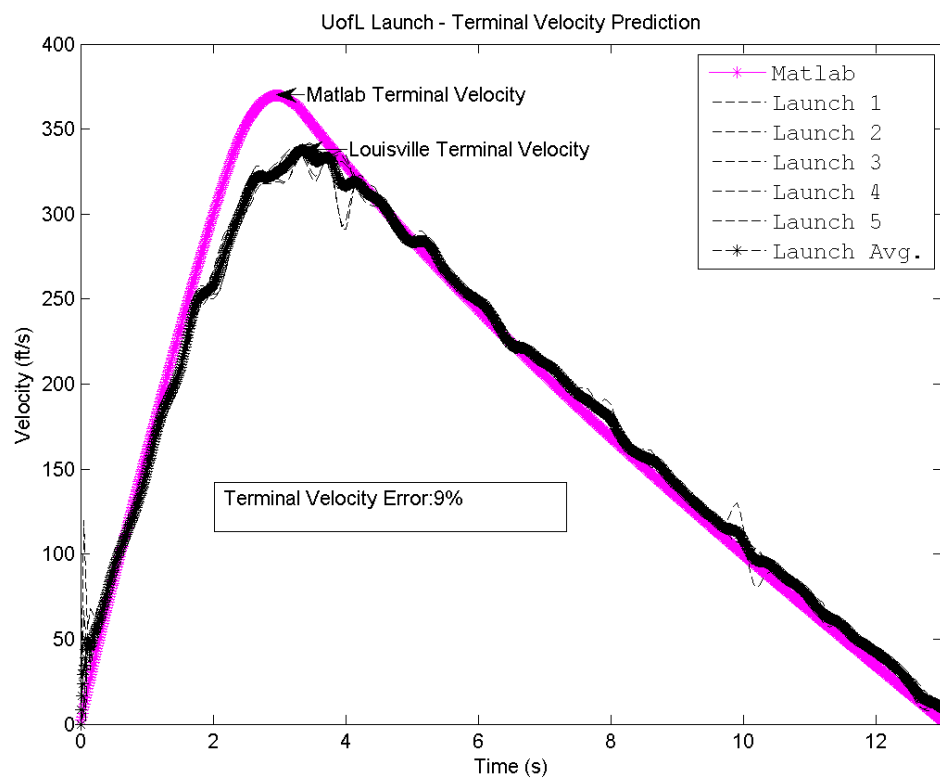


Figure 21: Velocity Plot of Simulation Data vs Louisville Rocket Launches

Comparison with Arcturus Rocket

The rocket flown at last years competition was also modeled. As shown in Figures 22 and 23, a high degree of accuracy with the avionics data is further confirmed.

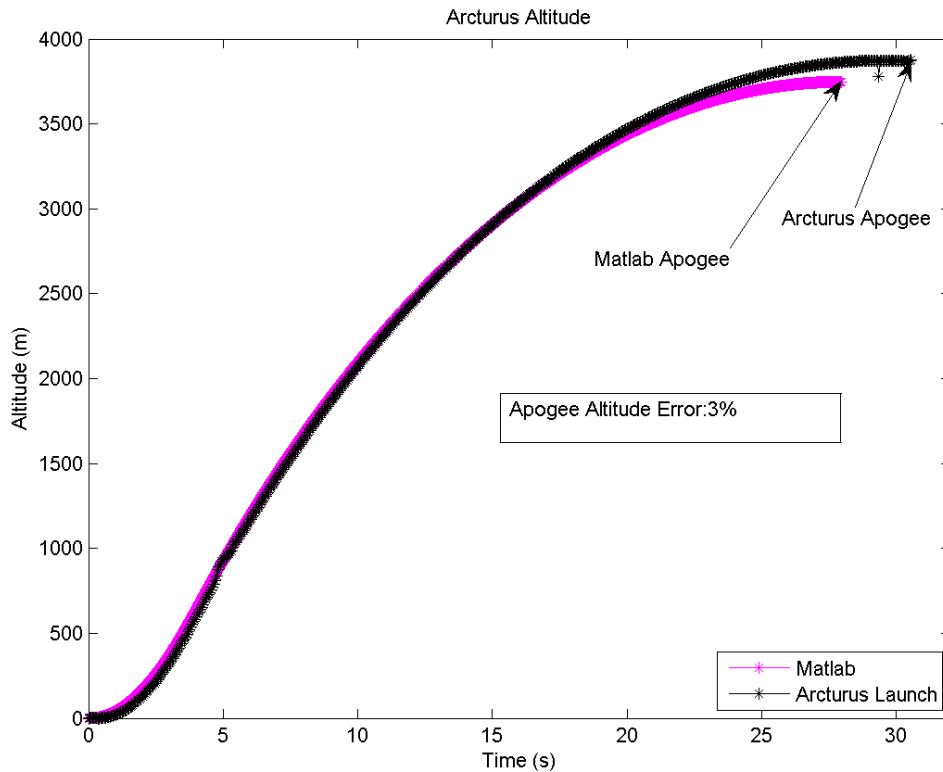


Figure 22: Altitude Plot of Simulation Data vs Arcturus Rocket Launch

Summary of Comparison with Experimental Data

Data Source	Parameter Tested	% Error
Weather Balloon Data (Salt Lake City, UT)	Pressure with Altitude	< 1%
Weather Balloon Data (Tuscon, AZ)	Pressure with Altitude	< 1%
University Of Louisville (avg. of 5 Launches)	Altitude	1%
University Of Louisville (avg. of 5 Launches)	Velocity	9%
Arcturus Flight Launch	Altitude	3%
Arcturus Flight Launch	Velocity	1%

Table 12: Summary of Comparison with Experimental Data

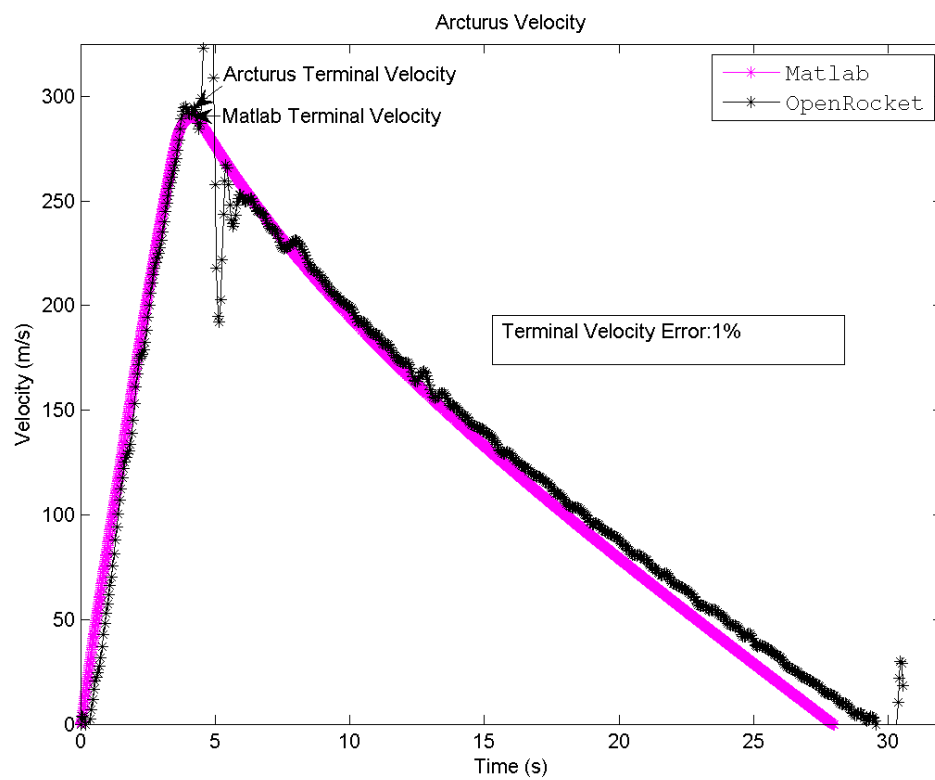


Figure 23: Velocity Plot of Simulation Data vs Arcturus Rocket Launch

Simulation Execution

Simulation Configuration

Historical Weather Data for Green River, Utah

The following conditions are historical data for Green River, Utah on June 25th, 2015 at 12:00PM (noon) [15].

Date	Elevation	Ground Pressure	Ground Temperature	Wind Speed	Humidity
2015/06/15	4,078 ft (1,243 m)	101300 Pa	298.15 K (25 °C)	6 km/h (1.6 m/s)	33 %
2014/06/15	4,078 ft (1,243 m)	100700 Pa	296.15 K (23 °C)	20 km/h (5.56 m/s)	8 %
2013/06/15	4,078 ft (1,243 m)	101000 Pa	299.15 K (26 °C)	10 km/h (2.78 m/s)	19 %

Table 14: Historical Weather Conditions, Green River, Utah

General Conditions

Elevation	Humidity	Launch Guide Length
4300 ft (1,311 m)	33 %	5.4864 (18 ft)

Table 16: General Simulation Conditions

Best Case

The best case scenario is with no wind, and a 0° launch angle, and the lowest air pressure.

Wind Speed	Ground Pressure	Ground Temperature	Launch Guide Angle
0 m/s	101000 Pa	298.15 K (25 °C)	0°

Table 18: Best Case Simulation Conditions

Worst Case

The worst case scenario, is the maximum wind condition permitted for launch by the competition, and a launch guide angle, and the highest pressure.

Wind Speed	Ground Pressure	Ground Temperature	Launch Guide Angle
8.33 m/s	101325 kPa	303.15 K (30 °C)	10°

Table 20: Worst Case Simulation Conditions

Figure 24: Full Model in Simulink, angle-of- attack less than 15 degrees

Observations

Figure 25 shows the predicted Altitude of the rocket compared against OpenRocket, RASAero, and Rocksim. It would appear that RASAero and Rocksim predict a higher altitude, perhaps considering their underestimation of the drag forces, shown in Figure 12.

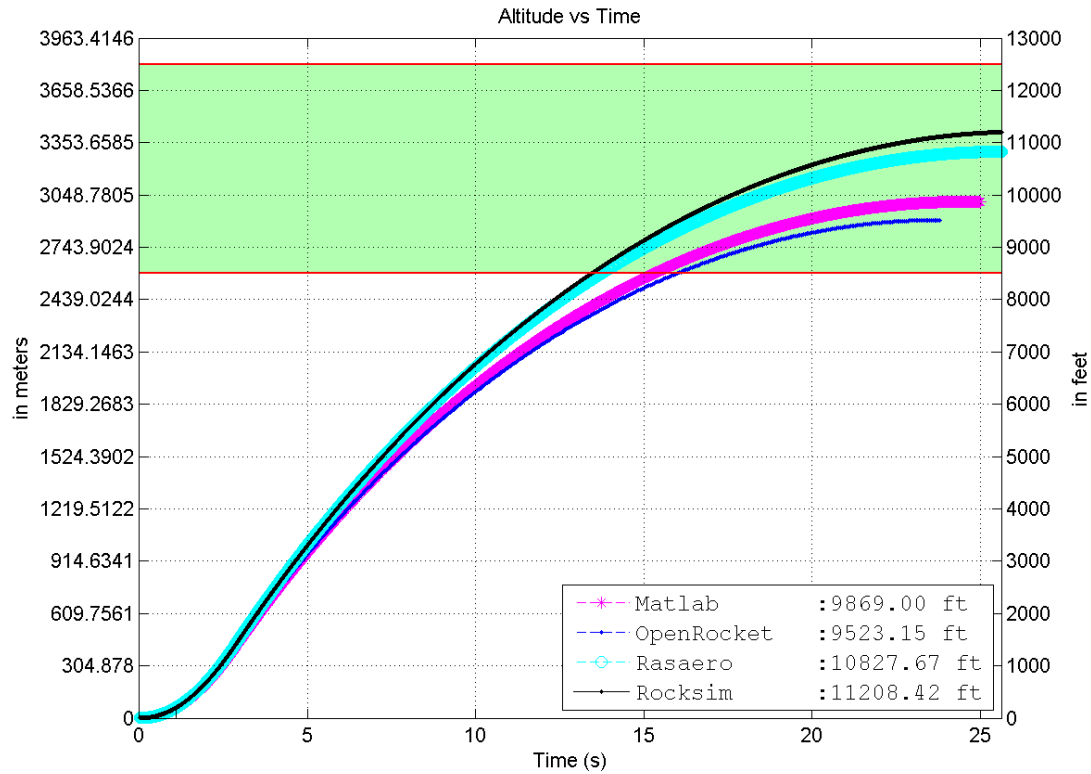


Figure 25: Altitude as a Function of Time

2e Vehicle reaches 10,000 ft altitude (+1000 feet / - 0 feet)

Figure 26 shows that the Mach number predicted by each software is quite close.

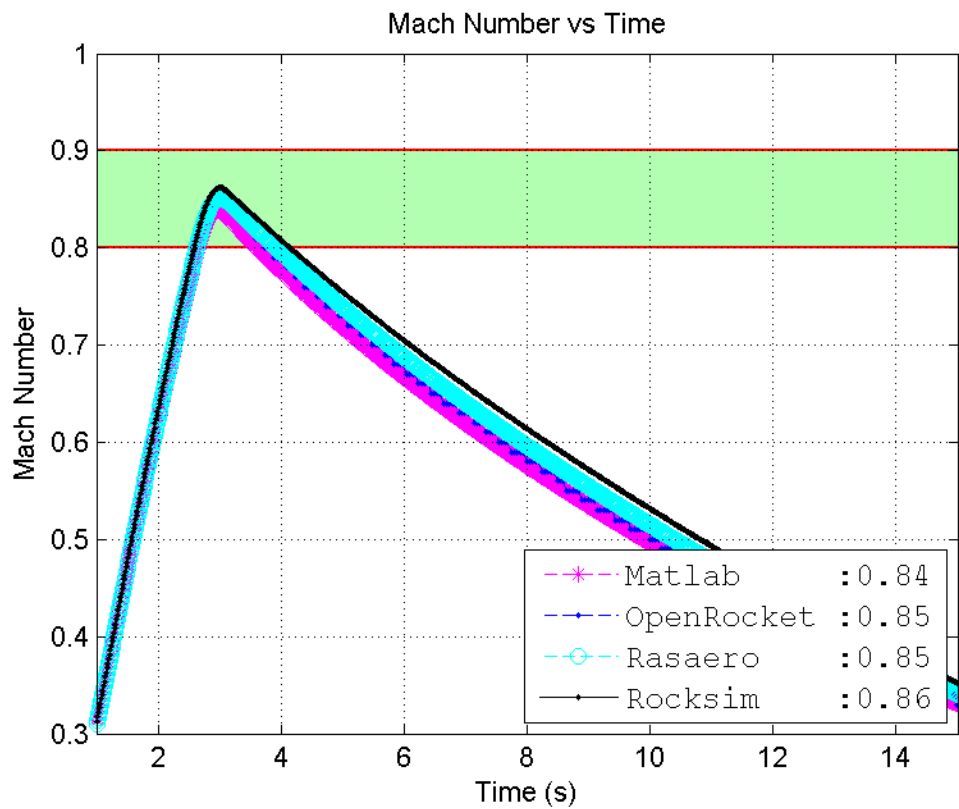


Figure 26: Mach Number as a Function of Time

2d Vehicle max speed mach 0.9

Figure 27 shows that the dynamic stability is quite similarly predicted by all tested simulators. OpenRocket shows a continuous oscillation, which according to my current analysis of their methodology, perhaps does not correctly consider the oscillation damping encountered during flight. In any case, if the OpenRocket model were to be 100% correct, the dynamic stability criteria would still be satisfied by a wide margin.

2a Static stability above 2 calibers

2b Dynamic stability above 0

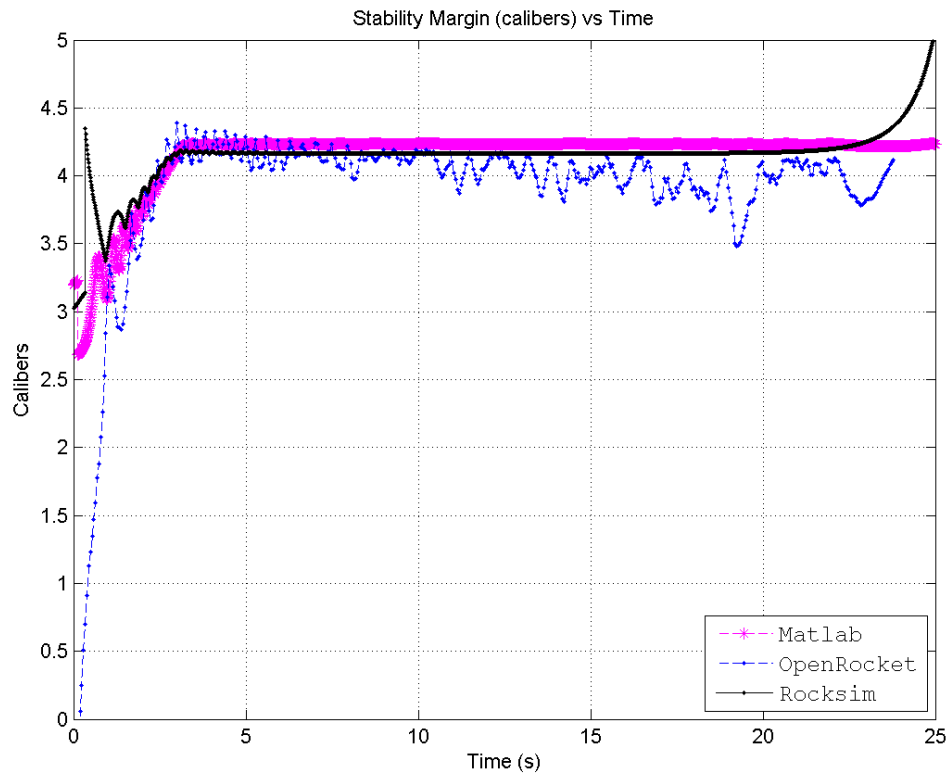


Figure 27: Stability (Calibers) as a Function of Time

As seen in Figure 29, once the rocket leaves the launch pad, the angular frequency of the rigid-body oscillation does not approach the natural frequency of the rocket, confirming requirement:

2f - The vehicle does not experience resonant pitching/yawing motion in flight

In any case, we know that resonant oscillation at the natural frequency does not occur, since the rocket stabilizes. Figure 28 shows the stabilization of the angle-of-attack with time.

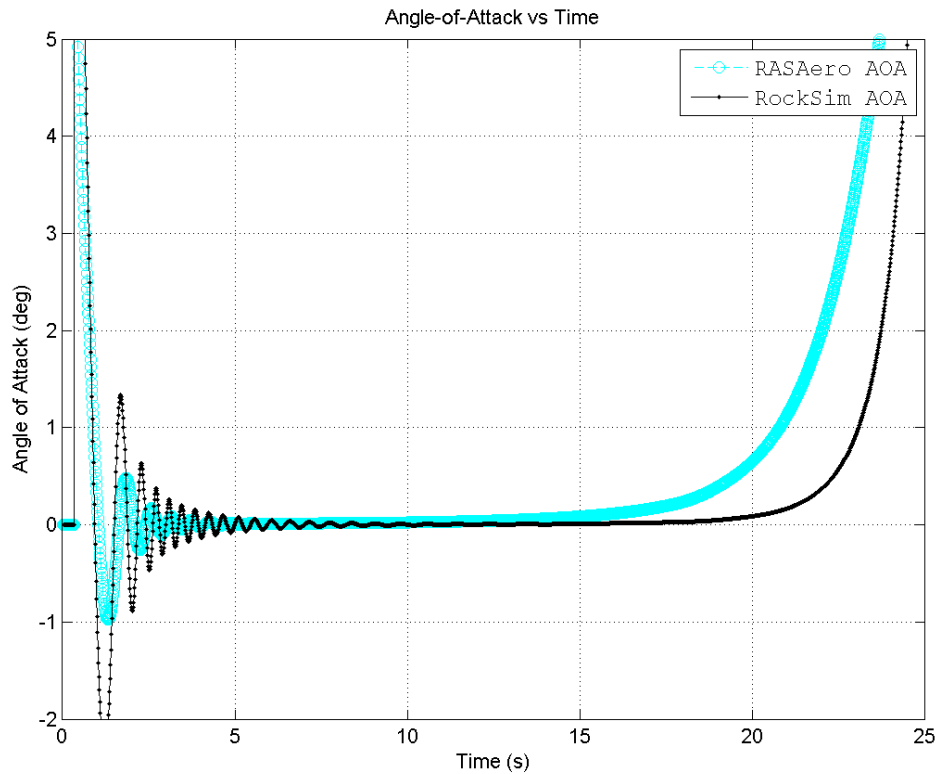


Figure 28: Angle of Attack Stabilization

RockSim and RASAero are chosen for this plot since they have a more mature stability methodology.

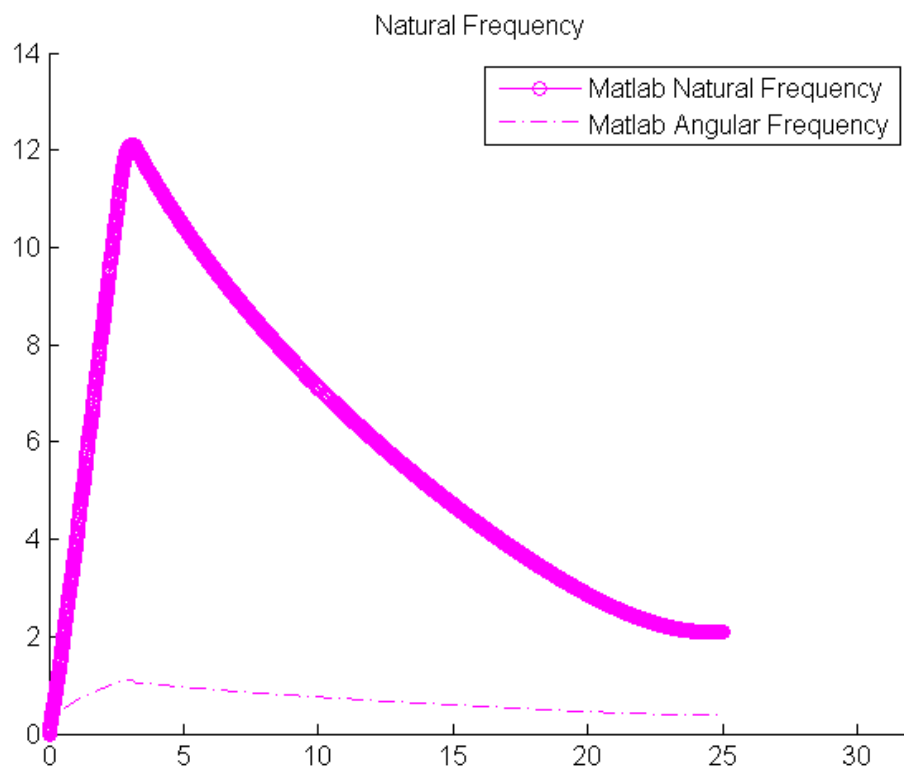


Figure 29: Natural Frequency

Simulation Summary

Ideal Case Competition Case	Altitude at Apogee	Highest Mach Number	Velocity leaving launch rail	Static Stability Margin	Dynamic Stability Margin	Damping Ratio
RASAero	11,372.39 ft 10,827.67 ft	0.84 0.85	33.5 m/s 33.5 m/s	> 3	N/A	N/A
Rocksim	11,190.78 ft 11,208.42 ft	0.86 0.86	33.5 m/s 33.5 m/s	> 3	> 3.0 < 4.5	~ 0.05
OpenRocket	10377.92 ft 9672.72 ft	0.84 0.83	33.7 m/s 33.8 m/s	> 3	> 0.5 < 4.5	~ 0.3
Matlab	10,364.00 ft 9881.65 ft	0.84 0.84	33.7 m/s 33.6 m/s	> 3	> 2.5 < 4.5	~ 0.05
Requirement	10,000 ft +- 2500 ft ✓	< 0.9 ✓	> 32.8 m/s ✓	> 2 ✓	> 0 ✓	< 0.707 ✓

Figure 30: Simulation Summary

Discussion

Sources of Error

There are a great many sources of error in this analysis.

First and foremost, the Barrowman Method contains a lot of simplifications which have a limited range of validity, and even in the valid ranges introduce error. For example, that the *Stability Derivative* is constant at angles of attack less than 10% is not exactly correct. In his analysis, it is demonstrated that the error is small, but added to the errors for other simplifications and approximations, the result may be quite significant.

The following assumptions introduce error

- axis-symmetric rigid body rocket
 - the rocket in fact will have some slight asymmetry, due to slight manufacturing defects
- single cylindrical body
- constant fuel expenditure rate
 - the fuel expenditure does not vary greatly, but it is certainly not constant, as evidenced in 2
- the *Ideal Gas Law* applies throughout the flight
 - it was shown that the atmospheric error was roughly 1%, however this will increase with altitude
- steady-state irrotational flow around the body [3]
- fully aligned thrust [4]
 - it is likely that the alignment of the motor and exit nozzle will not be perfect along the longitudinal axis
- smooth transition between nose cone and body tube (no shoulder)
- wind turbulence
 - assuming a step input for wind disturbance does not consider turbulent effects
- fins are assumed perfectly aligned
 - it is likely that the fin alignment may have some small error and that the edging will not be perfect
- roll is neglected
 - almost all of the items above will contribute to some amount of roll, which can have positive and negative effects for rocket flight

There are doubtlessly other errors that are not mentioned here, but these are significant and obvious at this point of the project. Addressing these issues would go a long way to making a more robust simulator.

Conclusion

Although many sources of error were identified, the engineering simulator appears to produce relatively good results. The comparison of the simulator with experimental data shows a maximum error of 9% and minimum error of 1%, which for the demands of the competition is very good. Most importantly, the flight performance requirements of the rocket are confirmed. The project is built with validation in mind, allowing it to be in all facets compared to 3rd party data and other simulators. More simulator validation with experimental data is planned for this Spring 2016, with smaller launches planned at nearby Quebec competitions. There is much potential for future development, opportunities for improvement are discussed in the next section.

Future Enhancements

Hardware-in-the-loop

Porting to Python / OpenModelica

Plotting with Plot.ly

Robust Wind Model

To account for wind turbulence in future models, two commonly used Wind Models are explored.

Kaimal Wind Model

$$\frac{S_u(f)}{\sigma_u^2} = \frac{4L_{1u}/U}{(1 + 6fL_{1u}/U)^{5/3}} \quad (130)$$

Von Karman Wind Model

$$\frac{S_u(f)}{\sigma_u^2} = \frac{4L_{2u}/U}{(1 + 70.8(fL_{2u}/U)^2)^{5/3}} \quad (131)$$

Where

- $\frac{S_u(f)}{\sigma_u^2}$ is the *Spectral Density Function* of turbulence velocity
- f is the turbulence frequency
- σ_u is the standard deviation fo the turbulence velocity
- L_{1u} and L_{2u} are length parameters
- U is the average wind speed

[3]

ThrustCurve.org API Integration

ThrustCurve.org has an API we could use to dynamically pull motor data for integration into the simulation

Rocket Orientation

While good results have been achieved thus far, a 6DOF simulator is preferable to produce the most realistic simulation possible. It would be possible to account for wind turbulence and other disruptions which are not confined to a single axis. If all forces and moments can be clearly defined, it also allows a seamless coupling of the point-mass and rigid body rotation systems described earlier, as well as the pitch/yaw and roll systems.

Building on the material explored in the Angular Stability model, this section introduces topics relating to the orientation of the rocket during flight.

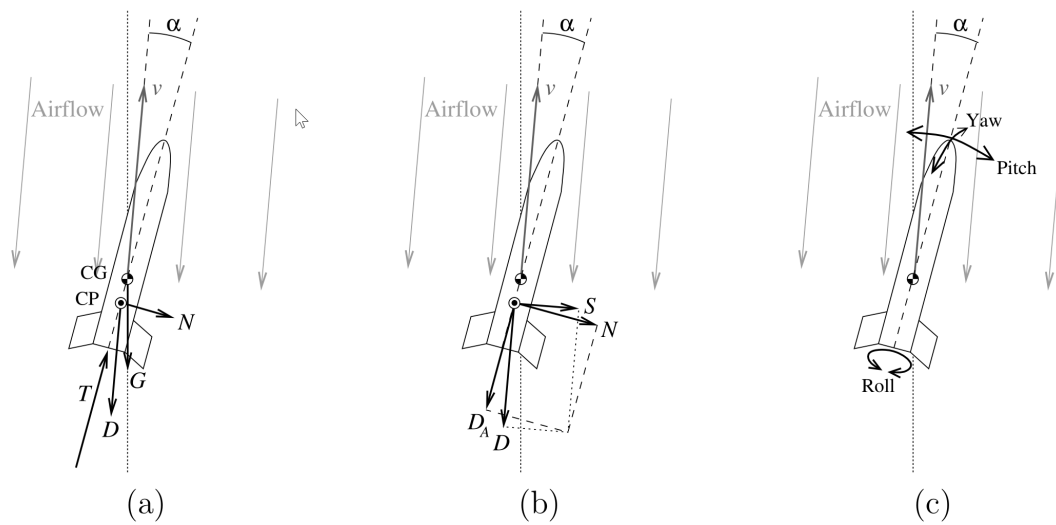


Figure 3.1: (a) Forces acting on a rocket in free flight: gravity G , motor thrust T , drag D and normal force N . (b) Perpendicular component pairs of the total aerodynamical force: normal force N and axial drag D_A ; side force S and drag D . (c) The pitch, yaw and roll directions of a model rocket.

Figure 31: Forces and Moments Experienced by rocket in flight

Rotations

Spherical Coordinates and *Euler Angles* are commonly used to describe the orientation of an object, however both systems encounter singularities where the orientation is ambiguous. Special cases are required to handle these singularities, which complicate the analysis and programming.

Quaternions

Quaternions are commonly used to describe spatial rotation, avoiding singularities.

An initial position is taken as reference to describe subsequent changes in orientation. Vectors can be transformed from rocket coordinates to world coordinates, and the reverse.

Leonhard Euler proved that

$$e^{i\phi} = \cos \phi + i \sin \phi \quad (132)$$

Thus, $e^{i\phi}$ lies on the unit circle in the complex plane, and has a unit length [16].

Multiplication

$$(a + bi)(c + di) = re^{i\phi} se^{i\theta} = rse^{i(\phi+\theta)}$$

$$i^2 = j^2 = k^2 = ijk = -1$$

Quaternions are typically denoted as the addition of a scalar and vector [3]:

$$q = w + x\hat{i} + y\hat{j} + z\hat{k} = w + v$$

i, j, k are all square roots of -1 [16]

$$ij = k = -ji$$

$$jk = i = -kj$$

$$ki = j = -ik$$

If we consider three-dimensional space to be purely imaginary quaternions [16]:

$$R^3 = xi + yj + zk : x, y, z \forall R$$

Rotations are done using unit quaternions [16]

$$\cos \phi + i \sin \phi$$

$$\cos \phi + j \sin \phi$$

$$\cos \phi + k \sin \phi$$

Which can be rewritten as [16]

$$e^{i\phi}, e^{j\phi}, e^{k\phi}$$

For example, taking any arbitrary unit quaternion (*vector*) \mathbf{u} [16]

$$u = u_1i + u_2j + u_3k = e^{u\phi}$$

We can rotate another arbitrary vector \mathbf{v} about the axis in the \mathbf{u} direction [16]

$$e^{u\phi} v e^{-u\phi}$$

We can also rotate in the inverse direction as follows

$$e^{-u\phi} v e^{u\phi}$$

Such multiplication of unit quaternions is useful for particular 3D rotations about an axis. Specifically, the unit quaternion $e^{i\phi}$ corresponds to a rotations about the origin on the complex plane of angle ϕ [3].

We can rewrite the previous rotations with the unit quaternion q

$$qvq^{-1}$$

$$q^{-1}vq$$

The computation of quaternions can be simplified, knowing that

$$q^{-1} = (w + x\hat{i} + y\hat{j} + z\hat{k})^{-1} = w - x\hat{i} - y\hat{j} - z\hat{k}$$

With the following transformation, q can be converted to a rotation matrix R

$$R = \begin{bmatrix} 1 - 2v_y^2 & 2v_xv_y - 2wv_z & 2v_xv_z + 2wv_y \\ 2v_xv_y + 2wv_z & 1 - 2v_x^2 - 2v_z^2 & 2v_yv_z - 2wv_x \\ 2v_xv_z - 2wv_y & 2v_yv_z + 2wv_x & 1 - 2v_x^2 - 2v_y^2 \end{bmatrix} \quad (133)$$

[1]

Where:

$$w = \cos\left(\frac{\phi}{2}\right) \quad (134)$$

$$v_x = \sin\left(\frac{\phi}{2}\right) a_x \quad (135)$$

$$v_y = \sin\left(\frac{\phi}{2}\right) a_y \quad (136)$$

$$v_z = \sin\left(\frac{\phi}{2}\right) a_z \quad (137)$$

[1]

This can be used to determine the unit vectors for the pitch (X), yaw (Y), and roll (Z) axes in the current orientation before rotation

$$X = RX_0^T \quad (138)$$

$$Y = RY_0^T \quad (139)$$

$$Z = RZ_0^T \quad (140)$$

[1]

Where:

$$X = [1, 0, 0] \quad (141)$$

$$Y = [0, 1, 0] \quad (142)$$

$$Z = [0, 0, 1] \quad (143)$$

[1]

An inertia tensor is defined as follows:

$$I = \begin{bmatrix} I_{xx} & 0 & 0 \\ 0 & I_{yy} & 0 \\ 0 & 0 & I_{zz} \end{bmatrix} \quad (144)$$

[1]

TODO:

1. calculate earth-relative linear velocity vector
2. angular velocity vector
3. calculate quaternion derivative

Et Voila!

Parameters needed for quaternion analysis

- rocket mass
- **reference length**
- angle-of-attack
- reference area
- longitudinal moment of inertia
- radial moment of inertia
- thrust force
- drag force
- weight force
- pitching moment
- pitch damping moment
- yawing moment
- yaw damping moment
- ~~roll moment~~
- ~~roll forcing moment~~
- ~~roll damping moment~~
- normal force
- side force
- pitch rate
- raw rate
- roll rate
- wind velocity

Rocket Moments

A *Pitch Moment* and *Pitch Damping Moment* are defined, which are different than the *Corrective Moment Coefficient* and the *Damping Moment Coefficient*. Note: a complementary *Yaw Moment* and *Yaw Damping Moment* are implied, with exactly the same considerations for motion along the uncoupled complementary yaw-axis.

Pitch Moment

The *Pitch Moment* is taken from the tip of the nose cone, it must be moved to the COG to mirror *Corrective Moment Coefficient*.

$$M_{pm}(x) = -\frac{1}{2}\rho v^2 C_m A_{ref} * L_{ref} \quad (145)$$

TODO why minus?

Where:

- ρ is the local atmospheric density
- v is the rocket velocity relative to the surrounding air
- A_{ref} is the reference area (frontal or side?)
- L_{ref} is ???

Pitch Moment Coefficient

$$C_m = C_m - F_s \cdot COG \cdot L_{ref} \quad (146)$$

Where:

- F_s is the side force

[3]

Pitch Damping Moment

- significant only near apogee

[3]

Stochastic Simulations

The simulator described in this paper is deterministic. It assumes that all input parameters are known and produces the same simulation result each time it is run, as long as no parameters are directly changed. While it was acknowledged that conditions may vary and produce different launch outcomes, only the extreme expected cases were tested - a multitude of possibilities exist in between.

A convincing and complete engineering simulation must account for the uncertainties of certain variables. In high-powered rocket flight, there are many such uncertainties. For example, any error in the shaping of the fins introduces roll during flight, which has many influences on the rocket. Additionally, wind turbulence is extremely difficult to predict, and can have impacts all all stages of the rocket flight which may change its directory. Temperature is a significant factor for the performance of the motor - for instance, its total impulse and burn time are sure to be affected at high temperatures.

The variation of all these parameters together creates a great deal of uncertainty, which must be accounted for in a robust engineering simulation.

Stochastic methods such as the *Monte Carlo* method randomize these parameters and provides a range of uncertainty from which it is possible to consider the probability that a given simulation outcome will occur in reality.

Conventions

Data Model

The *Data Model* provides static and dynamics parameters as needed by other models in the simulation.

Static Parameters

Many parameters are constant throughout the simulation, notably the structural dimensions. All structural dimensions are generated in the CATIA Design and output to a spreadsheet, which the simulation will load and place in the Matlab workspace.

This instance can be accessed by multiple models to clearly and effectively provide parameter access.

Dynamic Parameters

As discussed in the *Dynamic Parameters* section, many parameters are changing due to flight conditions. An additional *Map Container* instance is created to handle and deliver these changes to the models that need them.

Matlab Conventions

Matlab/Simulink Libraries

Overview

The goal is to create a robust Simulink model that references Matlab code from files that can be tracked by versioning software (Git). The Matlab source should be editable and effect changes in the Simulink model.

By a combination of both, full versioning control can be achieved in the project.

Creating a Library

1. Open Matlab
2. Open Simulink
3. Click File -> New -> Library

Add to path

Permanently add your workspace to the Matlab path. At the command prompt:

```
>> pathtool
```

[Alternatively, try this howto](#)

Add to Library Browser

[Add to Library Browser](#)

Algebraic Loops

With systems that involve direct-feedthrough (feedback), it is common to encounter an algebraic loop, wherein the output of a function is also an input of the same function.

e.g.

$$u = f(u)$$

These can commonly be solved with a combination of *Atomic Subsystems*, *Initial Conditions*, or *Unit-Delay*. This matter is discussed thoroughly in the following guide

[Algebraic-Loops](#)

Importing Data

Tabulated input data is relied upon to drive the simulation (see *Dynamic Parameters*). The following configuration is investigated to support this smoothly

[Recommended Methods for Importing Data](#)

[Load Signal Data for Simulation](#)

[Importing Signal Data in Simulink](#)

[Import Data Structures](#)

From File

The *From File* block in Simulink allows incremental loading of data

The From File block reads data from a MAT-file and outputs the data as a signal. The data is a sequence of samples. Each sample consists of a time stamp and an associated data value.

[From File](#)

Mat-File Versions

Data is read incrementally from Mat-File versions 7.3 and above [Mat-file Versions](#)

nD Lookup Tables

Specifying Time Data

[Specifying Time Data in Simulink](#)

Versioning for Matlab Files

Background

- Older versions allowed providing external ‘.m’ file for the *Matlab Function* block in Simulink
- Newer versions are shifting towards the embedded model, where Matlab code is compiled for execution on test hardware

[Naming conventions in Simulink for Matlab files changed after 2011A](#)

Interpreted Matlab Function

Interpreted Matlab Function blocks are used to reference Matlab files so they can be versioned in Git. *Interpreted Matlab Function* blocks only accept one input and one output, therefore we must pass an array as input and an array as output. The contents of the array will contain our variables of interest. (De))*Mux* and *Bus* blocks may be useful to streamline the model.

1. Write your Matlab function
2. Create a Simulink Model
3. Add the *Interpreted Matlab Function* block
4. Double-click the added block, and enter the name of your function as directed. Select 'OK'
5. Right-click the block, expand the 'Mask', and select 'Create Mask'
6. Add the following in the 'Icon Drawing Commands' box `disp('function_name')`
7. Add a *Mux* block to combine your inputs into a single input array, and a *Demux* port to unpack your output array into outputs

Versioning for Libraries

- Saving files as libraries and following the existing use cases in the documentation will allow robust versioning and collaboration workflow

Unit Testing

Simulink Unit Testing

Model Referencing

Model Referencing shall be used to test all libraries for expected behavior.

1. Create a Test Model in which you drag the Library
2. Provide all test inputs and output assertion
3. Create another model to contain all the test cases created in 2
4. From the *Simulink Library*, drag a *Model Reference* block
5. Edit the *Model Reference* block, providing the name of the Test Model created in 2
6. Run the model created in 3 to verify the model referencing was successful

More information:

- <http://www.mathworks.com/videos/getting-started-with-model-referencing-68918.html>
- <http://www.mathworks.com/help/simulink/ug/creating-a-model-reference.html>
- <http://www.mathworks.com/help/simulink/slref/model.html>

Exporting Images

High quality figures brings a great deal of value to a report. Simulink Models and Matlab figures can be exported to scalable vector graphics and PDF formats at high quality.

GhostScript

[GhostScript](#) is needed to handle the EPS format. It can be downloaded [here](#).

GhostScript and GIMP

GIMP has problems opening EPS files with the default configuration. Follow the instructions [here](#) to fix GhostScript in GIMP

Exporting Figures

[export-fig](#) is a Matlab library which provides functions to output figures to various formats

Exporting Simulink Models

[export Simulink models to publication-quality figures](#)

[publication quality graphics in Matlab](#)

[LaPrint](#)

[Howto](#)

File Organization

- data
- documentation
- functions
- libraries
- models
- referencing
- scripts
- testing

data

data → **csv**

documentation

- documentation
 - images
 - template

The *documentation* folder contains all markdown files with project documentation. It also contains

documentation → **images**

Contains all images used in the documentation

documentation → **template**

Contains LaTeX/Pandoc/Markdown template and styling files

functions

libraries

models

referencing

scripts

testing

Naming Conventions

Variables

All variables must be lowercase, separated by underscores

e.g.

wet_motor_weight

Functions

All *Matlab Functions* must be CamelCase

e.g.

DynamicWeightCalculation

Models

All *Matlab Model* names must be CamelCase, and end in the word 'Model'

e.g.

DynamicWeightCalculationModel

Libraries

All *Matlab Library* names must be CamelCase, and end in the word 'Library'

e.g.

DynamicWeightCalculationLibrary

Documentation Conventions

Markdown

Markdown is a markup language that is meant to be easy to read and easy to write, as well as easy to convert to HTML, LaTeX, PDF, and other output types.

Python

Python is used to enable additional filters which handle features currently not supported out-of-the-box by Pandoc

[Download Python for Windows here](#)

Pandoc

Pandoc is a document converter that in our case is useful in converting the Markdown (.md) files into PDF and HTML

[The User Guide is very helpful](#)

Haskell

Haskell is useful in this environment to do some custom scripting

LaTeX

LaTeX is a powerful typesetting language useful for academic writing. Its mathematical expressions are particularly useful for this report.

Citations

[Excellent citation discussion](#)

[Haskell and Bibtex in Pandoc](#)

[IEEE CSL File Another IEEE CSL File](#)

Equations

Wrap functions as follows to enable automatic numbering:

```
\begin{equation}
\label{my_equation}
f(x) = \int \cdots e^{xy}
\end{equation}
```

You can refer to the equation by the label you assigned to it

This comment refers to equation `\ref{my_equation}`

[LaTeX equations in Markdown+Pandoc](#)

Figures

To automatically number figures, use the following syntax to insert an image:

```
[rocket_drag_model_overview]: images/rocket_drag_model_overview.png "Rocket Drag Model Overview"
![Rocket Drag Model Overview \label{rocket_drag_model_overview_label}][rocket_drag_model_overview]
```

Then, in your pandoc command, add the lof variable:

```
pandoc -s ... -V lof=lof
```

You can refer to the figure by the label you assigned to it

This comment refers to Figure `\ref{rocket_drag_model_overview_label}`

Tables

To automatically number tables and add captions, add the *capt-of* package to your preamble

```
\usepackage{capt-of}
```

Then, in your pandoc command, add the lot variable:

```
pandoc -s ... -V lot=lot
```

References

- [1] Simon Box Christopher M. Bishop and H. Hunt, "Stochastic six-degree-of-freedom flight simulator for passively controlled high-power rockets," *J. Aerosp. Eng.*, 10.1061/(ASCE)AS.1943-5525.0000051, 31-45.
- [2] G. J. C. Mandell Gordon K. and W. P. Bengen., *Topics in advanced model rocketry*. Cambridge, Mass: MIT Press, 1973.
- [3] S. Niskanen, "OpenRocket technical documentation (development of an open source model rocket simulation software)," Master's thesis.
- [4] Simon Box Christopher M. Bishop and H. Hunt, "Estimating the dynamic and aerodynamic parameters of passively controlled high power rockets for flight simulation," February 2009 [Online]. Available: <http://cambridgerocket.sourceforge.net/AerodynamicCoefficients.pdf>
- [5] NASA, "General thrust equation." Online [Online]. Available: <http://www.grc.nasa.gov/WWW/k-12/airplane/thrsteq.html>
- [6] J. Barrowman, "Calculating the center of pressure of a model rocket," 1998.
- [7] J. Barrowman, "The theoretical prediction of the center of pressure," *NARAM-8*, August 1966.
- [8] G. A. C. Sr., "The descriptive geometry of nose cones." Online, 1996 [Online]. Available: https://web.archive.org/web/20110411143013/http://www.if.sc.usp.br/~projetosulfos/artigos/NoseCone_EQN2.PDF
- [9] R. Galejs, "What barrowman left out," 1999.
- [10] M. Cavcar, "Viscosity as a function of temperature." Online, September-2006 [Online]. Available: <http://aerojet.engr.ucdavis.edu/fluenthelp/html/ug/node337.htm>
- [11] F. Inc., "Viscosity as a function of temperature." Online, September-2009 [Online]. Available: <http://aerojet.engr.ucdavis.edu/fluenthelp/html/ug/node337.htm>
- [12] H. Munson Okiishi, *Munson fundamentals of fluid mechanics*. Cambridge, Mass: John Wiley; Sons Inc, 2013.
- [13] D. G. M. Gregorek, "Aerodynamic drag of model rockets," *ESTES INDUSTRIES INC.*, 1970.
- [14] U. of Wyoming, "Atmospheric soundings." Online [Online]. Available: <http://weather.uwyo.edu/upperair/sounding.html>
- [15] F. IO, "Forecast io time machine." Online [Online]. Available: <http://forecast.io/>
- [16] J. Huerta, "Introducing the quaternions." Online [Online]. Available: <http://math.ucr.edu/~huerta/introquaternions.pdf>