REPAIR MANUAL

Type AllO

300vA,1300 vB,1300vc,1600 VB, Option GS

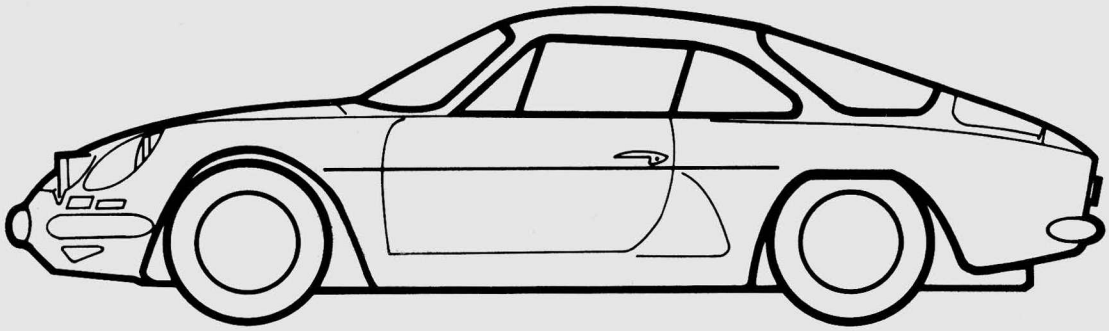

44

Alpine

ALPINE

RENAULT

ALPINE RENAULT

Société des Automobiles ALPINE

:Aboulevard Foch - Epinav/Seine - 93 - FRANCE
Tel. 243-46-16-40, Avenue Pasteur - Dieppe
76? FRANCE Tel. 84-23-40:41 ? R.C. Seine
55 b 9847 ? INSEE No 261 75 118 0001

MANUAL

OF REPAIR

Type A 110

1300 VA, 1300 VB, 1300 VC,

1600 VB, option GS

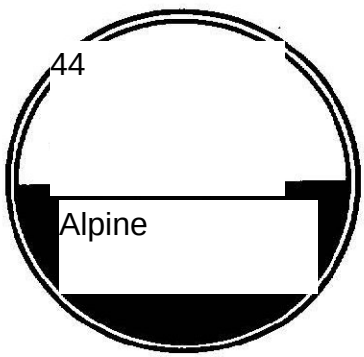

1st edition October 1970

GENERAL A

MOTOR ALLUMAGE B

ELECTRIC EQUIPMENT C

EMBRAYAGE D

BOX OF VITSES E

DIRECTION G

TRAIN BEFORE H

ARRIER TRAIN J

SUSPENSION

AMORISTS L

BRAKING SYSTEM M

CARROSSERIA N

OUTILLAGE SPECIALISE R

"Les méthodes de réparation prescrites par le constructeur, dans ce présent manuel, sont établies en fonction des spécifications techniques en vigueur on the date of preparation of the manual.

Elles sont susceptibles de modifications en cas de changements apportés par the manufacturer at the manufacture of différents organes et accessoires vehicles of his mark".

Tous les droits d'auteur sont réservés à la Société des Automobiles ALPINE. La reproduction ou la traduction même partielle du présent document ainsi que l'utilisation du système de numérotage de référence des pièces de rechange sont interdites sans l'autorisation écrite et préalable de la Société ALPINE Automobiles.

CONTENTS

GENERAL



A1

MOTOR

CHARACTERISTICS



82

DEMONCHING

REGISTRATION



? 3 BS

REPAIR OF THE SUBSEMBLES



? B6



87



B9





B11



B13



B14



B15

EQUIPMENT

ELECTRIC

CHARACTERISTICS



C1

SCHEMA

C2

EMBRAYAGE

CHARACTERISTICS



D1.

BOX OF VITSES

CHARACTERISTICS



E2

DEMONCHING
REGISTRATION



E4

DIRECTION

DEPOSITED
REPOSED



G1

TRAIN BEFORE

CHARACTERISTICS



H1

CONTROL



H1

ARRIER TRAIN

CHARACTERISTICS



J2

III

SUSPENSION

AMORISTS

RESENTS



L1

BRAKING SYSTEM

CHARACTERISTICS



M2

CARROSSERIA

REPAIR



N1

PEINTURE



N3

SPECIAL TOOL



R1

GENERAL

A-1

BERLINETTE TOUR DE FRANCE

GENERAL

I- PRESENTATION OF THE VEHICLE

Model A. 110?



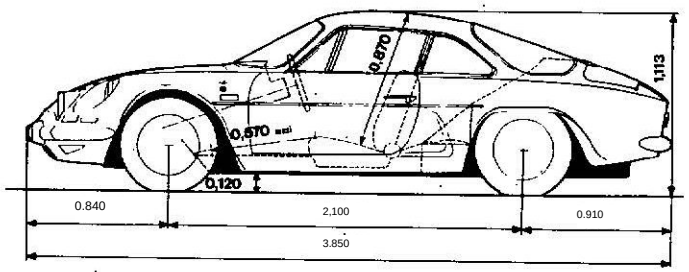



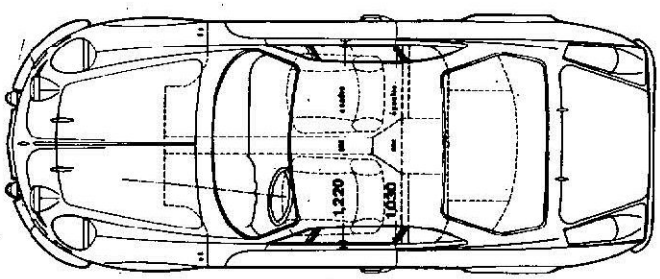

Rear-propelled passenger car:

Bodywork : Coupe consisting of a co-

only polyester and a beam chassis.

From model 70, type A: 11.0 is

divided into four versions:

: Version 85 type 1300 VC

? Version 1300 G type 1300 VA

? Version 1300 S type 1300 VB

? The version 1600 S type 1600 VB. GS engine option (competition version)

Identification of these versions by a

diamond plate located in the trunk.



A -2

II- GENERAL CHARACTERISTICS

1) General dimensions

Applicable to all versions.

Overall length	3.85 m	Wheelbase	2.10 m
Overall width	1.52 m	Front track on the ground	1.29 m
Overall hem (load) 1.10 m		Back to the ground	1.27 m
Overall height (empty)	1.13 m	Ground guard in charge	0.11 m
Fake Door Front	0.840 m	Inner width	
Back	0.910 m	with elbows	1.22 m

2) Weight

VERSION		85	1300 G	1300 S	1600 S
Unladen in running order	Before	260 kgs	280 kgs	280 kgs	280 kgs
	Back	425 "	415 "	415 "	435 "
Total weight		685 "	695 "	695"	715 "

3) Engine

Version 85 - Z cv

Type 810-30 derived from engine 810-03 of RENAULT R. 1192

Version 1300 G. - 7 cr

Type 812-00 keeps the same ca- that of the RENAULT 8 G.

Version 1300 S - 7 cv

Type 1300 VB derived from engine 812-00 of RENAULT 8 G.

Version 1600_S - 9 cv

Type 807-25 engine derivative 807-01 RENAULT 16 TS

Water cooling with radiator

Waterproof.

Oil cooling with r-

Diversion-mounted diator.

(4) Electrical equipment

Battery 12 Volts - 55 Amp/h.

Dynamo for version 85 from 25 to 30 Amp/h.

Alternative for other versions of 30 to 40 Amp/h.

(5) Clutch

Dry mono-disc.

Diaphragm mechanism.

Torsion shock absorber hub disc.

Unguided or graphite guided stop or ball depending on the versions.

(6) Gearbox

Type 330 for version 85

or Type 353 for version 85 but in optión.

Type 353 for other versions.

Type 364 mounted on certain versions 1600 S

Reports: 4 front synchronized, 1 step rear for 330

5 front synchronised, l step rear for 353 and 364

Speed lever on the floor.

A - 3

(7) Transmissions

Lateral transmissions on rear wheels.

1 needle cardan joint per tree

Wheel.

(8) Directorate

A rack with compensating spring.

Number of laps of the steering wheel: 3.2

Multiplication: 17/1

Steering wheel Ø: 300 mm, 330 mm and 360 mm.

Optional: Direct direction.

Number of laps of the steering wheel : 2,5

Multiplication: 13.5/1.

(9) Front train

Transversal quadrilateral deformables.

Independent half-trains.

10) Rear train

Rear arms consisting of two trom-

pettes on both sides of the

speeds.

Independent half-trains maintained

in their longitudinal movements

by two adjustable force legs.

(17) Suspension

Front and rear helical springs.

Two telescopic shock absorbers at the a-

var located inside the springs.

Four telescopic shock absorbers

on both sides of the

come out.

Front stabilizer bar.

12) Brakes

Hydraulic control.

Discs on all four wheels.

Cable hand brake on wheels

back.

13) Tyres and rims

Michelin X AS - Dunlop SP Sport -

V10 GT

Recommended pressures in kg:

	Before	Back
Wheels 15 inches 1, 4 to 1,6		2.0 to 2.3
Wheels from 13 inches 1.6 to 1.8		2.3 to 2.5

The rims identified by an asterisk do not

can be adapted only on car-

rosseries of the lightened type with passages of

Expanded wheel.

	Sheet	Aluminium	Sheet and alloy
Wheels	41/2 × 15	ALPINE 4 1/2 × 13 ALPINE 5 1/2 x 13* G.T. 41/2 × 13 G.T. 5 × 13 G.T. 5 1/2 x 13 * G.T. 6 × 13* GOTTI 5 × 13	DELTA-MIC 4 1/2 × 13 DELTA -MIC 5 × 13 GOTTI 4 1/2 × 13 GCTTI 51/2 × 13* GOTTI 6 × 13 *

14) Capacity

Gasoline tank 38 / sheet metal or 50 / plastic placed at the front.

Optional 79-type aviation tank placed at the rear.

Cooling with heating 9 1.

Oil box deck 2l. (BV 364 - 2 1.1/4)

Brake system 0.27 l.

VERSION	85	1300 G	1300 S	1600 S
MOTOR OIL (lower plate)	31	2.51	4 l	4 l
+ Oil radiator	+ 0.5	+ 0.5	+ 0.5	+ 0.5
	4l. option	4l. option		
Special oil filter competition			+ 0.5	+ 0.5

MOTOR. ALLOWING

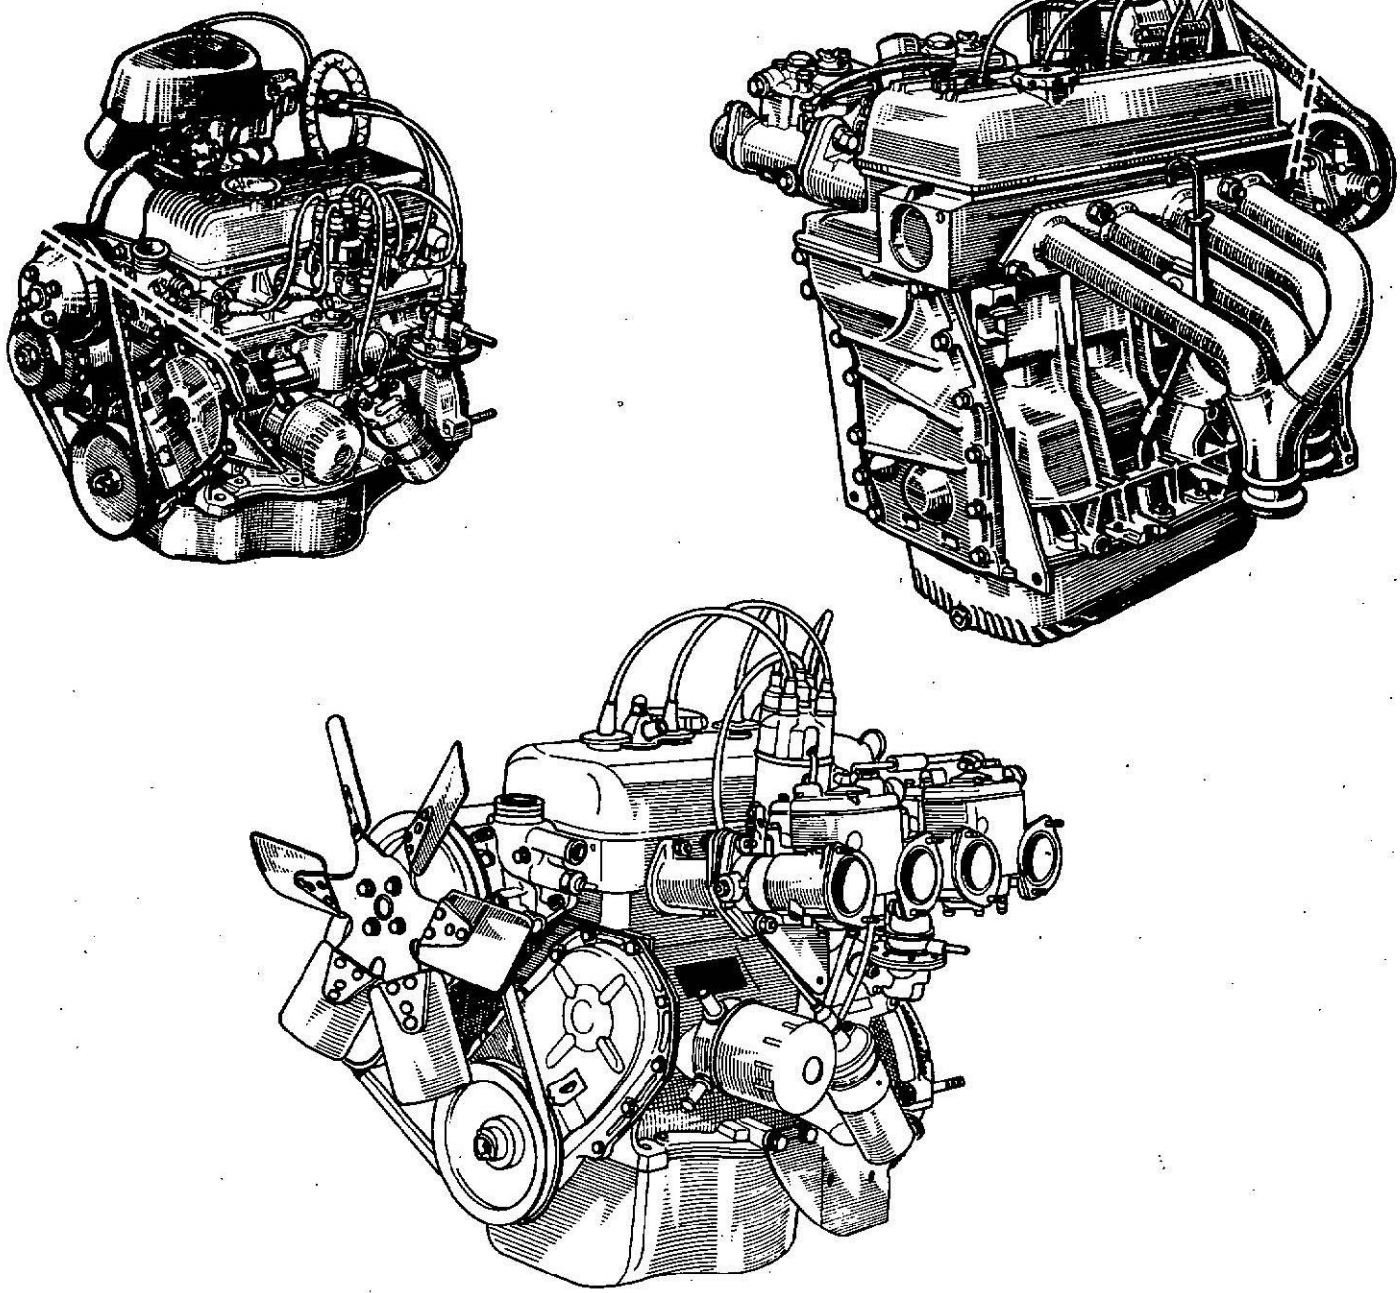

B-2

- MOTOR-

1- CHARACTERISTICS

(1) General

VEHICLE VERSION		85	1300 G	1300 S	1600 S	1600 GS
Engine type		810-30	812-000	1300 S	807-25	1600 GS
Engine capacity		1289 cm3	1255 cm3	1296 cm3	1565 cm3	1596 cm3
Aleage race		73 x 77	74.5 x 72	75.7 x 72	77 x 84	77.8 × 84
Volumetric ratio		9.4/1	10.5/1	12/1	10.25/1	11.5/1:
Maximum SAE power		81 Ch to 5900 t/min	103 Ch to 6750 t/min	132 Ch to 7200 +/min	138 Ch to 6000 +/min	172 Ch to 7000 +/min
Maximum SAE torque in m da/N		10.5 d 3500 +/min	11.9 a 5000 +/min	12.4 to 4500 +/min	14.7 to 5000 +/min	18.4 d 6000 +/min
Dist diagram.	AOA	20 °	31°	50 °	40 °	53 °
	FRG	80 °	61 °	91 °	72°	83 °
	AOE	55 °	62 °	74°	72 °	83 °
	RFE	42 °	26°	54 °	40 °	53 °
Recommended speed t/min		6300	6750	7000	6000	6500
Maximum speed t/min		6500	7000	7500	6250	7000

2) Identification

? By rectangular plate on the group (RENAULT plate or plate) ALPINE).

Note: Engine number and type on this plate shall. to be mentioned IMPERATIVELY when ordering parts.

3) Difference between original engine

RENAULT and ALPINE engine

(a) type 810-30 derived from 810-03 of R. 1192

Identical parts:

- Cylinder group
- Pistons shirts
- Vilebrequin
- Distribution
- Lower Carter
- Soups

Parts processed or replaced:

- Culasse : usináge of valve chambers, machining of spring bearings intake and exhaust and cups for mounting. internal springs, adjustment of the intake lights in relation to the collector and in- very admission on collector, rectification (2.6 mm) of the plane joint.

- Intake collector and exhaust RENAULT 8 S
- ALPINE scumbags
- RenaULT carburetor 8 S
- RENAULT 8G water pump and fan
- RENAULT 8G oil pump
- ALPINE camshaft
- Clutch type R. 1135 with type steering wheel Estafette No 8331975 for graphite stops.

B-3

(b) Type 812-00 identical to the engine RENAULT 8 G

Optional 4 l aluminium crankcase with bilge ALPINE H oil pump = 13 mm

Type 1300 S derived from 812-00

Identical parts:

- Cylinder group
- Vilebrequin
- Clutch
- Carburettor

Identical or replaced parts:

- Piston shirts: 1296 cm3, type ALPINE
- Oil pump extension, H = 13 mm
- Lower ALPINE aluminium housing
- Camshaft 13 R ALPINE
- Stronger setting of the valve spring oil pump (+ 1 washer of 1,2 mm)
- Bone joint
- Culasse: machining of the intake ducts, polishing and alignment, 5/10th rectification for intake valves Ø 35 mm, rectification of 4/10th for intake valves Ø 38,5 mm.

(d) Type 807-25 derived from 807-01 of R. 1151

? This engine is delivered prepared by. the R. N. U. R. according to specifications the following:

- Pion of additional centering on the crankshaft
- Reinforced rods
- ? - Pistons, axes, special segments
- Special camshaft
- Cylinder housing reinforced at the level Levels
- Distribution Carter machined for re- cover an intermediate plate of engine AR cross-beam support
- ALPINE aluminium scumbags
- Special ass.
- Double valve springs
- Intake valves Ø 42 less head hollow - shape tulip valve escape- different
- Inlet and exhaust collectors ALPINE
- Cultivators (heat treatment dif- (Ferent)
- Rotor 5 mm higher oil pump
- WEBER 45 DCOE carburettor
- Carter ALPINE oil in aluminium with re- cut height crepine.

Option 1600 GS derived from 807-25

- Special shirts and pistons, bore: 77.80 (cylinder: 1596 cm3)
- Culasse: alignment of the ducts, internal valve springs different externalities, special support cups of springs (stitched spines), alignment of the ducts.
- Special camshaft.

Note: For all these types of mo-? ALPINE reserves the right to the right to bring other mo- This will be achieved through the following: the type of customers and the use of the vehicle (competition).

I1- INTERVENTIONS

MOTOR DEPCSE ONLY

All these engines being attached to the rear of the vehicle by a cross-section of R.1135, The procedure shall be as follows:

1) Empty the cooling circuit.

(2) Decouple:

- mechanical and electrical controls
- pipes of water, petrol and Of oil
- on certain models, the pulls connecting the engine at the chassis or at the AR cross-section.

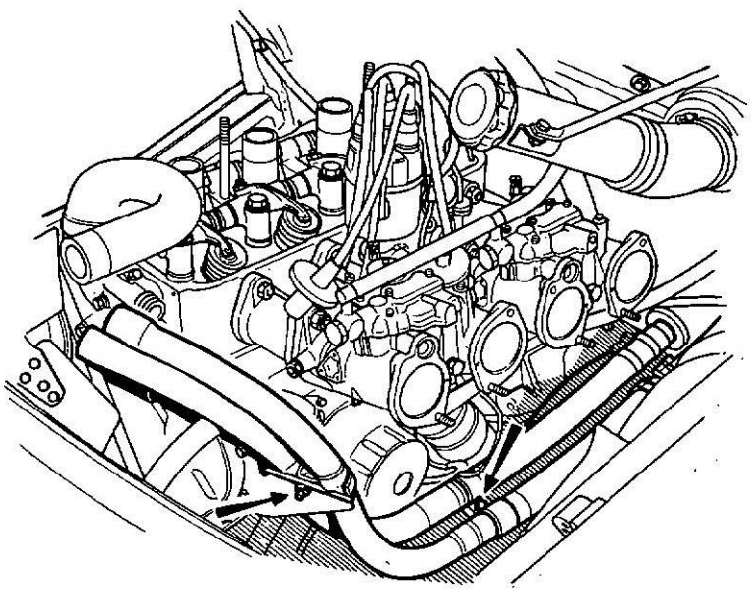

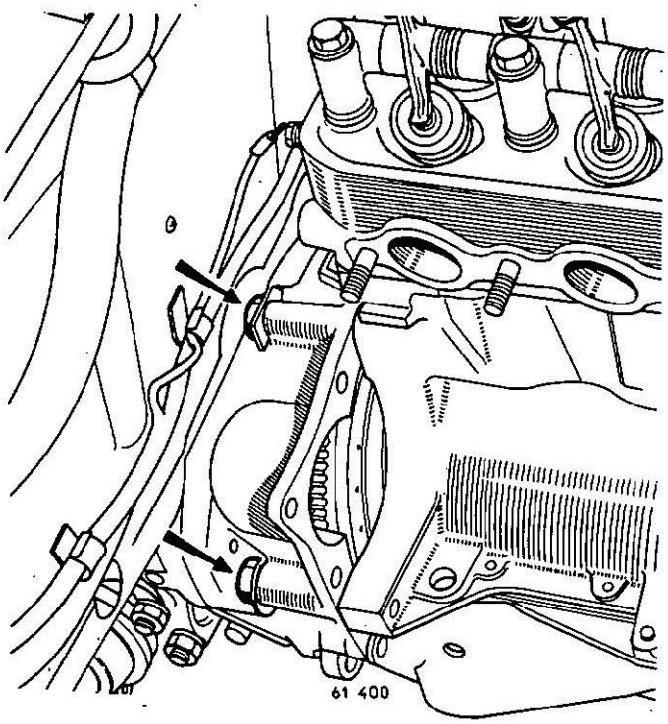

6) Lift the rear of the body;

Let's clear the engine from the bottom.

MOTOR ONLY

Operate contrary to filing.

Ensure the proper condition of the water drains and oil before connection.

DEPOSITED PROPULATOR GROUP

1) Empty the water circuit.

2) Unplug mechanic commands

electrical and hydraulic equipment,

pipes of water, oil and petrol.

3) Unburst the cross-section support box

chassis speeds.

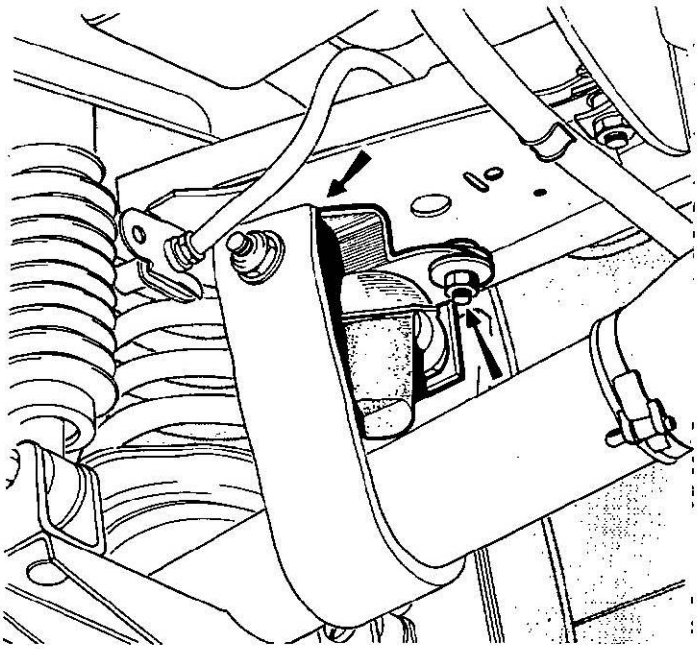

3) Uncoupling the bell entourage

clutching of the cylinder group.

4) Place the AR crossover.

5) On 1600 S, it is necessary to

place the exhaust manifold, the alternator, the water pump pulley,

arrivals and departures on the water pump,

the starter and right engine support

on the chassis.

Access to the AV face of the head

is facilitated by the removal of the plate

inspection of the AR bulkhead.

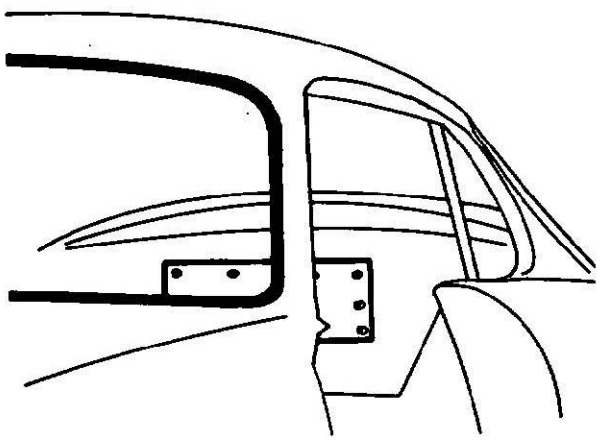

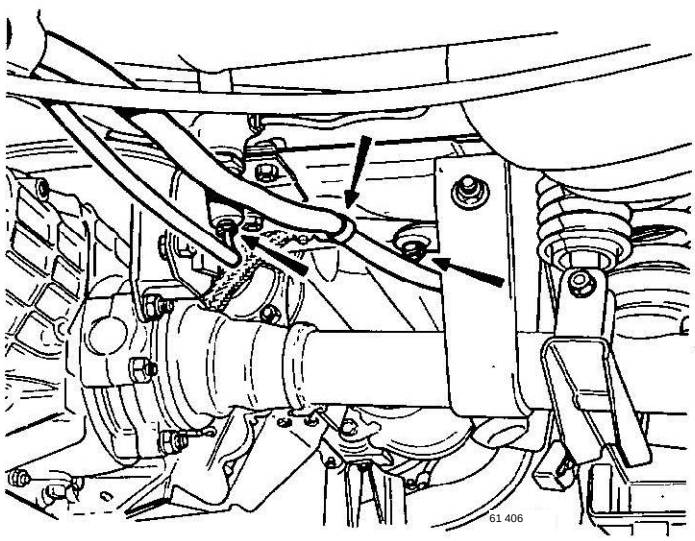

B-5

4) Place the pulls connecting the group
on the chassis.
5) Unroll the mo-
the chassis.
(6) Lift the rear of the vehicle sufficient
high to let the group pass.
Note: The 1600 S crossover is mo-
improved and strengthened.
7) Separate the engine from the box.

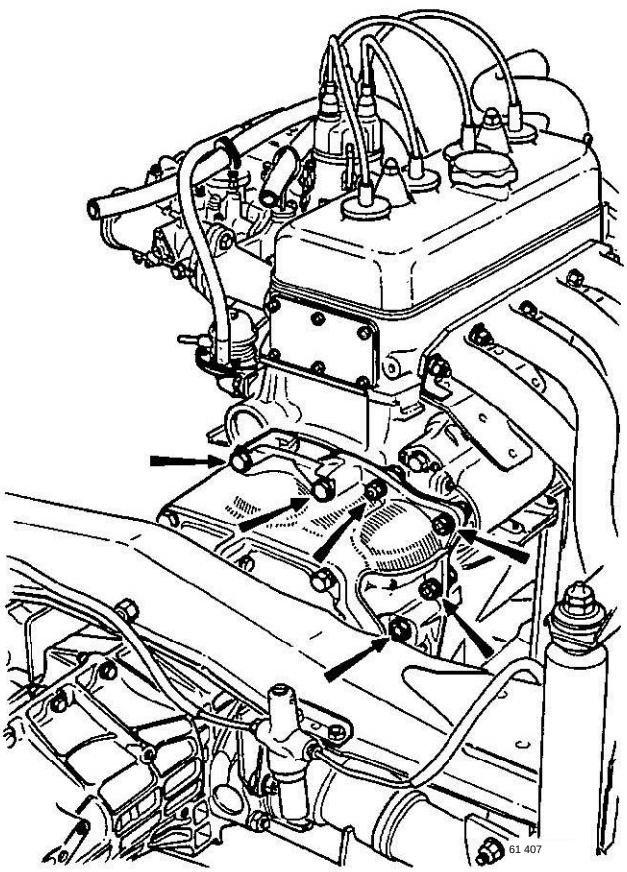

SUBMITTED PROPULENT GROUP

Operate contrary to filing.
Replenish the oil and water.
Purging the brake system.
Control the engine alignment by
ratio to the longitudinal axis of the vehicle.

Refer to the corresponding MR RENAULT:

Version 85 MR 131 (R. 1192)

Versions 1300 G and 1300 S MR 133 (R. 1135)

Versions 1600 S MR 96 (R. 1151)

1- CULASSE



	810-30	812-000	1300 S	807-25	1600 GS
Screw clamping torque			in 2 strokes	in 2 strokes 5.5 and	in 2 strokes 5.5 and
cold m da/N	5.5 to 6.5	7-7.75	7.5 and then 8	7.75-8, 25-7, 75-8.25	
hot (after 50' stop) in m da/N	6.5	unplanned		8.5 to 9	not foreseen
Cold starter setting					
Admission	0.20	0.20	0.25	0.20	0.25
Exhaust	0.25	0.30	0.30	0.30	0.35
Height of head in mm	71.80	73.0	72.4 or 72.6	93.5	93.5
Maximum correction in mm	0.30	0.20	0.20	0.30	0.20
Maximum deformation in mm	0.05	0.05	0.05	0.05	0.05.
Volume of rooms in cm3	36	36	35	43	43
Thickness of the head joint *	15/10	15/102	10/10g 12/10th after rectification	15/10	15/10
SOUPAPED GUIDES					
Inner diameter in mm	7	7	7	8	8
Outer diameter in mm					
Normal	11	11	11	13	13
Repair with 1 throat	11.10	11.10	11.10	13.10	13.10
Repair with 2 throats	11.25	11.25	11.25	13.25	13.25
SOUPAPED STEELS					
Width of litters in mm					
Admission	1.1 to 1.4	1.7	1,7	1.5 to 1.8	1.5 to 1.8
Stimulation	1.4 to 1.7	1.5	1,5	?1.7 to 2	1.7 to 2

B-7

	810-30	812-000	1300 S	807-25	1600 GS
Soupaps.					
Head diameter in mm					
Admission	33.5	35	35 or 38.5	42	42
Exhaust	30.0	32.6	32.6	35.35	35.35
Diameter of tail in mm					
Admission	7	7	7	8	8
Exhaust	7	7	7	8	8
Angle of range	90°	90°	90°	90°	90°
Lifting valves in mm.					
Admission	8.4	8.94	10.2	10,1	10.1
Exhaust	8.4	8.43	10	10,1	10.1
SOUPAP RESSORITES					
Free length in mm					
External spring	42.2	# 43	43	54.3	46
Domestic spring	34	# 41,2	41.2	46.8	34.2
Decrease in length					
in mm under load of	type R.1170	type R.1135	type R.1135	type R.1151	type 1600 GS
external spring	17.2 under 36 da/N	18 sub 44 da/N	18 sub 44 da/N	13.8 sub 52 da/N	22.7 sub 61 da/N
	type ALPINE	type R.1135	type R.1135	type R.1171	type 1600 GS
internal spring	18 sub 17 da/N	18.2 under 23 da/N	18.2 under 23 da/N	22.3 sub 16 da/N	.16.7 under 17.5 da/N
Yarn diameter in mm					
external spring	3.4	3.8	3.8	4.2	4.2
internal spring	2	2.7	2.7	2.6	2.6
Inner diameter in mm					
external spring	21.6	24.4	24.4	27.6	27.6
internal spring	12	17.3	? 17.3	19.8	19.8
CULBUTOR POWERS					
Diameter in mm					
Normal	19	21	21	12	12
repair	19.2	21.2	21.2	12.20	12.20
IIGE OF CULBURIERS					
Length in mm					
Admission	176	166	166	74.5	74.5
Exhaust	176	189	189	105.5	105.5
Diameter in mm	5	5.5	5.5		

* The thickness of the head joints may be different depending on the version.

DEPOSITED IN REPOSITED STATE

REPLACEMENT OF THE CULASSY JOIN

Refer to the corresponding MR RENAULT:

Version 85 — MR 131 (R. 1192)

Versions 1300 G and 1300 S — MR 133 (R. 1135)

Version 1600 S — MR 96 (R.1151)

B-8

SPECIFIC

1300 S Mounting of the head joint.

In the event that the latter had been a stocké in a damp place it is reordered to dry the joint before it is assembled. operation is performed by heating At about 150°C for 20 minutes in an oven.

The necessary equipment may be ? reduce to a simple to the on which the joint will rest to avoid direct contact with the flame of any stove. Temperature control can be made by thermochrome pencil.

The breech joint plans and the crankcase cylinders will then be enhylomar SQ 32/M applied with a hard hair brush.

The head will be tightened twice before the vehicle is put into service butt : First time at 7,5 mkg and then after heating the engine fixed point for 30 minutes, new clamping at 8 mkg to be made after cooling. A last clamp at 8 mkg will have location after 500 km of use of the car.

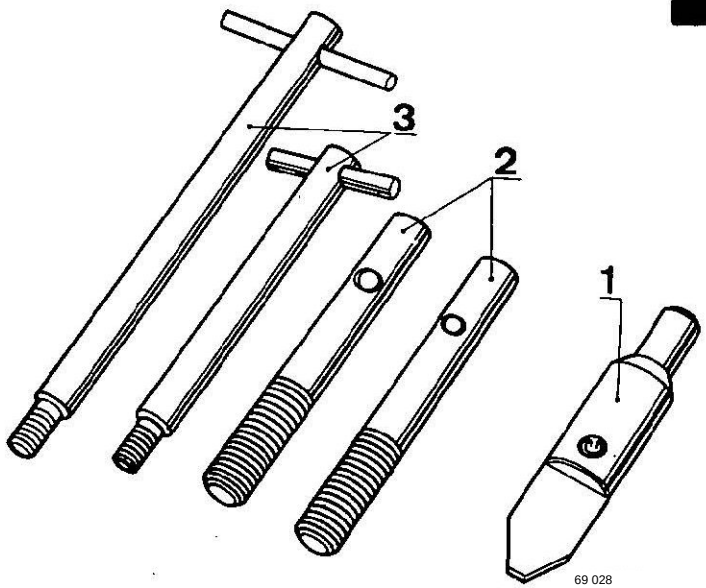

MOT 451

1600 S Disposes and rests from the head or replacement of the joint.

This operation cannot be done validly only on the delaid down. Indeed if the deposit on car is possible, height liunder the AR panel does not allow not the use of the cen- MOT 451. Access to the AV face of the head is. facilitated on this model by the removal of the inspection hatch AR bulkhead.

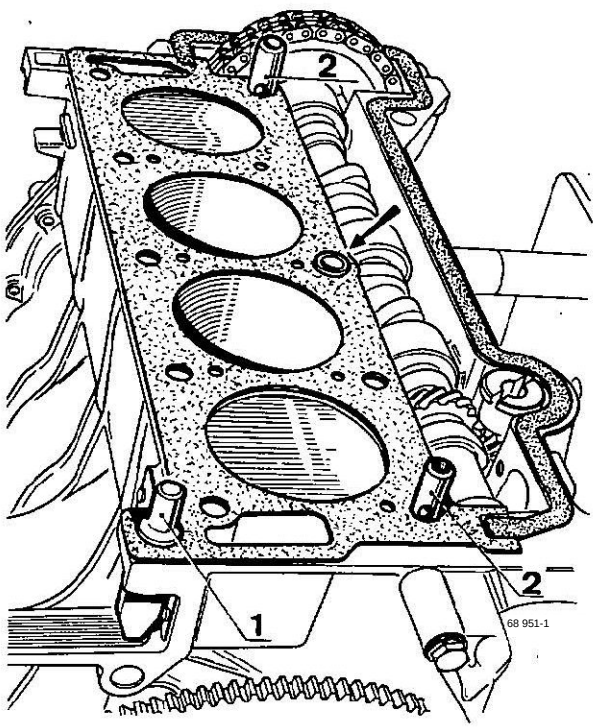

1600 GS It is recommended according to the use- (competition) replace exhaust valves all 7000-10000 km.

B-9

2-ENSEMBLE - CHEMISE - PISTON - BELIEVE

(a) Shirts



VERSION	85	1300 G	1300 S	1600 S	1600 GS
Blue gasket thickness	Paper	Paper	Copper	Paper	Paper
Red	0.08	0.07	0.05	0.08	0.08
Green	? 0.10	0.09	0.07	0.10	0.10
	0.12		0.10	0.12	0.12
			0.12		
Exceeding shirts	0.04 to 0.11	0.05 to 0.12	0.15 a 0.20	0,10 to 0.15	0,10 to 0.15
Ø inside	73	74.5	75.7	77	77.80

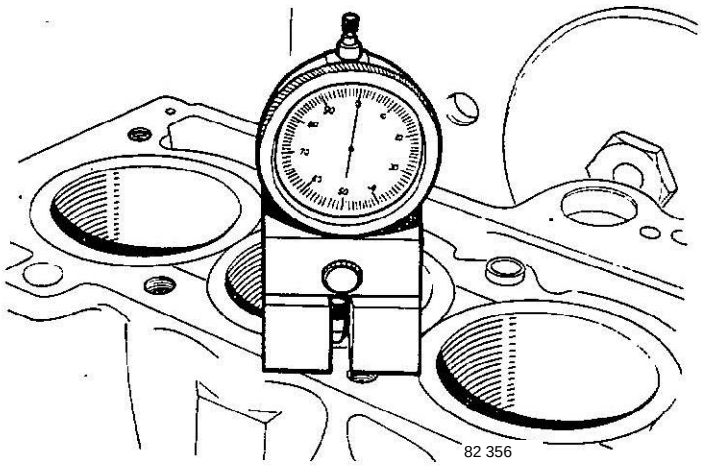

82 356

(b) Piston

Remarked with an arrow on the steering motor.

	85	1300 G	1300 S	1600 S	1600 GS
Head shape	Plate	Bomb with flats	Bomb with flats	Bomb with flats	Bomb with flats

B-10

(c) Axises

85	1300 G	1300 S	1600 S	1600 GS
Hard in the biel and free in the piston	Free in the and the piston	Free in the and the piston	Free in the and the piston	Free in the and the piston

(d) Rods 

	85	1300 G	1300 S	1600 S	1600 GS
Nature of pads	Regulated	Alu Etain	Alu Etain	Alu Etain	Alu Etain
Theoretical difference in weight between the 4 rods	6 g	3 g	3 g	3 g	3 g
Clamping torque hats in m da/N	4 to 4.5	4.25-4, 75, 4.25-4,75 foot of bial offset (A)	foot of bial offset (A)	4.5	4.5

Note: 812-00 and 1300 s motor rods.

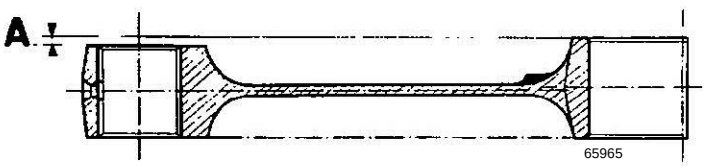

?

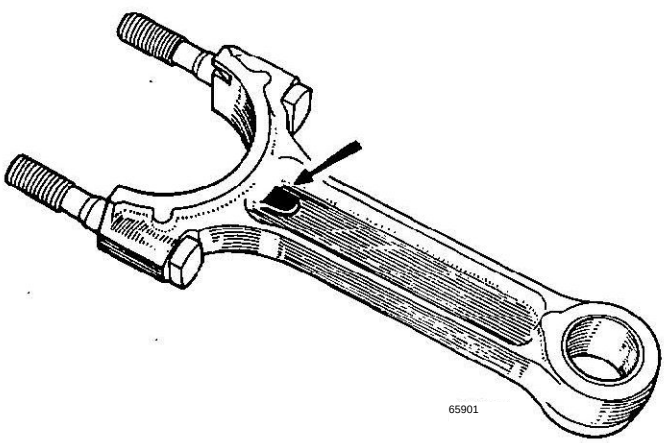

Each rod has, on the side of the decal-

This is a job that allows for its orientation.

The rods of cylinders 1 and 3 are mounted in the same direction: working side di-

Tribute.

Cylinders 2 and 4 also:

Working on the steering side.

B-11

3- VILEBREQUIN

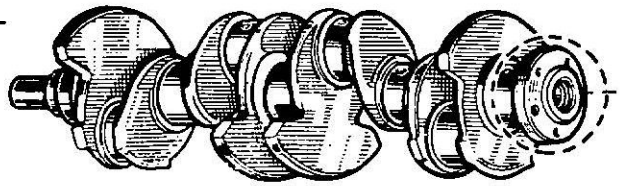

	85	1300 G	1300 S	1600 S	1600 GS
Ø of manetons	44	43.98	43.98	48	48
Ø of turrets	46	46	46	54.8	54.8
Rectification on manetons and tourillons	0.25	0.25	non-advice - non-advisory on-line	on-line	against- on-line
Next use check of pads all	—	15000km	10000km	15000km	15000km
Nature of pads level	Regulated	Alu Etain	Alu Etain	Alu Etain	Alu Etain
Longitudinal range in mm	0.044 to 0.16	0.045 to 0.19	0.045 to 0.19	0.05 to 0.23	0.05 to 0.23
Turntables	Galetes	Galetes	Galetes	Galetes	Galetes
Clamping torque hats of bearings in m da/N	5.5 to 6.5	6 to 6.75	6 to 6.75	6.5	6.5

4- DISTRIBUTION

Similar in all respects to the distributions of the original RENAULT engines.

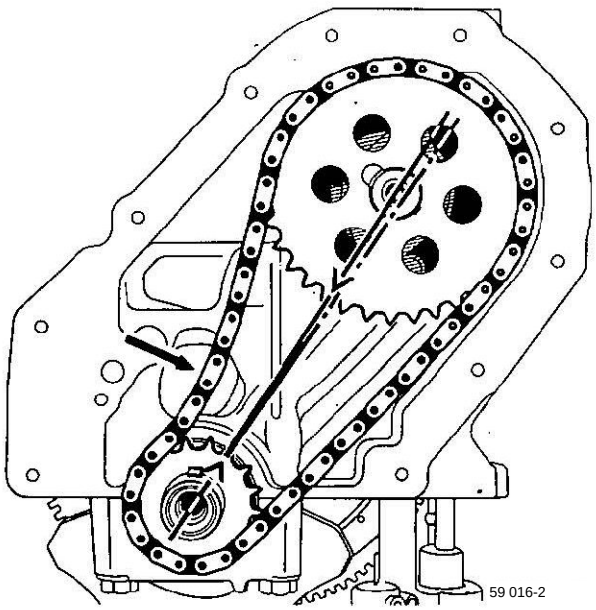

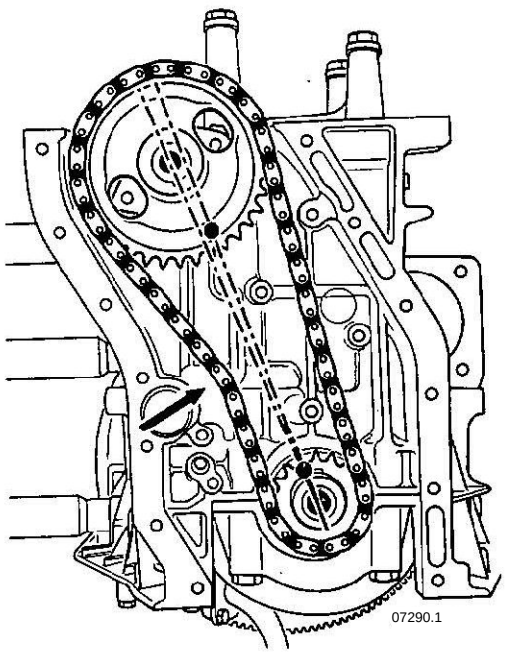

85-1300 G-1300 S

1600 S

	85	1300 G	1300 S	1600 S	1600 G S
Side game of the tree With cams in mm	0.06 to 0.11	0.06 to 0.11	0.06 to 0.11	0.05 to 0.12	0.05 0.12

B-12

5- LUBRIFICATION

Version 1300 G = 1300 S = 1600 S.

Oil radiator at right back for $1,600 5 and $1300 competition, cooled by a motor- fan for 1600 S, and behind the AR skirt on $1300 and 1300 G.

Version 85

ALPINE modified oil radiator at the RA of the water radiator, it is cooled by venti- water pump lator.

	.85	1300 G	1300 S	1600 S	1600 GS
MOT crankcase capacity	3 or 4l.	2.5 or 4l.	4 1.	4 1.	4 1.
? Pressure oil pump					
Cold	4 to 4.5	4 to 4.5	4.5 to 5	4 to 4.5	4 to 4.5
hot	3.5 to 4	3.5 to 4	3 to 4	3.5 to 4	3.5 to 4.
Replacement cartridge oil filter all	10000km	10000km	5000km	10000km	5000km
Periodicity of discharges all	2500km	2500km	2500km	2500km	2500km
Oil recommended	Elf	EIFs	Elf	Pres-trigrade	Pres-trigrade
	20W40	20W40	20W40	20W50	20W50

No additives are recommended either in oil or in petrol.

6- REFROIDMENT

By waterproof circuit and expansion vase.

9L mixing capacity for all versions with AV radiator; 6.5 to 7 l. for versions with AR radiator.

For cars equipped with an aluminium AV radiator the circuit filling shall only with 50% antifreeze mixture 50% demineralized water or with prepared coolant ref. 806.834 (bidon 6l.) or 806.835 (bidon 8 1.)

Version 1300_G_=_1300 S_= 1600 S

Water radiator at the front of the vehicle with two motor-ventilators, l of which controls Manual.

On the versions competition a water box replaces the expansion vase.

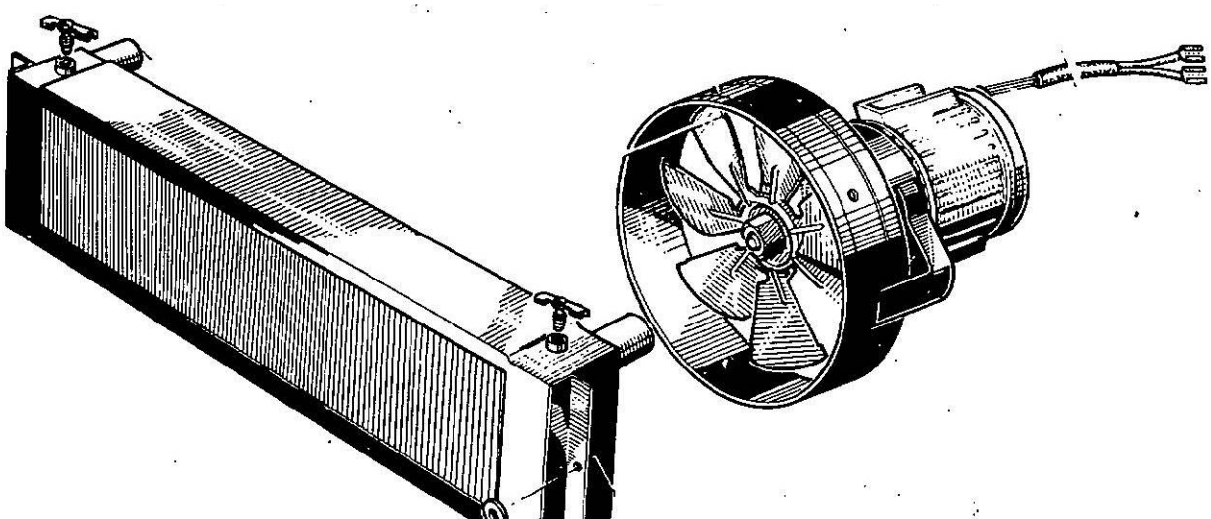

B-13

Version 85

Rear radiator type 1135 cooled by fan.

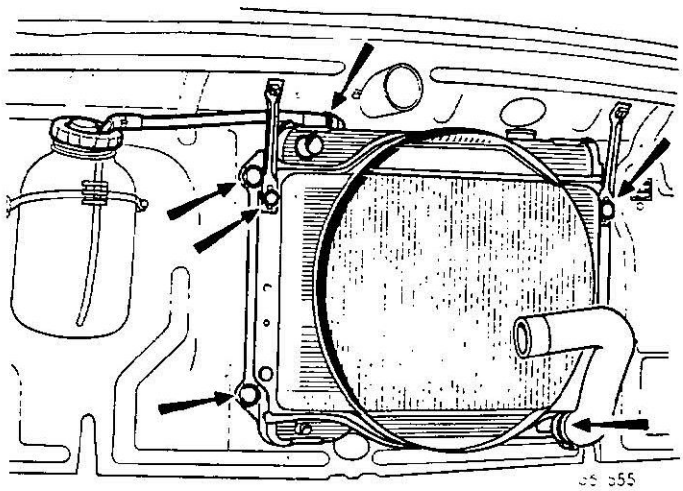

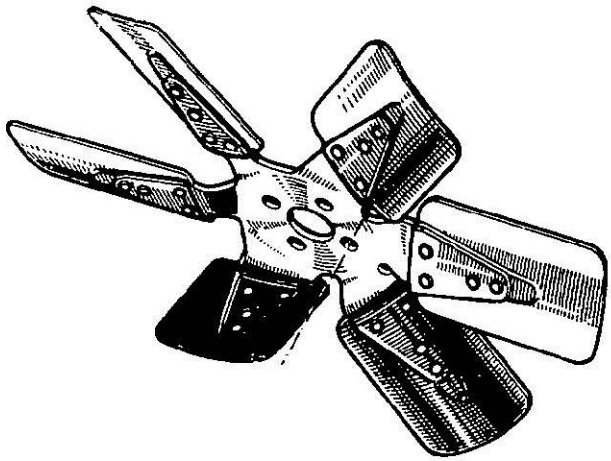

Thermostat : Depending on the outside temperature and use, pierced from l to 4 holes of additional leak of Ø 4.5 (thermostat type winter or summer).

7- CARBURATION

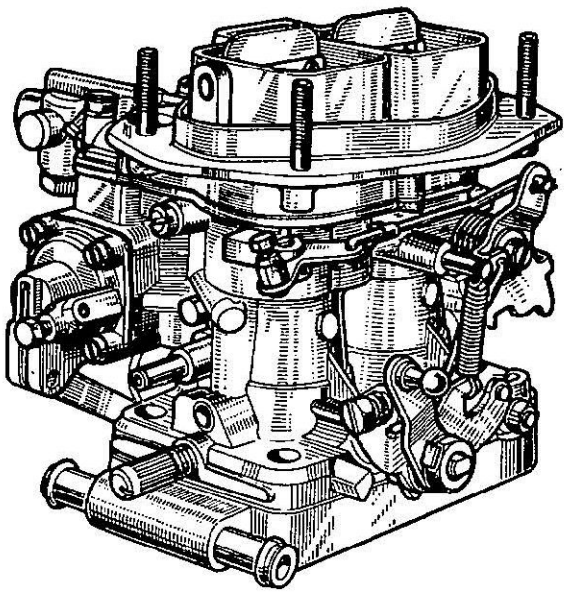

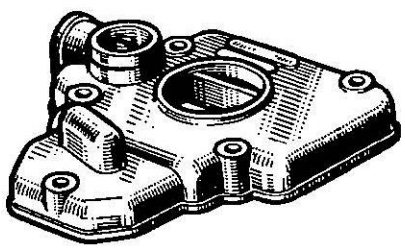

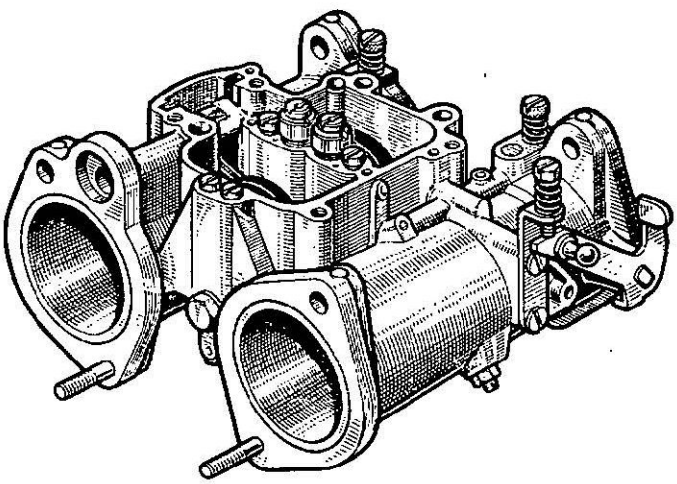

B-14

VEHICLE VERSION	85		1300 G	1300 S	1600 S	1600 GS
Carburettor type	WEBER type 32 Dir. 4 body 28 body		WEBER 40 DCOE 29 and 30 or 25 and 26	WEBER 40 DCOE 29 and 30	WEBER 45 DCOE 18-19 or 14 or 36-37 or 38-39	WEBER 45 DCOE 18-19 or 14 or 36-37 or 38-39
Nozzle	23	24	32	33	34	38
G.P. (Gq)	125	125	125	130	125	150
G. Air (a)	160	150	200	200	200	175
Emulsor			F 15.	F 15	F 15	F 15
G.R. (g) "	50	60	45 F 8	45 F 8 (then 50F8) from MOT 1635,	55 F 8	55 F 8
Inj.			35	35	35	35
Float weight	11 g		23g (26g) on 25/26)	23 g	23 (26g out of 14)	23 g (26g out of 14)
Float height in mm	7		5 (8.5) on 25/26)	5 (8.5) on 25/26)	(8.5 out of 14)	5 (8.5 out of 14)
Float stroke in mm	8		11.5	11.5	15	15
Air filter	A. 8 Lautette with Cobra's head on Carburettor.		ALPINE	ALPINE	ALPINE	ALPINE

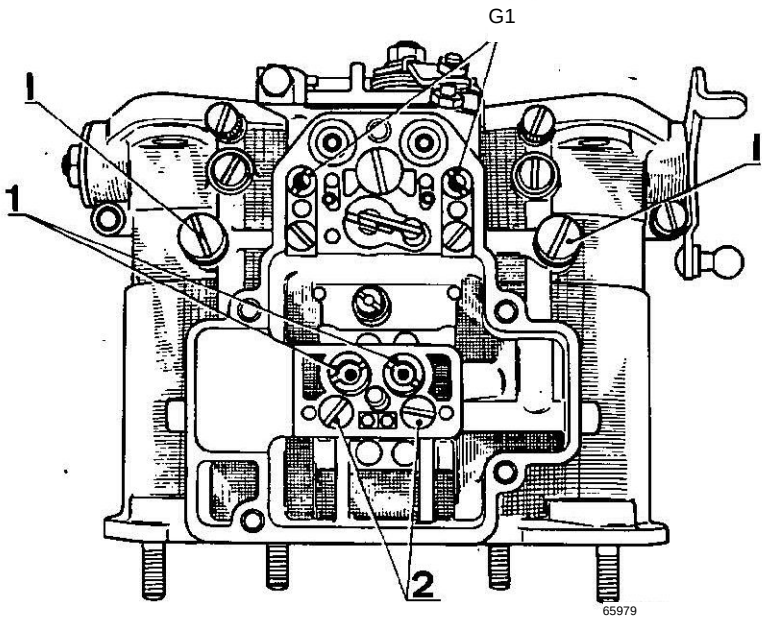

Set between alu collectors and carburetor base 1.2 to 1.3 mm.

For the level adjustment of the float and the race see the carburetor chapter MR 96.

1600 S or GS never remove the mechanical petrol pump when using a pump. electric.

B-15

8) LIGHTING

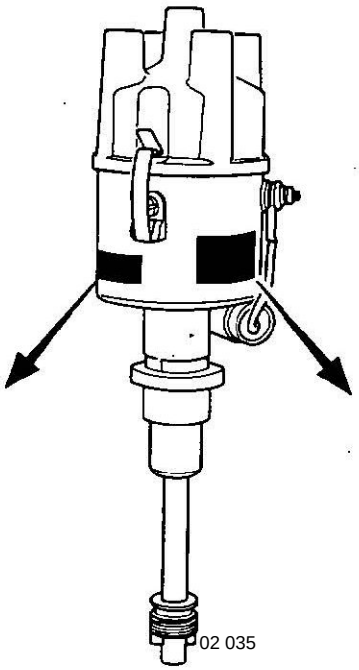

IDENTIFICATION OF ALLOWERS

	85	1300 G	1300 S	1600 S	1600 GS
Ducellier-to-Ducellier taking turns account	No. 4172	4189	4189	4266	4266
Centrifugal advance curve	R. 236	R. 230	R. 230	R.234	R. 234
Curve Advances Depression	C.34	without	without	without	without
Initial timing of the advance	5°	0 to 1°	0°	0°	0°
Normal	March 345	March	H 32 GR	Champion	2-32 H
Candles	Champion L85	H 33 RG		N 62 R	
Circuit	—	H 32 GR	2-32 H	or H 32 RG	Champion N 57 R

Important: it is imperative to mount the recommended type of candles, for lighter 4266, it is necessary to redo a notch on the body of the lighter to orient the head lighter to the Engine.

B-16

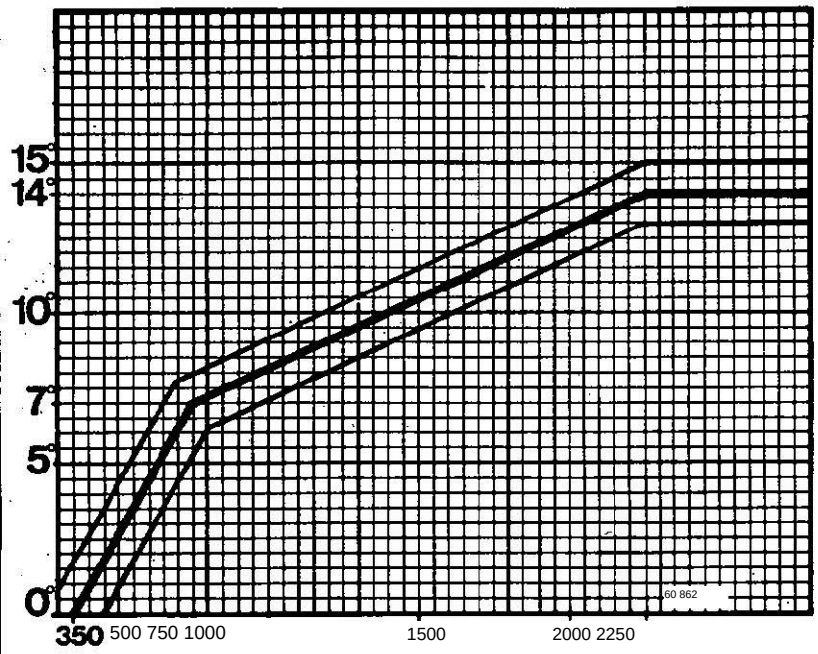

CURRENT R 230

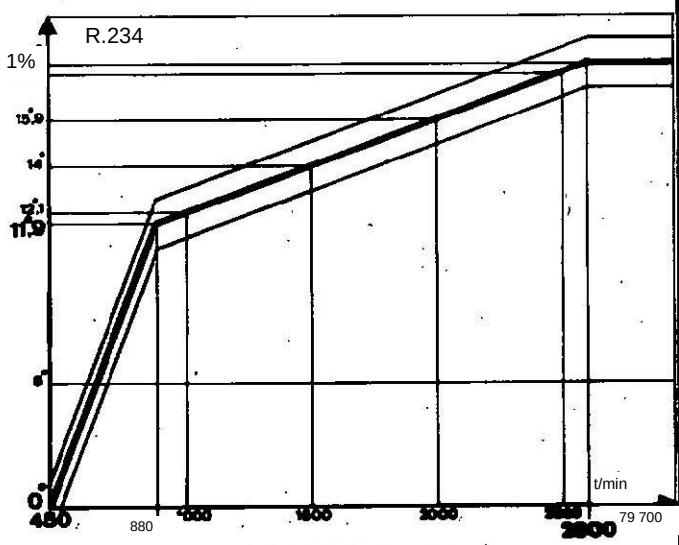

CURRENT R 234

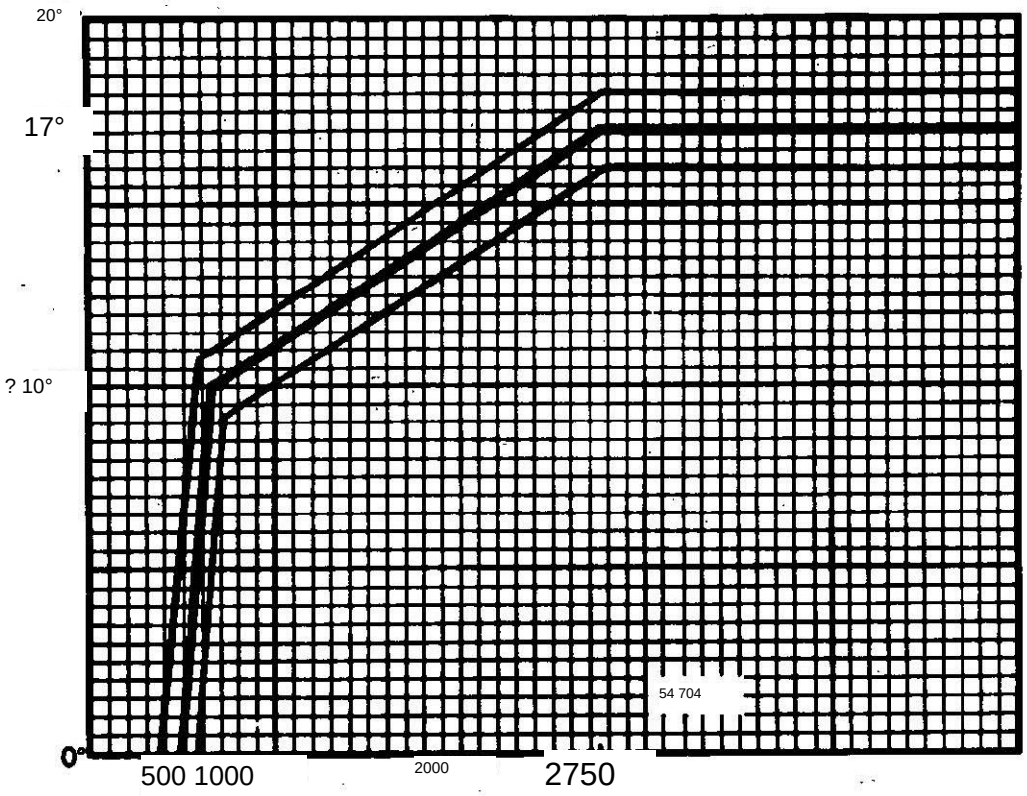

CURRENT R 236

ELECTRIC EQUIPMENT

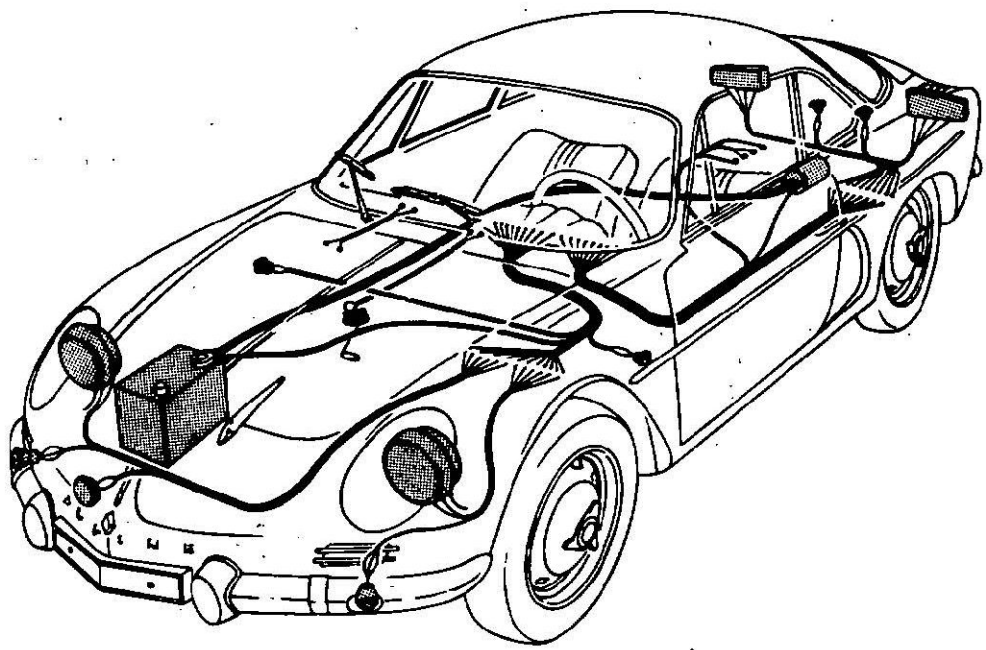

ELECTRIC EQUIPMENT

	85	1300 G-1300 S	1600 S
1) DEMARRIER			
TYPE	DUCEL 12V 6187 (type R 1170)	PARIS-RHONE 12V D8 E75 (type R 1190)	DUCEL 12V 6183 (Type R 1151)
Locked pinion torque	1.25 m da/N	1.05 m da/N	1.25 m da/N
Intensity sprocket blocked	380 A	380 to 420 A	375 A
2) ALTERNATOR OR GENERATRICE	GEN BOSCH 12 V	ALT SEV-MOTOROLA 12 V	ALT SEV-MOTOROLA 12 V
TYPE	0101302103	A 14/30-40	A 14/30-40
Normal intensity	14V 30A 25 30A type R1190 Great colds	30A to 3000 +/m ? under 13.2 V type R 1135	30A to 3000 +/m SOus 13.2 V type R 1135
3) REGULATOR	BOSCH 14V 30A-DUCEL 8364		DUCEL 8364 12 V type R1135
	0190309019 type R 1190 Great colds	12 V type R1135	
(4) ALLUMER See engine chapter			
5) BOUGIES See engine chapter			
(6) PRESSURE TRANSMITTOR	Jaeger 12V	Jaeger 12V	Jaeger 12V
OIL (TRAMA)	6 bars No 6000000624	6 bars No 6000000624	6 bars No 6000000624
7) ELTRA THERMISTANCE	Jaeger 12V	Jaeger 12V	Jaeger 12V
Oil and water temperature	No 0853989600 type R 1151	No 0853989600 type R1151	No 0853989600 type R1151
8) THERMO-CONTACT MOSTA			82/92: 12V
Radiator fan oil			No 0855957600 identical to MOSTA water R1151
9) THERMO-CONTACT MOSTA		Jaeger 12V	Jaeger 12V
Radiator fans water		75/84° Peugeot type	75/84° Peugeot type
10) MCTO VENTILATOR			
Water radiator		Rabotti 12V No 6000000631	Rabotti 12V No 6000000631
Oil radiator			Rabotti 12V No 6000000631

C-2

	85	1300 G - 1300 S	1600 S
(11) AMPEREMETTER OR VOLTO	Amperemeter Jaeger 30A No 6000000059	Volto Jaeger 12V No 0855808900 type R1135	Volto Jaeger 12V No 0855808900 type R1135 or Amperemeter 30A No 6000000059 on versions Mills
12) PRESSURE INDICATOR OIL	Jaeger 12V	Jaeger 12V	Jaeger 12V
13) TEMPERATURE INDICATOR WATER	Jaeger 12V	Jaeger 12V	Jaeger 12V
14) TEMPERATURE INDICATOR OIL	Jaeger 12V	- Jaeger 12V	Jaeger 12V
(15) TEST INDICATOR	in block Veglia meter	in block Veglia counter	in block Veglia counter
16) BLOCK	Viglia 12V	Viglia 12V	Viglia 12V
17) BLOCK ACCOUNT	Veglia	Veglia	Veglia
(18) RELATIONS PHARES in IODE-ANTI-BROUGHT-BROUGHTER	DUCEL 12V 22621	DUCEL 12V 22621	DUCEL I2V 22621
(19) WISE-VITER MOTOR	SEV 12V derivative R1133	SEV 12V derivative R 1133	SEV 12V derivative R 1133
20) HEATING MOTOR	Sofica 12V type R1135	Sofica 12V ype R 1135	Sofica 12V type R 1135
21) COMMODO ECLAIRAGE	Jaeger type R1132	Jaeger type R 1132	Jaeger type R1132
22) ROAD PHARES	Cibié Ø 180	Cibié Ø 180	Cibié Ø 180
23) LONG-RANGE PASSENGERS	Iodine cibium Ø 162	Iodine cibium ? Ø 162	Iodine cibium Ø 162
24) ROAD WARNING	DUCEL Tenor	DUCEL Tenor	DUCEL Tenor

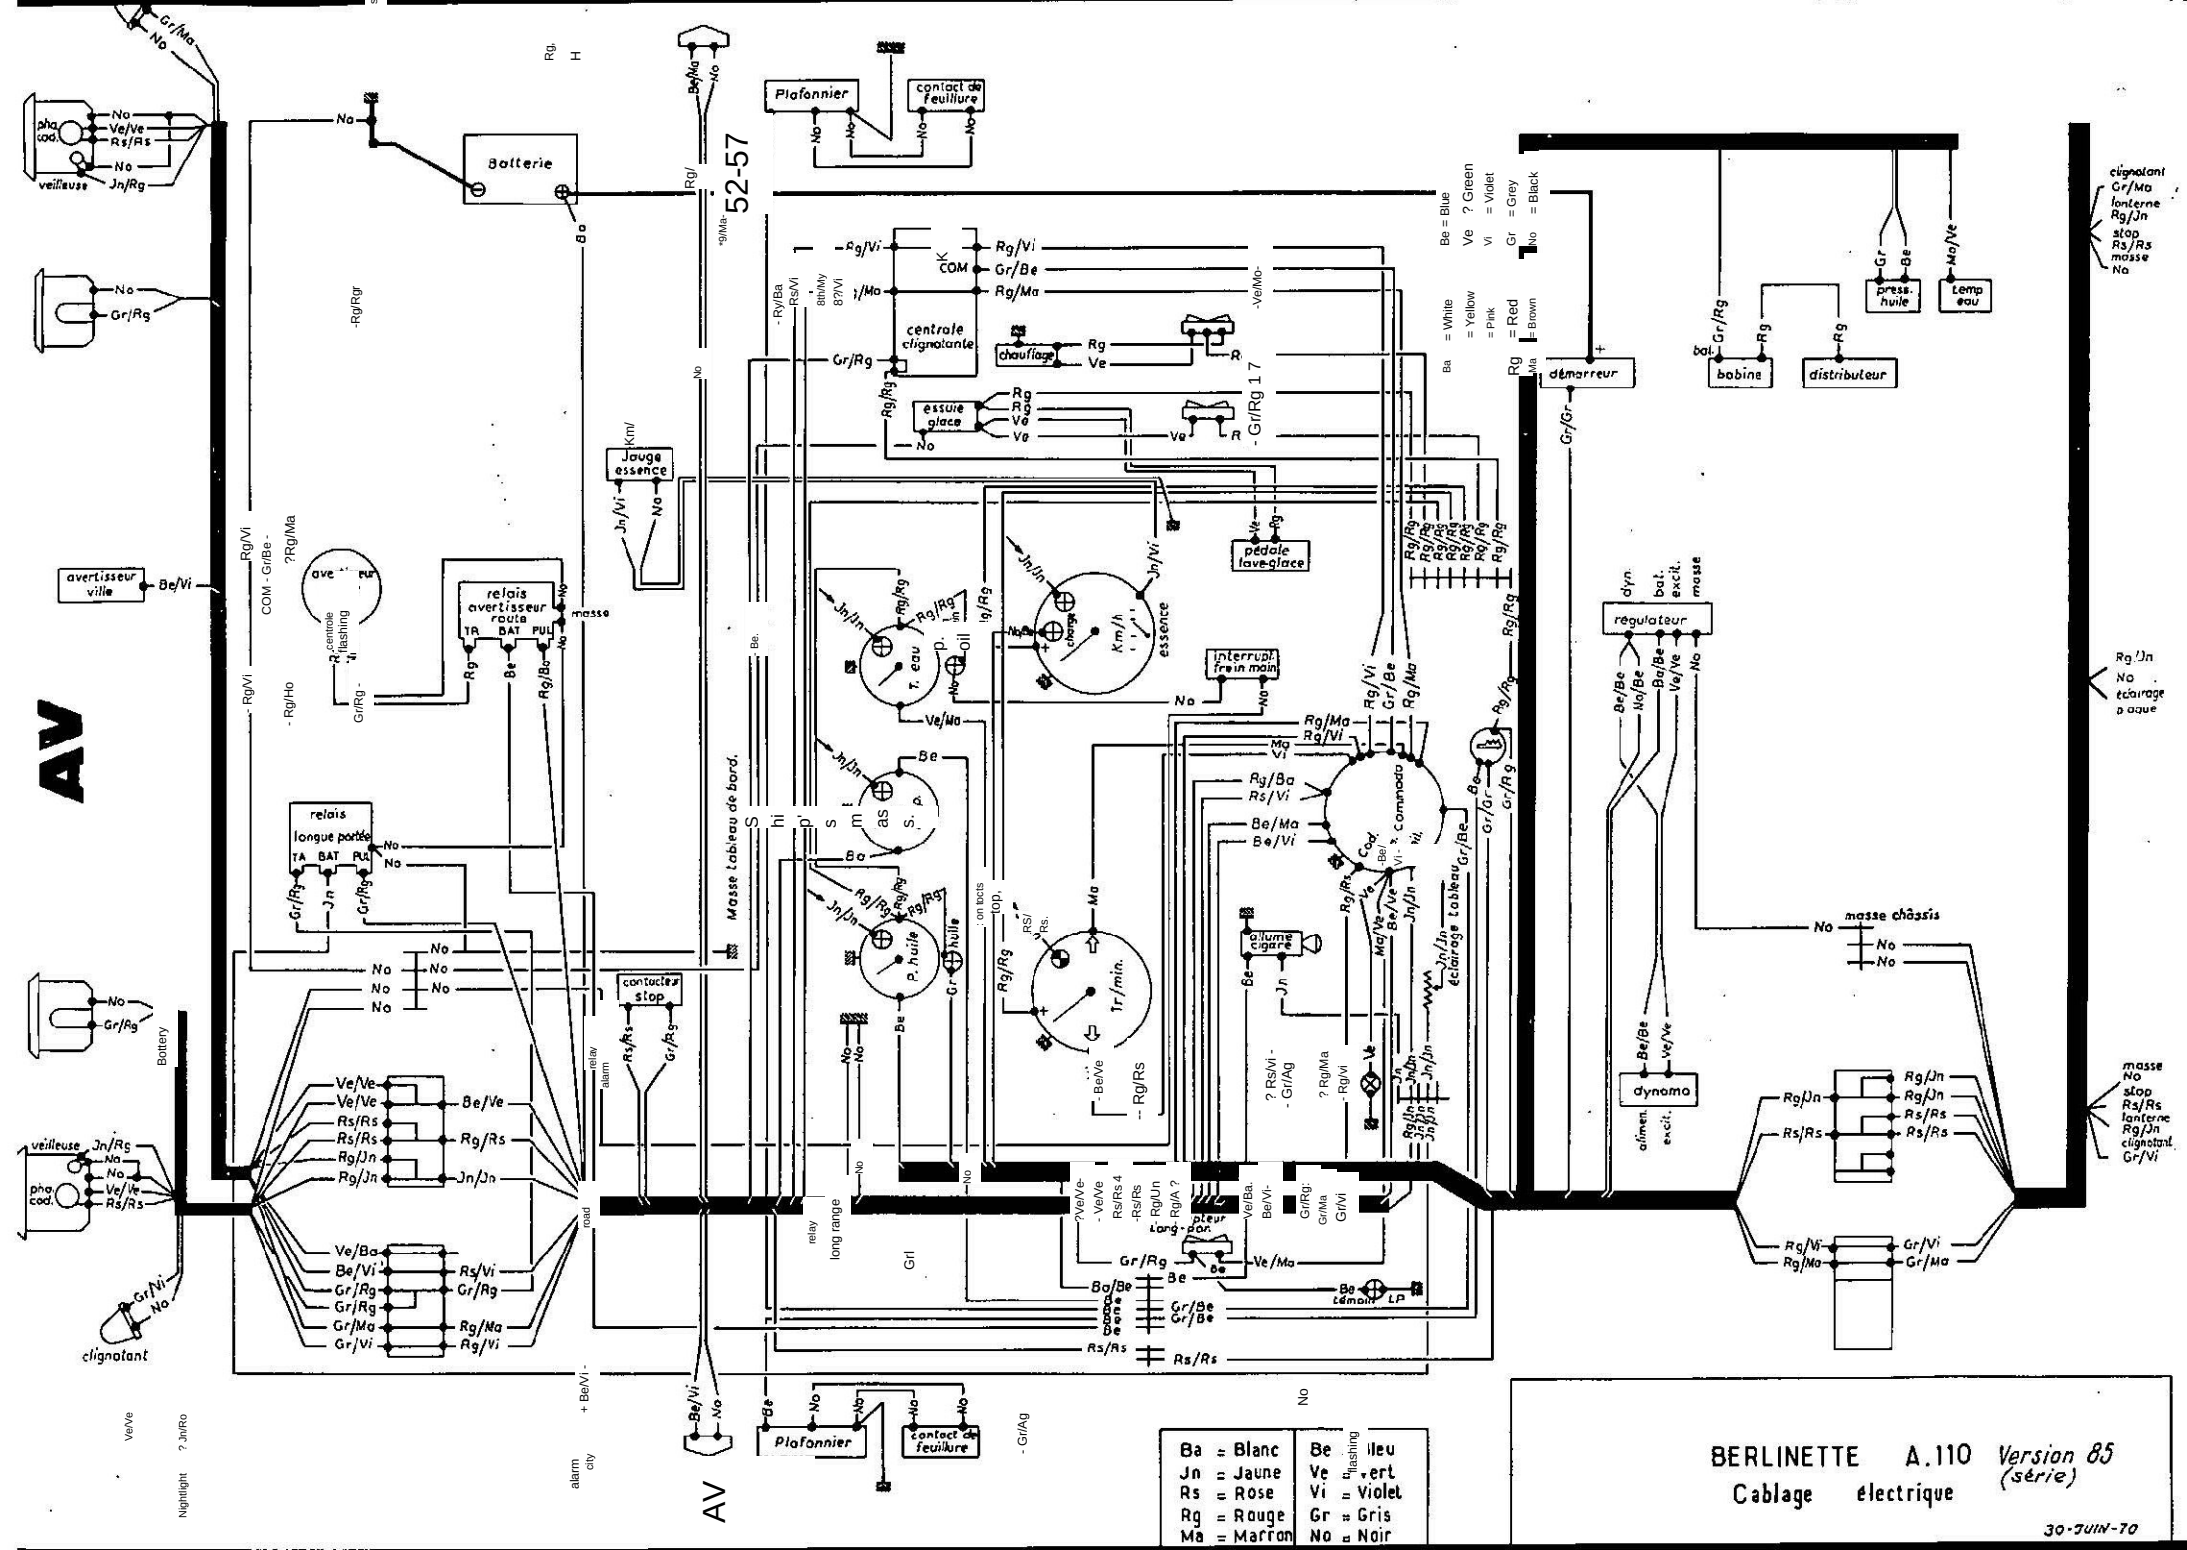
Batterie
Plafonnier
contact de feuillure
centrale clignotante
chauffage
essuie glace
Jauge essence
avertisseur ville
relais avertisseur route
relais longue portée
contacteur stop
pédale lave-glace
Interrupt. frein main
démarreur
bobine
distributeur
press. huile
temp eau
régulateur
dynamo
allume cigare
Eclairage tableau
Eclairage plaque
clignotant
lanterne
stop
masse
masse châssis
Masse tableau de bord.
Shunt
Battery
relay alarm
relay long range
Nightlight
alarm city
AV
52-57
Ba = Blanc
Be = Bleu
Jn = Jaune
Ve = Vert
Rs = Rose
Vi = Violet
Rg = Rouge
Gr = Gris
Ma = Marron
No = Noir
Be = Blue
Ve = Green
Vi = Violet
Gr = Grey
No = Black
Ba = White
Ye = Yellow
Pi = Pink
Rg = Red
Ma = Brown
BERLINETTE A.110 Version 85 (série)
Cablage électrique
30-JUIN-70

D

EMBRAYAGE

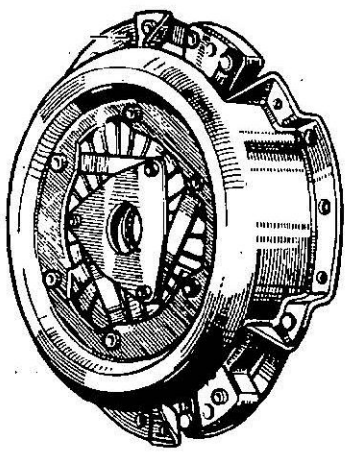

D-1

FOURCHETCARTERE MB							
VOLANT	083319 Esafette 0	type F 211755 44 00	type F 211 5	08 55 93 18 00 60 00 00 00 13 19 60 00 00 13 21	77 00 50 78 36 Ø 215	60 00 00 13 24 Ø 200	
PURPOSE	085587 graphe 840 0	085589 graphe 840 0	085587 graphe 840 0	60 00 00 13 23 Ballbearing guided	77 00 52 36 29 Ballbearings	77 00 52 36 29 Ballbearings guided	
MECHANISM	085587 crazy at 335 Ø 180 daN	085587 crazy at 335 Ø 180 daN	085587 crazy at 335 Ø 180	60 00 00 13 22 crazy at 420 Ø 200 daN/	60 00 00 13 78 at 335 Ø 215 sicl	60 00 00 13 42 Ø 200 crazy tal to plates daN	
FRICTION	type F 085593 Ø 180	type 085593 Ø 180	type	complotecux option (small hub)	77 00 52 32 27 Ø 215	77 00 50 27 95 Ø 200 with trays type	
TYPE	180 D	180 D	180 D	with trays	215 DB	200 DEC	
VERSION	85	1300 G	1300 S		1600 S	1600 S Comoption	

Note: A number of 160 S were equipped with the 200 D type R 115 clutch.

The term pering of the mechanism is strucon the liding between 2 fixing holes.

DEPOSITS THEREPAIRAND REPOSESTHEPRAYER

It is recommended that the engine be removed for the repair of the clutch.

EMBRAYAGE

D-2

IMPORTANT: 200 DEC competitive clutch.

In the "debray" position one can hear with this type of clutch a noise similar to that caused by an insufficiently sounded stop

The characteristic noise is normal and its origin in a "vibra-

In its guidebook, "the plateau " is used.

BOX OF VITSES

E

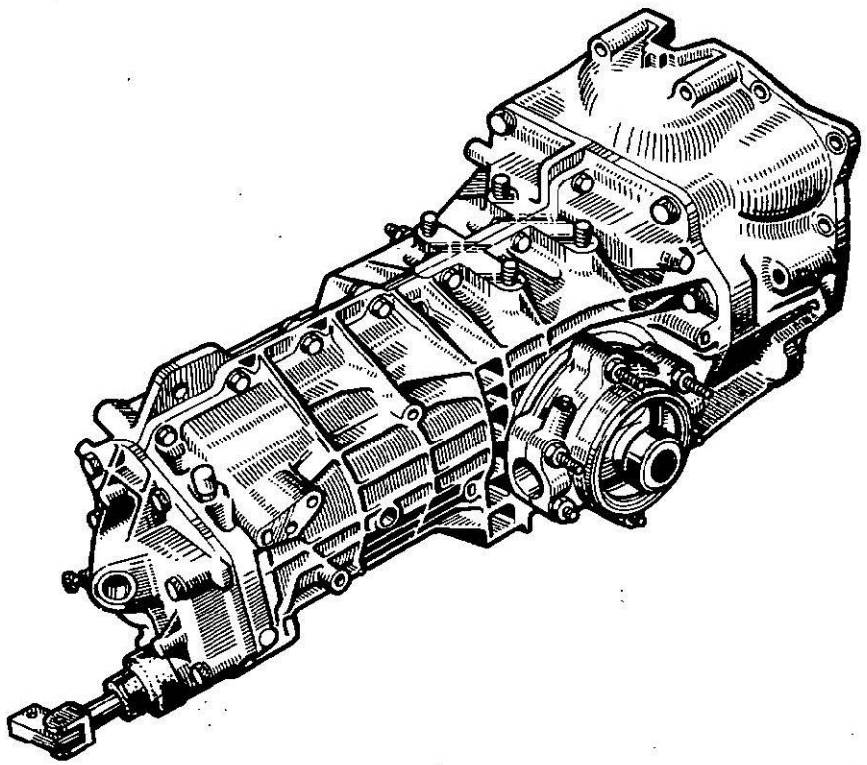

Identification

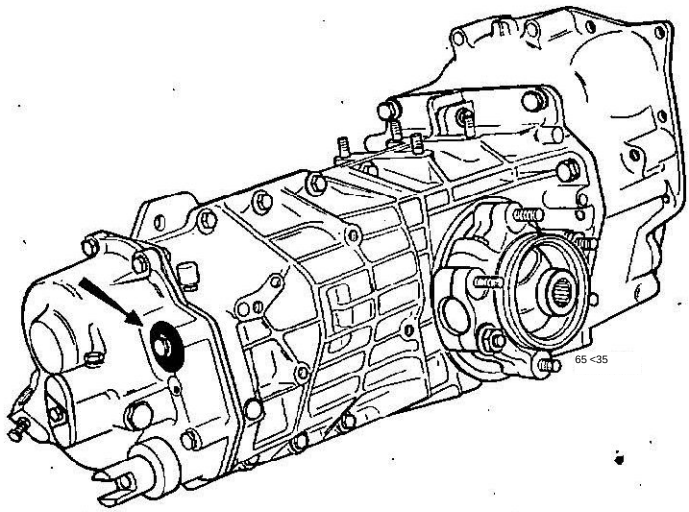

The type, the index and the number of the

brication are indicated on a plate

marking at the front of the

Carver..

Type 353-03

LONGITUDINAL CCUPE.

Gearbox 353.

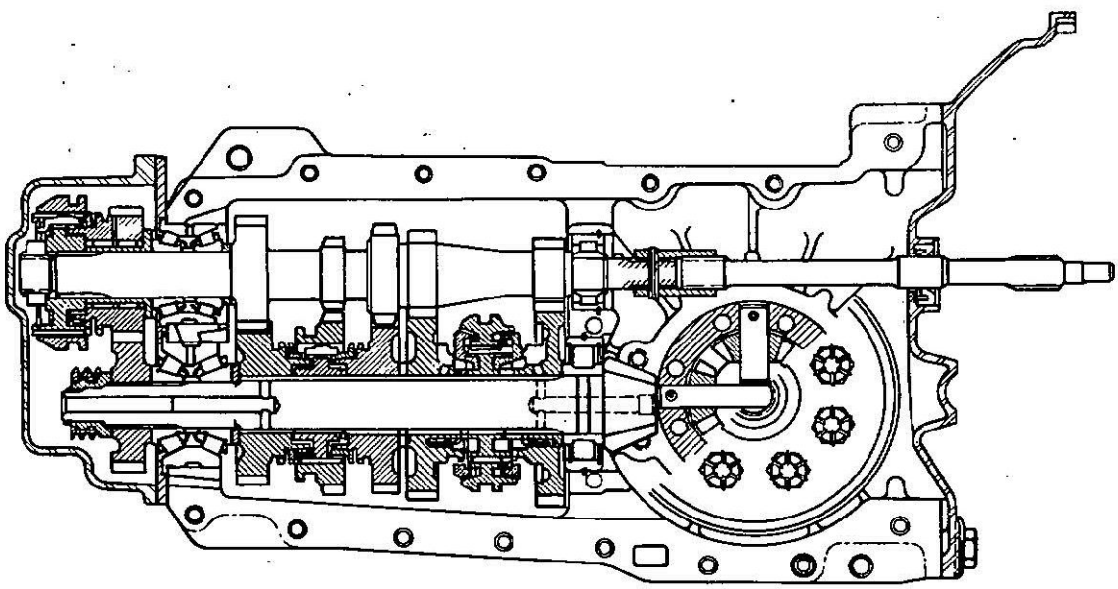

65 048

CARACTERISTIQUES DES BOITES DE VITESSES

| BOITE TYPE | MONTEE S | TYPE BOCITY | AMOUNT ON | COUPLE CONI- DISTANCE | | |

remplacé par 353-33 N° 7701508101	sur version 85
353-15 t5 vitesses normales couple 9x34 renforcé N° 7701500576 remplacé par 353-35 N° 7701508103	Ne diffère de 353-0 par couple 9x34 ren roulement largeur=1 En série sur 1300 G e en option sur 1600 S et version 85
353-16 t5 vitesses "rallye" couple 9x34 renforcé remplacé par 353-36	Ne diffère de 353-03 que par couple 9x34 renfo et rapports des pign option sur 1300 G et 1600 S et version 85
353-20 5 vitesses normales couple 8x27 renforcé N° 7701506355	Spéciale 1600 S. Ne de 353-03 que par cou 8x27 renforcé et carte embrayage type Rt 16. série sur 1600 S
353-33 353-35 353-36	Diffère de 353-13 Diffère de 353-15 Diffère de 353-16 par billage adouci
364-01 5 vitesses "rallye" couple 8x27. Différentiel renforcé carter emb Rt 16	Diffère de 353 par cou rapports, carter embra type Rt 16, différentie forcé, arbre d'embrayage option sur 1600 S et 160
364-06 5 vitesses normales couple 8x27. Différentiel renforcé carter emb Rt 16 N° 7701507158	Diffère de 353 par couple, rapports, carter embrayage type Rt 16, différentiel ren- forcé, arbre d'embrayage. En série sur 1600 GS en option sur 1600 S

replaced by 353-33
No 7701508101
1
353-15 t5 speeds
Standard torque
9x34 reinforced
No 7701500576
replaced by 353-35
No. 7701508103
0
353-1615 speeds
"Rallye"
torque 9x34
replaced
paras. 353-36
3
353-20 5 speeds
Normal
torque 8x27
strengthened
No 7701506355
53
364-01 5 speeds
"Rallye"
couple 8x27. Different-
enhanced impact
case em Rt 16
4
7
364-06 5 speeds
Normal
9
4
couple 8x27. Different-
enhanced impact
case em Rt 16
No 7701507158

on version 85
1,14
Different from 353-03 only
14
with reinforced 9x34 torque
bearing width=19mm
1,03
Serial on 1300 G and 1300 S
optional on 1600 S and 85
48
and version 85
1,48
Different from 353-03 only
13
with reinforced 9x34 torque
and gear ratios.
option on 1300 G and 1300 S
1600 S and version 85
50
Special 1600 S. Does not differ
2
of 353-03 only per couple
8x27 reinforced and crankcase
62
clutch type Rt 16.
3
series on 1600 S
Different from 353-13
Different from 353-15
Different from 353-16
by softened ringing
53
Different from 353 per couple,
gears, clutch housing
type Rt 16, differential
Forced, clutch shaft.
option on 1600 S and 1600 GS
Different from 353 per couple,
gears, clutch housing
type Rt 16, differential
Forced, clutch shaft.
optional 1600 GS series
or 7701452792
tach: 6x11
8x27
Dem:3,37
No 7701452793
or 7701452792
tach:6x11
8x27
Dem:3,37
No 7701452793
or 7701452792
tach:6x11
9x34
Dem:3,77
No 7701452021
or 7701452022
tach: 6x12
9x34
1,48
3-11
Dem:3, 77
No 7701452021
or 7701452022
tach: 6x12
8x27
,5(
den
Dem: 3.37
No 7701452183
or 7701452184
tach:6x11
8x27
61,50
61,50
61.50
53
1,14
53
1,29
53
,36
1,03
1,6
3,62
rapports dentures = 353-03
3.62 2.36 1.
gear ratios = 353-
3.62 2.50 1
gear ratios
3.62 2.3
gear ratios = 353-
3.62 - 2.50
gear ratios = 353-1
3.62. 1 2.3
gear ratios =

E-3

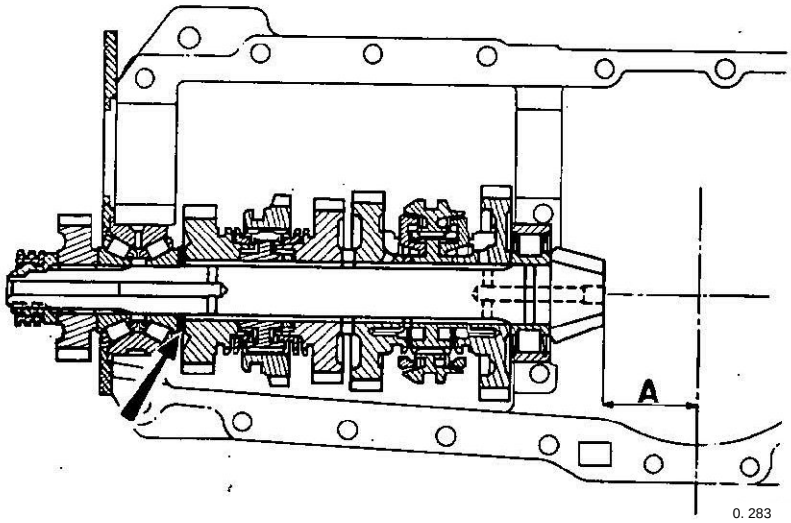

Note: Tachymeter training is done by a square, as there is no reference as on the RENAULT 8 GORDINI.

There is an optional "Hewland" self-locking bridge, only in competition.

DEPOSITED AND REPOSED BY THE B.V.

In general proceed as for the removal of the box of the vehicles of the range Renault 8 and 10.

Versions 85 - 1300_G and 1300 S

It is possible to drop off the box only.

Versions_1600

It is advisable to drop off the complete powertrain.

Note: When rewinding, do not omit to pull up the holds between side pads and central box and crossover.

STRENGTHENING OF THE CITY OF VITSES

The procedure as well the setting values remain the same as those of the boxes 330-00 or 353-13. Check however the conical distance given in the table of features. For boxes 330-06 and 330-08 you can refer to MR. 131.

Boxes 353 and 364 refer to MR 133 (R 1135).

REPLACEMENT OF THE VITES AND LEVEL CONTROL BREAKDOWN.

VITSES

Place the gear lever cup and lever box. Disconnect the rod to the coupling side box, pull out the rod assembly lever backwards and downwards. Separate the lever rod. In case of difficulties in the release of the rod unbridled the AR attachment of the engine so as to raise the nose of the box.

DIRECTION

G

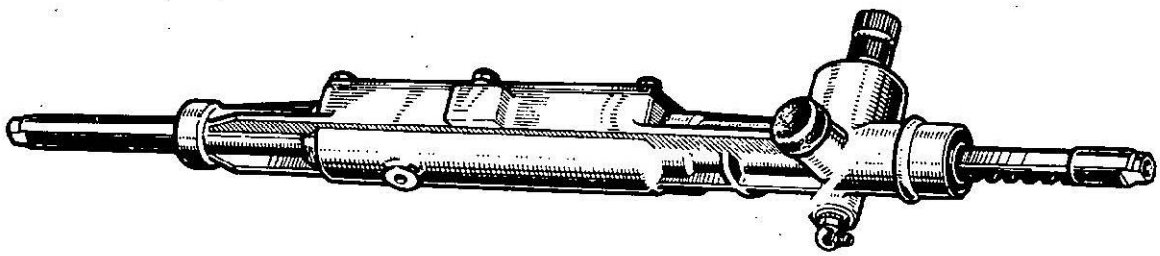

G-1

CUP

Longitudinal

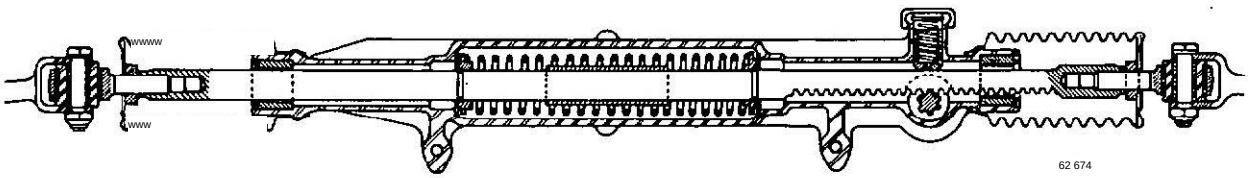

A rack with compensating spring.

Serial. 17.1 multiplication with a 7 tooth attack sprocket.

Number of laps of the steering wheel 3.2.

A turn of the steering wheel causes a movement of the 44, 8mm rack.

As an option. Direct direction with an attack sprocket of 9 teeth.

Multiplication 13.5.

Number of laps of the steering wheel 2.5.

A turn of the steering wheel causes a movement of the 57.5mm rack.

This direction is repairable and transformation of the 7 teeth sprocket into 9 teeth,

drags the replacement of the rack rings (the latter is raised

2mm.)

DEPOSITED REPAIR AND DIRECTORATE-GENERAL

This direction being the same as that of RENAULT 8 refer to MR 68.

Note FIXATICN

2 fixation methods were used.

1) Welded supports on cross-section: The steering holes are slightly

Lie down.

2) Removable supports bolted on the cross-section, there are 2 types of support,

standard ports (H = 55mm mounting holes) and mounting supports

(H = 56mm and 57mm) the distance is struck on the AR face of the support.

After each rest it is imperative to control the variation of clamps between

the low and high position of the vehicle: Refer to the chapter

AV train.

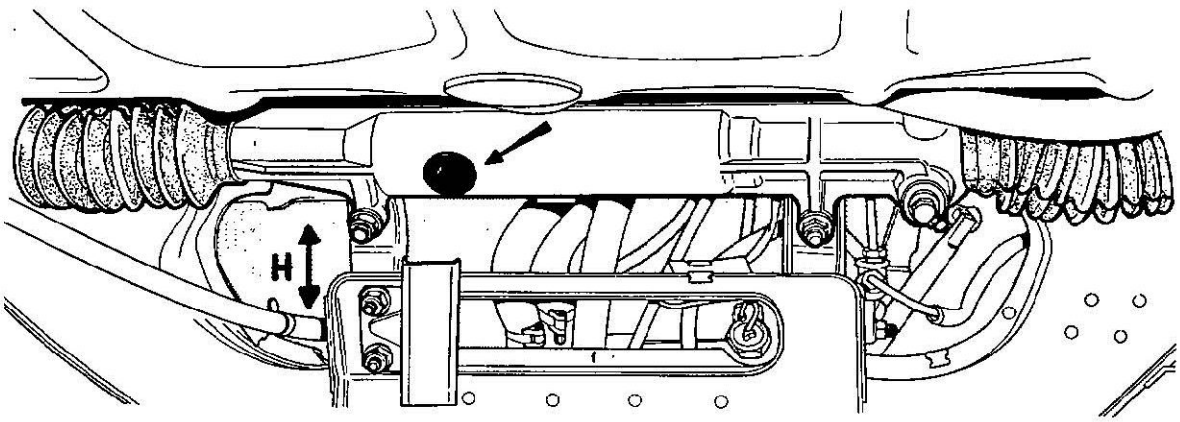

TRAIN BEFORE

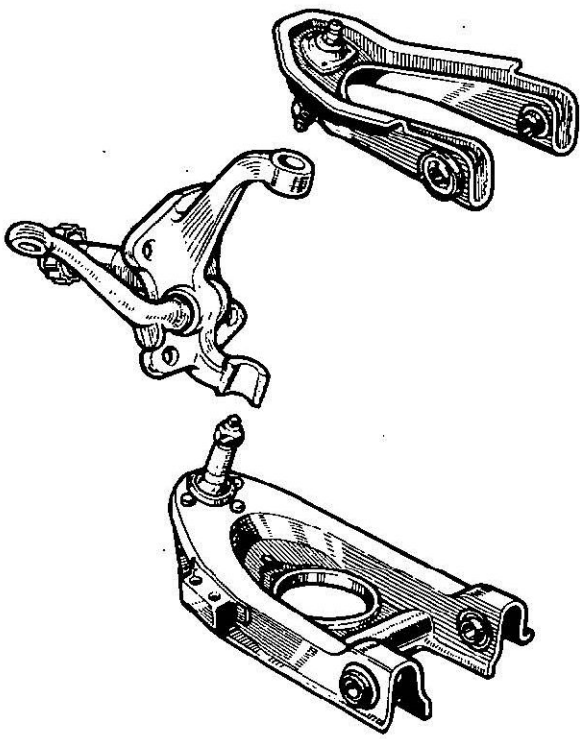

H

H-1

TRAIN BEFORE

Transversal quadrilateral deformable,
using the same elements as the
RENAULT 8 GORDINI.

Upper triangle.

Lower triangle.

Rocket door.

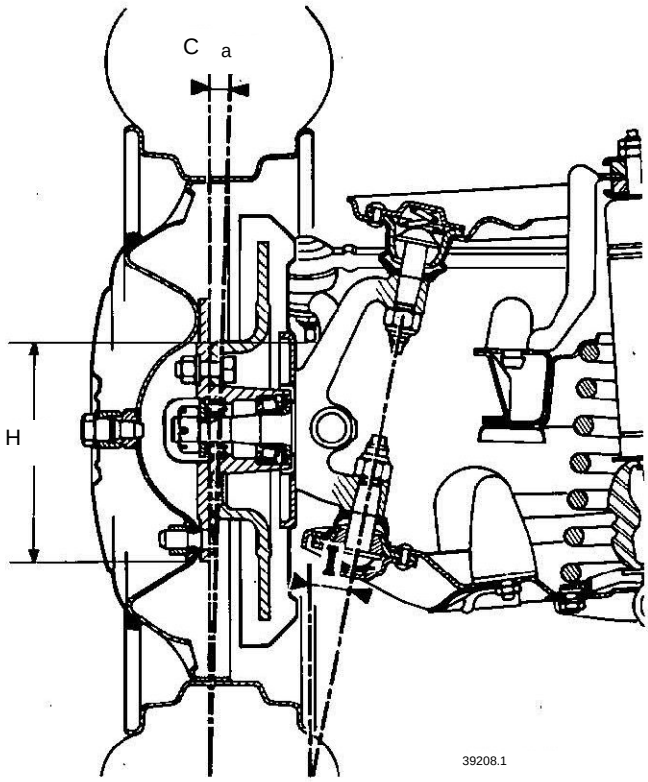

39208.1

However, the positioning of the triangle
lower on the cross-section is modified in the
the purpose of obtaining a nega-
tif. Fastening points are moved
9mm outwards.

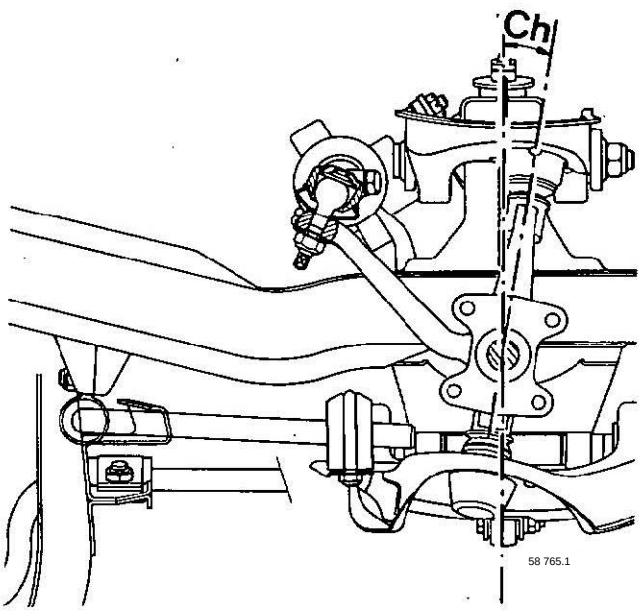

58 765.1

REGULATORY VALUES

Up to bodywork No. 2162.

Carrossing 1°40 positive.

Hunting 9°:1.

Parallelism between 1mm opening and 2mm

Clamps.

From bodywork No. 2162.

Carrossing 1°30 negative.

Hunting 8°30: 30 for a direction

direct.

7°30$30 for a direction

normal.

Parallelism, 2mm:l in mid-load position.

(Opening)

H-2

FOREIGN TRAIN RELATIONSHIP METHOD

With Facom 470 device or device
optical BEM.

1) PRELIMINARY VERIFICATIONS

(See MR 101 fascicle G 100)

- Check the tire pressure.

Articulation games etc...
the sail of the rims (the apparatus
BEM neutralizes
the latter).

- Hunting angles.

The values taken from the angles of chas-
half-trains must be ega-
with a tolerance of 1°(pre-
we'll try to get the value
the highest on side D).

- Steady steering.

2 types of die holder
It was also used.
- Welded brackets on the AV cross-section.
- Bolted supports on the cross-section
AV, available under three references
which differ by the centre line between the
centre of mounting hole of case
and the center of the top hole of fixa-
on the cross-section.

Standard support: 55mm interax
No 6000000557
Enhanced support: 56mm interax
No 6000000351
Upgraded support: 57mm interax
No 6000001352

Numbers 56 and 57 mm are struck
on the AR face of the supports.
The media have the effect of placing the
rack bits in relation to
rudder, in a position
such as the variation of parallelism
between mid-load and high positions
always go towards a decrease of
opening (from 0 to 2mm per 1/2 train)
AV pinching under these conditions).

2) CONTROLS AND REGISTRATIONS

(a) Carry out the tests after testing, or
Shake the car.
(b) Stabilize the vehicle on an area
All right.
(c) Centre management with the help of cava-
bind DIR 326 (plocate the latter side)

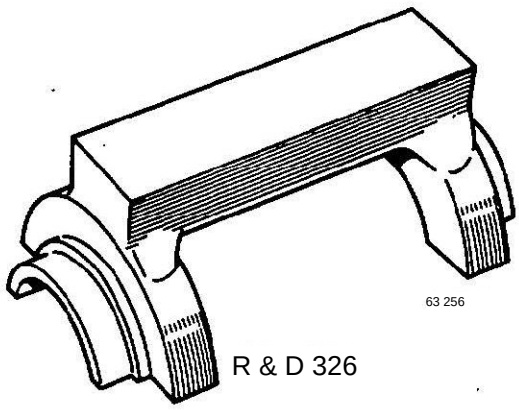

R & D 326

(d) Make a brief alignment of the wheels
AV.
(e) Checking the angle of bodywork.
(f) Place the vehicle on swivel trays.
(g) Block the wheels with the press-
pedal.
(h) Obtain the mid-load position by placing
the forward-rail holds 56 A between triangle
Superior and longeron.

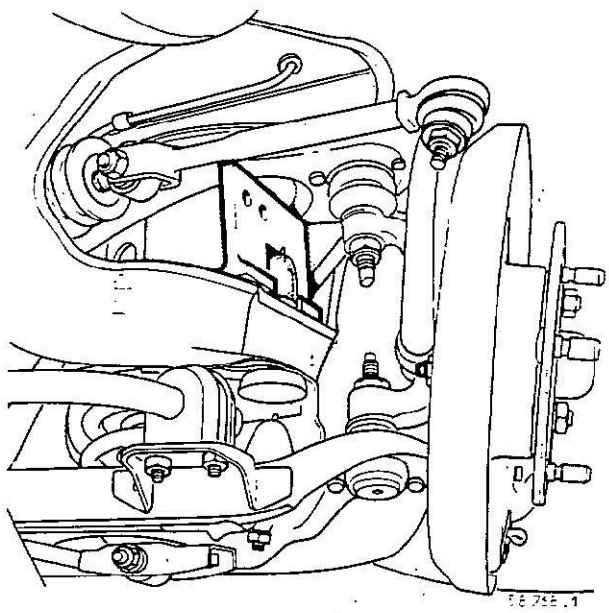

(i) Set up train-to-train flags
modified before 481 and the supports of
local manufacturing. (See sketch at end
of the chapter).
of the TAV 246 with the aid of a
sandow under the box at 1.30m from the axis
AV wheels.
(i) Using the equipment available,
point the needle or light beam
on the cross superiture of the flag,
Next, decompress the front train to
bring the needle or light beam
on the graduated scale

H-3

k) If the needle falls into the hachu-
ree, the adjustment of the patella heights
is correct.

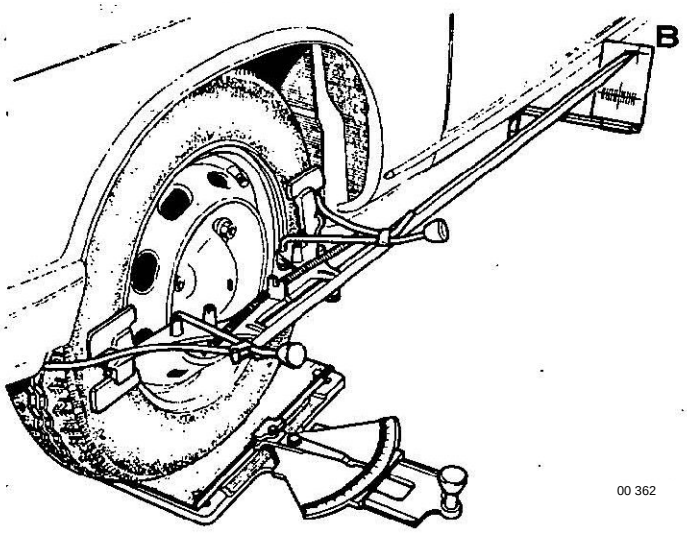

00 362

I) If the needle falls outside the area
We must act on the eccentric.
of the inner triangle, to bring the
Guarantor or radius in this area.
In the latter case, it will have to be recommenced.
h-i and i, control
the result, and repeat so much of
When it is necessary.

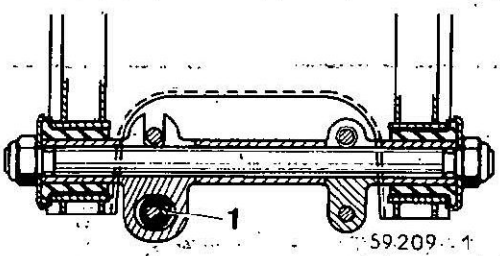

(m) Control the hunting angle (one different)
maximum rate of 1o is allowed between
Sides D and G):
If the difference is greater than 1°,
to define the position of the case on the deck.
or by ovalising the fixing holes
the case in the case of welded supports
or by replacing the support(s) of
direction by an en-
55-56 or 57mm as appropriate.
Surveys carried out on a chain basis
shown that in general it was necessary
to raise the boxes to the right by the
replacement of a support 55 by a
support 56mm.

Note: If after this operation
may obtain this tolerance by:
the readings of the angles of
hunting it will be necessary to control
AV train elements using
I don't know.

(n) Finally, to regulate parallelism
in the mid-load position and perfect the
wheel movement.

DEPOSITED - STATE REMISSION - REPCSE

FOREIGN TRAIN

(See MR 68 or MR 131)

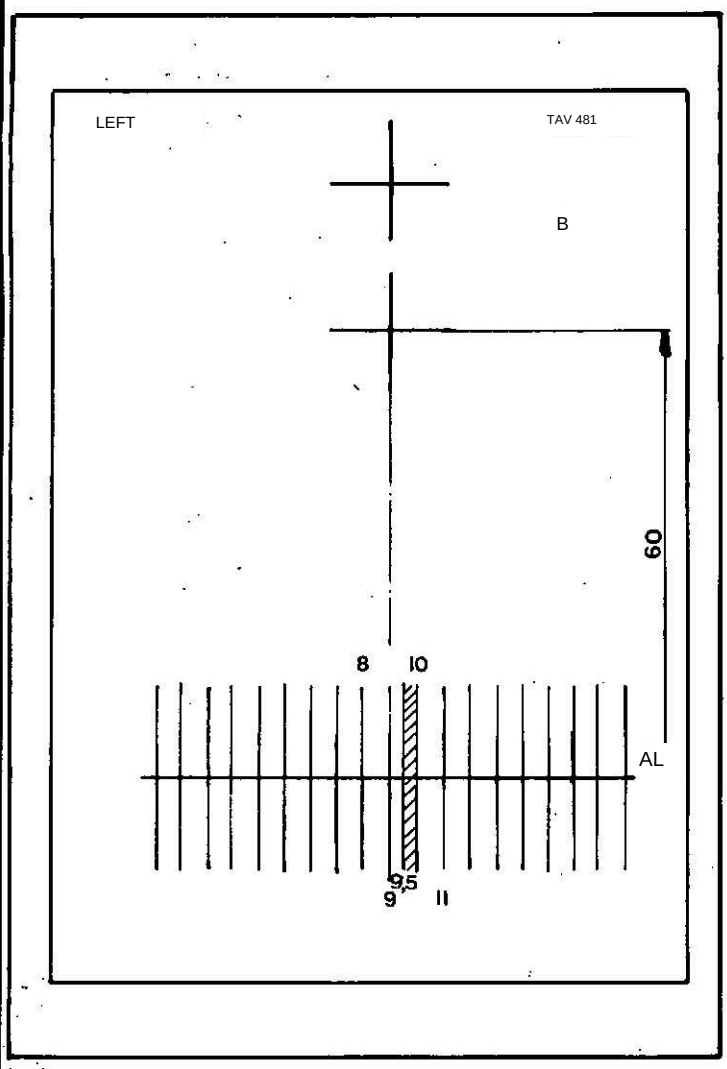

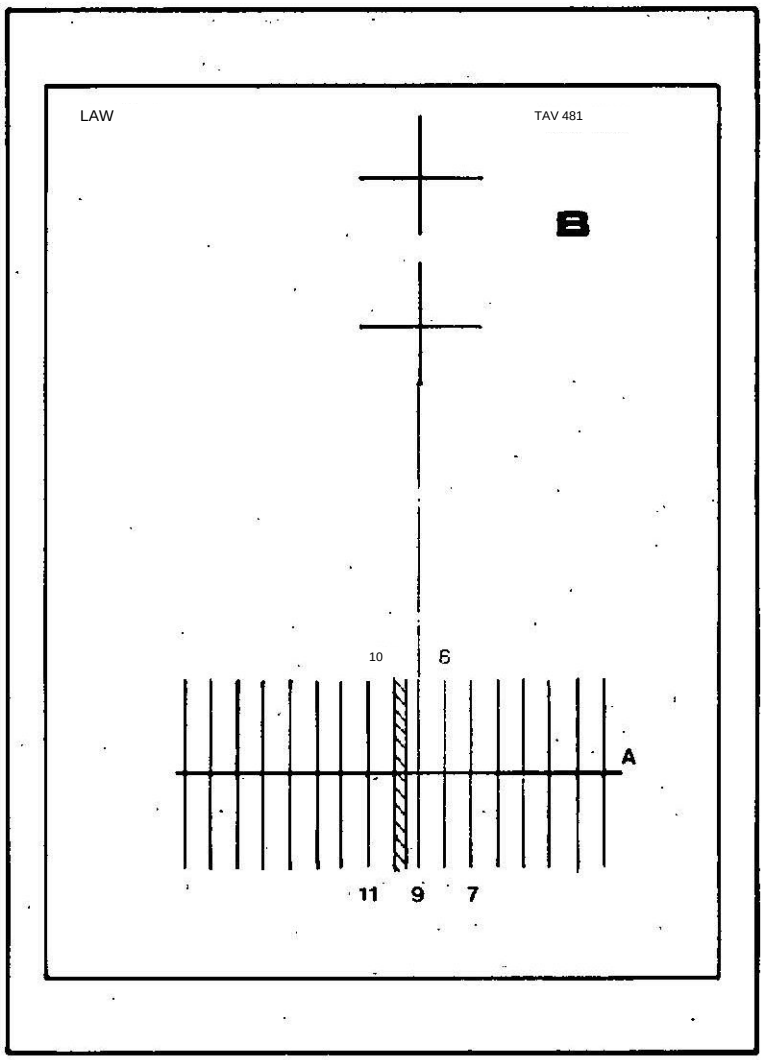

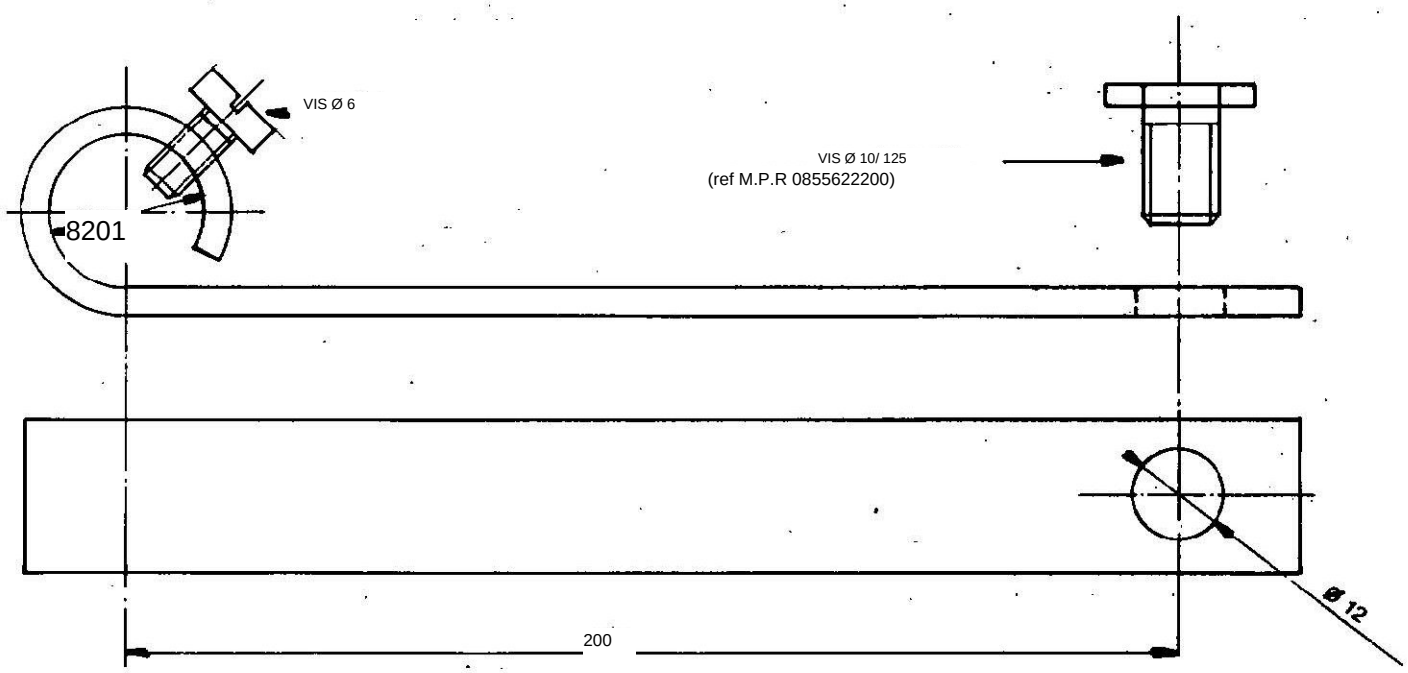

BEFORE THE VEHICLE

This piece is attached to the safety belt position under the floor.

ARRIER TRAIN

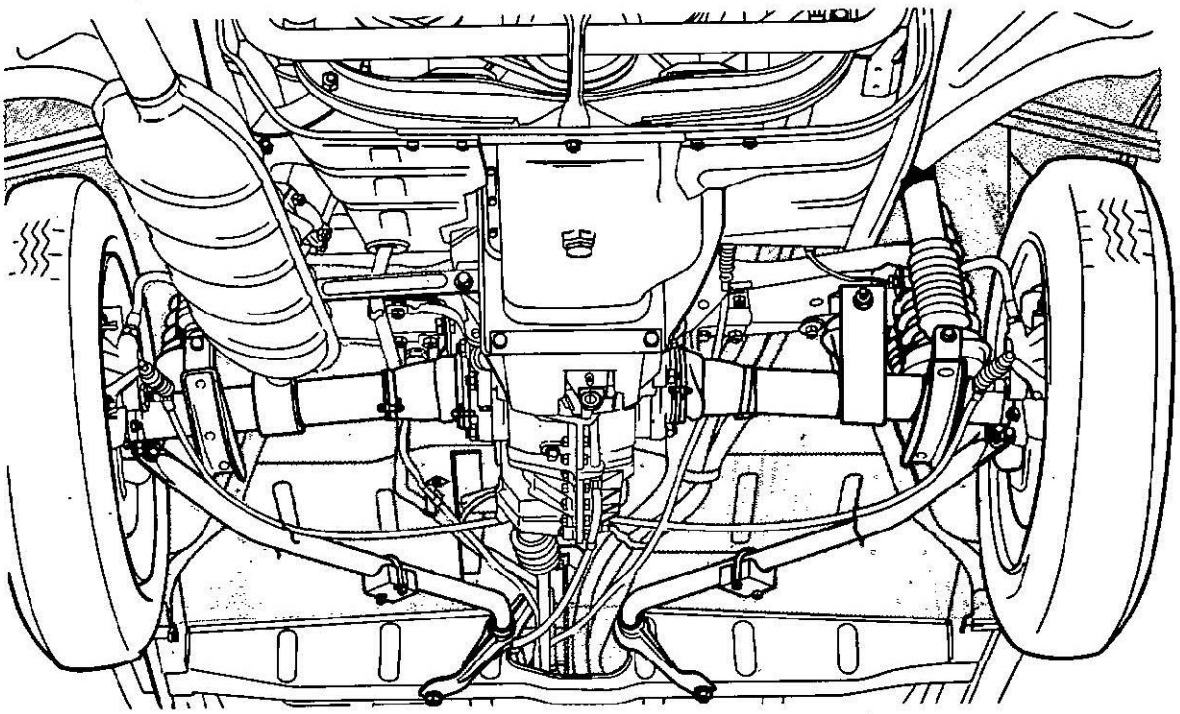

J

J-2

ARRIER TRAIN

As for the TAV changes are
brought in to obtain a bodywork
negative.
These changes are as follows:

Version 85 and 1300G = S Mounting

Normal with box 353.
- Installation of 12mm holds between cross-section and
B. V. side supports.
- 12mm holds between B.V. and B.V.
central B.V. support, which leads to
Replacing the studs.
Note: 6mm Cales for Versions
1600 S with box 364 and buffers
lateral "hard" type (collec-
Silentblocks No 0996128200)

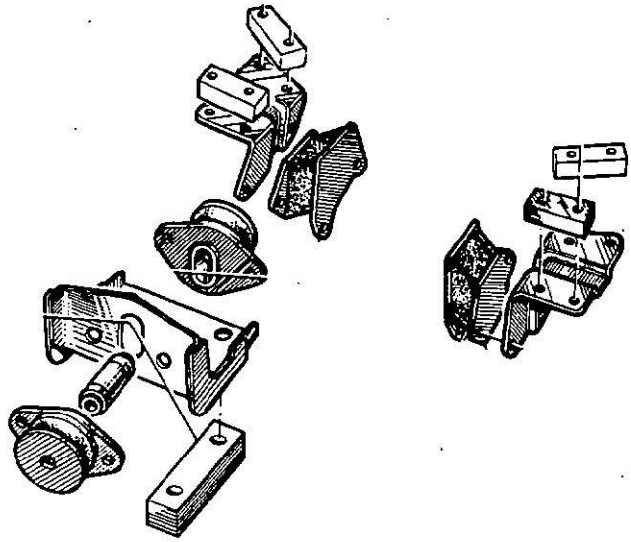

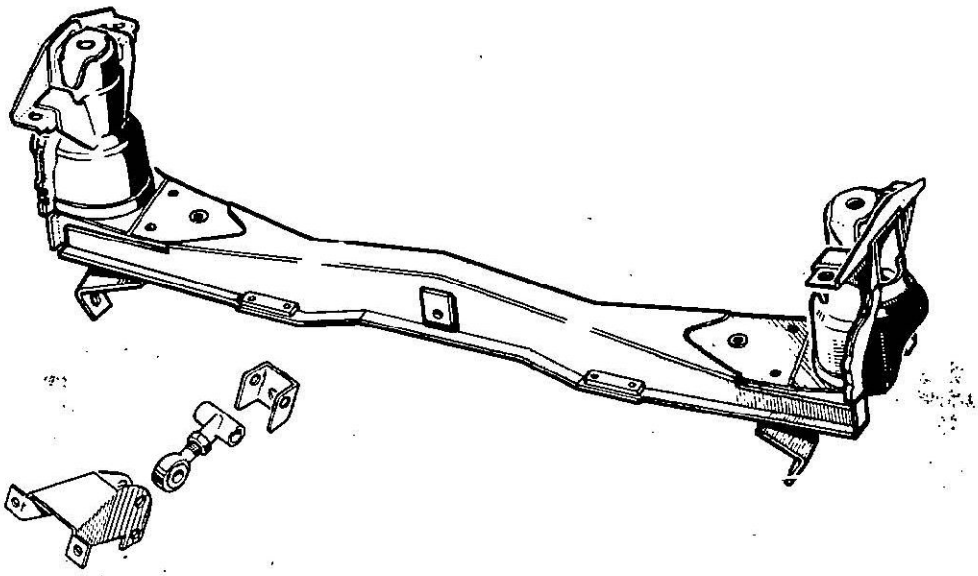

Version 1300G (factory assembly) 1300 S:

- Placing 23mm holds between cross-section and
B. V. side supports.
- Replacement of central support (sup-
ALPINE port).
- Laying a pull between clutches
and cross.
- Side pads in hard c/c (collection
Silentblocs No 0996128200).

The AR force legs are also
amended:
They receive two ends on the chassis side
to replace the silent-
Blocks.
In addition, and on option, some of the
wind up between the suspension crossover
engine and engine block; it is in this case
the need to provide for a cross-section
with welded threaded tips. All these
The aim of these changes is to ensure
rigidity of the rear gear and hence a mel-
the stability of the vehicle at high speed.

DEPOSITED - REMISSION IN STATE - REPOSITED FROM
TRAIN AR OR ALTERNATION OF ITS
ELEMENTS (see MR 133 Chapter J)

The rocket tubes are mounted without any contraindications.
There is therefore no need to act on the
eccentric to get a pinch or
an opening of the AR wheels. On the other hand it
is recommended to check the alignment of the
powertrain in relation to the
Chassis.

SUSPENSION OF AMORTISSERS

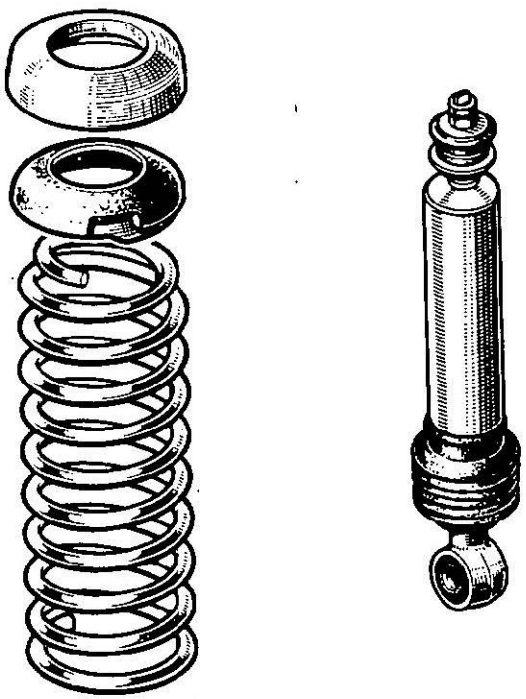

L

SUSPENSICN - AMORISTS

CHARACTERISTICS OF RESENTS

	VERSION 85	VERSION 1300 G 1300 S	VERSION 1600S
VA spring	spring No 0428158000 flexibility 40% with 16mm holds or spring No. 6000001316 flexibility 33% without (Voices without AV radiator).	spring No 0428158000 flexibility 40% with 23mm holds or spring No. 6000001353 flexibility 33% without (Cars with AV radiator).	spring No 0428158000 flexibility 40% with 23mm holds or spring No. 6000001353 flexibility 33% without (Cars with AV radiator).
AR spring	R 1190 spring modified No 6000000494 flexibility 27% with "Caravelle" holds No 0555554300	R 1190 spring modified No 6000000494 flexibility 27% with "Caravelle" or spring R 1135 No Ó428353800 with "Caravelle" holds on vehicles equipped with AR tank 80 l.	spring R 1135 No 0428353800 flexibility 24% with "Caravelle" holds No 0555554300

	Ø of the wire	Number of Spires	Free length (for information (ii)	Length under load	Fexibility
AV Spring No. 0428158000	11.8mm	7	274mm	198^2 under 200kg	40%
AV Spring No. 6000001316 Blue marker	13mm	8.5	?260mm	65 sub 340kg	33%
AV Spring No. 6000001353	13mm	8.5	265mm	70 sub 340kg	33%
AR Spring No. 6000000494	12.3mm	9	reduced from 307 to 275mm	-	27%
AR Spring No. 0428353800	12.3mm	8	275mm	206*2 under 300kg	24%

- AV dampers type R 1135 ref. 0855838000
- R type R 1135 dampers ref. 0855916800

For the competition it is possible to mount Koni or Bilstein shock absorbers.

DEPOSITED AND DEPOSITED BY A RESORT OR A MAJOR

See MR 133 Chapter L.

BRAKING SYSTEM

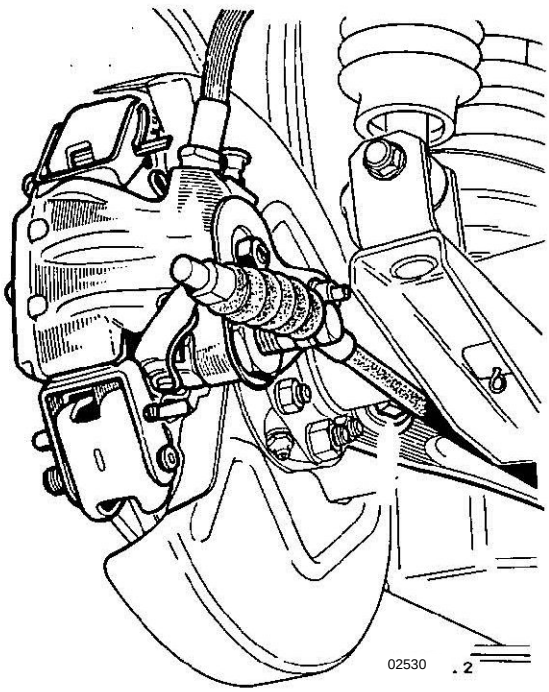

M-2

BREINS

CHARACTERISTICS

- Front brakes:

? Disc brakes.

Floating brackets "BENDIX" , one

Piston with game catchup.

Ø of cylinder 38mm

Ø of disc 261mm

Disc thickness 7.5mm

Platelet thickness 9.5mm

Braking track width 40mm

Rubbing surface of linings 140cm2

(for 2 wheels).

Type of platelet Ferrodo 736. (733

on version 85)

- Rear brakes:

Disc brakes.

Floating "BENDIX" floats a seu!

Piston with game catchup.

Hand brake control on calipers.

Brake splitter only

on version 85 and 1300 G.

Ø of cylinder 32mm

Ø of disc 261mm

Disc thickness 7.5mm

Platelet thickness 9.5mm

Braking track width 40mm

Rubbing surface of linings 140cm2

(for 2 wheels).

Plate Type Ferrodo 736 (733

on, version 83).

Splitter: Only mounted on

the 85 and 1300 G versions and

vehicles equipped with hydrovac.

- Master cylinder:

Ø.19 simple for version 85

Ø 19 tandem for versions 1300 G-

1300 S- 1600 S

(Master cylinder of R 1190 type U.S.A.)

Brake fluid standard:

GIRLING AMBER

Important: No other liquid is

Miscible.

Note: Some versions depending on

their use have flasks

of cut-off brakes allowing for a

better cooling of

I'm sorry, I'm not.

E-relief pads

AR sorters may also be

deleted to facilitate inter-.

Competition.

Extenders are adaptable

VA and AR hoses in order to achieve

Celerate heat dispersion

caused by the heating of

brakes.

REMISSION IN STATE OF THE SYSTEM OF

BREINING

Refer to MR 133 Chapter M.

CARROSSERIA

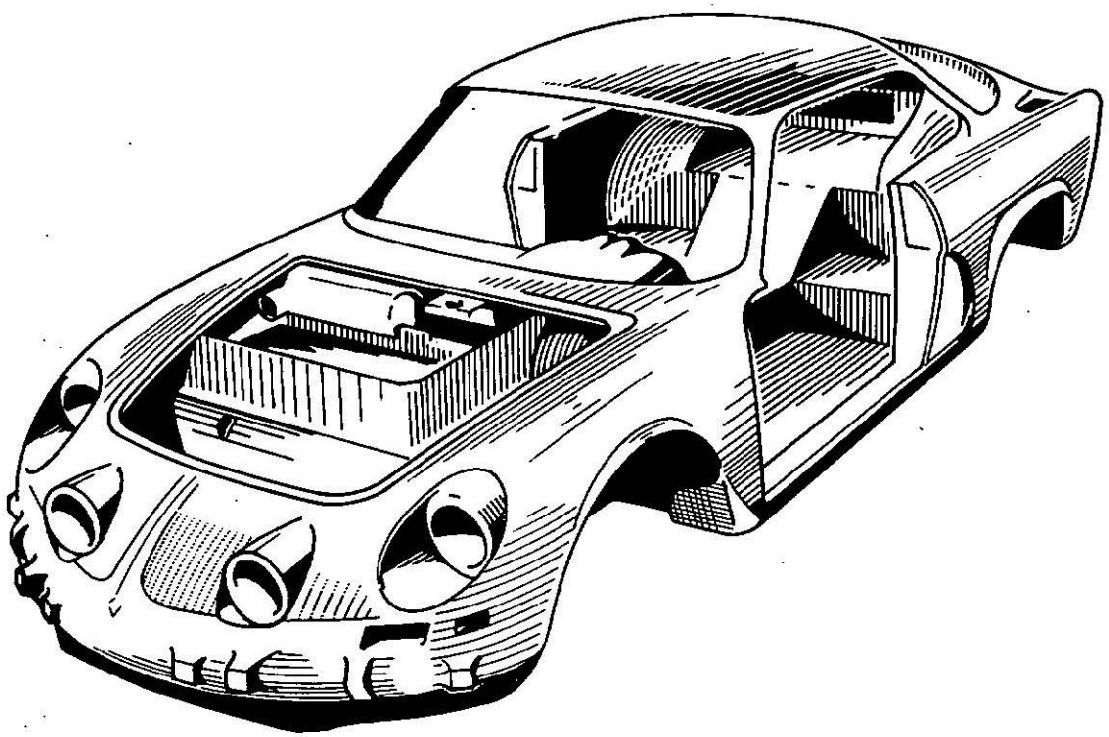

N

N-1

CARROSSERIA

CHARACTERISTICS

Polyester bodywork consisting of two

Main elements:

- 1 floor frame or platform.
- One hull.

These two elements come together on a chas-

beam with polyester resin and

Of woven fabrics of glass fibres, constituting a

very rigid and light assembly (about 100kg)

for the hull and 50kg for the chassis

otters).

Removable elements:

- Doors,
- Cap AV and AR,

require an adjustment for each

vehicle.

In replacement these elements are delivered to the

maximum ribs to allow their adjustment

In the bodyshell.

Note: As an option, the ALPINE Corporation

can deliver for use in

competition of lightened hulls,

weight gain can reach

30 to 40kg.

MATERIALS USED AND PROPORTION

1) Woven fabrics.

Lightweight 270g/m2 glass fabrics

(light ROVING).

520g/m2 heavy glass fabrics

(heavy roving):

Felt or matt 300g/m2.

2) Resin.

Standard pre-accelerated polyester resin

Ree ex: STERPON 1069 pre-access AC

33%.

Resin is used to impregnate tissues

glass ?

3) Accelerator.

Naphthenate of Cobait at 6% ex: NL

51, incorporated into the resin it accelerates

"accelerates" the time taken to

This one.

(4) Catalyst.

Methylethyl ketone peroxide ex:

BUTUNOX or TRIGCNOX X 40 (plus

rapid), the catalyst causes

taken at the time of employment.

USE: At the time of employment

catalyze to 1.5% by weight (1 to 2%

In the case of a temperature change,

perature greater than 20°, decrease

the dose of hardener, in cold weather

increase this proportion.

POLYMERISATION: Once the melan-

a chemical reaction of

hardening takes place in 15 to 20 minu-

(depending on the proportions)

a heat release which

requires the resin to harden.

in an inadequate space

heated (less than 18°C) at currents

air with high humidity or

outdoors, hardening time

It is therefore necessary to increase the number of workers.

iron the atmosphere with infra-

or to increase the dose of ca-

Talyst.

REPAIR OF CARROSSERIA IN GREEN STRATEGY/PCLYESTER

MATERIALS:

Body repair kit

including 4kg resin plus catalyst

required and 2kg of light and matt fabric is

provided by the central MPR ALPINE under the

reference 6000001354.

The repair of the car bodywork in

glass-resin laminate does not pose any problem-

in particular, techniques used

being relatively simple, easily en-

training for non-specialised staff and

the materials used being those

the same products used in the manufacture of

to be rehabilitated.

There is a need to distinguish in bulk, two cases,

in the deterioration to be treated: or

body shape is saved, or

Well, the damaged part has nothing to do with-

of its original configuration.

1; Reparation for minor damage (without

replacement of elements).

In these cases, it is a waste of money.

less developed regions or areas

"delaminated" , i.e., ru le

plastic and glass fabric have been.

separated.

N-2

The first operation consists of:
perfectly polish the inner face
(not moulded) in order to make it dispa-
remove all traces of paint or paint
body fat and activate the surface for
to allow for a good fight of pro-
This work is very often carried out by
Flushed with disc sander
but in places that are not accessible,
we will use with advantage, a
Wood grating or a simple scraper.
area so prepared, must always
be expected to be 5 centimetres more
developed as extreme ribs
damage to be repaired.
This operation completed, starts
the work itself, i.e.
installation of fabrics that will come to the interior-
or reunite the edges of a
or in the case of an area
delaminate, give the laminate back its
initial qualities of resistance meca-
I'm sorry.
Tissues will preferably be chosen
light (approximately 250/300 g/m2) plus
easy to apply and their number
tend to reconstitute a thickness
equal to that of the repairing room
This is not the case.
The pieces of glass cloth will be
cut in such a way that each
of which are slightly larger
than the one it covers in order to avoid
the co-incidence of the edges which provo-
would be too brutal a change of
These fabrics will be impregnated.
more conveniently on a sheet "to
flat", then set up and cared for-
applied with a brush.
The strengthening work completed and
polymerized resin (if necessary with
infra-red heating aid),
will work to restore the state of
to do this, we will still have
use of grater or sander
disk in order to remove, in the area
deteriorated, successive layers of,
paint, primer and gel-coat.
the tissue, thus exposed, the rattra-
surface page will be done by adjunc-
Polyester mastic, this work
being exactly the one to which
delivers the painters for the laying of
Traditional mastics on carriages-

(See section:
polyurethane paint application).
In the event of a tear executing a cha-
width brake C = 40 to 50mm on
the edges of the tear.

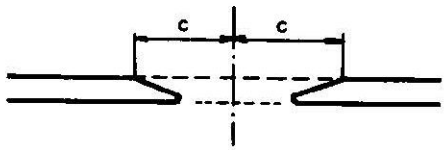

This operation takes place at the "scalex"
with abrasive disc No. 24 with a
Grate or disc grinder. Cover
the area thus free of fibre and re-
sine mixed then apply the mas-
tic polyester.

(2) Remediation with replacement
of a body part

If the body forms are,
because of the impact, totally "per-
It is clear that the only
valid clearance is the replacement of
the damaged part.
In the first place, we shall estimate the
car, the limits of the element of
replacement to be provided.
The illustrations of the elements "stan-
dards" provided in replacement by the
ALPINE Society appears in the
plates 82-05 to 82-08 of PR 871.
In addition, we will proceed with the de-
cutting of the deteriorated part with aid
of a saw and then to the placing in
place of the replacement element.
The latter will be kept in position
Using sheet metal plates (format
50m/m x 15m/m about)
Two holes and screws, like PARKER.
This work will be completed.
as above at the laying of fabrics
The polymerization termi-
born, we can remove the platelets
and continue the surface work,
that is, sanding the edges in
bevel about 5cm in share and
other of the junction line, laying
and impregnation of small strips of
glass fabrics (1 and 2) mounted on
edges, surface catchup
with polyester mastic, primer,
preparation, painting.
This work has been well carried out and has been completed.
are absolutely invisible and

N-3

and in no way depreciate,
the solidity of the car-
As a rossery, they are not diminished.
may, moreover, be carried out by
any bodywork workshop,
if one or two workers have followed a
a few days' training course
and again this condition does not prove
really useful as for execution
of important work.
identify the replacement elements,
These must be carried out by the
manufacturer but experience has
demonstrated that this approach
there was no problem, therefore
that the repairing workshop could it
send a command of the item
interested by referring to the catalogue:
Spare parts ALPINE - PR.
871.
The equipment required at last has nothing to do with
and is already in all
bodywork workshops.

Note: Cleaning brushes and brushes
containers are made with acetone.

POLYURETHAN PEINTURE

(a) Method of application of Polyurea lacquers
"Vérilac" thane

(b) Paint of bonnet interiors.

(c) Dashboard painting.

(a) Method of application of Polyurea-

Thane "Vérilac".

Two types of paintings are currently available
used in manufacturing.
On the one hand cellulosic lacquers, including
application processes are well known.
On the other hand polyurethane lacquers of
Verilac brand for which we you
give below a method of application.

1) Identification of paint

A rectangular plate fixed in the
AV box on the apron near the pla-
that diamond allows to identify the fa-
bricant, the nature of the lacquer and
colours according to the code given in the annex
(Table 1).

2) Products used

On request of the pro-
for the application of
polyurethane paints, ingredients
may be provided by no-
Central RPM:

- I'm sorry.

Polyester coating K 89021.
Catalyst TC 50.

- Apprehend.

Ready Polyester K 89007.
Catalyst 817.

- SCUS-CCUCHE.

For shades Blue ALPINE me-
Tallised ref. 33l and yellow ref. 3310:
- coated with blue lacquer AU 49173 or
yellow AT 49124.
- 41000 B varnishes for blue:
Only 331.
- Hardening 430.
- Diluent D 4047.

For other colours:
- Lacquer according to Table 2.
- Hardening 430.
- Diluent D 4047.

- That's right.

- Lacquer according to Table 2.
- Hardener from 430.
- Diluent D 4047.

3) Surface preparation

- Paper stripping 220 - 320 -
400 in the water.
- Mastication of major defects
with Polyester coating K 89021 to
prepare at the time of employment
as follows:
coated K 89021 = 100 parts.
TC 50 catalyst (yellow) = 2 per-
It's not a big
deal.
Prepare only the corresponding amount-
weighting at a use of 15 to
20 minutes.
Mix well: The dough obtained must
Be practically white.
Do not force the dose of TC 50:
Any excess slows drying with
possible re-entry under the lacquer..
Sanding.

- Application of Polyester primer.

To be prepared at the time of employment,
lifetime: 20 minutes.
K 89007 primer = 100 parts.
catalyst 817 = 10 parts.

N-4

Pass 3 or 4 layers without interrup-

drying: 5 to 6 hours.

Resumption of slight defects with coating

Polyester.

Paper sanding 400 with water.

4) Application of lacquers. (composition)

Table 2

- Application of the underlayer.

To be prepared at the time of employment,

lifetime: 12 hours.

(Special underlay called in-

duit-lace for blue 331 and yellow

3310). Temperature drying

ambient.

- After 15 minutes : Application

a first layer of lacquer.

To be prepared 20 to 30 minutes before

employment, service life: 12 hours.

(More varnish for blue 331). Drying

at room temperature: 15 minu-

Yours.

- Application of the second layer

Lacquer.

Air drying, 6 to 8 hours at tem-

ambient perature, manipulatory

After 2 to 3 hours.

Do not lacquer on hot surfaces or

wet.

Avoid hot air currents and

wet.

(5) Material and quantities of products

For information purposes , we use

Devilbiss guns JG A 502, nozzle

AV 15 EXE. hat number 30.

Pistolage pressure 4 bars for

primer, 3 bars for underlayers

and lacquers.

For the complete painting of a voy-.

We must consider:

- 9kg of primer mixture.
- 1.7kg of underlay mixture.
- 3, 3kg of lacquer mixture.

(b) Paint of bonnet interiors.

After sanding, apply to the gun the

Gayflex Multicolor Mix sold ready for sale

employment.

(c) Dashboard painting.

In order to avoid the appearance of aureoles, it

is recommended to treat the board with

section: Upper part for example

with stop of masking along the a-

Frontal edge.

Depolished depolishment of the area reaching

and the whole section.

Application from 1 to 2 layers, depending on

the importance of the area to be retouched,

Cracked black matte cellulosic (341 0016

For example, astral) is 50% diluted.

After 10 minutes of drying, apply

a layer of black cellulosic matte di-

50% (341 0014) of Astral by e.g.

Drying: 1 hour at am- temperature

You're a biante.

N-5

TABLE!

PEINTURE IDENTIFICATION PLAQUE

1 - MANUFACTURER

1 - MAX MEYER

2 - RINSHED MASON (R.M)

3 - VERILAC

4 - DUCO

5 - VALENTINE

2 - NATURE

1 - CELLULOSIC

2 - GLYCEROPHTALIC

3 - POLYURETHANE

4 - ACRYLIC

3 - COLORIS

1 - BLUE ALPINE

2 - BLUE AZUR

3 - ITALIAN RED

4 - RED RUBIS

5 - ROSE BRUYERE

6 - WHITE GARDENIA

7 - GRIS MONTEBELLO

8 - BEIG SABLE

9 - VERY PARIOLI

10 - JAUNE

11 - STEEL BLUE

12 - ORANGE

N-6

COMPOSITION OF POLYURETHAN LAKES VERILAC

TABLE?

LAKE	80 Parts UX lacquer 147172	20 Varnished parts 41000 B	25 hardening parts OF 430	40 Parts diluting 4047
SUB-COUGHORENDIGHT LAKE	100 Parts coated with lacquer AU 49173	25 hardening parts OF 430	30 Parts diluting 4047	
TREATY ALPINE BLUE 331				

LAKE	100 Parts of lacquer U 146010	15 hardening parts OF 430	40 Parts diluting 4047
SUB-COUGHORENDIGHT LAKE	100 Parts of lacquer U 146010	25 hardening parts OF 430	30 Parts diluting 4047
WHITE GARDENIA 336			

LAKE	100 Parts of Lake U 146435	15 hardening parts OF 430	40 Parts diluting 4047
SUB-COUGHORENDIGHT LAKE	100 Parts of Lake U 146435	25 hardening parts OF 430	30 Parts diluting 4047
ITALIAN RED 333			

LAKE	100 Parts of Lake U 146532	15 hardening parts OF 430	40 Parts diluting 4047
SUB-COUGHORENDIGHT LAKE	100 Parts lacquered 146,532	25 hardening parts OF 430	30 Parts diluting 4047
CRANGE 3312			

LAKE	100 Parts of Lake U 146253	15 hardening parts OF 430	40 Parts diluting 4047
SUB-COUGHORENDIGHT LAKE	100 Parts coated with lacquer AU 49124	25 hardening parts OF 430	30 Parts diluting 4047
JAUNE ALPINED 3310			

SPECIAL TOOL

R-1

SPECIAL TOOL

With the exception of the candle key ref. 6000001258 for 1600 S no tools other than those necessary for the repair of RENAULT vehicles of the Renault 8 - 10 and 16 ranges is essential for the rehabilitation of ALPINE type A vehicles 110.

UPDATE OF THIS MANUAL

The Technical Notes will be included in the table below.

N.T. No.	DATE	JT

ALPINE RENAULT

Société des Automobiles ALPINE
Te boulevard Foch - Epinay/Seine - 93- FRANCE
243:46-16 - Avonue of BREAUTE - Dieppe
76 - FRANCE ? Tel. 84. 37. 21 to 25-R.C._ Seine
55 b 9847 ? INSEE No 261 75 118 0001

MANUAL

OF REPAIR

Type A 110

1300 VA, 1300 VB, 1300 VC,

1600 VB, option GS

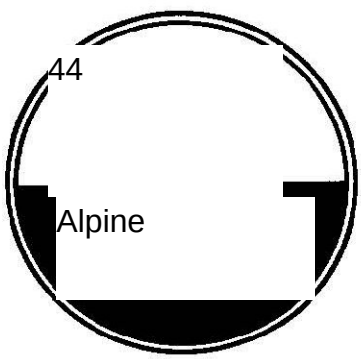

OCTOBER 1971 ADDITIVE

The mi sodes of es in the tone of singing the consonant of this present

by the manufacturer a tabration of the hearing organs and stop

vehicles of its mark*.

ous copyrights are reserved for the Société des Automobiles ALPINE
a reproduction or even partial translation of this document
que l utilisation du système de numérotage de référence des pièces de rechange sont interdites sans l'autorisation écrite et préalable de la Société ALPINE Automobiles.

GENERAL A
MOTOR ALLUMAGE B
ELECTRIC EQUIPMENT C
EMBRAYAGE D
BOX OF VITSES ?E
DIRECTION G
TRAIN BEFORE ?H
ARRIER TRAIN J
SUSPENSION
AMORISTS L
- BRAKING SYSTEM M
?CARROSSERIA N

OUTILLAGE SPECIALISE R

CHAPTER A: CHARACTERISTICS

GENERAL

Page A-3

Paragraph 13 - Pheumatics and rims:
Add the ALPINE 5a aluminium rim
series mounted on 1,600 S since January
1971.

Paragraph 14 - Capacity:
Cooling system with heating:
correct models with AV radiator: capa-
quoted 13 to 14 litres instead of 9 litres.

CHAPTER B: MOTOR

Page B-2

Version 85 from engine 810-30 No290:
removal of inner springs from valves.

Page B-7

Engine internal valve spring 807-25: so much not:
replace type R.1171 with R.1151, ca-
erysteria indicated in the MR are cor-
Rects.
Engine 807-25 and 1600 GS: correct
lengths of shafts of buttocks: read ad-
mission 178 mm - read exhaust 110 mm.

Page B-8

Add address of supplier of dough
Hylomar : BEAUCHAMPS
96, rue Georges SAND
37- COURSE

Page B-10

Axes: specify diameter piston axes:

85	1300 G	1300 S	1600 S	1600 GS
Ø 20	Ø20	Ø20	Ø21	Ø21

Page B-12

Paragraph 5 - Add oil pressure mo-
1600 S and 1600 GS at 4000t/min hot:
Four to five bars.
Paragraph 6 - Correcting mixing capacity
For versions with AV radiator: 13 to 14 li-
instead of 9 liters.

Page B-13

Add: thermostat type winter =
outside temperature < 15°
Summer type thermostat =
outside temperature > 15°
The 1600 GS group IV versions are mounted
without thermostat.

Page B-14

Engine 1600 S: replace air sprinkler 200
para. 180.
Specify for all types of carburetors:
23 g floats, point 150, height of
float: 5 mm
26 g floats, point 150, height of
float: 8.5 mm.

Correct: game between collectors and embankments
Of carburettors: 1.3 to 1.5 mm instead of
1.2 to 1.3 mm depending on the depth of the throats
O-rings.

Engine 807-25 and 1600 GS: petrol pump,
add static pressure, the pump does not debi-

- minimum : 0,170 bar
- maximum: 0.280 bar.

Page B-15

Engine 1600 S and 1600 GS:
The méca-
reference 4266 curve R. 234 was
replaced from Model 71 by Allu-
meur without reference tower count
4311 curve R.262 and then by the type ignition
R. 1173 reference 4355 curve R.267.

With this last lighter, the initial setting
from 0 to 8 mm/10 mm at the
pulley.
For information, the 5° marker on crankcase
clutch corresponds to a position of the
0,2 mm piston before the PMH and with a
6 mm distance before the index on the pulley
Of crankshaft.

Engine 1300 G and 1300 S:
Starting from model 71, mounting of the lighter
without mechanical return account
reference 4136 curve R.230.

Engine 810-30 version 85:
From vehicle 12249, mounting of
the lighter without counting-turns meca-
reference 4245 curves R.247 C. 34.

Page C-1

Starter 1600 S : Add starter

Paris-Rhône reference D8 E7I to use from

Preferential to Ducellier reference 6183.

Moto fan:

The motor motor motor fan reference

08 70 459 500

is replaced by the reference engine

77 01 003 920 double polarity.

so during an intervention on this device

ensure that it is connected correctly.

on the other hand, the power supply for this engine is

provided by a Cartier 12 V reference relay

08 55 608 100.

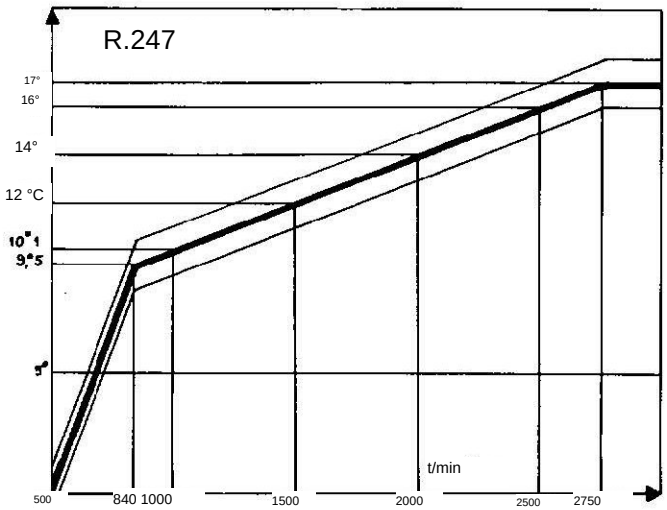

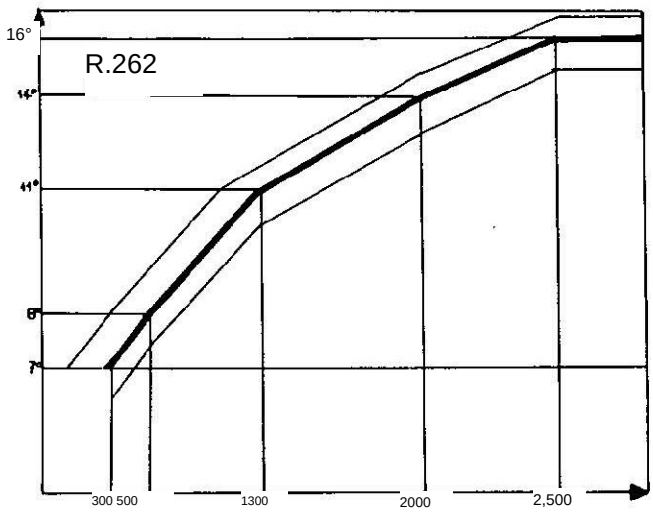

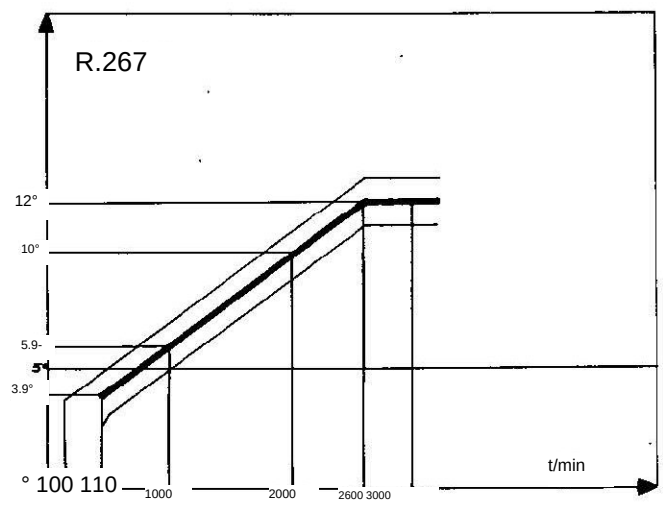

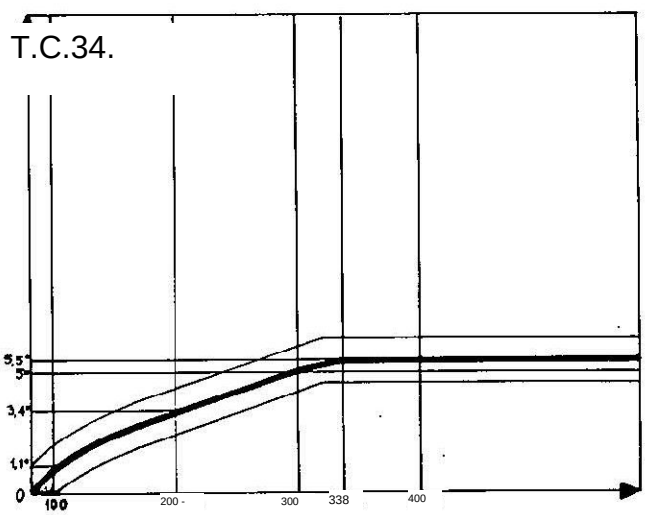

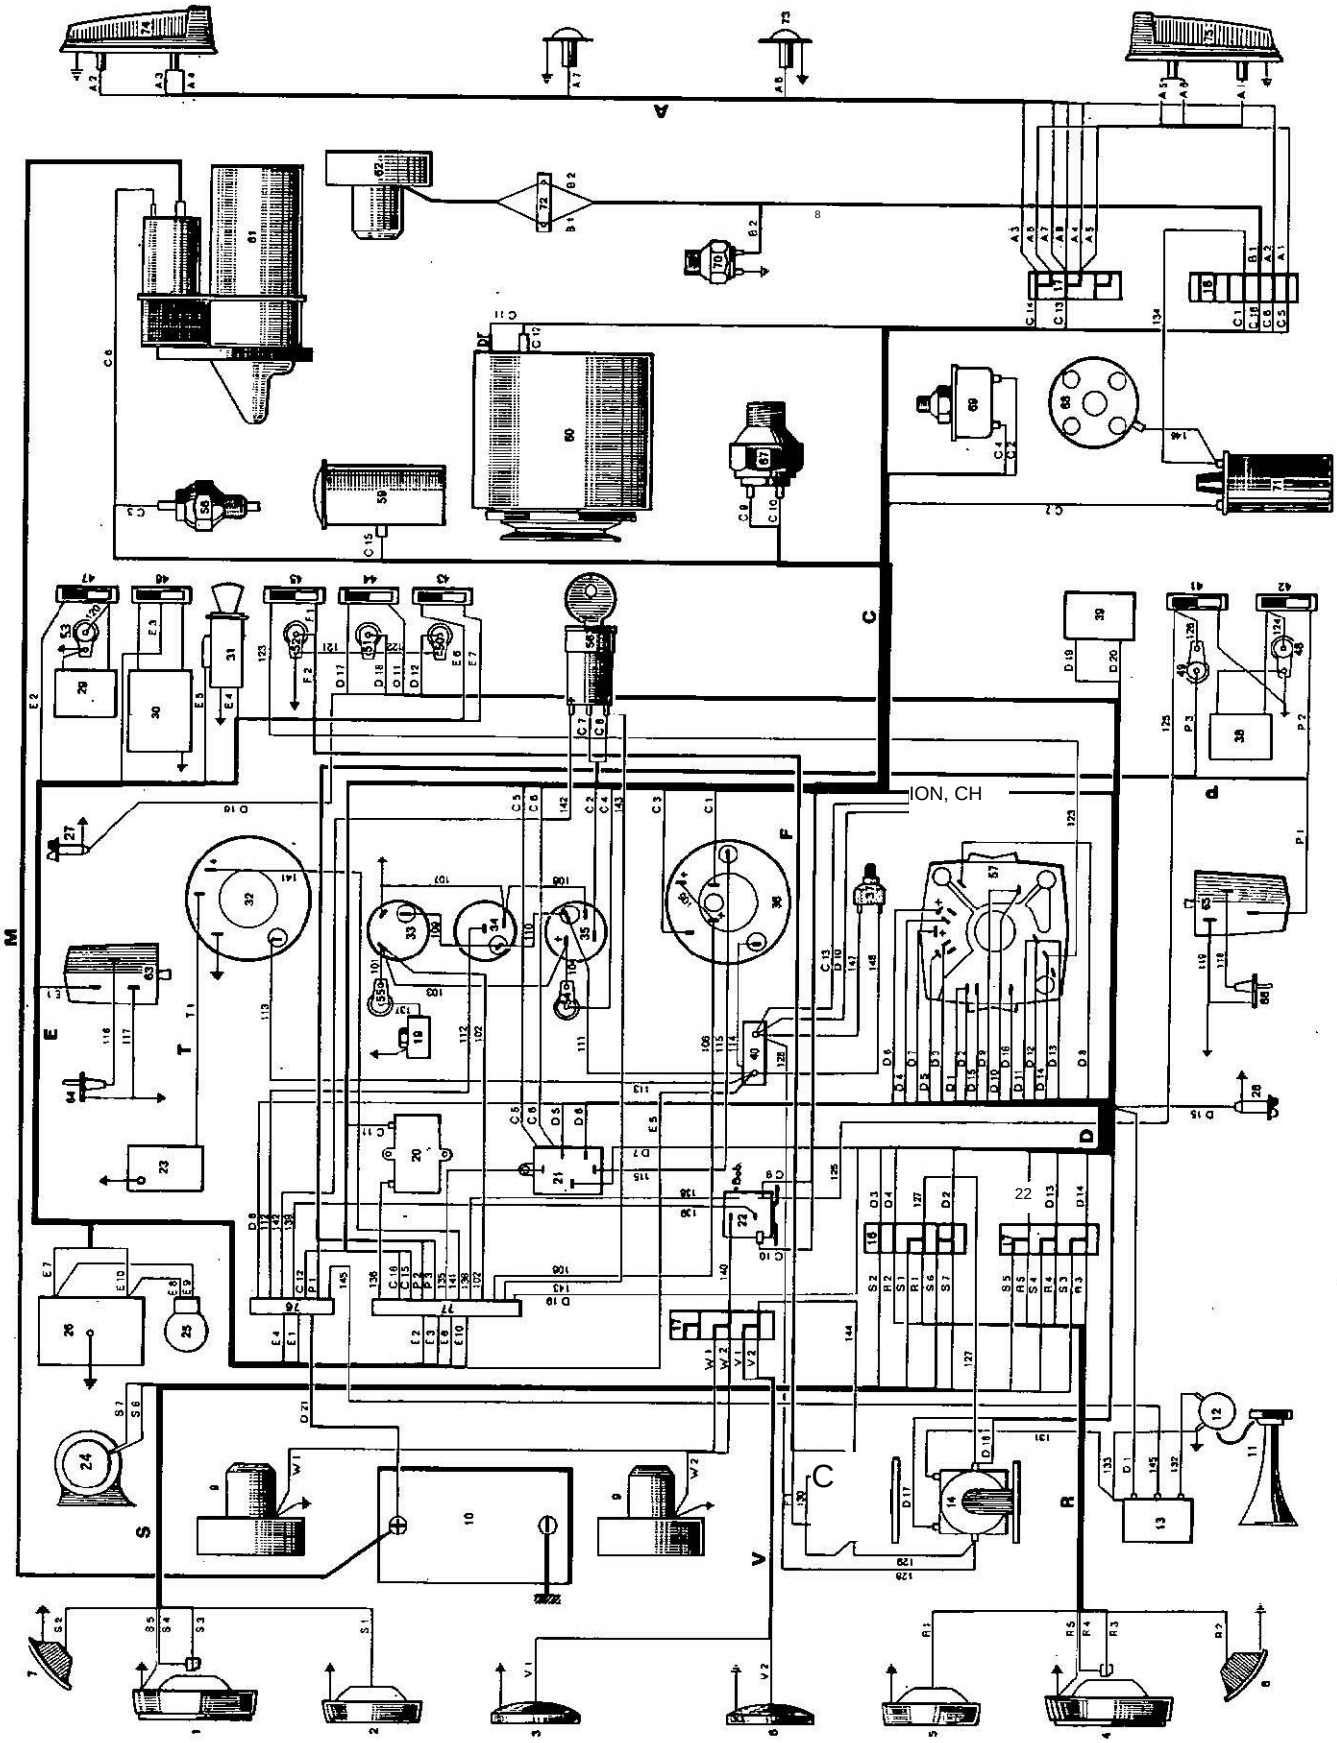
ION, CH

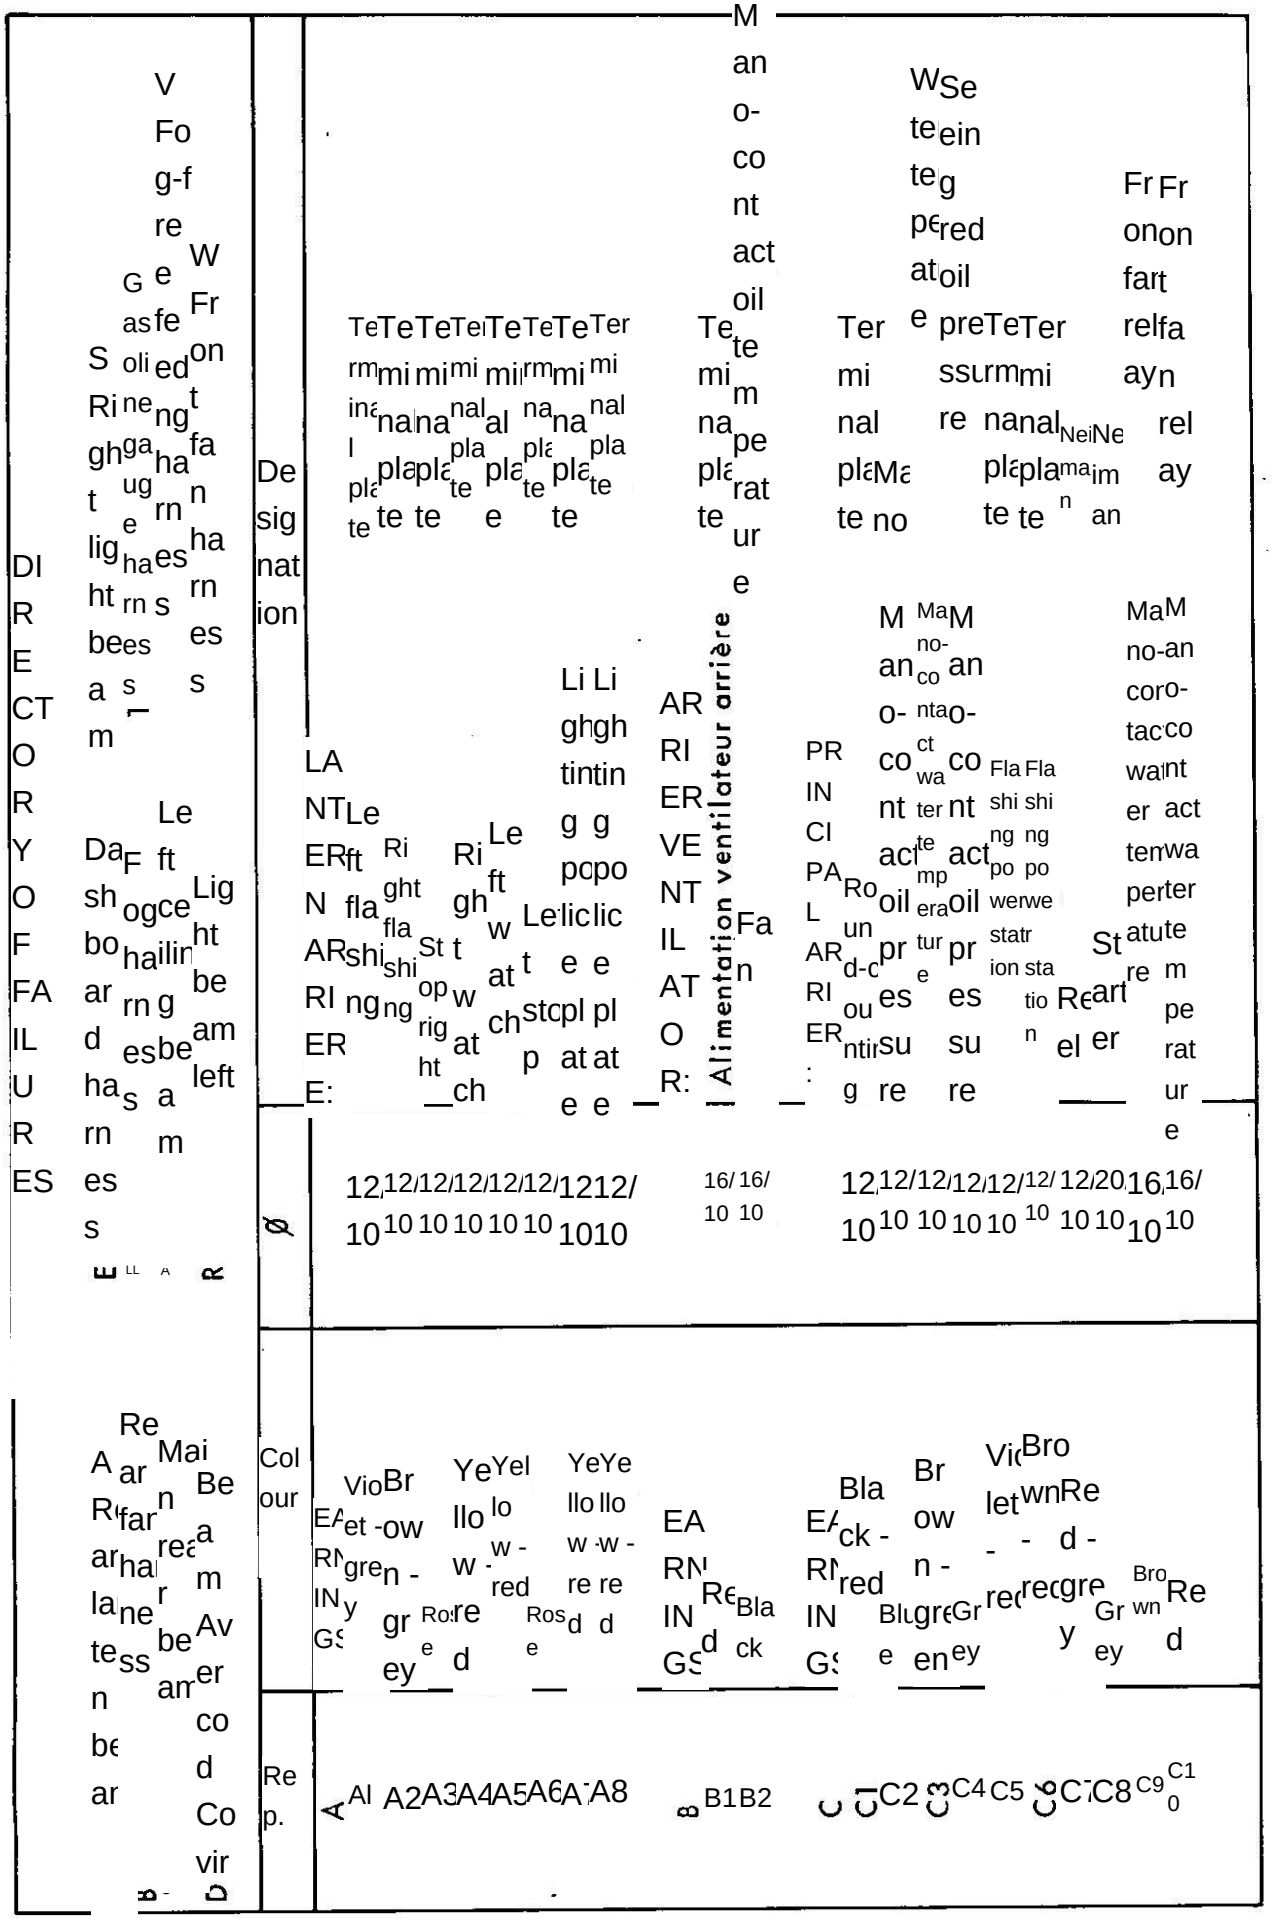
DIRECTORY OF FAILURES
Rep.
Colour
Date
Designation
LANTERN ARRIERE:
PRINCIPAL ARRIERE:
Alimentation ventilateur arrière

Designation	Manno-contact electric water pump	Electric water pump	Alternator	Start alternator	Rear fan	Right ceiling	Front-right door contact	Left ceiling lamp	Manno-contact water temperature	Front left door contact	Manno-contact oil pressure	Rear fan terminal plate	Rear right lamp	Rear left lamp	Contact power supply	Contact power station
Rep.	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	wil	76	77

Designation	Kilometer	Volt meter	Manno-oil pressure	Reburn-counting	Left half resistance	Reburtmper-light	Stop heating Contacter	Light-itch sign	Switch-breeze	Front fan	Long range switch	Heating switch	Long switch	Front fan switch	Half-left green	Front fan red	Long range	Yellow fog-proof	Green blind half	Seeing red oil pressure	Yellow hand brake
Rep.	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56

Designation	Long range	Anti-bro	Right light	Lowsgeer	Right straight	Lighthouse left	Long range	Left fo	Right	Left control	Front flash	Radiator fan	Bantery	Tromp	Rocad	Rocad horn	Rocad horn relays	Long range relays	Long Relays	Terminal plate 6-5	Terminal plate 6-3	Terminal plate 6-6	Hand brake	DUCELL	Flashing	Front fan relay	Gasoline	Klaxon	Ice-was	Ergine	Right position	Left pcan	Half-right	Left resist	Heating	Heating breeze	Heating Heater-e
Rep.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30

Designation	Regulatory exciter Bonnet	Alternator Contacts	Terminal plate	Terminal plate	Electric pet pump	Terminal plate	Terminal plate	Terminal plate	Terminal plate	Contactless power supply	Long range switch	Heavy duty switch	Terminal plate	Terminal plate	Left position lamp	Right position lamp	Relay	Relay	Stop Contactor	Rear harness	Contactless power supply	Contactless power supply
Qty	12	30	12/10	12/10	16	12/10	12/10	12/10	12/10	12	20/10	12/10	12/10	16/10	16/10	?12/110	12	20/10	12/10	12/10	12/10	30/10	12/10
Colour	Black	Blue-white	Yellow	Red	Red	Red	White	Violet-red	Brown-red	Violet-green	Blue-grey	Blue-grey	Yellow	Yellow	Green	Green	Green blue-red	Blue-purple	Blue-brown	Red-grey	Red-grey	Red-grey	Red	White	EARNINGS	Blue
Rep.	C11	C12	C13	C14	C15	C16	D	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	D14	D15	D16	D17	D18	D19	D20	D21	E	E1

Designation	Interrupteur anti-brouillard avant	Contact position feux de recul	Contact position feux stop	Contact position essuie-glace	Contact position lave-glace	Relays	Contact position feux de recul	Interrupteur, contact position feux de recul	Terminal plate	Terminal plate	Terminal plate	Terminal plate	Terminal plate	Terminal plate	Terminal plate	Terminal plate
Ø	6/10	16/10	12/10	16/10	16/10	16/10	16/10	16/10	12/10	12/10	2016/10	12/10	16/10	12/10	2016/10	12/10
Colour	Red	Red	Blue	Yellow	Red	White	Red	White	Red	Red	Red	Green	Green	Green	Red	Green
Rep. :	E2	E3	E4	E5.	E6	E7	E 8	E9	E10	F	F1	F2	P	P1	P2	P3

Designation	Heating switch	Cigarette lighter	Contact position essuie-glace	Engine switch window screen wiper	Windscreen wipers	Windscreen wipers	Alim. Borne	Front fan	Ceuse de freinage	Driving beam	Night	Passing beam headlamp	Clignotant droit
Ø	16/10	12/10	16/10	16/10	16/10	16/10	12/10	2/10	2016/10	12/10	16/10	2016/10	12/10
Colour	Red	Red	White	Red	White	Red	Green	Green	Red	Green	Yellow-red	Red	Green
Rep. :	R1	R2	R3	R4	R5	S	S1	S2	S3	S4			

Designation	Terminal plate	Klaxon city	? Meter	ANTI-BROUILLARD FOOD plate	Terminal plate	Terminal plate	Terminal Nipplock gr	JAUGE ASSENCE Gasoline gage	Anti-fog gouche	VENTILATOR: Right fan	Left fan
Ø	12/10	12/20/10 10		12/10		16/10	16/10			12/10	12/10
Colour	Yellow-red	Violet-blue	White-green	EARNINGS	Yellow	EARNINGS	Green	Green		EARNINGS	Brown
Rep.	55	S6 S7		IT		VI	V2			W	W1 W2

SCHUNTS

	Buttsbase	Fiche-base	Double-ended 2 double plugsØ5	Undressed 2 double plugsØ5	Single shoulder 2 double plugsØ5	Single shoulder 2 double plugsØ5	Single shoulder 2 single plugsØ5	Single shoulder 2 single plugsØ5	Single-Dumped Sheet	Single-Dumped Sheet	Undressed Double-ended Sheet	Undressed 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets
	Designation	Valve likes to be with contact	Manoil pressure Seeing	12/10 Contact fee Watcher	Manoil pressure Watcher	Manoil pressure Watcher	Manoil pressure Watcher	Compie-tours 12/10 Montre	Front non-right-hand door contact	Front non-left-hand door contact	Rounded-corner Counting	Long-range Switch	Seeing Low-range Switch	Seeing 12/10 ? Switch
	Ø	12/10 Voltmeter	12/10 Manoil pressure Counter	12/10 Voltmeter	12/10 Manoil pressure Watcher	12/10 Manoil pressure Watcher	12/10 Light station	12/10 Light station	12/10 Central flashing	12/10 Central flashing	12/10 Central flashing	12/10 Long-range Heavy Duty Switch	12/10 Long-range Average Switch	12/10 Fa Fa
	Colour	Rouge	Rouge	Rouge	Rouge	Rouge	Rouge	Noir	Black	Yellow	Yellow	Blue	Yellow	Yellow
	Rep.	101	102	103	104	105	106	107	108	109	110	111	112	113

	Buttsbase	Undressed Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets
	Designation	Undressed Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets	Double-ended 2 single Sheets
	Ø	16/10	10	10	10	10	10	10	10	10	10	10	10	10
	Colour	Yellow	Yellow	White	Black	Black	Black	Black	Red	Black	Black	Rose	Red	White
	Rep.	114	115	116	117	118	119	120	121	122	123	124	125	126

Buttons	Single card of 5	2 pods of 5	2 pods of 5	2 pods of 5	2 pods of 5	2 pods of 5	Single card of 5	Single-Sheet	Single card of 5	Single sheet 2	Single card of 5	Frame of 5 and 4	Frame of Ø 5 single plug	2 pods Ø 5	2 pods Ø 4	Cosdys of Ø 5 - bare
Designation	Terminal plate	Watch station	Spotlight relay	Long-range relays	Borne	Compressor	Compressor relay	contact power station	contact power station	Hand brake saw	contact power station	Terminal plate	contact power station	Frame of Ø 5 and Ø 4	contact power station	Terminal plate	contact power supply	Decoy	Rheostat	Rheostat
Ø	2016/10 Long range relay	16/10 Long range relay	16/10 Long range relay	12/10 Fog Relay	12/10 Terminal plate	12/10 Klaxon relay	12/10 Klaxon relay	12/10 Flashing power station	12/10 Hand brake contactor	12/10 Fan relay	12/10 Fan relay	12/10 Meter	16/10 Neimian	16/10 Neimian	16/10 Fog Relay	16/10 Klaxon relay	16/10 Rup Borne	16/10 Lighting station	16/10 Borne veilleuse	
Colour	Grey	Yellow	Yellow	Black	Red	Black	Red	Red	White	Red	Blue	Red	Red	Blue	Red	Green	Blue	Black / Yellow		
Rep.	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148

CHARACTERISTICS OF LAMPS

| | | |

From 1300 VA - VB No 11912;
1300 VC No 12249 and 1600 VB No 16951:
Mounting of dashboard instruments
ED brand with green letters and numbers
Instead of whites.
With this mounting, the temperature indicator
water is incorporated into the meter block
(PR 871 plates 61-01 and 61-05).

Plan electrical circuit diagram boards.

CHAPTER D : EMBRAYAGE

Version 85:
From vehicle No. 11779, the versions
85 are equipped with box 353-35 with
guided ball stop.
Friction Ø 180 ALPINE reference:
60 00 001 295
Mechanism Ø 180 ALPINE reference:
60 00 001 294
Ball stop type R. 1170 N°:
77 00 519 270
Fork type R. 1192 N° : 77 00 509 595
Clutch housing type R.1192 N°:
77 00 505 098

Version 1300 G and 1300 S:
Mounting identical to that of versions 85 to 85
from vehicle 11872

CHAPTER E : BOITE DE VITESSES

1600 VB: specification of a new index
BV 364.

BV 364-05: torque 11 x 34, nor-
malaise, multiplication: 3,09, tachymè-
tre : 6 x 10, conical distance : 61.50 mm.
Different from BV 364-01 and 06 only by the
Relationship of the couple.

The BV 353-20 and 364 can be equipped
32 x 31 long seme, multiplica-
0,97.
The unique distance adjustment for all
the indices of BV 364 is 61.5 mm.

CHAPTER G: DIRECTION

Add : on some versions 85 from
of vehicle No. 12037, mounting of the
R. 1136 instead of R.1135.

CHAPTER H : AV TRAIN

Add : on some versions 85 from
of vehicle No. 12037, assembly of the train
AV R. 1136 instead of R. 1135.
The setting values are unchanged.

CHAPTER J : TRAIN AR

Add : on some versions 85 from
of vehicle No. 12037, mounting of the AR train
type R. 1136 instead of R. 1135.

CHAPTER L : AMORTISSERS

Add : on some versions 85 from
of vehicle No. 12037, installation of amortised-
AV and AR type R. 1136 instead of
R.1135:

CHAPTER M : BREINS

Add: on some versions 85, mounting
original discs, calipers and chapes
R. 1136 instead of R. 1135, from the vehi-
base No. 12037, assembly of master cylinder
tandem Ø 19.

1600 VB Group IV competition: assembly
big brakes like competition.

AV brakes:
Bendix II AS brackets type R.1151 Ø cylinder
wheel: 48 mm
Disc derived from R.1151, diameter: 254 mm
thickness: 12 mm
Plate thickness: 16 mm with upper
port.

AR brakes:
Bendix type III ACG brackets with control
Hand brake, Ø wheel cylinder: 45.
Disc derived from R.1151, diameter: 250
for 254
reduced thickness
12 to 10 mm.

Plate thickness: 14 mm with upper

. port.

Tandem master cylinder Ø 22: specification

ALPINE, reference: 60 00 001 452.

Type of brake pads: Ferodo 738

VA and AR.

L- FREINS AV : INSTALLATION PROCEDURE-
LATION

(a) Chassis support:

- Present the aluminium support on the
rocket and grinding or trimming if necessary
the passage of the upper and in-
the lower part of the pivot.
- Mount support with four
8 x 35 square head screws, reference
07 06 302 900, nuts and washers.

(b) Assembly of the chape:

- Present the chape and fix it on its
support with screws 12 x 30 and ron-
These fans.
- For any other details, see
Chapter M of MR 96.

(c) Mounting of the hub:

- Go up to the AV hub R. 1135 modified
the intertwined puck 60 00 001 387 and
the R. 115l disc modified using the
screws 10 x 27 reference 60 00 001 427,
head thickness: 6.8 cm, nuts,
Washers etc...

II - FREINS AR : INSTALLATION PROCEDURE-
MODIFIED FUSE TUBE LATION

pous Monter (o0 001 435

- Mount thrust tube support G
or D 60 00 001 435 or 60 00 001 436
and chape support (symetri-
60 00 001 437 on the rocket tube
modified with square-headed screws of
8 x 35 ref. 07 06 302 900.
- Equipping the bearing cage of its
seal, bearing,
Wheel shaft and studs.
- sawing the smooth part of the
brake pad holder stud
hand ref. 06 05 959 400.
- Get a flat puck on that stud.
3 mm thick to compensate the e-
Weighing of the thrust tube support.
- Mount the cage assembly, bearing,
wheel shaft on the rocket tube.

(b) Mounting hub and disc:

- Mount on hub R. 1135 modified the
centering washer (moved to the
hub) ref. 60 00 001 387 and disc
AR (thickness 10 mm) with 3 screws
10 x 27, head thickness: 4.2 ref.
60 00 001 427.
- Mount the set on the wheel shaft.

(c) Assembly of the chape:

- Present the chape.
- Grinding the game, if necessary
tact with the working of the red cage-
I think it's a good idea.
- Fix the chape with screws 10 x 35
Ref. 60 00 001 444 equipped with ron-
These fans.

(d) Mounting of the caliper:

- Drill a hole of Ø It on the outer side-
front of the caliper in the piston axis
in order to be able to replenish
for the piston (key six male bands of
7 mm).

III - BREIN A MAN

- Special hand brake sheath stop
ALPINE.
- ALPINE special hand brake cable.

IV - FLEXIBLE MONITORING AND RAC-
CORDS

(a) At the rear:

- Reunite with each other, 2 connectors ref.
60 00 001 431 with connection screw
ref. 60 00 001 430 and fix this "L" on
the caliper with a screw connection ref.
60 00 001 432 to get an output
flexible upwards between the stirrup and the
The rocket tube.
- Do not omit the copper washers ref.
60 00 001 450 or 60 00 001 451.

(b) In front:

- Use connectors ref. 60 00 001 431
with screw connections ref. 60 00 001 430 and
the sealing washers correspond-
Yours.

(c) All types:

- When replacing or disassembling a master cylinder, make sure the presence or not at the bottom of the piston master cylinder, of an aluminium interlocker- minium acting on the thrust rod and possibly back up this in- tretoise on the new master cylinder or the document filed.

CHAPTER N : CARROSSERIA

Polyurethane paint:

- Replace table 2 on page N6 by attached table (December 70 edition) which takes account of the removal of the in the case of blue 331 as a result of adjunc- This product is replaced by lacquer.

Page N-4

Dashboard painting:

The final layer of cellulosic matt black can be replaced by 2 layers of black polyurethane U 48-024 matt in propor- by:

- 100 parts of black U 48/224
- 16 parts of hardener DU 430
- 40 parts of diluent 4,047

applied 5 minutes apart.

Drying: 2 hours in the open air.

Addition of the table on compo- sition and references of paint kits in replacement.

- TABLE 2 - DECEMBER 1970 EDITION -

- COMPOSITION OF POLYURETHANE LAKES VERILAC -

	LAKE	100 parts UX lacquer 147-172	100 parts lacquer U 146-010	100 parts lacquer U 1463435	100 parts lacquer U 146532	100 parts lacquer U 146253
		25 hard enamel parts DU 43470	15 hard Diluent parts DU 4347 0	15 hard enamel parts DU 43470	15 hard enamel parts Diluting DU 43470	15 hard enamel parts Diluting DU 43470
SUB-COUGH ORENDIGHT LAKE		100 parts pertinacosity lacquer 4301 AU 49173	100 parts lacquer U 146010	100 parts lacquer U 146435	100 parts lacquered 146532	100 parts coated lacquer AU 491243
		16 hard enamel parts Diluting DU 43470	15 hard enamel parts Diluting 4347 0	15 hard enamel parts Diluting 43404 70	15 hard enamel parts Diluting DU 43470	16 hard enamel parts Diluting DU 43470
TREATMENT		ALPINE BLUE 33 1	WHITE GARDENIA 336	ITALIAN RED 333	ORANGE 33 12	YELLOW ALPINE 33 10

Pour toutes les teintes, les trois composants : laque, durcisseur et diluant sont fournis séparément dans les proportions requises. Sur commande au MPR Central d'un ou de plusieurs kilos de laque bleu 331 ou jaune 3310, il sera fourni une quantité équivalente d'enduit laque.

This does not apply to other shades since the composition of the undercoat and lacquer are identical.

COMPOSITION OF KIT-PEINTURE IN

RECHANGE

1) "BLANC 336" POLYURETHANE LAKE:
60 00 001 601 -

White	UT 146 010	1,000 kg
Hardener	OF 430	0,150 kg
Diluent	4047	0,500 kg

2) POLYURETHAN LAKE "RED 333" :
60 00 001 602 -

Red	U 146 435	1,000 kg
Hardener	OF 430	0,150 kg
Diluent	4047	0,500 kg

3) POLYURETHAN LAKE "ORANGE
3312" - 60 00 001 603 -

Orange	U 146 532	1,000 kg
Hardener	OF 430	0,150 kg
Diluent	4047	0,500 kg

4) POLYURETHAN LAKE "BLUE 331" :
60 00 001 604

Blue	UX 147 172	1,000 kg
Hardener	OF 430	0,250 kg
Diluent	4047	0,500 kg

5) "YELLOW 3310" POLYURETHANE LAKE:
60 00 001 605 -

Yellow	U 146 253	1,000 kg
Hardener	OF 430	0,150 kg
Diluent	4047	0,500 kg

6) POLYURETHAN LAKE "BLUE -
GENDARMERIA": - 60 00 001 606 -

Blue gendarmerie	U 146 576	1,000 kg
Hardener	OF 430	0,150 kg
Diluent	4047	0,500 kg

7) BLUE ENDUIT: - 60 00 001 607 -

Blue coated	AS AT 4917 3	* 1,000 kg
Hardener	OF 430	0, 160 kg
Diluent	4047	0,500 kg

8) YELLOW END: - 60 00 001 608 -

Yellow coating	As at 49 124	1,000 kg
Hardener	OF 430	0.160 kg
Diluent	4047	0,500 kg

9) FINISHING BORDER TABLE:
60 00 001 609 -

Cellulosic matt black	1,000 kg
Black cellulosic cracked	1,000 kg
Black polyurethane matt	1,000 kg
Durcessor OF 471	0.420 kg
Diluent 4047	0,500 kg

10) APPRET POLYESTER: - 60 00 001 610 -

Ready	K 89 007	1,500 kg
Catalyst	C8 17	0,150 kg

11) MASTIC POLYESTER: - 60 00 001 611 -

Mastic	K 89 021 EN	1,500 kg
Catalyst	TC 50 (dose)	0.030 kg

12) CAPOTAL PEINTURE: - 60 00 001 612 -

Bicolor paint	1,000 kg

(13) CELLULOSIC LAKES:

White	1,000 kg	60 00 001 6
Red	1,000 kg	60 00 001 614
Metallic blue	1,000 kg	60 00 001 615
Yellow	1,000 kg	60 00 001 616
Black	1,000 kg	60 00 001 617
Orange	1,000 kg	60 00 001 618
Metallic beige	1,000 kg	60 00 001 619
Andalusian blue	1,000 kg	60 00 001 620
Heather rose	1,000 kg	60 00 001 621
Silver grey	1,000 kg	60 00 001 622
Ruby red	1,000 kg	60 00 001 623
Parioli green	1,000 kg	60 00 001 624
Green Bosco	1,000 kg	60 00 001 625
Blue 442	1,000 kg	60 00 001 626
Blue 418	1,000 kg	60 00 001 627
Azure blue	1,000 kg	60 00 001 628
Sublayer alu.l, 000 kg		60 100 001 629

A - Control of the beam chassis:

To perform this check, tools.

The following are required:

(a) Control pin CAR 27

(b) The joint inspection and repair bench

(c) Some local manufacturing tools.

1 - Different cases of use of the pin

(see plan ALPINE 05-11-04)

First, check the position-
of the pilot puck welded on the
lower part of the central beam.

This puck shall be located at 570 mm +2
of the pedal axis.

the puck or drill at Ø 10,5 la
beam at this distance and plug hole
using mastic.

(a) AV train control: arm position
lower:

- Check the hunting angle values,
the difference between the right and the left
che must be less than 1° (one deviation
of 1° results in a displacement of
3 mm from the lower patella).

- Compare using the equipped pige
short tip E and El (the points
of the AV train are material-
the cavities of the ro-
lower tules).

E shall be equal to 1005 $^{+2}_{-}$
El must be equal to 1008 $\pm$ 2

How it's best to have a little
more hunting to the right than to the left, the
distance as explained here-
above, may be more than 3 mm above
less than distance E.

(b) AV train control: arm position
upper and steering rotulae:

- Compare using the pige equipped with
the cubited tip the straight lengths and
See chapter N of MR 131.

(c) AV Crossing Control: AV train in
place or place:

The reference points to be checked are:
materialised by the axis of the fixa- bolts
AR D and AR G inside the lower arm - Order according to the usual methods
Inside.

- Compare A = Al = 794 + 2.

(d) Control of the AR train: tube position
rockets:

- With the reservations exposed page N-13
MR 131 and based on the centre
of the lower stud of fixing of the
bearing cage: compare with the
pige equipped with short tip.

D = DI = 1386 2 for all models
except 1600 S

D = DI = 13080 + 2 for 1600 S.

Indeed, the axis of the engine of a 1600 S
? being close to the horizontal while
the axis of the 1300 engine is "picker"
of about 3o (range of 12 mm instead of
6), this difference is reflected in
increase in D and DI of
6 cm.
(the "picking" makes the wheels pinch to
crashing).

e) Control of the AR train: position of the tra-
AR front loader, AR train in
place or place:

- Put down the suspension straps.

- Compare with the help of the equipped pige
of the long tip the position of the center
of the AV mounting bolt or holes
Crossing it.

B = B1 = 1285 + 2.

(f) Control of the geometry of the AR frame:

- Compare C = C1 = 1090, this measure
being given only for information.

B - Control bench : ALPINE Plan
05-11-02:

1 - Renault CAR test bench 08-7:

- Have local production carried out:

(a) Holds adapted to the support of
AV RENAULT CAR 09-5 (plan
05-11-02).

(b) Support for roll-proof bar bearings
(bottom) ref. 05-11-03
05-11-03).

2 - Cellette Control Bench:

adaptation parts ENS 55-019 com-
in addition to ENS 55-01 or 12.

Note: Do not consider support
05-11-05 intended for use on con-
Plant trainer.

3 - Use of different media (Plan
ALPINE 05-11-02):

- Only AV and AR trains deposited:

- Set up the AV cross-beam support
equipped with its ALPINE boosters, the support
anti-roll bar bearings, support
Cross-section AR (Renault or Celette support)
of origin).

The location of these elements is indicated
on Plan 05-11-02.

- Generally speaking, perform the con-
in accordance with the instructions of Chapter N
MR 131.

C - Replacement of chassis:

This replacement cannot be valid-
only on special conformors,
the chassis is not delivered separately in re-
Change.

D - Replacement of AV Crossing:

- Place the AV train, the AR train, the directional-
The master cylinder.

- Place the petrol tank in the
in the case of a sheet metal tank, unsealing.
tank belt.

- Remove the tubes from the cooling circuit-
(AV-Radiator).

- Cut the AV apron on a surface
between the vertical axis of the cross-section
AV, the bottom of the trunk and the passages of
Wheel.

- Untie with the torch or bow the tra-
VA of the central beam, of the upper beam
Wearing pedals, lanterns.

- Descelling wheel passages and cutting
the two fakes will follow as close to the tra-
Pays AV.

- Put the crossover down.

The RPM provides a replacement for:

- the AV crossover
- 2 false AV lanterns
- 2 sealing plates
- 2 flexible supports
- 2 holders of shock buffer cups
- 2 steering housing supports.

- Present the hull on the marble (support)
and with the help of holds,
between the lower part of the beam
and marble plan, a distan-
this of l37 mm + l and this, to about 100 mm
back to the axis of the VA stretchers (this
support is necessary since the crossover
AV is filed).

- Install the anti-bar bearing support
roll ref. 05-11-03.

- Position the AV crossover on the support
marble equipped with its enhancements after
? have engaged him in the beam.

- Check possibly the A = Al =
794 + 2 (plane 05-11-04).

- Position cup holders (hole)
in the axis of the cross-section).

- Position the false loin on the cross-section-
VA lines to the right of the cup holders.

- Point on the false plates
of sealing, their lower edge corres-
Laying in the bottom of the trunk.

- Weld brake hose supports.

- Welding.

- Using "Pop" laughs, riveting the plo-
seals on the passages of
Wheel.

- Reseal the plates with tissue of
glass and resin.

- Seal the cut of the apron.

- Lift up the mechanical assemblies and
adjust the AV train and co-ordinate
the steering housing.

E - Rear frame of the beam frame:

In the case of slight damage, the repair
the AR framework is possible.

- Use square or rec- section tubes
tangular of a corresponding dimension
to the origin elements (these elements do not
are not sold in replacement).
Refer to the C and Cl ratings of the plan
05-11-04 and those of the general plan of

chassis in the MR or at the setting
Date joined.
Since bodywork No. 4500 the elements
of the AR frame are made in dry tube-
50 x 30 square.

F - Replacement of hull elements:

In addition to the elements described plate 82-01
to 82-09 of PR 871, the following parts are
now available:

- Half floor G and D

- Air filter compartment

- VA part VA bottom plate-
shape up to the wheel axis

- AV radiator air intake

- Downside G and D

- Half-block AV and AR up to the amount of
door included

- Crossing of AV and AR wheels

- Pavillon with and without bullets-
Break.

For the cutting of carriage elements-
We recommend the use of the saw
pneumatic oscillating model SA 70 of the
Establishments:

Inflatable tools Globe
143, Avenue du Général de Gaulle
92 - THE GARENNE-COLOMBES

The alternative blades bear the reference:
EP 9239.

G - Nutsert and Jack-Nut Scrous sockets:

(a) Nutsert casings for bodywork:

In order to facilitate the laying and removal of.
Headlights and Lights
flashing devices, for replacement of a
lamp, for example, steel sockets
"Nutsert" are used in the manufacture of:

- Tubes Ø 4 in step of 70
reference: 60 00 001 363.

During an intervention, it is possible
to adapt these sockets on cars that
would not be able to do so by operating
the following:

- locally create a mounting tool
according to the sketch below.

- pierce the old fixing holes to
86.

- screw the Nutsert socket on the tool by-
not threaded to the tool, using
Of a screw 4 x 10 not of 70 and of a ron-
She's flat.

- shove into the body, using
with a hammer, the Nutsert socket.

- tighten the screw until the screw is tightened
Sees resistance.

- remove the screw, the socket is now
"riveted to the body.

Ø 6 inserts (fixation of carenages of
(e.g. floor) for which the
method of fixing is identical to that
as described above, are also available.
nibles under the reference: 60 00 001 364.

A Nutsert socket clamp is said to be
at AVDEL establishments - 66,
rue David d'Angers - 75 - PARIS 19th;
specify the size of the casings.

(b) Jack Nuts

Jack-Nut nuts of Ø 6 are equal-
For use in the fixing of caren-
and regulators
These nuts ref. 60 00 001 546
can be used in thicknesses
4 to 5 mm plastic.

- drill plastic to Ø 11

- set the Jack-Nut nut in his dressing room-
with the help of the special clamp
Molly Jack-Nut ref. TI 1956, provided-
seur:

Mr. F.O.M.
5 Dunkirk Street
75 - PARIS 10th

H - Windshield and AR bezel sealing:

(a) Serial

A number of improvements have been made.
production since May 1969.

1 - Windscreens: Seal
No 60 00 000 138
Plank 82-30 of PR 871.

- Transition from neoprene to "ring"
to the neoprene joint "in shape".

- Since the 2-1-70, adoption of the cash
natural cabbage that has a better-
re elasticity and change of dryness
(Drawing A).

- Improvement of the section per increase-
the bottom of the throat of the
glass and heel reduction (drawing B).

- On the other hand, since the 10-2-70
DIEPPE) and the
20-4-70 (carrosseries made from
THIRON-GARDIAN), holes in the
water collection were provided for in the
lower rounding of the frame
windscreens (C drawing) - (these e-holes)
vacuation are also used for
the passage of the feeding wires of the
Heated windscreens).

Finally, various precautions have been taken.
body chain:

- Respect for the width and profile of the
Foil.

- Reduction of the thicknesses of polyes-
and mastic on the edge of the
Hardwood (Drawing E).

- Reduction of lining thickness
windscreens in the windscreen
With hardwood.

2 - AR Bezel : Seal

No 60 00 000 139

Plank 82-30 of PR 871.

- Replacement of neoprene joint in
"ring" by a rubber seal
"form."

- On the same dates as above,
ge flow holes in the
Bezel foil (drawing D).

- In chain bodywork, precautions iden-
to those mentioned in paragra-
phe Al.

(b) In repair

1 - Windscreens:

- Windshield installation and cleaning
management.

- Pour with a sponge a little
water in the hardwood to verify,
the car being horizontal, that the
marked on drawing C corres-
is well placed at the lowest point of the
I'm pucked.

- Drill using a 9.5 mm forest
long series (useful length: 150 mm)
as indicated in the drawing: don-
a correct inclination to the per-
so that the hole leads in
door frame at the in-
liquefy.

- Suction a PVC 8/10 tube.

- In the case of a heated windscreen,
use the flow tube for the
passage of the wires, bring these der-
behind the dashboard by piercing at
Ø 8 mm, the doorway so
as indicated.

- On the width of the leaf, thinner
the lining of windscreens.

- Mount the windscreen according to the methods
usual with the new seal
Ref. 60 00 001 281 and using between
seal and caustat mastic case 20
ref. 306 or Fillum mastic
BOYRIVEN, and between joint and glass either
the 20-caustat or the Electro-Mastic
Plastic type PB.
Note: The new seal recognizes that
Your presence of a thin vein long...
dinal on the inner lip.

2 - AR Bezel:

- Place the bezel and clean it
management.

- By following the same method as above-
on and using drawing D, pierce
? 2 holes of Ø 8 mm.

- First lift the topping of
tablet in order to control that holes
do not lead inside the ha-
bitacle but in the mo- compartment
I'm sorry, sir.

- To the right of the leaf, thinning the
Tablet top.

- Mount the AR bezel with a

new seal Ref. 60 00 001 282 en

using pre-sealing sealants

for mounting the windscreen.

Note: The new bezel joint is

Recognises the presence of 2 fine nerves.

longitudinal vures on the lower lip

Other.

(c) Flag gutter integrity

- Water on the dashboard,

at the right of the end of the linings

windscreens, in particular

bind after a prolonged stop of the vehicle.

This infiltration seems to come from the

windshield joint is actually the conse-

a lack of mastic

between aluminium gutters reference : 6

60 00 000 163 and 164, plate 82-19

RP 871 and flag edges.

DESSIN A



DESSIN B



DESIGN C

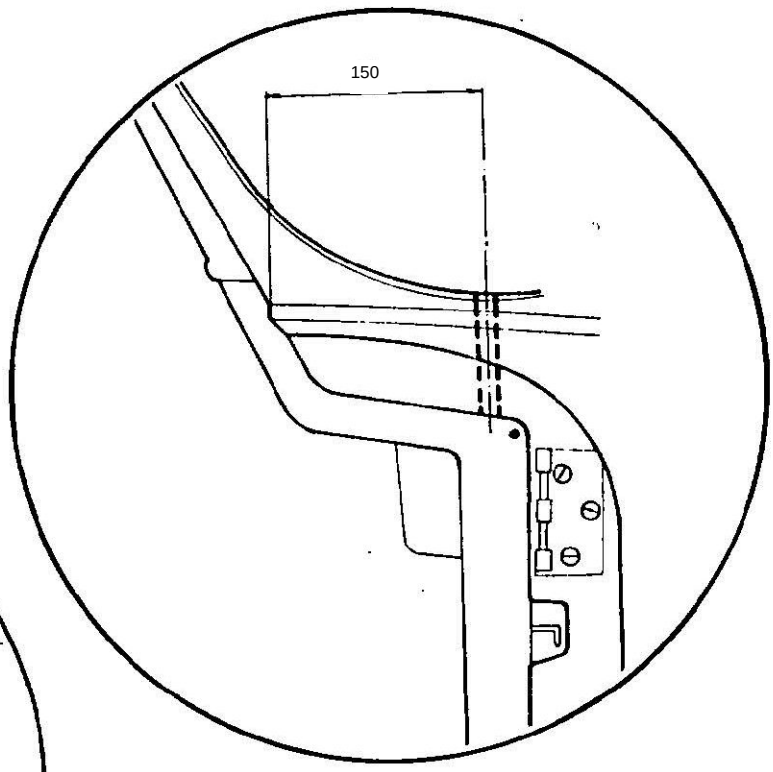

(a) Series:

Enhanced monitoring of the application of

mastic over the whole length of the taste profile-

All of it.

(b) In repair:

Ensure leakproofness by injecting between

gutters and pavilion, mastic reference

MPR RENAULT 00 01 316 200.

DESSIN D

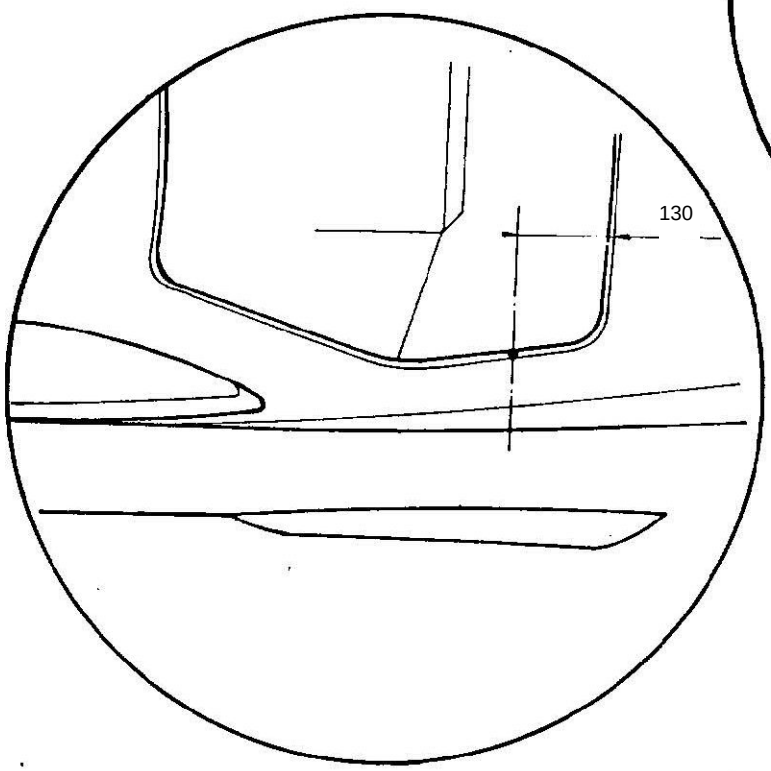

DESSIN E

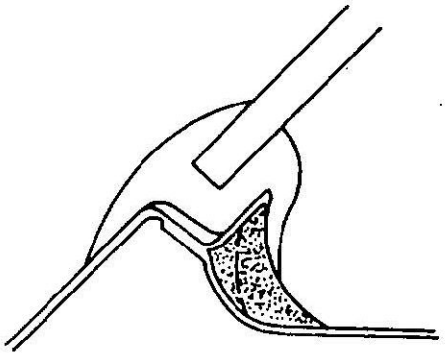

Reference	Supplier	Description of tool
05 11 02	F.L.	Upgrades to be used with cross-section supports AV CAR. 09-5 RENAULT test bench installation diagram
05 11 03 '	F.L.	Support for positioning mounting holes anti-roll bar (bottom height)
ENS. 55-019	Celette:	ALPINE RENAULT mounting complement to the ENS. 55-01 or. 12
Model SA 70	Globe	Oscillating saw for polyester cutting Inflatable tools Globe 143, Avenue du Général de Gaulle 92 - THE GARENNE-COLOMBES
EP 9239	Globe	Replacement blades for vibrating saws
IT 1956	Mr. F. O.M.	Jack-Nut nut clamp Mr. F.O.M. 5 Dunkirk Street 75 - PARIS 10th
Without	Avdel	Pliers for Nutsert sockets AVDEL 66 David d'Angers Street 75 - PARIS 19th
60 00 001 258	ALPINE	Candle key for 1600 S
POL 15 000	Ch. Mayor	Sander - pneumatic polisher small model Charles MAIRE 42 E. Bouté Street 91 - RIS ORANGIS

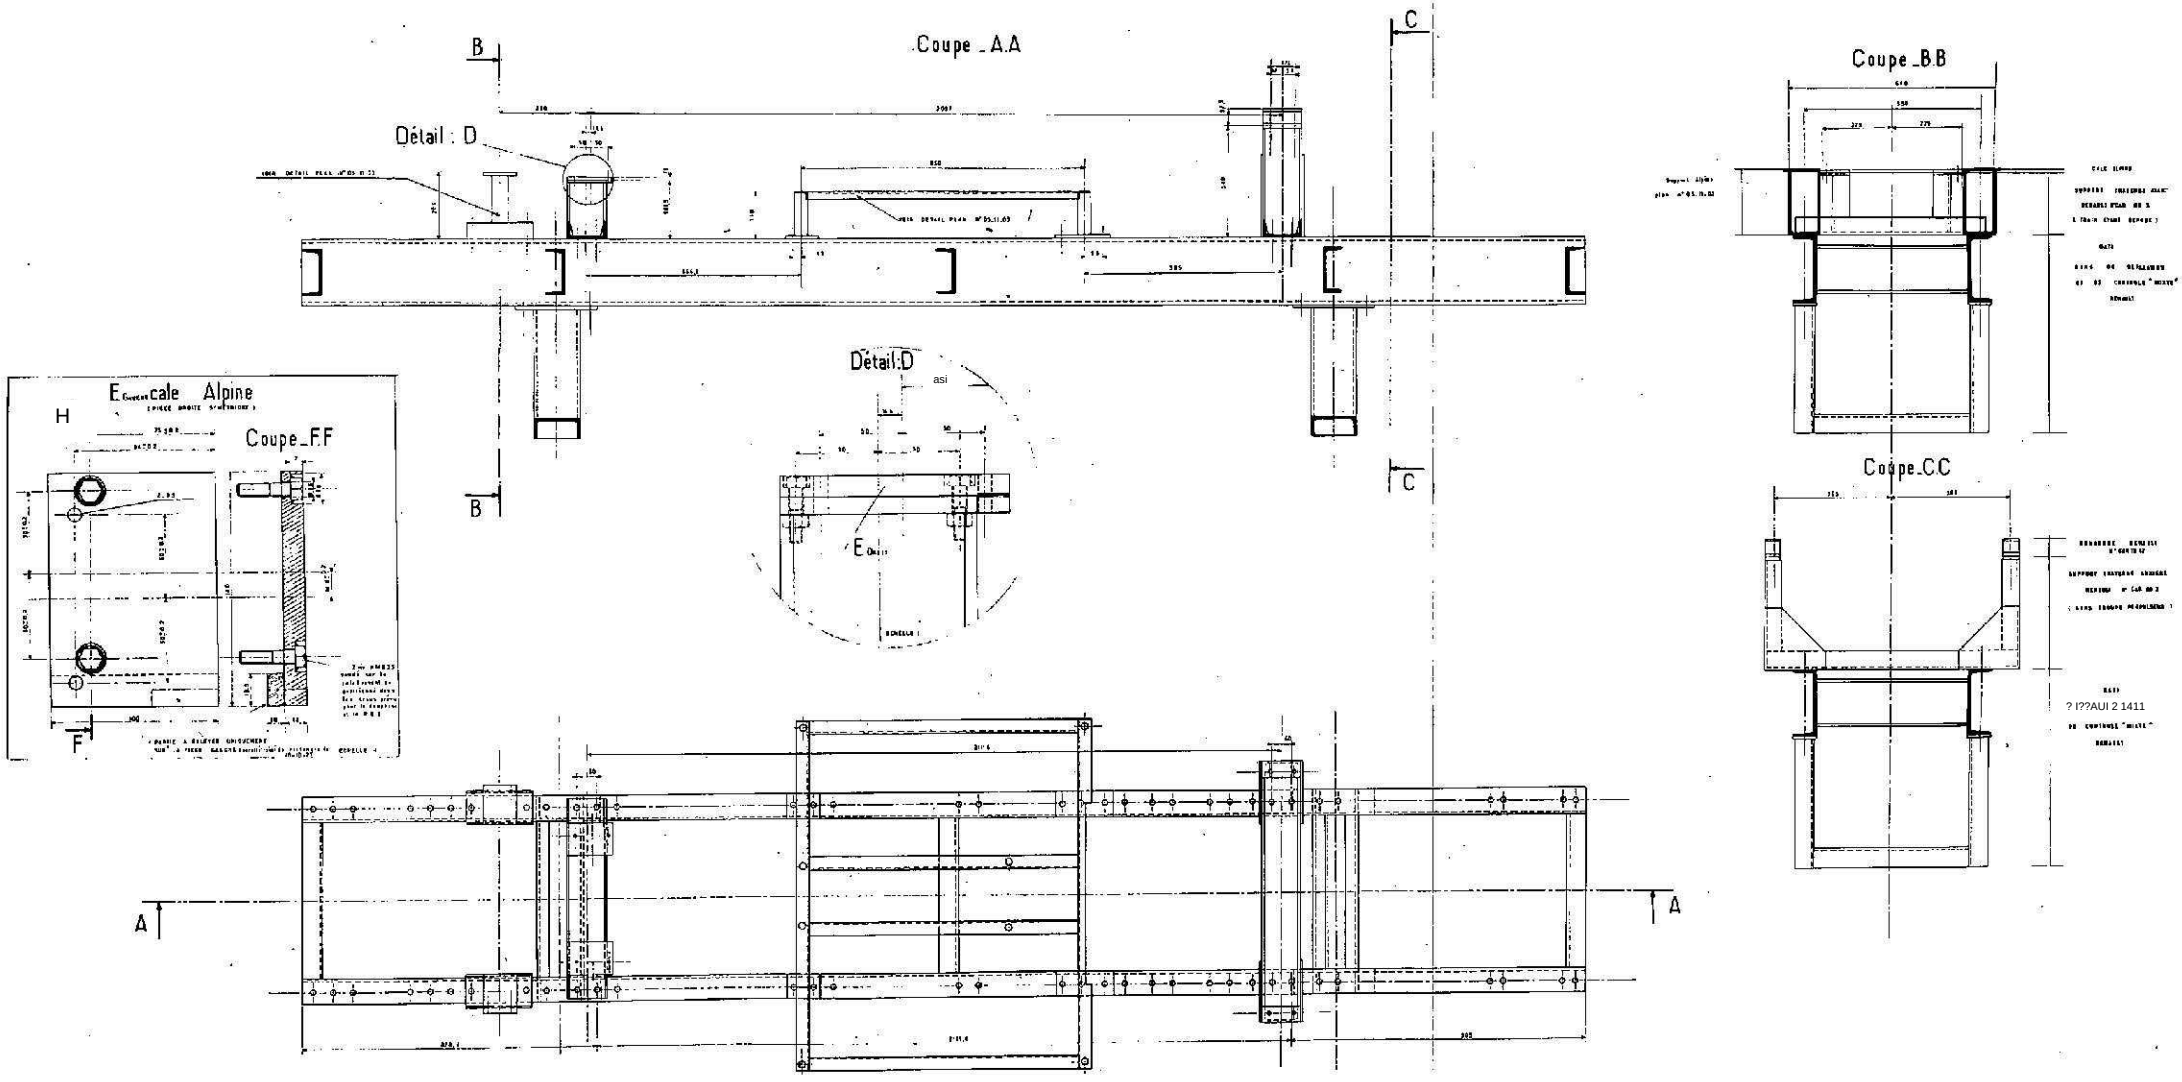
Coupe _A.A
Détail : D
B
C
Détail:D
Coupe_B.B
Coupe_C.C
Coupe_F.F
H
F
A
? I??AUI 2 1411

20-11-90

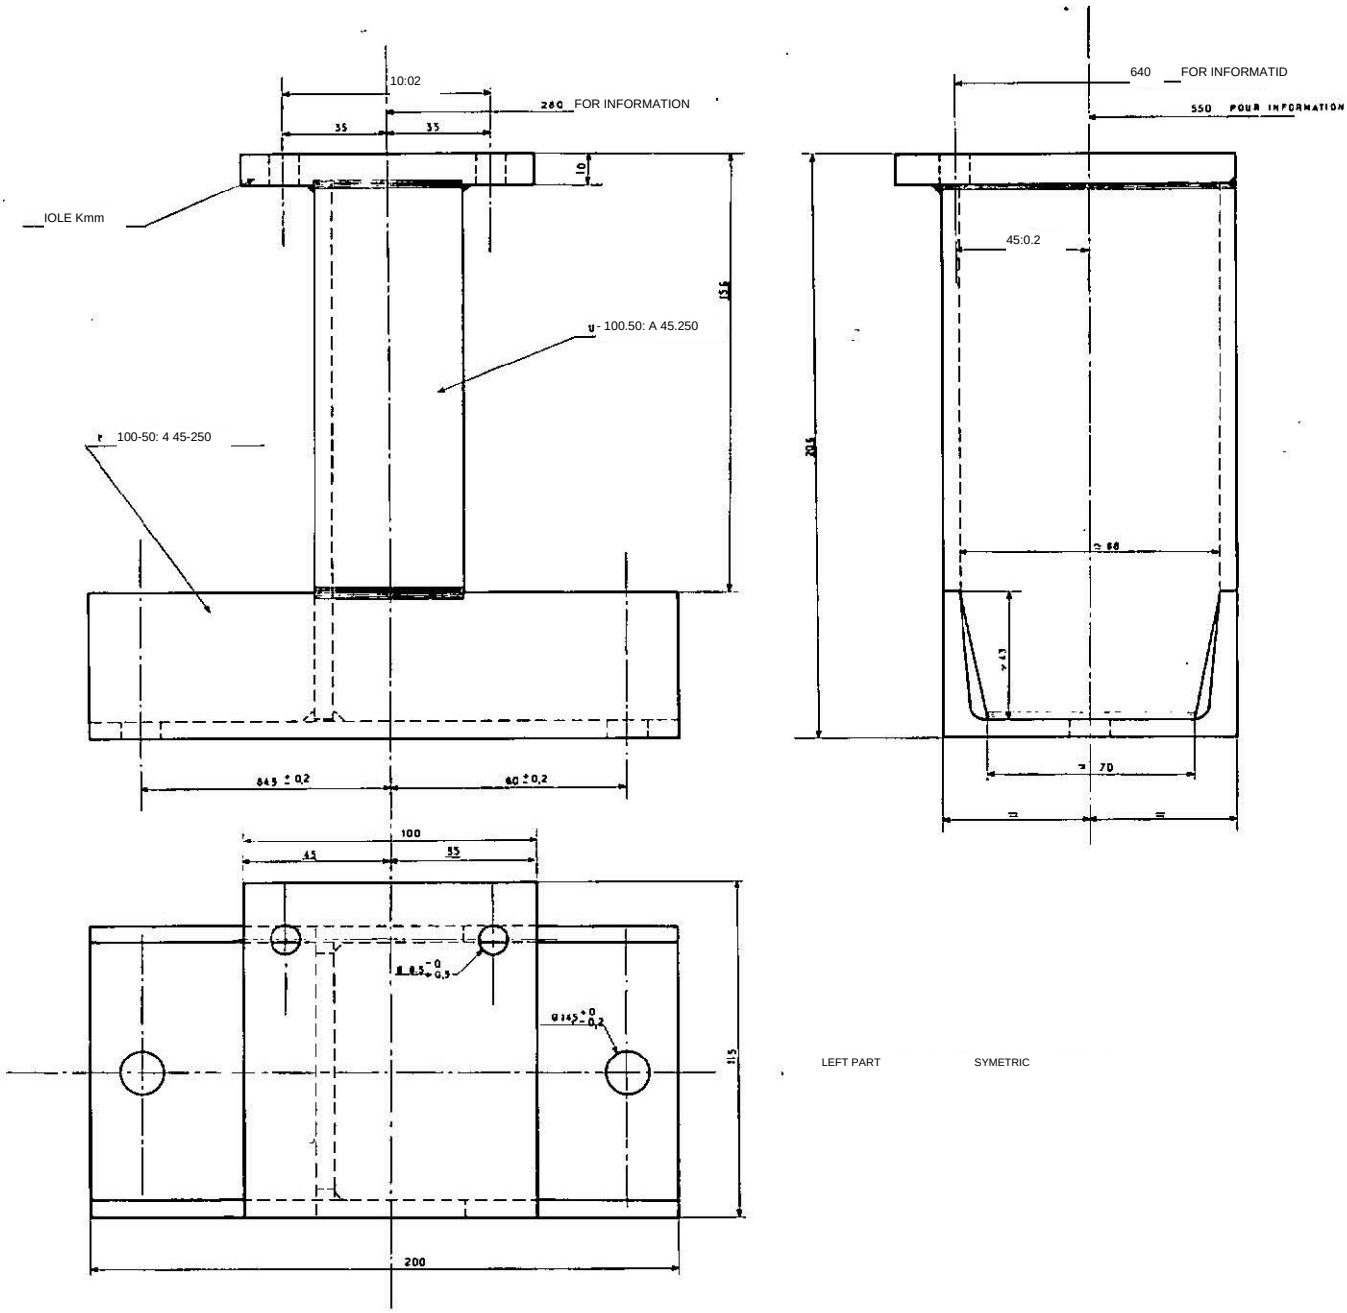

LEFT PART SYMETRIC

05
11
04

MEASUREMENT ON THE CENTRE OF THE SHORT POINTE.

THE MEASURE ROLLING FROM THE CENTRE OF THE SHORT POINTE.

6:01=10862 * 000 m 660 05 = 1300+2

4:B:41B, = = 79120 4:5:2

CHASSIS BERLINETTE

Underside view

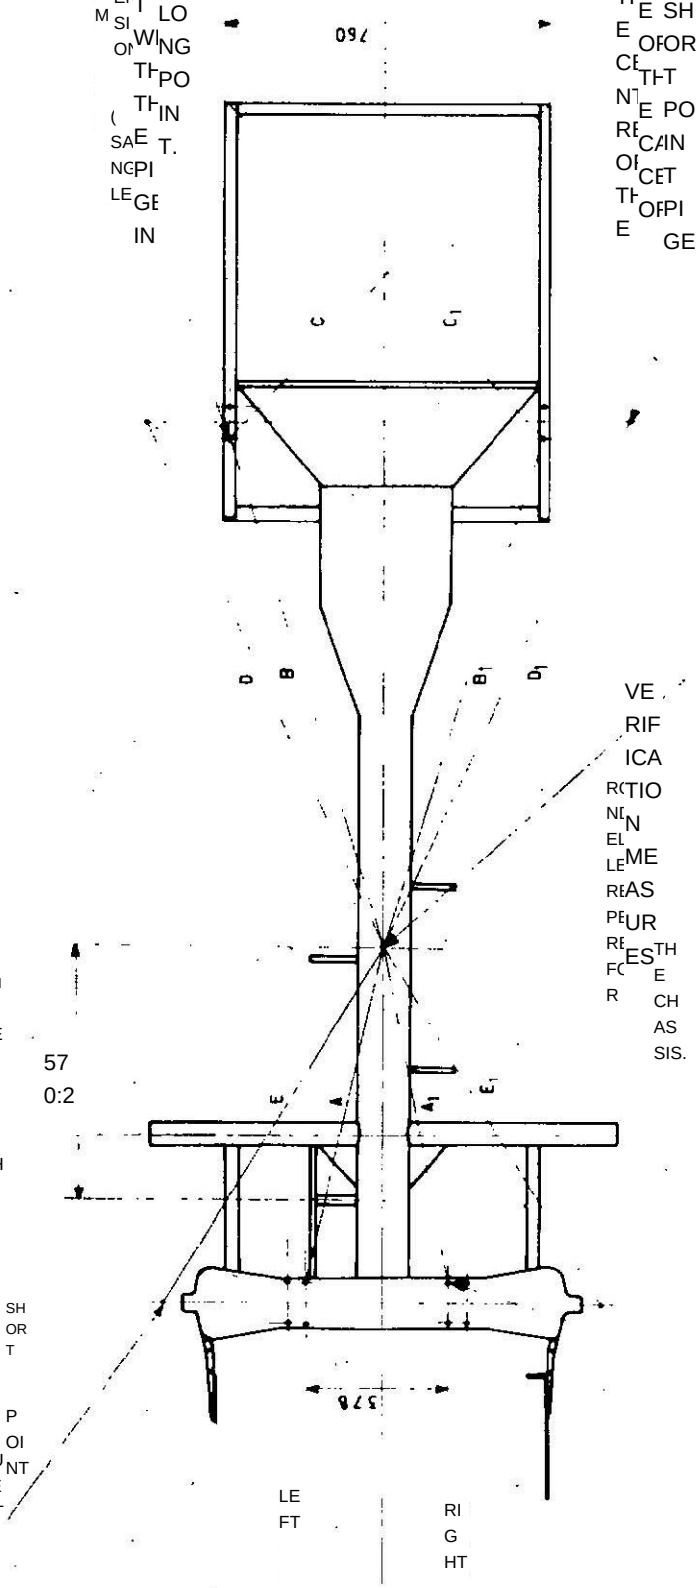

VERIFICATION DU CHASSIS.

CONTROLE DU CENTRE DE LA PIGE

EMPREINTE DU CENTRE DE LA PIGE

57
0:2

ONE. ON LAMP

FERROW WITH PIGE

SHORT POINT

MEASUREMENT

EROTULE

LEFT

RIGHT

BOULON

LA MESURE SE FAIT SUR LE CENTRE DU BOULON OU LE CENTRE DU TROU AVEC LA PIGE EN POINTE COURTE

REPERE DES COTES A, B, C, D SUR LA PIGE CAR 27

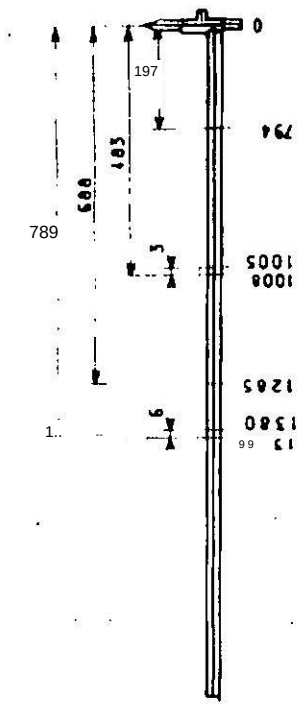

05 - 11-04

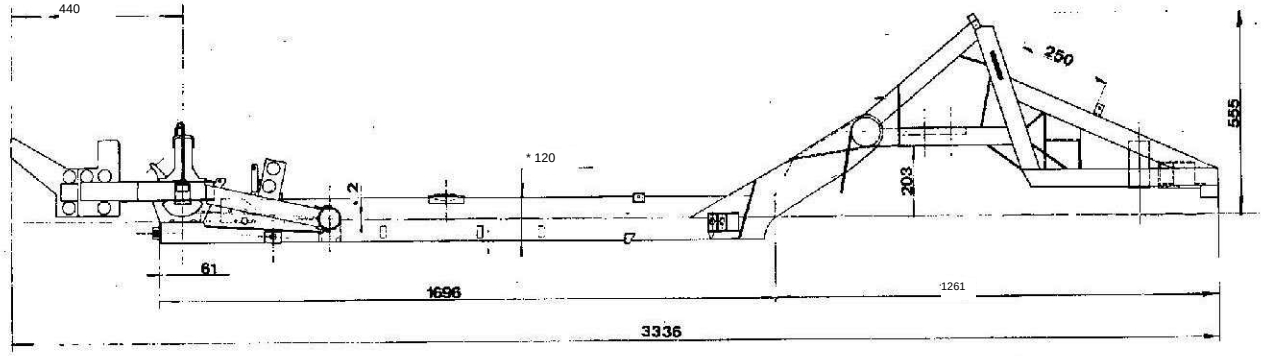

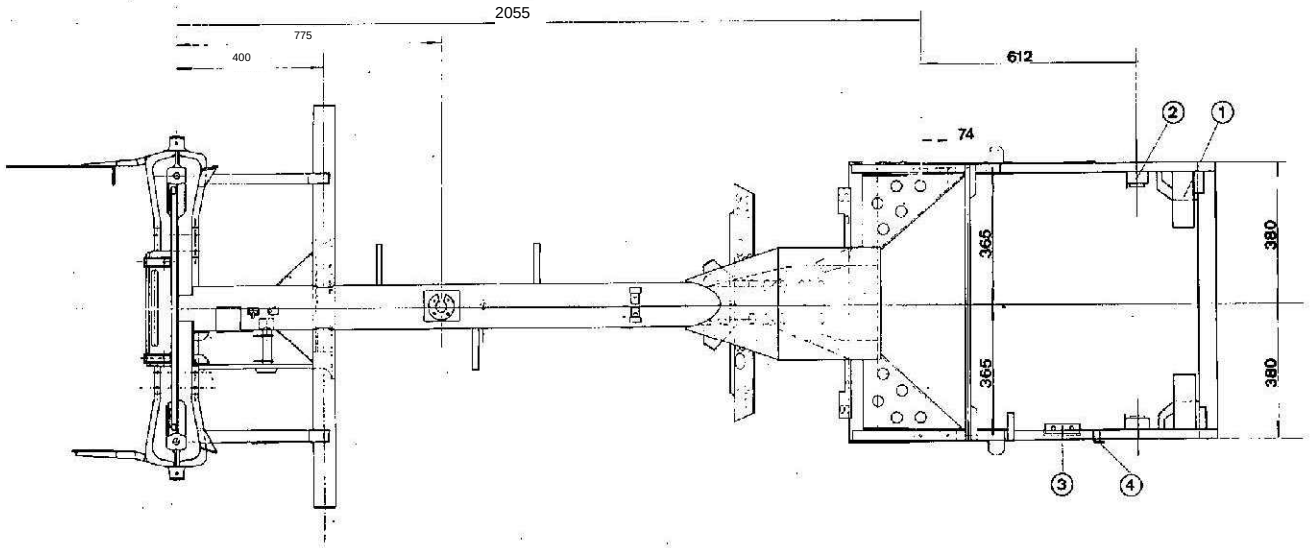

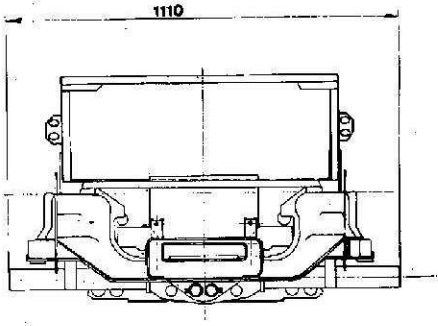

Note

① Meteus support 1600 B ? Veenier corpetition

② meior support 1300 VC-1300 G

③ medium liter a male 1800 9 Verziar compatition

? Pair superpers alite e or 1300 VE

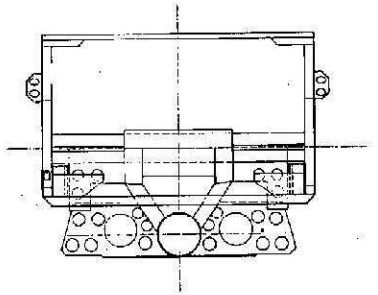

05 - 11 - 07

Index · Chapter Contents

Click a page number to jump to it. Alphabetical index follows.

General · covers, contents, vehicle presentation and characteristics 1

Engine and Ignition (Moteur - Allumage) 10

Electrical Equipment (Equipement electrique) 26

Clutch (Embrayage) 30

Gearbox (Boite de vitesses) 33

Steering (Direction) 38

Front Axle (Train avant) 40

Rear Axle (Train arriere) 45

Suspension and Shock Absorbers (Suspension - Amortisseurs) 47

Braking System (Freinage) 49

Bodywork (Carrosserie) 51

Special Tooling (Outillage special) and manual update log 58

Update supplement · title page; amendments to Chapters A, B and C 61

Update supplement · wiring harness and connector directory (images only) 64

Update supplement - amendments to Chapters C, D, E, G, H, J, L, M and N 73

Update supplement · paint and lacquer compositions; chassis and body checking 76

Update supplement · Chapter R special tooling and tool drawings 83

(

(a) Liners (*chemises*) 18
(a) Method of application of "Vérilac" polyurethane lacquers 54
(a) Type 810-30, derived from 810-03 of R. 1192 11
(b) Painting of bonnet interiors 54
(b) Pistons 18
(b) Type 812-00, identical to the RENAULT 8 G engine 11
(c) Dashboard painting 54
(c) Gudgeon pins (*axes*) 19
(c) Type 1300 S, derived from 812-00 11
(d) Connecting rods (*bielles*) 19
(d) Type 807-25, derived from 807-01 of R. 1151 11

1

1 56
1) "BLANC 336" polyurethane lacquer 77
1) General dimensions 8
1) Preliminary verifications 42
1) Repair of minor damage (without replacement of elements) 52
1) Woven fabrics 52
10) Polyester primer (*apprêt*) 77
10) Rear axle (train arrière) 9
11) Polyester mastic 77
11) Suspension 9
12) Bonnet paint 77
12) Brakes 9
13) Cellulosic lacquers 77
13) Tyres and rims 9
1300 S 17
14) Capacity 9
1600 GS 17
1600 S 17
1600 VB Group IV competition 73

2

2 56
2) Checks and settings 42
2) Polyurethane lacquer "RED 333" 77
2) Repair with replacement of a body part 52
2) Resin 52
2) Weight 8

3

3 56
3) Accelerator 52
3) Engine 8
3) Polyurethane lacquer "ORANGE 3312" 77

4

4) Catalyst 52
4) Electrical equipment 8
4) Polyurethane lacquer "BLUE 331" 77

5

5) "YELLOW 3310" polyurethane lacquer 77
5) Clutch 8

6

6) Gearbox 8
6) Polyurethane lacquer "BLUE GENDARMERIE" 77

7

7) BLUE ENDUIT (coating) 77
7) Transmissions 9

8

8) Steering 9
8) YELLOW ENDUIT (coating) 77

9

9) Dashboard finishing 77
9) Front axle (train avant) 9

A

A 78
A-1 7
A-2 8
A-3 9

B

B 78
B-10 19
B-11 20
B-12 / B-13 21
B-12 21
B-13 / B-14 22
B-15 24
B-16 24
B-2 / B-3 11
B-2 11
B-3 / B-4 / B-5 13
B-6 15
B-7 16
B-8 17
B-9 18
Brake cooling (note) 50

C

C 29, 78
C-1 27
C-2 28
Centrifugal advance curves R.247, R.262, R.267 and vacuum curve T.C.34 63
Chapter A: Characteristics 62
Chapter B: Engine 62
Chapter C: Electric Equipment 63, 73
Chapter D: Clutch (Embrayage) 73
Chapter E: Gearbox (Boîte de vitesses) 73
Chapter G: Steering (Direction) 73
Chapter H: Front axle (AV train) 73
Chapter J: Rear axle (AR train) 73
Chapter L: Shock absorbers (Amortisseurs) 73
Chapter M (continued) 75
Chapter M: Brakes (Freins) 73
Chapter N: Bodywork 75

D

D 78
D-1 31
D-2 32
Dimension drawing (A-1) 7
Distributor (*allumeur*) identification 24

E

E 78
E-1 34
E-2 / E-3 35
E-4 37

F

F 78
From bodywork No. 2162 41
Front brakes 50, 73

G

G 78
Gearbox adjustment 37
Gearbox types (from the French description column) 35

H

H 78
H-1 41
H-2 42
H-3 43

I

III 73
IV 73

J

J-2 46

L

L-1 48
Legible figures on the drawings 84

M

M-2 50
Master cylinder 50
Materials 52
Missing pages in this scan 24, 32, 37, 39, 46, 48, 50, 57, 60

N

N-1 / N-2 52
N-1 52
N-3 / N-4 54
N-5 / Table 2 57
N-5 56
Note 39

O

Option 1600 GS, derived from 807-25 11

P

Page A-3, paragraph 13 62
Page A-3, paragraph 14 62
Page B-10 62
Page B-12 62
Page B-13 62
Page B-14 62
Page B-15 62
Page B-2 62
Page B-7 62
Page B-8 62
Page C-1 63
Page N-4 75
Publisher 2

R

R-1 59
Rack and pinion 39
Rear brakes 50, 73
Refitting the engine only 13
Refitting the powertrain 13
Removal, repair and refitting 39
Removing and refitting the gearbox 37
Removing the engine only (*dépose moteur seul*) 13
Removing the powertrain (*dépose groupe propulseur*) 13
Replacing the gear linkage 37
Rocker bearing surfaces and pushrods 16

S

Section map (from the contents plate) 2
Spring detail 48
Steering rack mounting supports 42
Supplement p.15 76
Supplement p.16 77
Supplement p.22 83
Supplement pp.17·21 78

T

Tool drawing sheets 84

U

Up to bodywork No. 2162 41
Update log for this manual 60

V

Valve guides (*guides de soupapes*) 15
Valve seats (*sièges de soupapes*) 15
Valve springs (*ressorts de soupapes*) 16
Valves (*soupapes*) 16
Version 1300 G (factory assembly) and 1300 S 46
Version 85 73
Version 85, from vehicle No. 12037 73
Versions 1300 G and 1300 S 73
Versions 85 and 1300 G 46

W

What is on each page (orientation only 64
Wire colour key (from the diagram's own legend) 29