




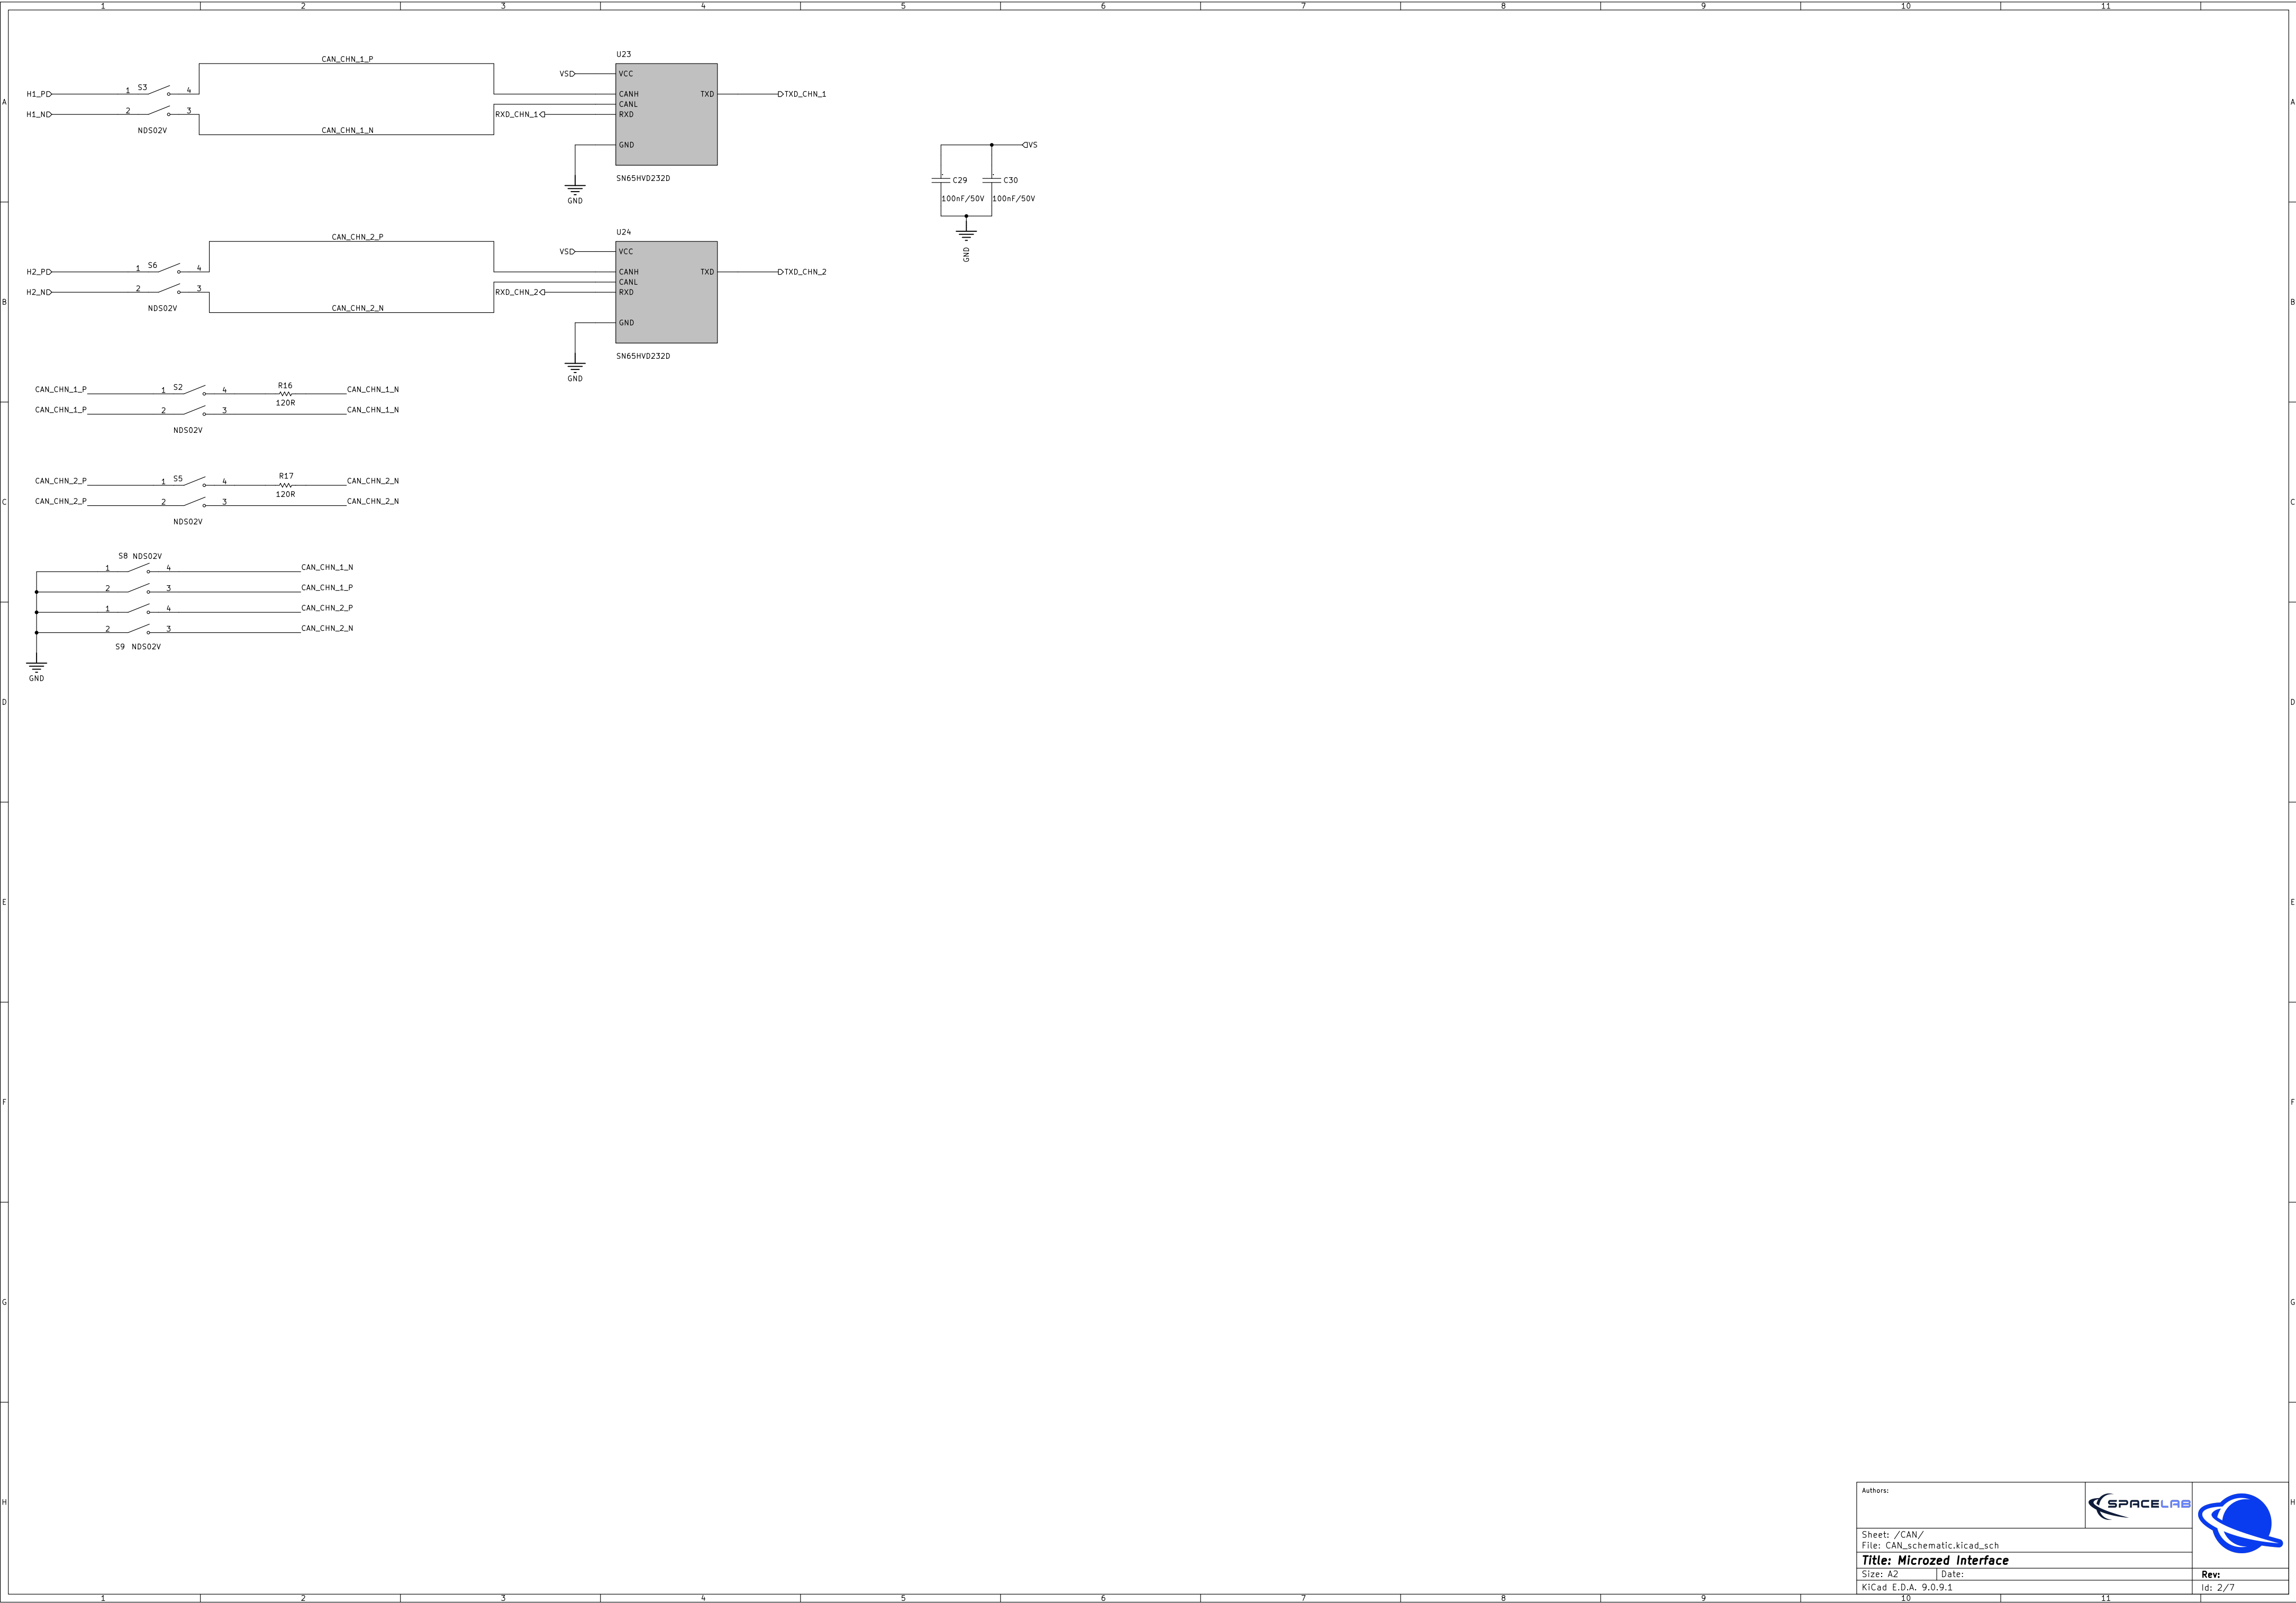


PC104 slot N°1 (EPS)

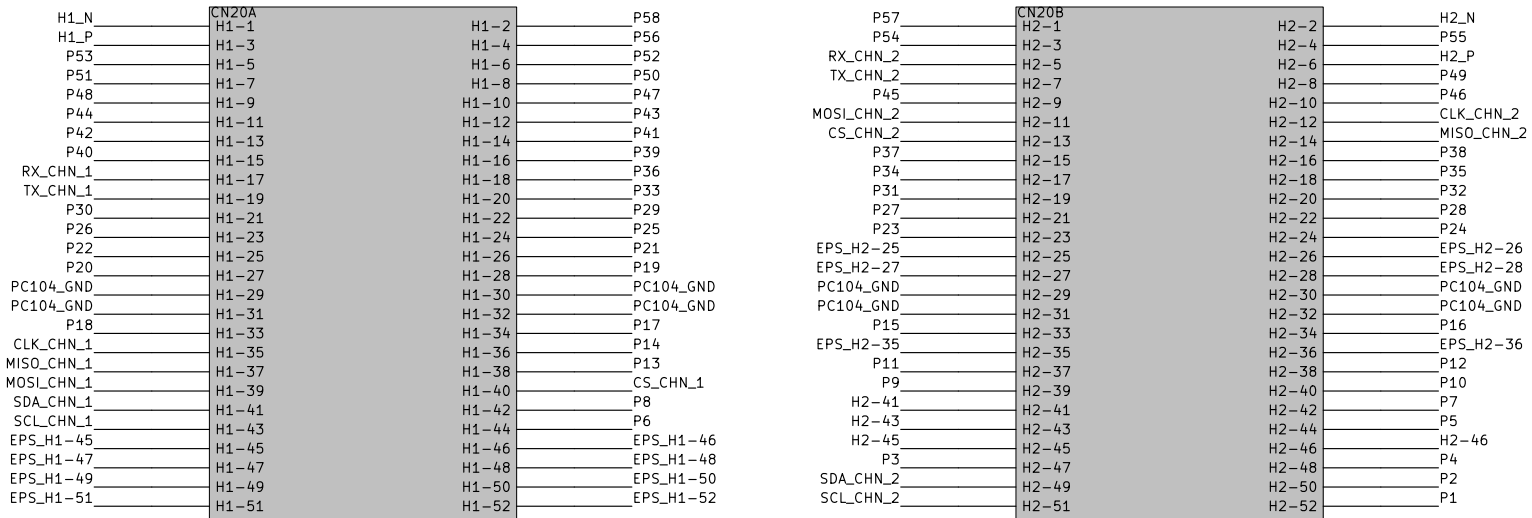


PC104 slot N°2 (CAN bus tests)

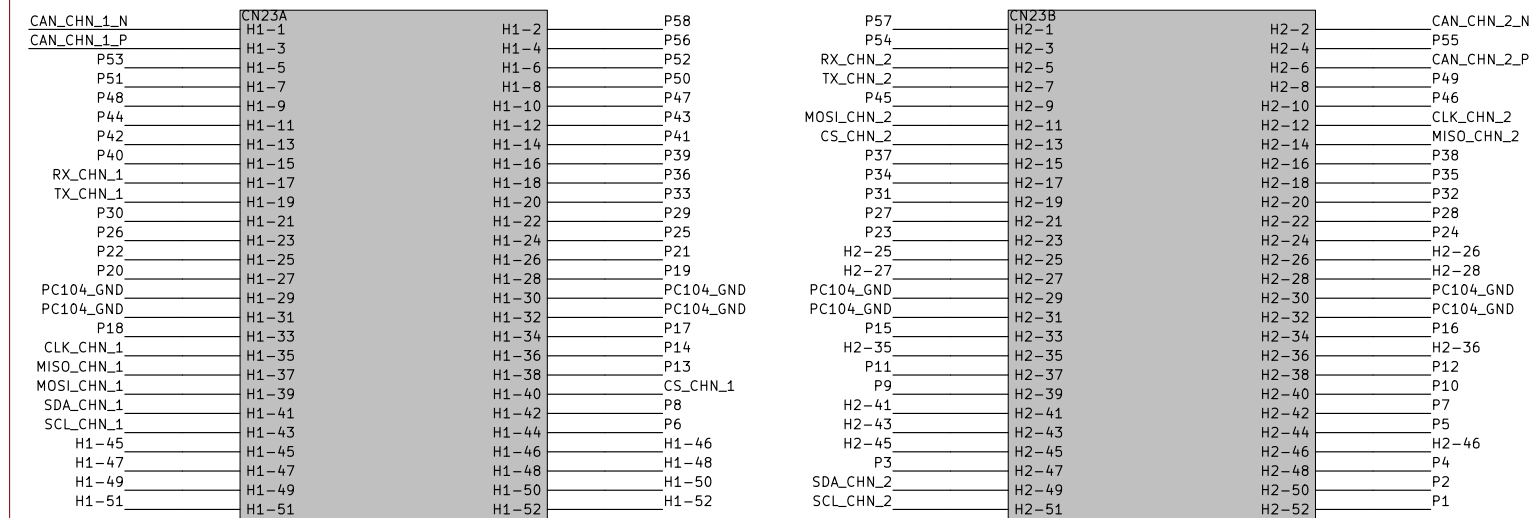


PC104 slot N°3

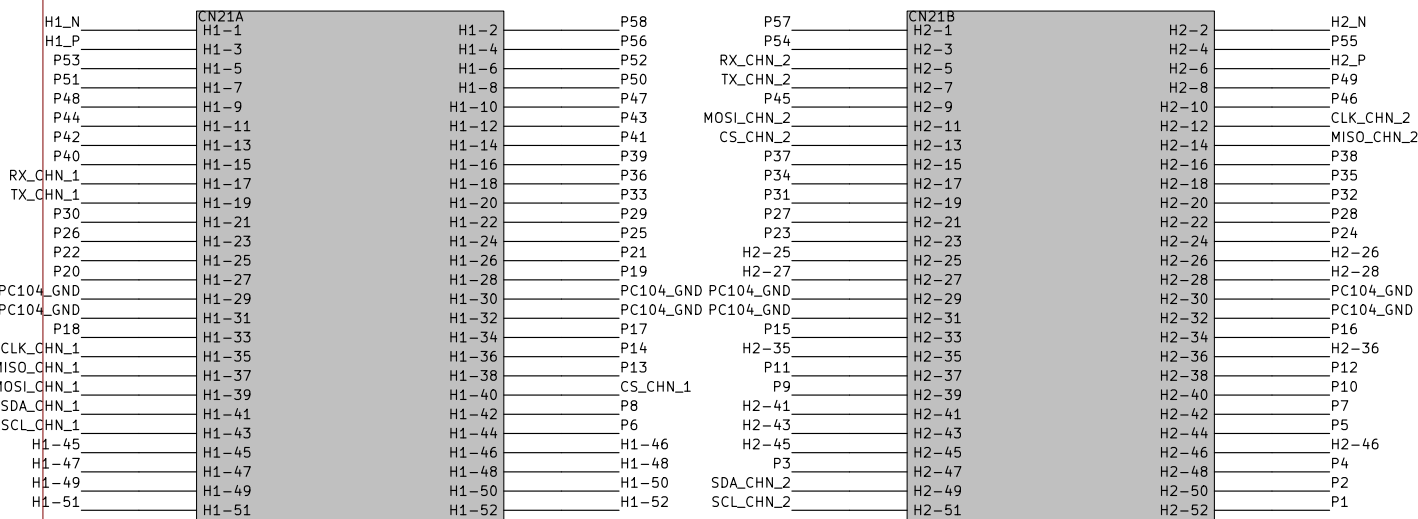






PC104 slot N°4

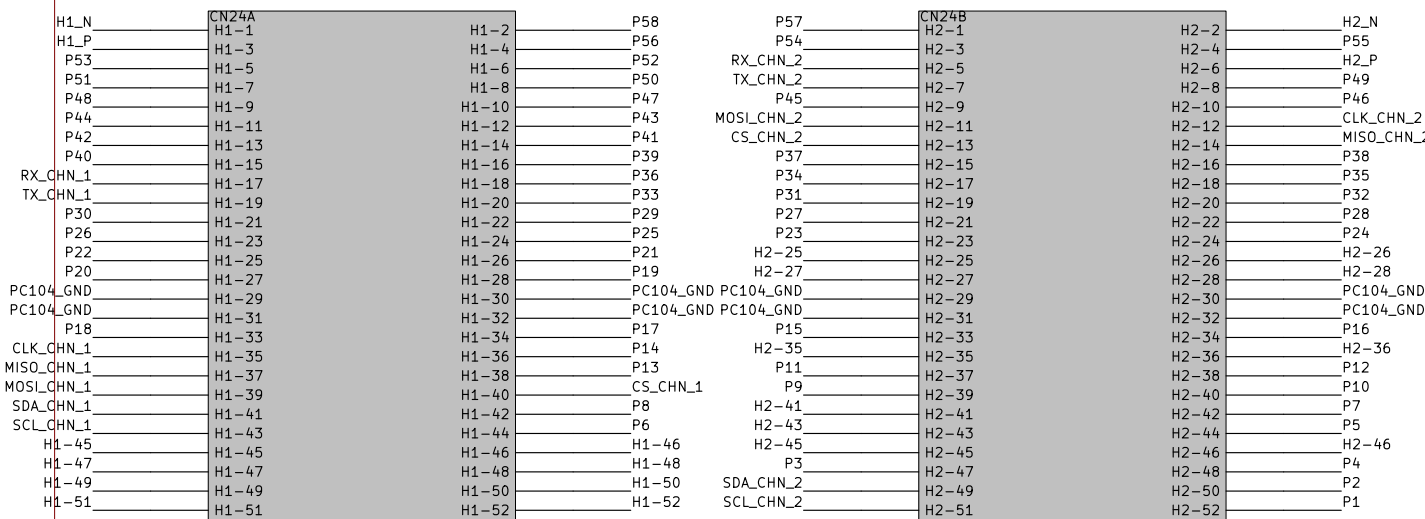


PC104 slot N°5

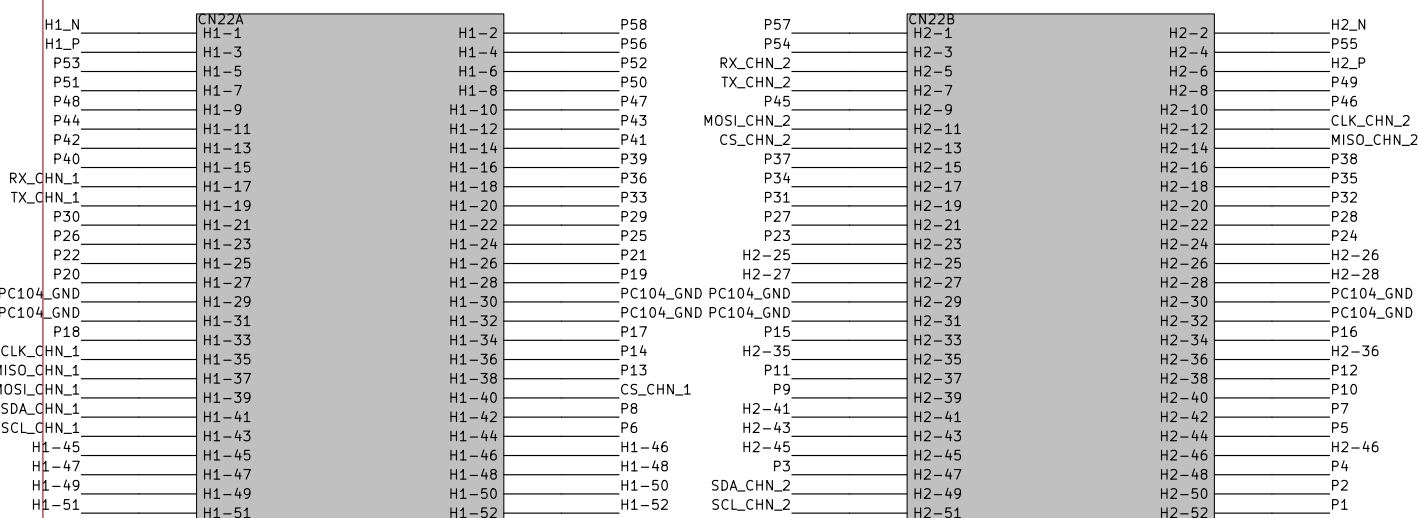

PC104 slot N°1

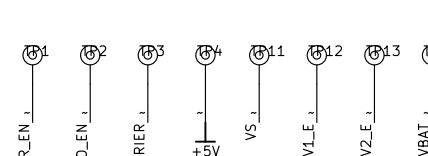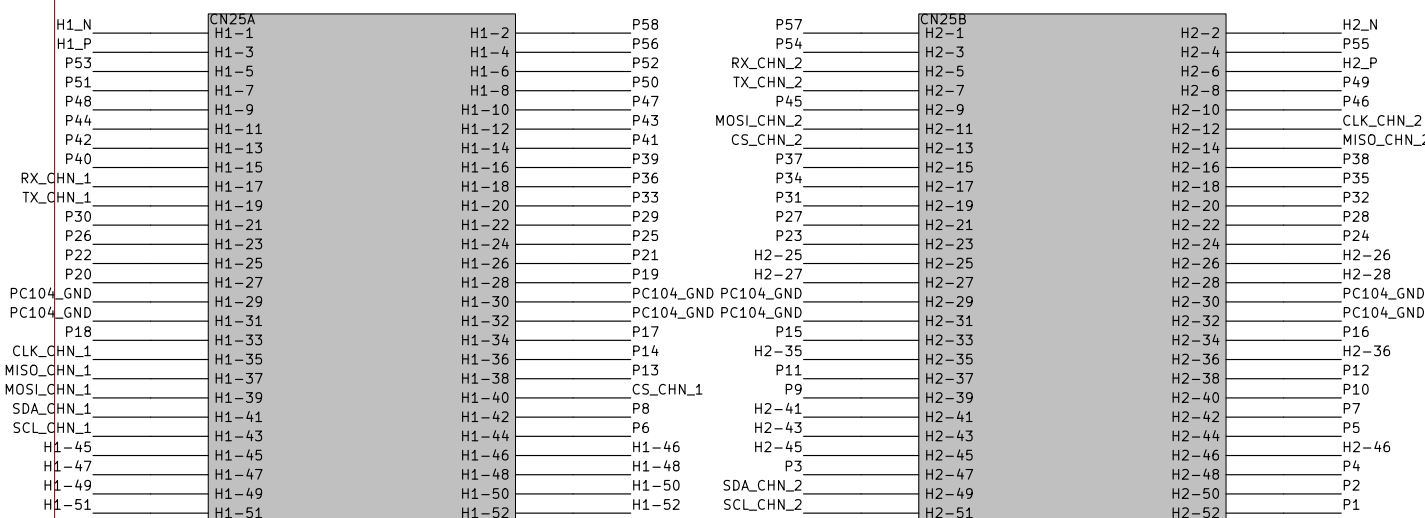

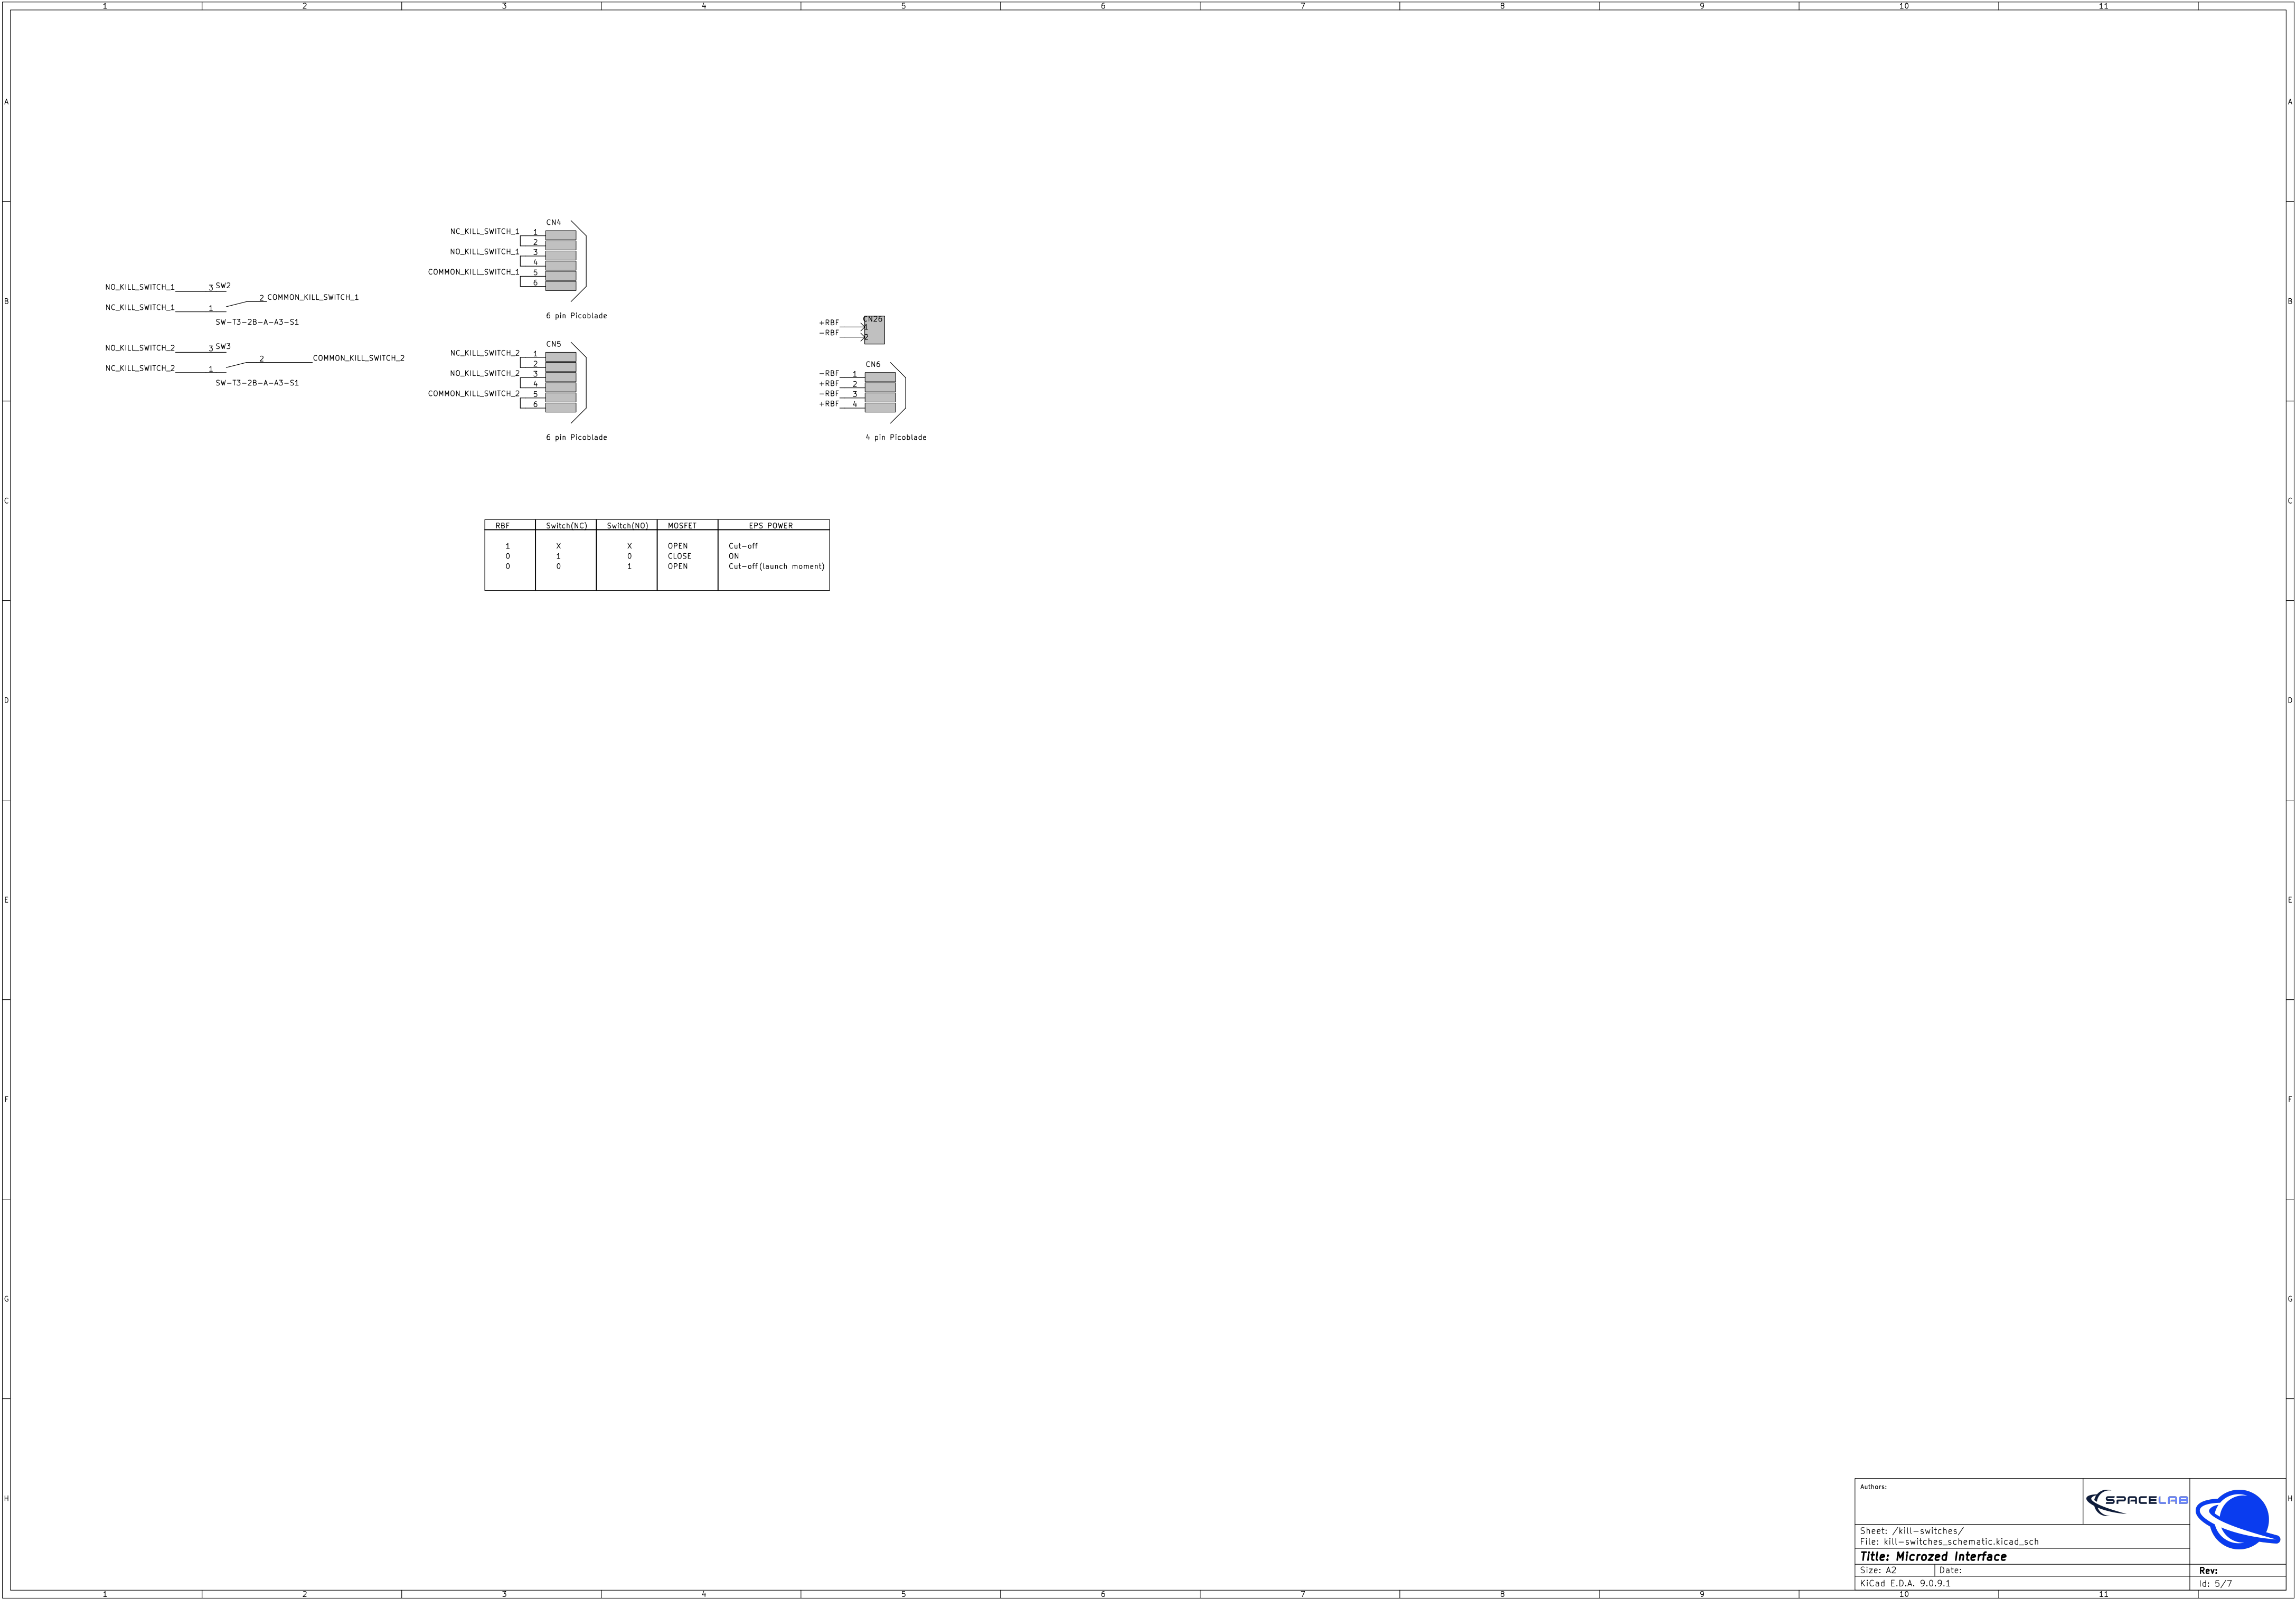

CN26

+RBF1

-RBF2

CN6


-RBF1

+RBF2



-RBF3

+RBF4

4 pin Picoblade

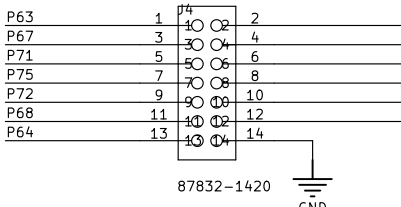

A
B
C
D
E
F
G
H



H	
---	--

The diagram illustrates the pin connections for two RS485 transceiver modules, RS485_01 and RS485_02. Each module is shown with its internal components and external connections.

Module RS485_01:

- Pin 1:** RX_CHN_3
- Pin 2:** TX_CHN_3
- Pin 3:** T/R_CHN_3
- Pin 4:** DE
- Pin 5:** DI
- Pin 6:** B/Z
- Pin 7:** A/Y
- Pin 8:** VCC
- Pin 9:** GND

Module RS485_02:

- Pin 1:** RX_CHN_4
- Pin 2:** TX_CHN_4
- Pin 3:** T/R_CHN_4
- Pin 4:** DE
- Pin 5:** DI
- Pin 6:** B/Z
- Pin 7:** A/Y
- Pin 8:** VCC
- Pin 9:** GND

The modules are connected to a 5V supply (VCC) and ground (GND). The modules are connected to a 12V supply (VCC) and ground (GND). The modules are connected to a 12V supply (VCC) and ground (GND). The modules are connected to a 12V supply (VCC) and ground (GND).

Interface Board Mechanical Holes

The diagram shows four identical circular holes arranged horizontally. Each hole is represented by a gray circle with a small white circle in the center. Below each hole is a label: M1, M2, M3, and M4.

Ambient temperature measurement system

The diagram illustrates the connection of a TMP112AIDRLT IC (labeled U19) for ambient temperature measurement. The IC is shown as a grey rectangle with pins on all four sides. The connections are as follows:

- Top Pin:** Labeled **V+**, connected to a supply voltage line labeled **V5**.
- Bottom Pin:** Labeled **GND**, connected to a ground symbol.
- Left Pins:**
 - ADD0:** Connected to a line labeled **GND**.
 - ALERT:** Connected to a line labeled **SCL_CHN_3**. A small 'X' is placed on this line, indicating a pull-up resistor.
 - SCL:** Connected to a line labeled **SCL_CHN_3**.
 - SDA:** Connected to a line labeled **SDA_CHN_3**.

The IC is identified by the label **U19** at the top and **TMP112AIDRLT** at the bottom.

