ALTUS II

VERSATILE OUTDOOR CHARGER FOR GSE & EV

ROBUST CHARGER WITH GLOBAL DEPLOYMENT

SALIENT FEATURES

COMPACT YET POWERFUL
Dual Port, 40 kW Charger

24 – 100 VDC OUTPUT
Charge all traditional GSE, SMALL EVs

OPTIONAL EV CHARGING
3rd port added for Level 2 (J1772) charging

INTELLIGENT POWER SHARING
Maximize available power & reduce grid power needs

PLUGGABLE CHARGE CABLES
Minimize charge cable damage and hassle-free replacement

CHEMISTRY AGNOSTIC
Lead acid, lithium, EV

RETRACTABLE CABLE MANAGEMENT



OPTIONAL EV CHARGING

ALTUS II offers optional J1772 (Level 2) charging as a 3rd port. Smart port management allows you to prioritize charging.

POWER USAGE BILLING

Certified power meter records power usage of each vehicle. Our cloud platform can provide automated billing which eliminates legwork.

POWER STRUGGLE?

Not anymore...with intelligent power sharing you can sequence charging an maximize power.


(908) 789-8700

MINIT CHARGER
PowerFul Solutions

www.minitcharger.com

Insight on your NetZero Goals & Bottomline

Minit Charger's cloud platform provides crucial visibility on chargers, mobile assets' operation and maintenance, dashboards on energy usage, charger efficiency and asset tracking. Airport ramp management software or ERP integration can share data across your enterprise so stakeholders can make proactive decisions.

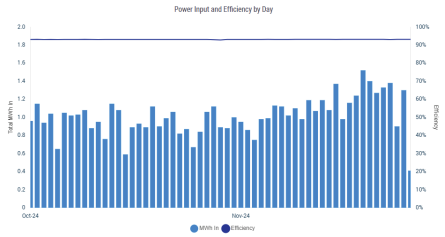

EFFICIENCY- AVERAGE CHARGE TIME

Net CO2 emissions avoided


Driving a car 405,916 km

The carbon offset of 3,147 trees

69 round-trip flights from NYC-LHR

Filling 15 swimming pools

YOUR CARBON FOOTPRINT

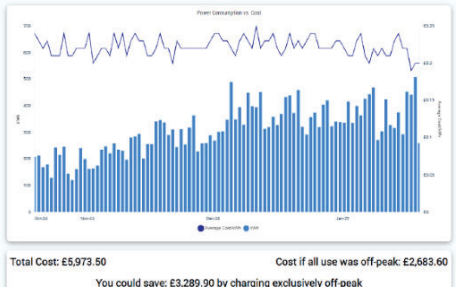

ENERGY COSTS SAVINGS

SPECIFICATIONS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

INPUT POWER	Nominal Input Voltage	323–530VAC, 3 Phase (4-Wire), 50/60Hz
	Rated Input Current	52A @ 480VAC
	Max Efficiency	95%
OUTPUT POWER	Output Power Rating	40 kW
	Output Voltage Range	24–100 VDC
PROTECTION	Protection	Over current, Over voltage, Under voltage, Short circuit, Ground fault, Over temp.
		IP54
USER INTERFACE	Graphic LCD	7" Graphic LCD with Touch Panel
COMMUNICATION	Cloud Communication	Cellular, Wi-Fi or Ethernet
ENVIRONMENTAL	Operating Temperature	-13°F to 122°F (-25°C to 50°C)
	Dimensions	63"H x 20"W x 12"D, 250lbs (113 kg)
	Mounting	Pedestal Mount
PORT OPTIONS		Anderson Euro 320, REMA 320, BIW, J1772
REGULATORY		UL1564