


Cisco WCC – Red River Voice Design

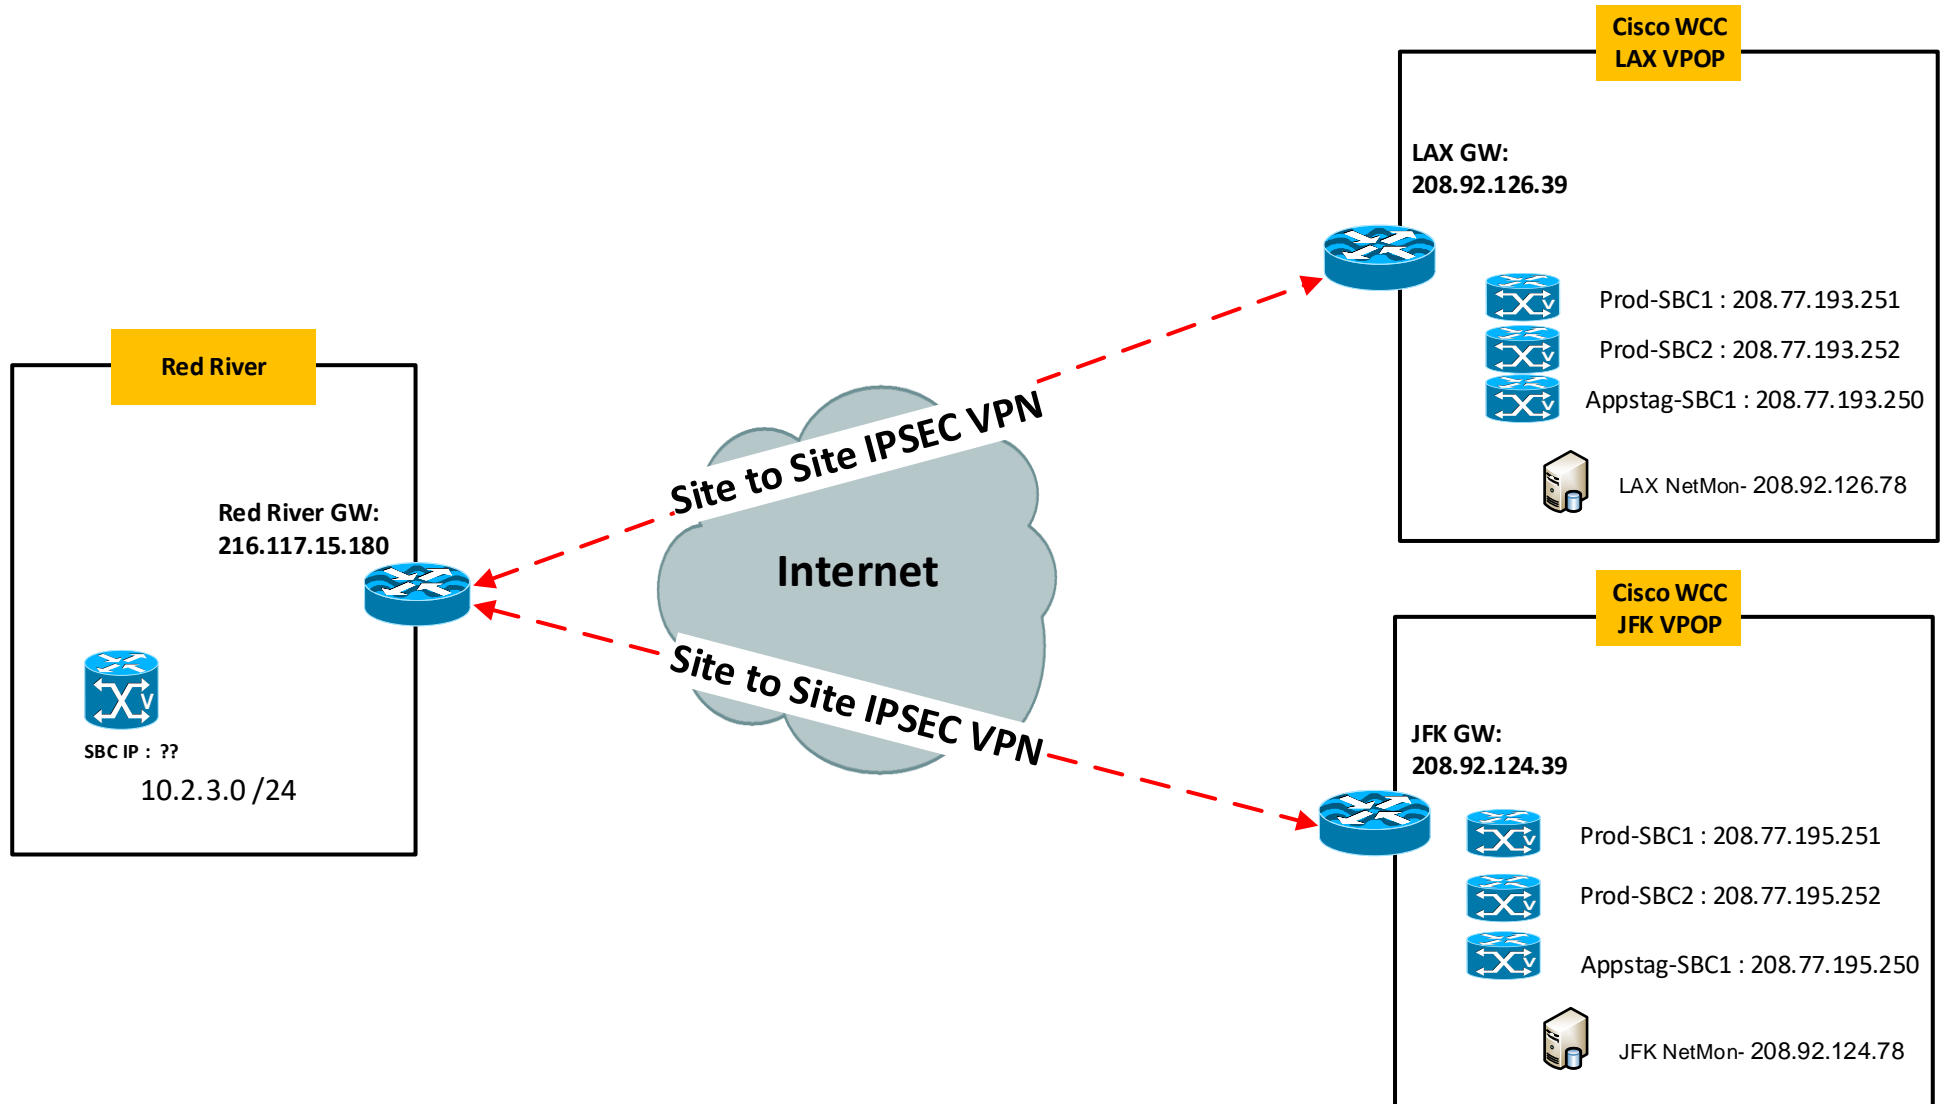

Technical Details :

- IPSEC VPN setup between Red River and Cisco US VPOPs
 - Red River SBC IP reachable over VPN should be unique (i.e. public IP preferred)
 - Allow below ports from Cisco SBC IP's and Netmon servers
- UDP 5060 - From Cisco SBC IP's
- UDP Range 8000 – 48199 - From Cisco SBC IP's
- ICMP - From Netmon Servers (LAX – 208.92.126.78 and JFK – 208.92.124.78)
- NO NAT in Transit Path and SIP Inspect/ SIP ALG needs to be disabled.

Cisco –Red River Design

Guruprasath

10/19/2020