



USB

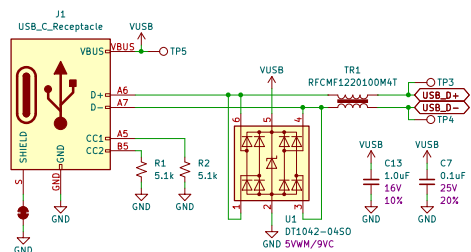


USB Track Impedance: Coplanar Differential Pair @ 90Ω
<https://tjpcb.com/pcb-impedance-calculator>
 Board Thickness: 1.6mm, Layers: 4, Er: 4 (7628 Prepreg)
 Dielectric Thickness (Layer 1 to 2): 8.28mil/0.21mm (JLC7628)
 Copper Thickness (1oz outer / 0.5oz inner): 1.38mil/0.035mm
 Polygon Isolation: 7mil/0.1778mm
 Trace Spacing: 9.07mil/0.2304mm
 Trace Width: 10.93mil/0.2776mm
 Trace center-to-center: 20.0mil/0.508mm


Power

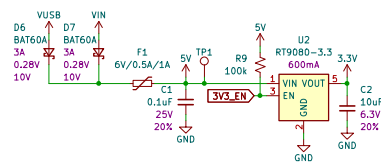


mosaic-G5 P3 GNSS Receiver

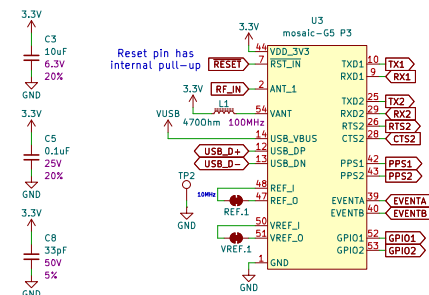

External PTH Connectors

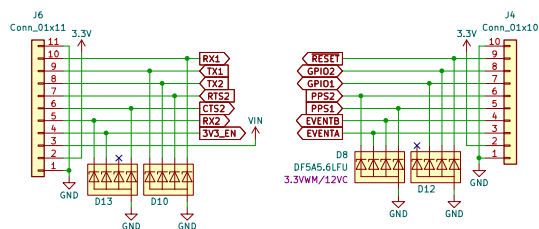


Antenna Connector




Microstrip (Coplanar Single Ended) 50Ω Calculation:
<https://jlcpcb.com/pcb-impedance-calculator>
 Board thickness: 1.6mm. Layers: 4. Er: 4.4 (7628 Prepreg)
 Dielectric Thickness (Layer 1 to 2): 8.28mil/0.2104mm (JLC7628)
 Copper Thickness (Loz outer / 0.5oz Inner): 1.38mil/0.035mm
 Polygon Isolation: 7mil/0.1778mm
 Trace Width: 11.1mil/0.2819mm


BlueSMiRF



Locking JST



LEDs



open source
hardware



Designed by: P.C.
SparkFun Electronics

Sheet: /

File: SparkFun_GNSS_mosaic-G5_P3.kicad_sch

Title: mosaic-G5 P3 Allband GNSS Receiver Breakout

Size: US Ledger	Date: 2025-04-23
-----------------	------------------

Rev: v01

Size: USLedger
KiCad E.D.A. 9.0.1