

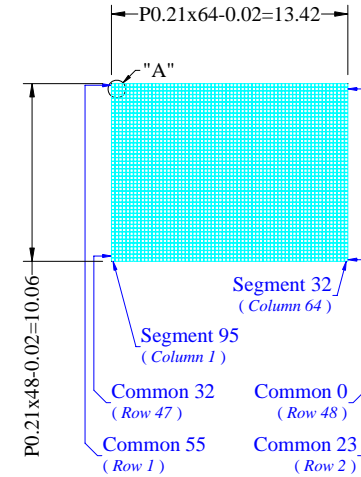



Notes:

1. Color: Light Blue
2. Driver IC: SSD1306
3. FPC Number: UT-0206-P13
4. Interface:  
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
5. General Tolerance:  $\pm 0.30$
6. The total thickness (1.55 Max) is without polarizer protective film & remove tape.  
The actual assembled total thickness with above materials should be 1.80 Max.

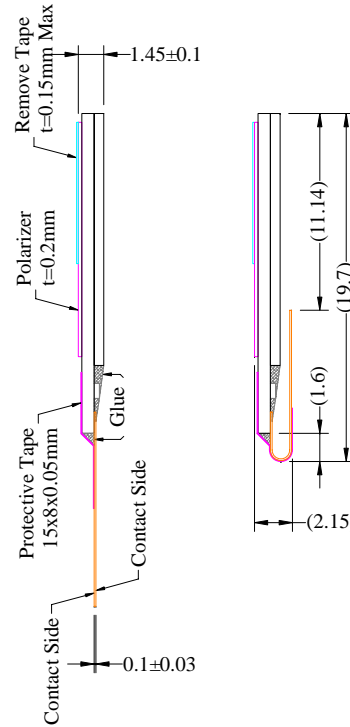

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VDDDB
7	VSS
8	VDD
9	BS1
10	BS2
11	CS#
12	RES#
13	D/C#
14	R/W#
15	E/RD#
16	D0
17	D1
18	D2
19	D3
20	D4
21	D5
22	D6
23	D7
24	IREF
25	VCOMH
26	VCC
27	VLSS
28	N.C. (GND)

Customer Approval Signature	WiseChip Semiconductor Inc.							Drawing Number		Rev.
								DMX6448SDGF07		C
	Unless Otherwise Specified		Title	UG-6448HLBEG03 Folding Type OEL Display Module Pixel Number: 64 x 48, Monochrome, COG Package				Material		
	Unit	mm						Soda Lime / Polyimide		
	General Roughness									
	Tolerance			Drawn	E.E.	Panel / E.	P.M.			
	Dimension	±0.3	By	Gary Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale	Sheet	Size
	Angle	±1	Date	20101229	20101229	20101229	20101229	1:1	1 of 1	A3