




Power Switch




LED

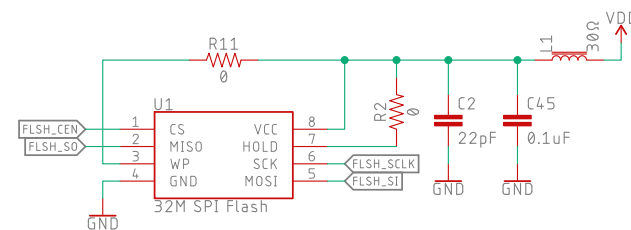


Flash Memory

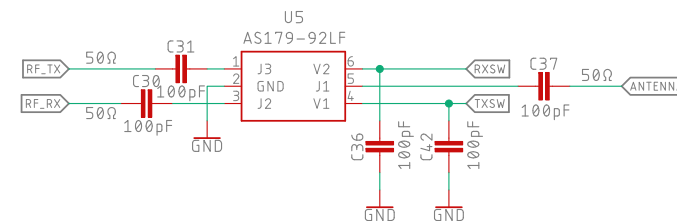


Antenna Switch




Antenna

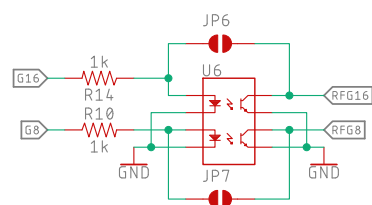


Gain Opto-Isolation

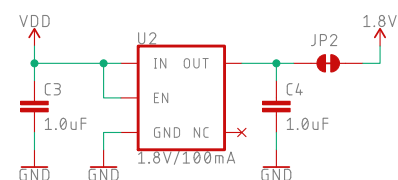

1.8V Regulator

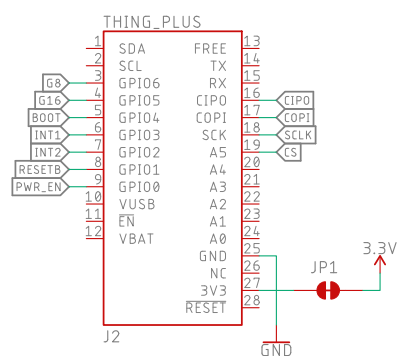

Pins

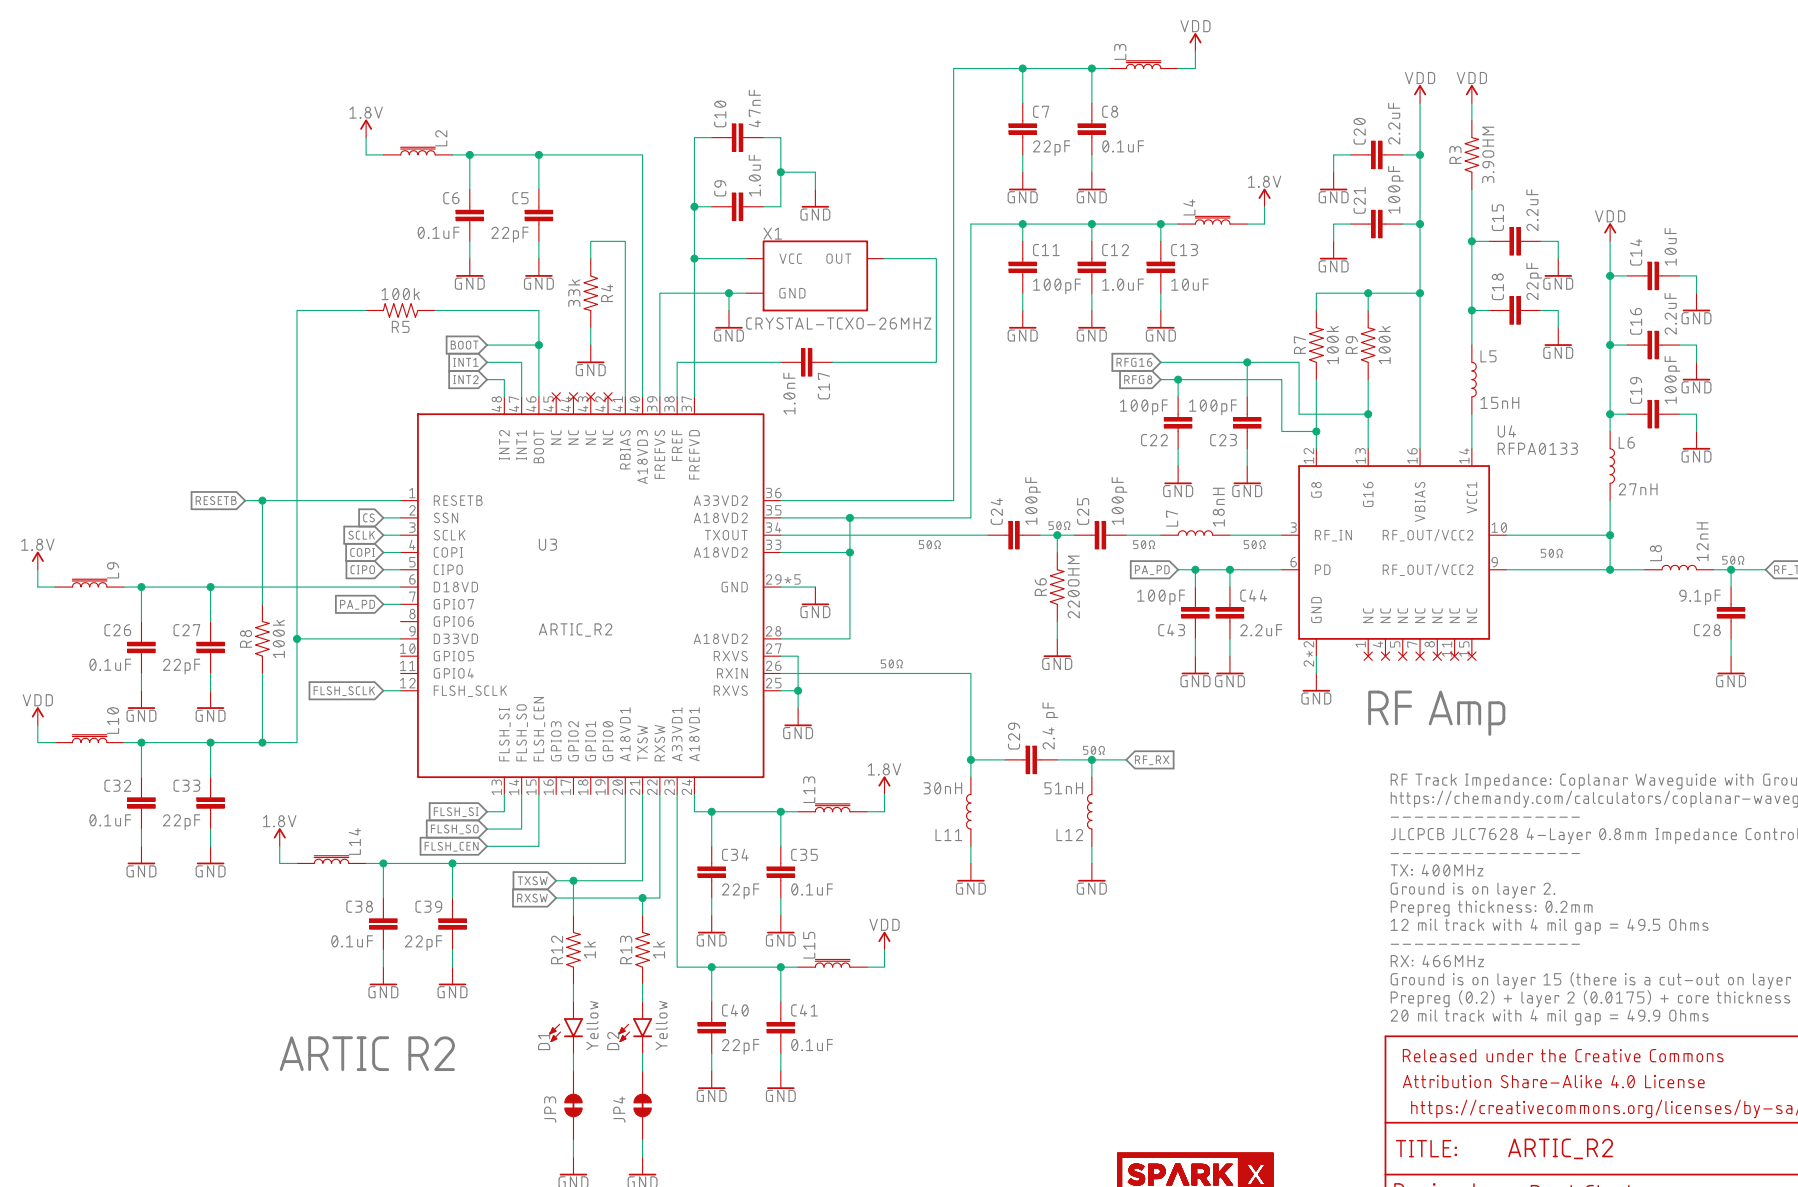

ARTIC R2

RF Amp

RF Track Impedance: Coplanar Waveguide with Ground Calculations
<https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>
 JLCPCB JLC7628 4-Layer 0.8mm Impedance Control Stackup (Er = 4.6)
 TX: 400MHz
 Ground is on layer 2.
 Prepreg thickness: 0.2mm
 12 mil track with 4 mil gap = 49.5 Ohms
 RX: 466MHz
 Ground is on layer 15 (there is a cut-out on layer 2 as per AnSem's design guide).
 Prepreg (0.2) + layer 2 (0.0175) + core thickness (0.265) = 0.4825mm
 20 mil track with 4 mil gap = 49.9 Ohms



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		Special Instructions
TITLE: ARTIC_R2		
Design by: Paul Clark Based on the Icoteq Reference Design		REV: X01
Date: 29/07/2020 10:06		Sheet: 1/1