




Power Switch




LED

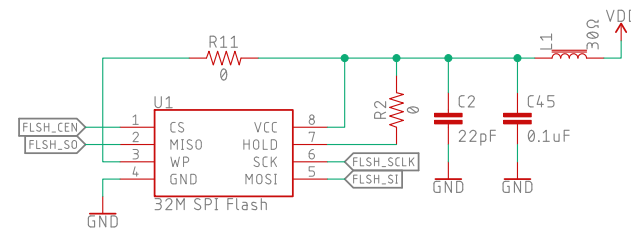


Flash Memory

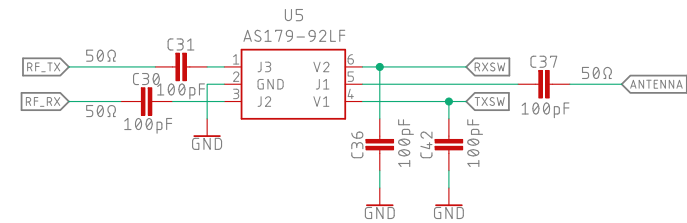


Antenna Switch




Antenna

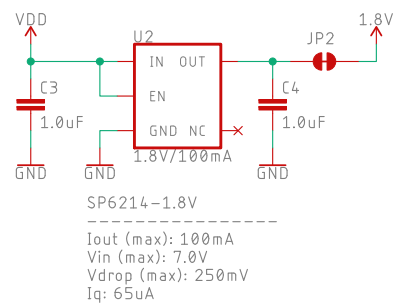

1.8V Regulator

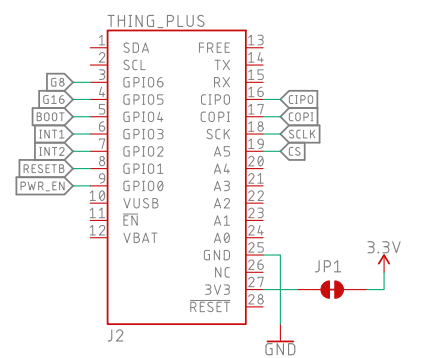

Pins

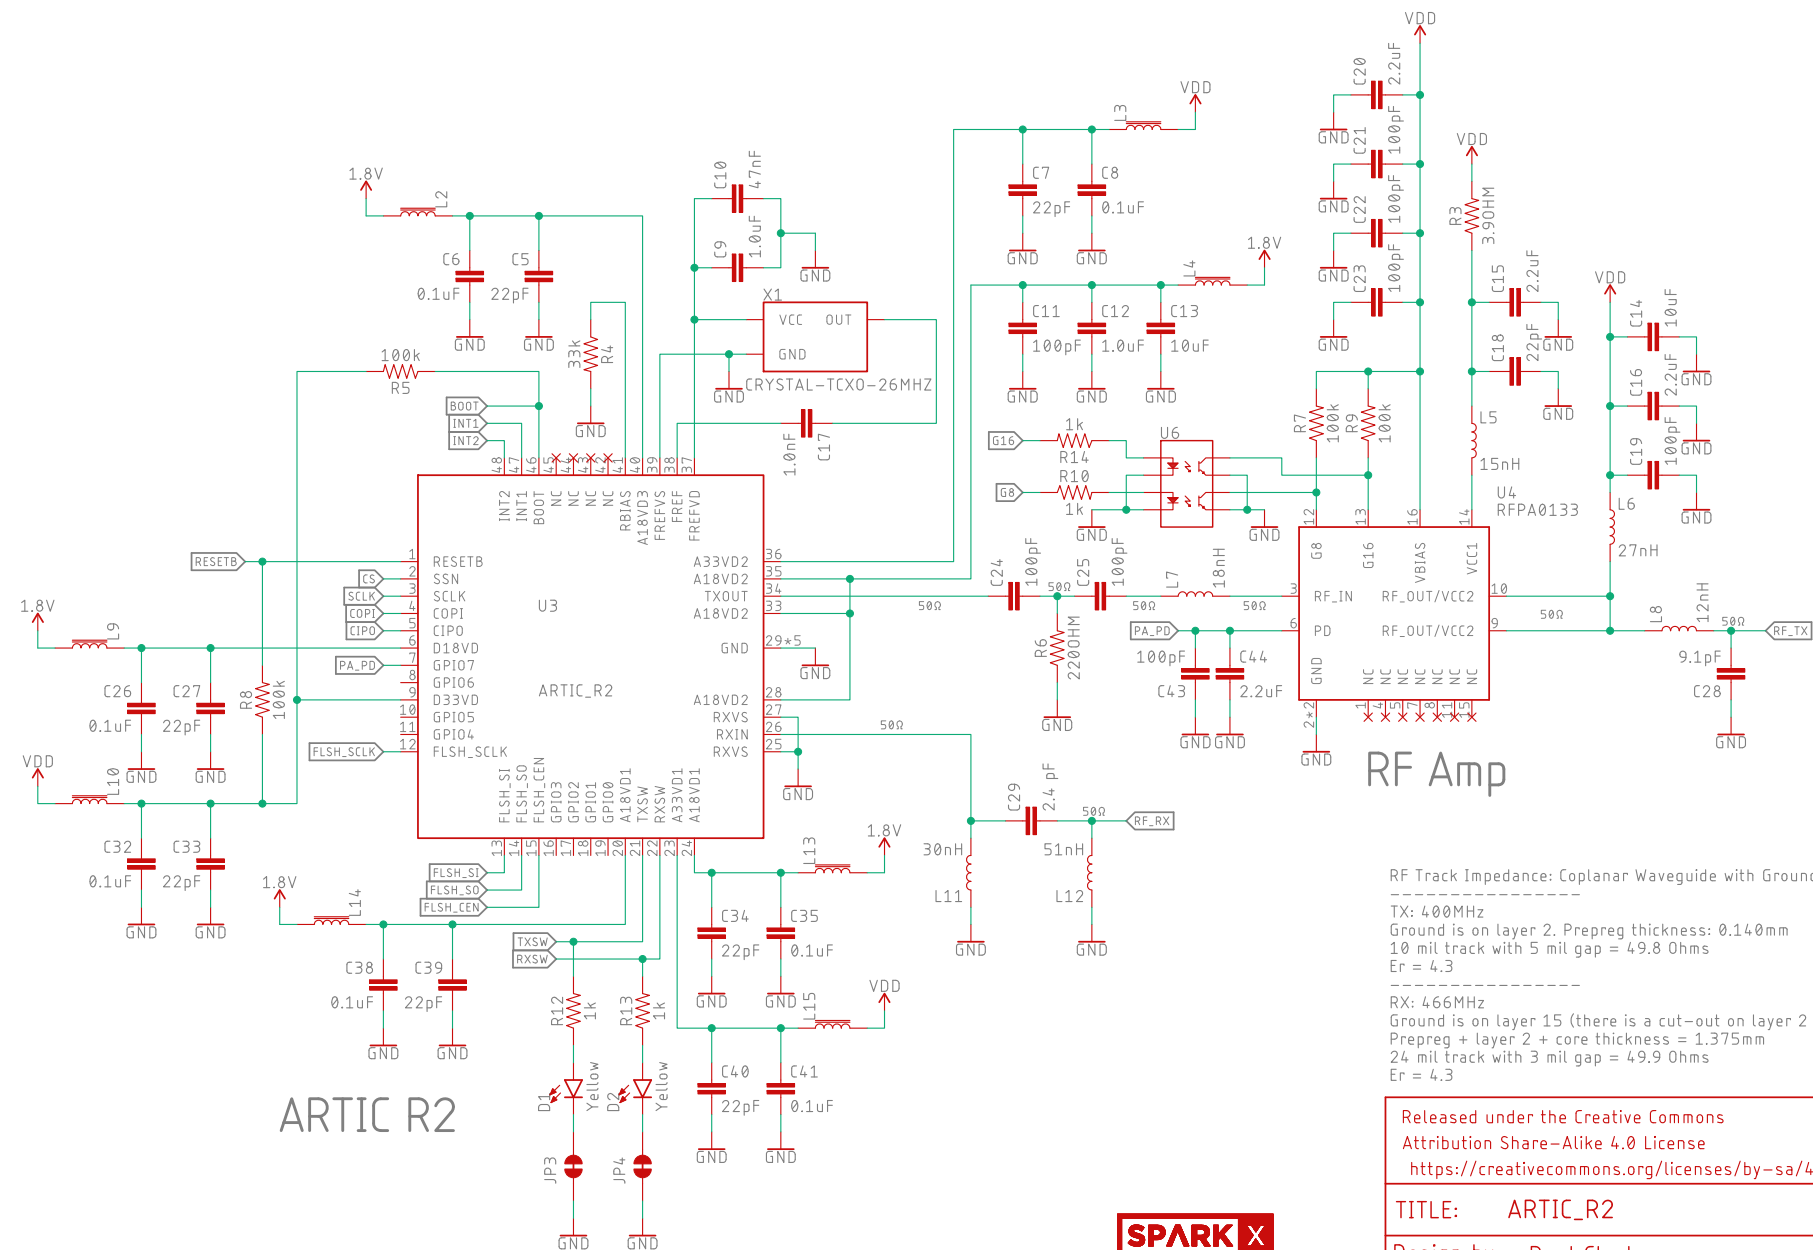

ARTIC R2

RF Amp

RF Track Impedance: Coplanar Waveguide with Ground Calculations

TX: 400MHz
Ground is on layer 2. Prepreg thickness: 0.140mm
10 mil track with 5 mil gap = 49.8 Ohms
Er = 4.3

RX: 466MHz
Ground is on layer 15 (there is a cut-out on layer 2 as per AnSem's design guide).
Prepreg + layer 2 + core thickness = 1.375mm
24 mil track with 3 mil gap = 49.9 Ohms
Er = 4.3



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		Special Instructions
TITLE: ARTIC_R2		
Design by: Paul Clark Based on the Icoteq Reference Design		REV: X01
Date: 27/07/2020 22:38		Sheet: 1/1