


## EZ Connectors




## Disable Processor Board Regulator



## ATtiny43



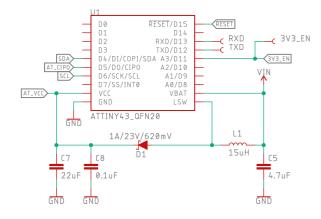


ATtiny43
=====
Pin 4 is COPI and Pin 5 is CIPO when the chip is in peripheral mode or is being programmed
Pin 4 is CIPO and Pin 5 is COPI when the chip is operating in controller mode
The #defines in the ATTinyCore assume controller mode

## Boost Converter

===== Ensure the battery polarity is correct There is no reverse-polarity protection on this board

Recommended VIN (Min): 1.5V (1 x AAA) Recommended VIN (Max): 3.0V (2 x AAA) Maximum VIN: 5.5V

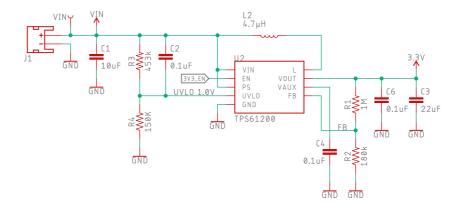







Released under the Creative Commons Attribution Share—Alike 4.0 License https://creativecommons.org/licenses/by—sa/4.0/	Special I	nstructions
TITLE: SparkX_smol_Power_AAA		
Design by: Paul Clark		REV: X02
Date: 19/08/2021 11:43	Sheet: 1	/1