


## EZ Connectors




## Disable Processor Board Regulator



## ATtiny43






ATtiny43
======
Pin 4 is COPI and Pin 5 is CIPO when the chip is in peripheral mode or is being programmed
Pin 4 is CIPO and Pin 5 is COPI when the chip is operating in controller mode
The #defines in the ATTinyCore assume controller mode

## Boost Converter

Caution ===== Ensure the battery polarity is correct There is no reverse-polarity protection on this board

Recommended VIN (Min): 1.1V Recommended VIN (Max): 3.0V (2 x AAA)

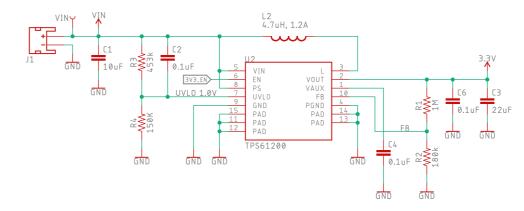





Released under the Creative Commons Attribution Share—Alike 4.0 License https://creativecommons.org/licenses/by—sa/4.0/	S	pecial Ir	nstructions
TITLE: SparkX_EZ_Power_AAA			
Design by: Paul Clark			REV: X01
Date: 18/05/2021 12:55	Sheet	: 1	/1