

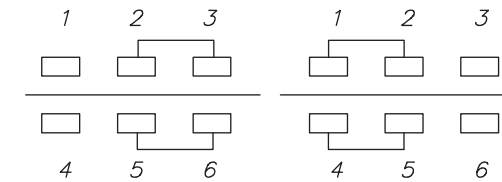


Date	Rev.	Description



FREE      PUSH  
CIRCUIT



P.C.B. LAYOUT

**MHPS2273**  
**TL2230EEF100**  
**TL2230EEF140**

**GOLDSUN ELECTRONICS CO., LTD.**




PART NO. **2335999** Rev. **1**

Description :

UNIT mm SCALE SHEET 1 OF 1 CAS No: ERN No:

DRAWN : Jay

VERIFY : Arthur / Sam

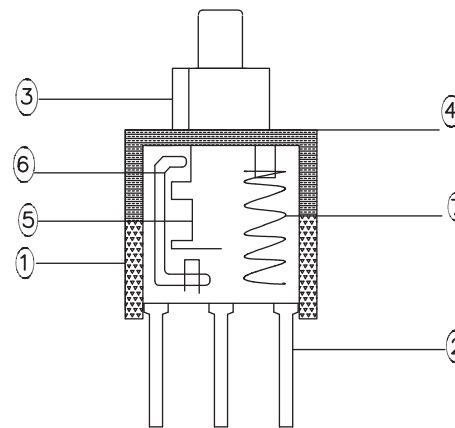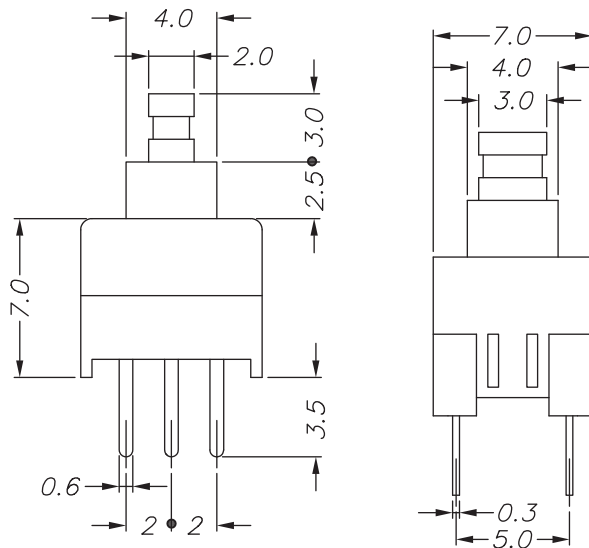

SPECIFICATIONS:  
1.RATING: DC 30V 0.1A  
2.OPERATING FORCE: 200±80gf  
3.CORCUIT: 2C-2P  
4.STROKE: FULL 1.8mm  
                    LOCK 1.0mm  
5.GENERAL TOLERANCE: ±0.2mm  
6.LIFE: 10,000 Cycles

8	Plating		Silver plating	
7	Spring	1	carbon steel wire	
6	Crochet	1	Stainless Steel	
5	Reed	2	Ag/Copper	
4	Cover	1	PC	White
3	Stem	1	POM	Blue
2	Terminal	2	Silver-plated copper	Silver plating
1	Case	1	PA66	Black
NO	PART NAME	Q'TY	MATERIAL	REMARK

Dimensions unless otherwise specified	
Size Range	Tolerance
L ≤ 1	±0.15
1 < L ≤ 8	±0.20
8 < L ≤ 23	±0.25
23 < L ≤ 50	±0.30
ANGEL	±1°

DCC. NO.  
A4 DRAWING NO.