

Planar Physics for Computer Simulation with Geometric Algebra

Spencer T. Parkin

December 12, 2023

The goal of this paper is to develop the math and algorithms necessary to perform basic rigid-body dynamics in the plane using geometric algebra. As the reader will see, the equations fall out quite nicely under this alternative mathematical framework. As we go along we can make comparisons with traditional methods involving matrices and the cross product. Geometric algebra (or GA for short) generalizes the inner product by first developing the notion of the outer product. An introduction to GA is first given before diving into the main material. Readers already familiar with GA can just skip over that part.

1 Intro to GA

A GA is constructed using a vector space \mathbb{V} , a set of scalars \mathbb{R} , addition, and the outer product. The scalars can be any field, such as the complex numbers, but since complex numbers arise naturally as a sub-structure of the GA, it makes sense to just stick with \mathbb{R} .

Given a set of n vectors $\{v_i\}_{i=1}^n$ taken from \mathbb{V} , we define

$$V = \bigwedge_{i=1}^n v_i \tag{1}$$

to be an n -blade if the vectors form a linearly independent set, or zero otherwise. We call n the grade of the blade, and it follows immediately that the dimension of \mathbb{V} is an upper-bound on the highest grade blade we can make that is non-zero. Also, we let this be an anti-commutative product; a

property we'll take advantage of later on. This just means that a swap of any two adjacent vectors in a wedge product will negate the product.

But how do we imagine a blade? Well, in the case $n = 1$, these are already familiar, because they're just vectors. In the case $n = 2$, you can think of them as pieces of area. Similar to vectors, they need not be rooted in any particular location, and they have an orientation and magnitude. Unlike vectors, however, they have a non-unique factorization. Often, the ability to choose how we factor a blade can make it easier to algebraically manipulate them in equations in order to work them out. In the case $n = 3$, you can think of these as pieces of volume, also factorable in many ways, and so on.

Now enters the inner product, and we can understand this product in terms of the outer product in the sense that it simply does the opposite thing that the outer product does. That is, while the outer product builds blades up, the inner product breaks them down. You're probably already familiar with the inner product between two vectors (or 1-blades) as a scalar value (or 0-blade), and you already know the geometric interpretation of this operation. We are now going to generalize this with higher-grade blades.

First, imagine the outer product as something that extrudes a point (0-blade) through space to make a vector (1-blade). Now use the outer product again to extrude a vector (1-blade) through space to make a 2-blade, and think of it in the shape of a parallelogram. This parallelogram, though, is not the only one representative of the 2-blade, remember, because the factorization in terms of the outer product is not unique. (Just bare that in mind for now.) Now extruding the 2-blade (or parallelogram) again, to get a 3-blade, or peice of volume, and think of it in the shape parallelepiped, or even just a box.

Okay, now let's break it down using the inner product. With each extrusion, a vector was taken in the outer product with what we had to build it into a higher-grade blade. We'll now take what we have in the inner product with a vector to break it down into a lower-grade blade. As we do this, only the component of the vector parallel to (or in the space of) the blade will contribute to the operation, while the component of the vector perpendicular to the blade will play no part. That is, a vector taken in the inner product with a blade is zero if that vector is perpendicular to the blade. If we're working in 3 dimensions, then a vector will always collapse a 3-blade into a 2-blade perpendicular to that vector. Similarly, another vector can then collapse the 2-blade into a vector orthogonal to it, provided it wasn't orthogonal to the 2-blade.

This has all been a bit hand-wavey so far, so let's be more concrete about it with some algebra. Given a 2-blade B , and a 1-blade v , let's consider the inner product $v \cdot B$. We begin by writing

$$v \cdot B = (v_{\perp} + v_{\parallel}) \cdot B = v_{\perp} \cdot B + v_{\parallel} \cdot B = v_{\parallel} \cdot B. \quad (2)$$

This equation illustrates the fact that only the component v_{\parallel} of v parallel to B will contribute to the operation, since $v_{\perp} \cdot B = 0$. Now, since factorizations of blades are not unique, we can write $B = v_{\parallel} \wedge b$ for some appropriate vector b such that $v_{\parallel} \cdot b = 0$. This is because v_{\parallel} is in the space of the blade, which is also to say that $v_{\parallel} \wedge B = 0$. We can then define

$$v_{\parallel} \cdot B = v_{\parallel} \cdot (v_{\parallel} \wedge b) \equiv |v_{\parallel}|^2 b. \quad (3)$$

And there we have it! How should we interpret this? Well, I like to think of it as a collapsing of B into the space of b along the v_{\parallel} dimension; the opposite of an extrusion, but it shouldn't be confused with a projection. It's not quite that. We can actually calculate the projection p of v onto B as

$$p = B \cdot v \cdot B^{-1}. \quad (4)$$

Note that the inner product is not necessarily associative in all cases. Also, what are we to make of B^{-1} ? Neither the inner nor the outer product supports a multiplicative inverse. Well, that's where the geometric product comes in. Given a vector $a \in \mathbb{V}$, and blade B , we define

$$aB \equiv a \cdot B + a \wedge B \quad (5)$$

to be the geometric product of a and B . To show that this is invertible, realize that the product is associative and commutative, and then write

$$aaB = a(a \cdot B) + a(a \wedge B) \quad (6)$$

$$= a \cdot (a \cdot B) + a \wedge (a \cdot B) + a \cdot (a \wedge B) + a \wedge (a \wedge B). \quad (7)$$

We can now apply some logic. Clearly, $a \wedge a \wedge B = 0$, because a vector repeated in a list never gives a linearly independent set of vectors. Also, we must have $a \cdot (a \cdot B) = 0$, because a will be orthogonal to the collapse $a \cdot B$ of B by a . This leaves us

$$aaB = a \wedge (a \cdot B) + a \cdot (a \wedge B). \quad (8)$$

Again, applying what we know about the inner and outer products, we see here that in one case, B is collapsed by a , then extruded by a ; and in another case, B is extruded by a , then collapsed by a . In either case, the net result is just some scalar multiple of B . What scalar multiple? Well, we can also write

$$aaB = (a \cdot a + a \wedge a)B = |a|^2 B. \quad (9)$$

To verify this further, we can also write

$$aaB = a \wedge (a \cdot B) + a \cdot (a \wedge B) \quad (10)$$

$$= a_{\parallel} \wedge (a_{\parallel} \cdot B) + a_{\perp} \cdot (a_{\perp} \wedge B) \quad (11)$$

$$= |a_{\parallel}|^2 B + |a_{\perp}|^2 B \quad (12)$$

$$= (|a_{\parallel}|^2 + |a_{\perp}|^2) B \quad (13)$$

$$= |a|^2 B. \quad (14)$$

All in all, we've shown that $a^{-1} = a/|a|^2$, but what about B^{-1} more generally? Letting B now be an n -blade, a trick for determining B^{-1} is to write B in terms of an orthogonal set of basis vectors $\{b_i\}_{i=1}^n$. (We then have, for any two distinct integers $i, j \in [1, n]$, the property $b_i \cdot b_j = 0$.) Doing so, we have

$$B = \bigwedge_{i=1}^n b_i = \prod_{i=1}^n b_i. \quad (15)$$

Recalling that the outer product is anti-commutative, we also have

$$B = \bigwedge_{i=1}^n b_i = (-1)^k \bigwedge_{i=1}^n b_{n-i+1} = (-1)^k \prod_{i=1}^n b_{n-i+1}, \quad (16)$$

where $k = n(n-1)/2$ is a triangle number. Thus,

$$B^2 = (-1)^k \left(\prod_{i=1}^n b_{n-i+1} \right) \left(\prod_{i=1}^n b_i \right) = \prod_{i=1}^n |b_i|^2. \quad (17)$$

Finally, we see that

$$B^{-1} = \frac{(-1)^k B}{\prod_{i=1}^n |b_i|^2} = (-1)^k \frac{B}{|B|^2}. \quad (18)$$

So far we've covered blades, the inner and outer products, and the geometric product. The last thing to cover to give one a general overview of GA

is simply a linear combination of blades, which is what we call a multivector. Realize that while all vectors are closed under addition, this is not true of blades in general. That is, the sum of two blades is not necessarily a blade, even if they have the same grade. If they do have the same grade, then the result is what we call a k -vector. Every k -blade is a k -vector, but not every k -vector is a k -blade. In the case $k = 1$, we call them vectors; $k = 2$, bivectors; $k = 3$ trivectors, and so on. It's not hard to see why some k -vectors are not k -blades. Just add two 2-blades from partially disjoint vector spaces.

There are many applications of GA; most notably are those of projective and conformal geometry. In each of these, a vector space of dimension greater than 3 is used to generate a geometric algebra, and then the projections into 3-dimensional space of the elements of that algebra are studied. Operations in the higher-dimensional algebra produce geometrically meaningful results in terms of their "shadows" in 3-dimensional space. Some are quite fascinating. For example, in conformal geometric algebra,¹ the outer product of 4 vectors, each representative of a point in 3-dimensional space, gives an element (a 4-blade) representative of the 3-dimensional sphere fitting those 4 points, if the blade is non-zero, of course. Pretty cool stuff! Can you think of calculating the sphere fitting 4 given points without such an algebra?

But I believe I've digressed too far. Let's get back to physics in the plane as our chosen application of GA.

2 Rigid Body Model

For the remainder of the paper, we're going to use $\mathbb{V} = \text{span}\{e_1, e_2\}$ as our vector space, where e_1 and e_2 denote the x and y -axes of the traditional, right-handed cartesian coordinate plane, respectively. The basis for our GA will then be

$$\{1, e_1, e_2, e_1 \wedge e_2\}. \quad (19)$$

That is, the elements of our GA will all be linear combinations of these basis elements.

¹CGA is patented, by the way, which I think is silly, but whatever.

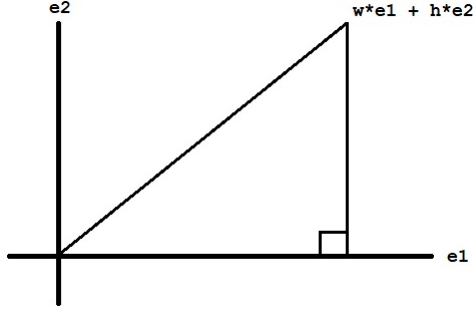


Figure 1: A right-triangle in the plane with width w and height h .

2.1 Center of Mass

For our purposes, a rigid body will be a convex polygon of uniform density. Convex, because it simplifies collision detection; and of uniform density, so that mass is a scalar multiple of area. To make things even simpler, we'll just let mass and area be the same.

That said, such a rigid body is typically stored in memory as an array of n points $\{x_i\}_{i=1}^n \subset \mathbb{V}$, wound counter-clock-wise in the plane. Our first order of business will be to calculate its center of mass. We have to be careful here, because it is tempting to think that C is the center of mass, where

$$C = \frac{1}{n} \sum_{i=1}^n x_i, \quad (20)$$

but this is not always the case. We will let C , as it is written here in equation (20), denote the average center of our convex shape. (Note that since our shape is convex, C is guaranteed to be inside our shape.) To find the center of mass, however, let's look at its definition. Given a shape S with area A , the center of mass is given by

$$C = \frac{1}{A} \int_S x dA, \quad (21)$$

where here, dA is a bit of area in S at x . Using this definition, we can prove that the center of mass of a right-triangle is also its average center. To that end, consider the triangle in figure (2.1). The average center of this triangle is clearly

$$C = \frac{(0e_1 + 0e_2) + (we_1 + 0e_2) + (we_1 + he_2)}{3} = \frac{2}{3}we_1 + \frac{1}{3}he_2, \quad (22)$$

but is this also the center of mass? To find out, we apply our definition, and come up with the integral

$$C = \left(\frac{wh}{2}\right)^{-1} \int_0^h \int_{yw/h}^w (xe_1 + ye_2) dx dy. \quad (23)$$

I'll leave the evaluation of this integral as an exercise for the reader. Suffice it to say, equations (22) and (23) should be equal. Admittedly, I had to scribble this integral on paper a million times before I finally verified its correctness. Give it a try if you're skeptical.

With this result in hand, we can now use the following trick to calculate the center of mass of our convex polygon. First, we tessellate the convex polygon into a set of m right-triangles $\{T_i\}_{i=1}^m$. (Tessellate into triangles first, then split each triangle into two right triangles.) Having done that, let $C(T_i)$ denote the average center of T_i , and let $A(T_i)$ denote its area. The center of mass of our polygon is then

$$C = \frac{1}{A} \sum_{i=1}^m C(T_i) A(T_i), \quad (24)$$

where $A = \sum_{i=1}^m A(T_i)$. This works because each term is the total moments of T_i , so the sum is the total moments of our polygon, and then the center of mass is the total moments of the polygon over its total mass.

Note that another way to compute A is as

$$A = \frac{-e_1 e_2}{2} \sum_{i=1}^n (x_i - C) \wedge (x_j - C), \quad (25)$$

where C is the average center of the polygon, or really just any interior point of the polygon, and $j = i + 1 \pmod{m}$. A positive result here depends on the counter-clockwise winding of the polygon.

2.2 Moment of Inertia

For linear motion we have Newton's famous equation $F = ma$, where F is force, m is mass, and a is acceleration. Its counter-part in the realm of angular motion is $\tau = I\alpha$, where τ is torque, I is the moment of inertia, and α is angular acceleration. Simulating the motion of our rigid body polygon will require us to use these equations. At this point, however, we only know

the mass of our polygon, and its center of mass (about which it will rotate.) To know how to rotate our polygon, we'll also need to know its moment of inertia.

Let's look at the definition.

$$I = \int_S (x - C)^2 dA \quad (26)$$

Here, S is our shape in the plane, dA is a bit of area (or mass in our case), C is the center of mass, and x is our variable of integration, visiting every point of S .

It is at this point that I'm at a loss for any kind of trick for calculating the exact value of I for our polygon, and so what I've done in practice is simply approximate the integral numerically. This is time-consuming, but it doesn't have to be done on initialization of your simulation. It can be done as a build step for the assets loaded by your simulation.

Note that in 3-dimensions, I is not a scalar, but a tensor matrix, and to make things more complicated, it depends on the orientation of the rigid body. We won't have to worry about that in 2-dimensions, though. Using CGA, the authors of [?] found a way to represent the inertial tensor as an element of the algebra.

2.3 The Equations of Motion

Our first goal is to just get our polygons moving realistically through space, with no regard to any external forces or impulses. After that, we can consider the influence of forces, and resolve collisions using impulses.

2.4 Resolving Collisions

$$j = \frac{-(1 + \epsilon)(n \cdot (v + r\omega))}{M^{-1} - (r \wedge n)^2 / I} \quad (27)$$

$$j = \frac{-(1 + \epsilon)v_{rel}^-}{M_a^{-1} + M_b^{-1} - (r_a \wedge n)^2 / I_a - (r_b \wedge n)^2 / I_b} \quad (28)$$