


Intelligent Battery Management System

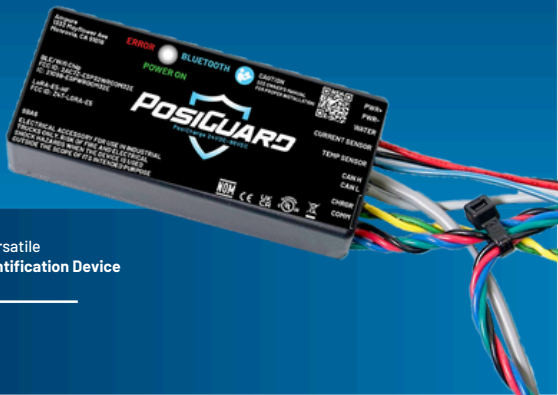

Compact, Powerful, Versatile Battery Monitoring Identification Device

Category:
Battery Management

KEY FEATURES

- **Ultra-compact design** – Small footprint, easy installation.
- **Versatile compatibility** – Supports both lead-acid and lithium batteries.
- **Advanced sensor capabilities** – Monitors current, voltage, and electrolyte levels for actionable battery insights. *
- **Option for wireless connectivity via LoRa Communications** – Enables fleet-wide insights and communication over long distances with LoRa integration.
- **Seamless charger communication** – Compatible with wired, Bluetooth, and CAN communication for maximum flexibility.
- **Mobile access & configuration** – Easily download BMID data and configure settings via PosiCharge's mobile app.
- **Built for industrial use** – Designed for harsh warehouse environments, ensuring reliability in the toughest conditions.

*Some sensor capabilities may require optional components.

TECHNICAL SPECIFICATIONS

PosiGuard Specifications	
Nominal Battery Voltage	24 - 96 Volts
Operating Voltage	18 - 20 Volts
Voltage Resolution	30 mV
Current Resolution	100 mA
Operating Temp Range	-25 to 75 C
Exterior Dimensions (L x W x D)	4.05" x 1.80" x 1.00"
Enclosure Rating	IP65 - Sealed against water / acid intrusion
Communication Interfaces	Serial, CAN, WiFi, Bluetooth, LORA
Date and Time	Battery Backup
Storage Memory	16 MB
Safety Certifications	UL 583 and EN1175



PosiCharge is a product line of Ampure

1333 S. Mayflower Ave Suite 100
Monrovia, CA 91016 USA

Hotline: +1 888-833-2148 (UNITED STATES)

