


POSILINK™

Smart Fleet Intelligence for Industrial Charging
Plan, Monitor, and Optimize



What is PosiLink?

PosiLink is an advanced fleet intelligence and battery management platform that delivers key insights into battery health, usage, and performance. Designed to diagnose issues quickly and optimize performance, it helps operators identify improper usage early, reduce battery degradation, avoid unexpected failures, and keep fleets running efficiently throughout their service life.

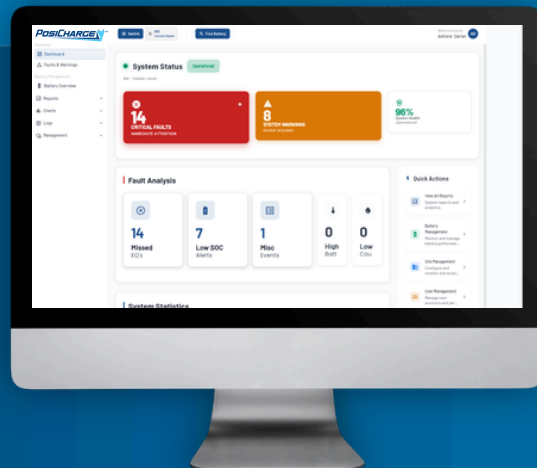

KEY FUNCTIONS

+ Simulation

Plan & Design with Site Data

- Capture site data using PosiCharge site study tools.
- View and monitor E-Meter and IC-Meter data within PosiLink.
- Analyze operational usage patterns to inform charger selection and fleet configuration.
- *Coming Soon:* Integrated simulation tools to model and optimize site configurations.

+ Operate & Maintain Your Fleet

Monitoring, Maintenance & Telematics

- Full visibility across your entire fleet, regardless of battery type or chemistry
- Real-time alerts and notifications for critical issues
- Battery performance and lifecycle insights
- Track usage and maintenance against recommended practices to support warranty compliance
- Monitor, maintain, and optimize fleet operations at scale.

Exceptions-Based Reporting

Identifies critical issues that could lead to downtime or damage.

Customizable Views & Reports

Build role-specific dashboards and access detailed reports on usage, compliance, and performance.

Asset-Level Drilldowns

Move from fleet-wide insights to individual battery data, configuration, and history in a few clicks.

Context-Aware Navigation


Quickly navigate across organizational levels with consistent views and fewer clicks.

⚡ COMING SOON ⚡

Energy Management – Optimize Power Across Your Site

Site-level power management and coordination.

- Enforce total facility power limits
- Time-of-use and scheduled charging controls
- Integration with external meters and energy management systems
- Designed to reduce demand charges and optimize facility energy usage.

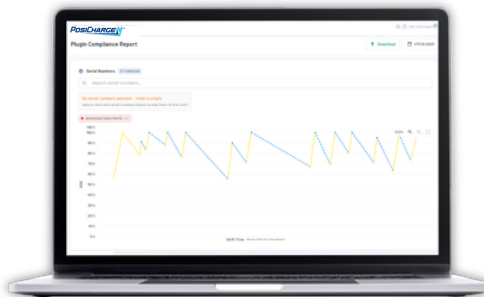

Without Real-Time Battery Monitoring



In many operations, battery misuse conditions are not consistently monitored, allowing battery degradation to occur and impact operational performance over time. Individual misuse events may not immediately result in a major service event, but repeated or unaddressed issues commonly lead to costly repairs or premature battery replacement.

Misuse Condition	Technical & Operational Impacts	Typical Repair Outcome if Unaddressed	Major Service Repair Cost
Low Water	Plate corrosion, Stratification à Reduced runtime, Overheating risk	Over time, contributes to degradation that may require major service	\$500-2,000+ (major service)
Missed EQ / Over-Discharge	Sulfation, Cell imbalance à Reduced capacity, Shortened lifespan	May require de-sulfation or deep cleaning	\$2,000+
High Temperature	Thermal Runaway, Sulfation à Reduced lifespan, Higher maintenance needs	Increased likelihood of cell damage or repair	\$500-1,000+
When Issues Go Unaddressed Over Time	Degradation compounds across the battery lifecycle	Premature battery replacement	\$7,000+

Estimated Lifecycle Service Cost Exposure from Lead-Acid Battery Misuse

How Battery Misuse Scales Costs Across a Fleet

- PosiLink provides real-time alerts when misuse occurs, enabling operators to correct issues before they lead to advanced degradation.
- By providing visibility into battery usage and maintenance patterns, PosiLink helps reduce the likelihood of costly repair or premature battery replacement.

** In operations with consistent misuse or neglect, a majority of lead-acid batteries (up to ~80% in larger fleets) will require service intervention at some point in their lifecycle.*

Fleet Size (Batteries)	Batteries Requiring Shop Service	PosiLink Monitoring Costs (over 5 years)	Average Major Service Cost (~\$2,000)
5	1	\$1,797	\$2,000
10	4	\$3,594	\$8,000
50	40	\$17,970	\$80,000
100	80	\$35,940	\$160,000
500	400	\$179,700	\$800,000

5-YEAR COST COMPARISON: POSILINK VS. SERVICE COSTS

