



ACTUAL SIZE

PowerTrac 3

BATTERY MONITORING SYSTEM

The PowerTrac 3 is a high-performance, wireless electronic battery monitoring device that attaches directly to the battery to provide detailed operating data. It enables remote monitoring of battery performance across your entire fleet, helping prevent unscheduled downtime, improve utilization, and extend forklift battery life. The PowerTrac 3 continuously measures voltage, temperature, current, and electrolyte level, processing and storing key data whenever an event or condition change occurs.

The PowerTrac 3 tracks and records key battery parameters during charge, discharge and idle operation of the battery. It can store up to 10,000 events and has wireless data transfer. The new PowerTrac is more compact, less invasive, and easier to install due to a shuntless design. The PowerTrac 3 strengthens your ability to manage battery life, maintenance and battery usage.

Features

- + Extends battery service life and reduces maintenance costs
- + Tracks battery performance
- + Smart Equalize with REVOLUTION chargers: Automatically completes any missed equalization during the next charge cycle and will continue to complete the cycle until finished
- + Integrates with the REVOLUTION charger, enabling multi-amp, multi-voltage (24/36/48/72/80V) capability.*
- + Automatically recognizes battery voltage and AH capacity to charge multiple lead-acid and lithium batteries
- + Helps to oversee and schedule maintenance operations
- + Discrete electrolyte reporting
- + Predicts battery replacements
- + Helps identify and solve battery/truck field problems
- + Wireless data transfer with superior microprocessor controls
- + Battery management software included to help analyze your data wirelessly



powertrac³


Critical information at your fingertips

- + PowerCharge.Net monitoring system option allows you to collect and analyze fleet utilization information from a single location
- + Provides timely data about forklift battery
- + Quick access to battery reports
- + Efficiently manage battery utilization
- + >10,000 stored events

Sustainability


- + Extend battery life
- + Eliminate extra batteries
- + Reduce energy costs
- + Increase energy efficiencies
- + Decrease maintenance costs
- + Integrated Power Line Communication (PLC): seamless integration with REVOLUTION chargers

Amp-hour

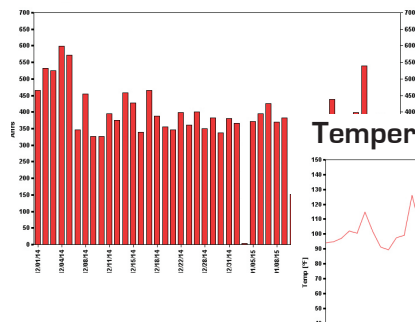

Temperature

Amp-Hours Per Event

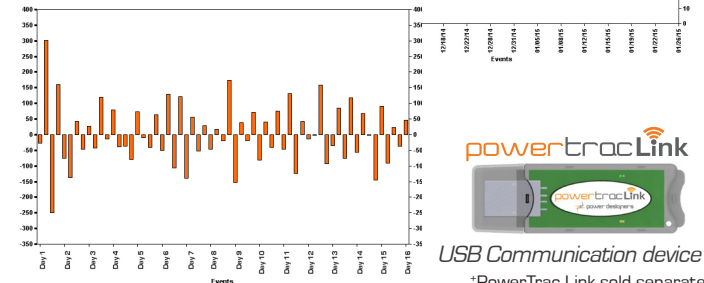


USB Communication device*
*PowerTrac Link sold separately

PowerTrac 3 Specifications

Models	PT3
Current Monitoring	Shuntless Intercell Sensing or Hall Effect Sensing
Temperature Monitoring	External Thermistor
Electrolyte Level Monitoring	Standard Electrolyte Sensor with a variable length probe
Nominal Battery Voltage	24V-84V
Operating Voltage	18V- 120V
Bi-Directional Current Measurement	+/- 500A typical 1A resolution
Voltage Accuracy	0.1V
Real Time Clock	Time keeping and stamping of data
Operating Temperature	-25°C to + 60°C (-13°F to +140°F)
Dimensions	4.25"L x 1.5"W x .6"H
Communication Interface	900Mhz Industrial Wireless
Data Storage	10,000 events
Data Collection	Upload data to PC via PowerTrac Link ⁺
Wireless Range	Up to 150'
Packaging	Water and acid resistant
Power Consumption	1/2 Watt nominal
Protection	Internal fuse and external in-line fuse Reverse Polarity Protection

*48V chargers are capable of charging 24/36/48 batteries; 36V chargers are capable of charging 24/36 batteries; 80V chargers are capable of charging 24V-80V batteries

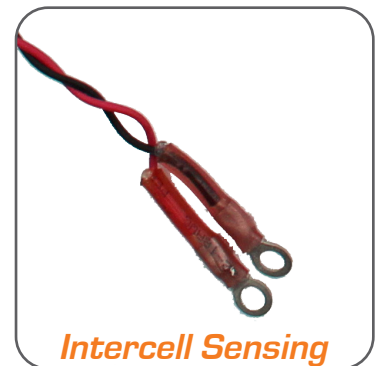

Your Complete Power
Solution Provider



Power Designers Sibex
430 North Suncoast Blvd. • Crystal River, Florida 34429
+1.352.795.0101 • sales@powerdesigners.com
www.powerdesignerssibex.com

Power Designers Sibex reserves the right to incorporate design and material changes without notice.

Design features, materials of construction and dimensional data are provided for your information only and should not be relied upon unless confirmed from Power Designers Sibex.

11/2025 PDS-PT3
COPYRIGHT © 2025 Power Designers Sibex