eGSE Catalog

PosiCharge™

INTELLIGENT FAST CHARGING SYSTEMS
FOR ELETRIC GROUND SUPPORT EQUIPEMENT

Contents

Why PosiCharge? 6

INTELLIGENT FAST CHARGING SYSTEMS FOR ELECTRIC GROUND SUPPORT EQUIPMENT

eGSE Fast Chargers

PosiCharge SVS 100 8

PosiCharge DVS 300 / 400 10

PosiCharge DVS 330 12

PosiCharge DVS 330 II 14

PosiCharge MVS 330 16

PosiCharge MVS 400 18

PosiCharge MVS 800 20

Cloud-Based Solution 22

PosiCharge SkyLink™ 24

Smart Charging for Cargo Facilities 26

PosiCharge ProCore Edge™ 28

Advanced Connect Rx™ 32

Battery Management 34

Battery RX™ 36

PosiLink™ 38

Accessories 40

About Us

Testimonials 42

The PosiCharge Advantage 44

Installation Photos 46

WHY POSICHARGE?

PERFORMANCE

- Our hands-off technology simplifies operations to the point where your drivers hardly have to think about charging.
- Intelligent charging gives each battery exactly the charge it needs.
- Closed loop gassing control allows precise charging to optimize battery performance and to eliminate gassing.
- Only outdoor-rated charger to have proven to be reliable in subzero / extreme weather.
- Multiport charging on a single circuit allows you to greatly reduce installation and construction costs. Chargers can also share power with other equipment at the jet bridge.

MAXIMUM PERFORMANCE + INCREASED PRODUCTIVITY

50% REDUCTION IN FORKLIFT BATTERY INVENTORY

24 **Round-the-clock.** Productive 24/7 performance for multi-shift operations

0% Eliminate downtime due to battery changing

SIMPLER AND SAFER CHARGE + LONGER BATTERY LIFE

INNOVATIVE SAFETY FEATURES

CLOSED LOOP GASSING CONTROL
eliminates gassing during fast charging

ANTI-ARC DISCONNECT
protects user & connectors

AUTO THERMAL SHUT DOWN
direct temperature sensing protects battery from overheating

BMID CONTROLLED EQ
allows battery to use any charger

c UL us LISTED

SAFETY

At PosiCharge, safety has always been our top priority. Designing for safety begins at the product concept stage and continues through manufacturing and training. Our intelligent charging technology removes problem areas and environmental factors that impact workplace safety across your operations.

- Anti-arcing technology and the exclusive advanced Connect RX™ protect your workers and equipment.
- First charger with automatic battery watering, so you'll reduce the chances of hazardous chemical spills.
- Intelligent Battery Protection Technology custom charges, monitors & protects any type of batteries, and extends battery life.
- PosiCharge eGSE chargers are the only fast chargers on the market that have been tested and certified to meet the most demanding requirements and regulations.

EFFICIENCY

- Hi-frequency, multi-voltage and modular chargers so that every battery gets the precise charge it needs in the shortest time without negatively impacting facility space.
- Only thermal management system for heavy use vehicles to maintain the optimal temperature, reduce charge times and extend the life of your batteries.
- Reduces your battery inventory by more than 50%and eliminates wasted facility space from battery changing or refueling.
- Automatic watering, battery reports and more features reduce man hours needed for daily operations and allows you to schedule maintenance before there's an issue.

FULLY AUTOMATED INTELLIGENT SYSTEM

POWER DISTRIBUTION TECHNOLOGY
delivers powerful charges during short breaks, enables maximum productivity & performance for multi-shift operations, and lowers infrastructure costs

SMART CHARGING TECHNOLOGY
automated EQ, autowatering, advanced battery monitoring & built-in safety features

DATA DELIVERY TECHNOLOGY
tracks vehicle, battery & user performance that's critical for effective fleet management

BATTERY UNIVERSAL
advanced algorithms custom-charge, monitor & protect any type of batteries, and extend battery life

FUTURE PROOF
CAN/PLC capability allows charging AGVs, robots and new battery chemistries such as lithium

PROVEN TO EXTEND BATTERY LIFE IN THE LAB & IN THE FIELD

10,000+ POSICHARGE FAST CHARGERS WITH OVER 10 YEARS OF OPERATION

1500 CHARGING CYCLES

10+ YEARS

3 AFTER YEARS **90%** BATTERY CAPACITY RETAINED

25,000+ CHARGING STATIONS

750+ LOCATIONS

BATTERY EXPERTS

- One of the largest repositories of fast-charge battery data in the world thanks to our PosiNet battery management system.
- Dedicated battery lab where we test every size, voltage, type and manufacturer of battery on the market with PosiCharge systems.
- Tens of thousands of units delivered all over the world, from Fortune 500 corporations to the U.S. Military, gives us the practical experience and data to make industry-leading products.

PosiCharge™

THE POSICHARGE ADVANTAGE

DISTRIBUTED MULTI-VEHICLE CHARGING SYSTEM

- One utility connection can charge up to 16 Vehicles simultaneously.
- Integrated software manages the charge with priority given to the battery with lowest State of Charge
- Reduces Infrastructure requirements and Installation cost
- Provides a flexible solution for the Airport Environment
- Robust and proven technology
- Over 3000 charging locations at Airports using MVS technology

INTEGRATED OEM CHARGING SOLUTION

- GSE OEM's have discovered that fast charging helps them sell more electric vehicles
- Most OEMs provide "Fast Charge Kit" from the factory:
  - Integrates the BMID into their wiring harness
  - Provides external charging port for Battery Charging
  - Interlocks with vehicle drive system
  - Lowest cost solution

SUB-ZERO APPLICATIONS

- PosiCharge is the only GSE Charger rated for OUTDOOR use in sub-zero applications
- All other "outdoor rated" GSE chargers have to be installed in a climate-controlled environment
- All other "BID Modules" do not work below freezing which prevents the charger from charging below zero

INTEGRATED POWER-SHARING

- PosiCharge developed this technology in cooperation with the Electric Power Research Institute (EPRI) and Delta Airlines in 2004
- PosiCharge integrates the Power Sharing function into the intelligence of the charger
- Because it is done intelligently, PosiCharge can share circuit power with other equipment (Jet Bridge, PCA, etc)
- NO additional "interface box" required, no additional point of failure

POSICHARGE PARTNERSHIP ADVANTAGE

- 95% of the world market share in eGSE Fast Chargers
- Wealth of experience in the eGSE market worldwide. One of the largest repositories of fast-charge battery data in the world thanks to our PosiNet battery management system
- 17 years of of historical knowledge and data on Airport Operations
- Internationally certified for safety, more than any other eGSE brand
- Over 3,500 chargers operating in airports around the world. Tens of thousands of units delivered all over the world, from Fortune 500 corporations to the U.S. Military, gives us the practical experience and data that helps to make our products the best choice

THE POSICHARGE ADVANTAGE

DISTRIBUTED MULTI-VEHICLE CHARGING SYSTEM

- One utility connection can charge up to 16 Vehicles simultaneously.
- Integrated software manages the charge with priority given to the battery with lowest State of Charge
- Reduces Infrastructure requirements and Installation cost
- Provides a flexible solution for the Airport Environment
- Robust and proven technology
- Over 3000 charging locations at Airports using MVS technology

INTEGRATED OEM CHARGING SOLUTION

- GSE OEM's have discovered that fast charging helps them sell more electric vehicles
- Most OEMs provide "Fast Charge Kit" from the factory:
  - Integrates the BMID into their wiring harness
  - Provides external charging port for Battery Charging
  - Interlocks with vehicle drive system
  - Lowest cost solution

SUB-ZERO APPLICATIONS

- PosiCharge is the only GSE Charger rated for OUTDOOR use in sub-zero applications
- All other "outdoor rated" GSE chargers have to be installed in a climate-controlled environment
- All other "BID Modules" do not work below freezing which prevents the charger from charging below zero

INTEGRATED POWER-SHARING

- PosiCharge developed this technology in cooperation with the Electric Power Research Institute (EPRI) and Delta Airlines in 2004
- PosiCharge integrates the Power Sharing function into the intelligence of the charger
- Because it is done intelligently, PosiCharge can share circuit power with other equipment (Jet Bridge, PCA, etc)
- NO additional "interface box" required, no additional point of failure

POSICHARGE PARTNERSHIP ADVANTAGE

- 95% of the world market share in eGSE Fast Chargers
- Wealth of experience in the eGSE market worldwide. One of the largest repositories of fast-charge battery data in the world thanks to our PosiNet battery management system
- 17 years of of historical knowledge and data on Airport Operations
- Internationally certified for safety, more than any other eGSE brand
- Over 3,500 chargers operating in airports around the world. Tens of thousands of units delivered all over the world, from Fortune 500 corporations to the U.S. Military, gives us the practical experience and data that helps to make our products the best choice

SVS 100

Compact Single-Port Intelligent Charger

The PosiCharge SVS100 delivers up to 10 kW of efficient single-port power in a compact, outdoor-rated design—ideal for small electric belt loaders, carts, and people movers. Built with high-performance IGBT technology, it withstands harsh environments while supporting a wide range of battery voltages, types, and capacities.

When paired with a PosiCharge BMID, the SVS100 intelligently adjusts charge profiles based on real-time battery voltage and temperature data, ensuring maximum safety, faster charging, and extended battery life. Charging session data can also be captured to monitor vehicle and battery performance.

KEY FEATURES:

- Compatible with all PosiCharge BMIDs for adaptive charging and data capture
- Supports multiple vehicles and battery types on one charger
- Adaptive charge rate with automatic start/stop
- High-efficiency IGBT technology
- Anti-arcing disconnect and auto-thermal shutdown
- Compact, easy to install, and low maintenance
- Cost-effective solution for small or remote fleets
- Euro and Burton output connector options

Technical Specifications

Power Rating	10kW
Utility Requirements	480 / 600 VAC, 3-phase
Full Load Amp Draw	15A / 12A MAX
Max Circuit Breaker Rating	20A / 15A
Power Factor	0.98
Efficiency	91%
Battery Voltage Range	24V - 80V
Max Output Current	250A
Weight	388 LBS
Dimensions	39.4"H X 22"W X 19.3"D

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
orders@posicharge.com

DVS 300 / 400

Flexible Dual-Vehicle Fast Charger

The PosiCharge DVS 300 / 400 are stand-alone industrial chargers designed to power one vehicle up to 500 A or two vehicles simultaneously at 250 A each. Built with ultra-efficient IGBT power electronics and an integrated AC-to-DC power server, it delivers high performance with significantly lower installation and utility costs than other fast chargers.

When paired with a PosiCharge BMID, the DVS intelligently manages battery temperatures using communicated temperature data and configurable foldback settings—enhancing charging safety and speed. Like all PosiCharge systems, it supports a wide range of battery voltages and offers comprehensive data management and onboard intelligence.

KEY FEATURES:

- Charge one vehicle up to 500 A or two vehicles simultaneously at 250 A
- Communicates via CAN protocol for lithium battery compatibility
- Works with all PosiCharge BMIDs for adaptive charging and data capture
- Supports multiple vehicles and battery types on one charger
- Delivers up to 3× the equipment throughput of conventional chargers using the same power
- High-efficiency IGBT technology
- Automatic start/stop, anti-arcing disconnect, and auto-thermal shutdown
- Rugged NEMA 3R outdoor-rated enclosure for all-weather operation
- Euro and Burton connector options

Technical Specifications

	DVS 300: Powerserver	DVS 400: Powerserver
Power Rating	30kW	40kW
Utility Requirements	480 / 600 VAC, 3-phase	480 / 600 VAC, 3-phase
Full Load Amp Draw	40A / 32A	40A / 32A
Max Circuit Breaker Rating	50A / 40A	70A / 60A
Power Factor	0.96	0.96
Efficiency	90%	90%
Battery Voltage Range	24V - 96V	24V - 96V
Max Output Current (Dual Mode)	250A	250A
Max Output Current (Single Mode)	500A	500A
Weight	905 LBS	915 LBS
Dimensions	60"H X 32.4"W X 21.9"D	60"H X 32.4"W X 21.9"D
Communication Port	RS232	RS232
Operating Temperature	-40°C -50°C	-40°C -50°C

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

DVS 330

Flexible Dual-Vehicle Fast Charger

Technical Specifications

Power Rating	33kW
Utility Requirements	380 / 400 / 415 VAC, 3-phase
Full Load Amp Draw	56A / 53A / 51A
Max Circuit Breaker Rating	64A
Power Factor	0.96
Efficiency	90%
Battery Voltage Range	24V - 96V
Max Output Current (Dual Mode)	250A
Max Output Current (Single Mode)	500A
Weight	905 LBS
Dimensions	60"H X 32.4"W X 21.9"D
Communication Port	RS232
Operating Temperature	-40°C -50°C

PosiCharge™

The PosiCharge DVS330 is a stand-alone industrial charger designed to power one vehicle up to 500 A or two vehicles simultaneously at 250 A each. Built with high-efficiency IGBT power electronics and an integrated AC-to-DC power server, it delivers high performance with lower installation and utility costs compared to other fast chargers.

When paired with a PosiCharge BMID, the DVS intelligently manages battery temperatures using communicated temperature data and configurable foldback settings—enhancing charging safety and speed. Like all PosiCharge systems, it supports a wide range of battery voltages and offers comprehensive data management and onboard intelligence.

KEY FEATURES:

- Charges one vehicle up to 500 A or two simultaneously at 250 A
- Ultra-efficient IGBT technology with integrated AC-to-DC power server
- GBT CAN protocol compatibility available via add-on kit
- CAN communication for lithium battery integration
- Works with all PosiCharge BMIDs for adaptive charging and data capture
- Supports multiple vehicles and battery types on one charger
- Up to 3× the equipment throughput of conventional chargers
- Automatic start/stop, anti-arcing disconnect, auto-thermal shutdown
- Euro or Burton connector options

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

DVS 330 IP55

Flexible Dual-Vehicle Fast Charger

CE Compliant

Technical Specifications

Power Rating	33kW
Utility Requirements	380 / 400 / 415 VAC, 3-phase
Full Load Amp Draw	56A / 53A / 51A
Max Circuit Breaker Rating	64A
Power Factor	0.96
Efficiency	90%
Battery Voltage Range	24V - 96V
Max Output Current (Dual Mode)	250A
Max Output Current (Single Mode)	500A
Weight	905 LBS
Dimensions	60"H X 32.4"W X 21.9"D
Communication Port	RS232
Operating Temperature	-40°C -50°C

PosiCharge™

The PosiCharge DVS330 is a stand-alone industrial charger designed to power one vehicle up to 500 A or two vehicles simultaneously at 250 A each. Built with high-efficiency IGBT power electronics and an integrated AC-to-DC power server, it delivers high performance with lower installation and utility costs compared to other fast chargers.

When paired with a PosiCharge BMID, the DVS intelligently manages battery temperatures using communicated temperature data and configurable foldback settings—enhancing charging safety and speed. Like all PosiCharge systems, it supports a wide range of battery voltages and offers comprehensive data management and onboard intelligence.

KEY FEATURES:

- Charges one vehicle up to 500 A or two simultaneously at 250 A
- Ultra-efficient IGBT technology with integrated AC-to-DC power server
- GBT CAN protocol compatibility available via add-on kit
- CAN communication for lithium battery integration
- Works with all PosiCharge BMIDs for adaptive charging and data capture
- Supports multiple vehicles and battery types on one charger
- Up to 3× the equipment throughput of conventional chargers
- Automatic start/stop, anti-arcing disconnect, auto-thermal shutdown
- Euro or Burton connector options

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

MVS 330

Multi-Port, Multi-Vehicle Fast Charge System

The PosiCharge MVS330 is a multi-port, multi-vehicle fast charge system designed to lower utility costs and maximize available infrastructure. Built on the DVS330 platform, it supports up to three additional power stations, enabling as many as eight industrial vehicles—such as tow tugs, baggage tractors, and belt loaders—to charge simultaneously.

Featuring intelligent power-sharing technology, the MVS330 automatically prioritizes vehicles with the lowest state of charge while distributing power efficiently across all connected units, providing faster charging and greater cost savings as fleet size increases. Like all PosiCharge systems, it supports a broad range of battery voltages and offers comprehensive data management and onboard intelligence.

KEY FEATURES:

- Charges up to 8 vehicles simultaneously via expandable power stations
- Intelligent power-sharing prioritizes low-SOC vehicles and balances load
- Ultra-efficient IGBT technology with integrated AC-to-DC power server
- GBT CAN protocol compatibility available via add-on kit
- CAN communication for lithium battery integration
- Works with all PosiCharge BMIDs for adaptive charging and data capture
- Supports multiple vehicles and battery types on one system
- Automatic start/stop, anti-arcing disconnect, auto-thermal shutdown
- Euro or Burton connector options
- Low maintenance, easy installation, and reliable performance

Technical Specifications

	MVS 330: Powerserver
Power Rating	33kW
Utility Requirements	380 / 400 / 415 VAC, 3-phase
Full Load Amp Draw	56A / 53A / 51A
Max Circuit Breaker Rating	64 A
Power Factor	0.96
Efficiency	90%
Weight	915 LBS
Dimensions	60"H X 32.4"W X 21.9"D

	Powerstation
Power Rating	60kW
Battery Voltage Range	24V - 96V
Max Output Current (Dual Mode)	250A
Max Output Current (Single Mode)	500A
Weight	304 LBS
Dimensions	30"H X 30"W X 19"D
Communication Port	RS232

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

MVS 400

Multi-Port, Multi-Vehicle Fast Charge System

The PosiCharge MVS400 is a multi-port, multi-vehicle fast charge system designed to lower utility costs and maximize available infrastructure. Built on the DVS400 platform, it supports up to three additional power stations, enabling as many as eight industrial vehicles—such as tow tugs, baggage tractors, and belt loaders—to charge simultaneously.

Featuring intelligent power-sharing technology, the MVS400 automatically prioritizes vehicles with the lowest state of charge while distributing power efficiently across all connected units, providing faster charging and greater cost savings as fleet size increases. Like all PosiCharge systems, it supports a broad range of battery voltages and offers comprehensive data management and onboard intelligence.

KEY FEATURES:

- Charges up to 8 vehicles simultaneously via expandable power stations
- Intelligent power-sharing prioritizes low-SOC vehicles and balances load
- Ultra-efficient IGBT technology with integrated AC-to-DC power server
- GBT CAN protocol compatibility available via add-on kit
- CAN communication for lithium battery integration
- Works with all PosiCharge BMIDs for adaptive charging and data capture
- Supports multiple vehicles and battery types on one system
- Automatic start/stop, anti-arcing disconnect, auto-thermal shutdown
- Euro or Burton connector options
- Low maintenance, easy installation, and reliable performance

Technical Specifications

	MVS 400: Powerserver
Power Rating	40kW
Utility Requirements	480 / 600 VAC, 3-phase
Full Load Amp Draw	56A / 45A
Max Circuit Breaker Rating	70A / 60A
Power Factor	0.96
Efficiency	90%
Weight	915 LBS
Dimensions	60"H X 32.4"W X 21.9"D

	Powerstation
Power Rating	60kW
Battery Voltage Range	24V - 96V
Max Output Current (Dual Mode)	250A
Max Output Current (Single Mode)	500A
Weight	304 LBS
Dimensions	30"H X 30"W X 19"D
Communication Port	RS232

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
orders@posicharge.com

MVS 800

Multi-Port, Multi-Vehicle Fast Charge System

CE Compliant version available

Technical Specifications

	MVS 800: Powerserver
Power Rating	80kW
Utility Requirements	480 / 600 VAC, 3-phase
Full Load Amp Draw	100A / 80A
Max Circuit Breaker Rating	125A / 100A
Power Factor	0.96
Efficiency	95%
Weight	1,405 LBS
Dimensions	62"H X 42"W X 27"D

	Powerstation
Power Rating	60kW
Battery Voltage Range	24V - 96V
Max Output Current (Dual Mode)	250A
Max Output Current (Single Mode)	500A
Weight	304 LBS
Dimensions	30"H X 30"W X 19"D
Communication Port	RS232

The MVS 800 is our multiple-port, multi-vehicle fast charge system, designed to lower utility costs and maximize available infrastructure. An MVS 800 can charge up to 16 industrial vehicles (e.g.tow tugs, baggage tractors, belt loaders, etc.) at the same time. PosiCharge's intelligent power-sharing technology prioritizes vehicles with the lowest state of charge while continuing to distribute power across all connected units, delivering faster charging and greater cost savings as more vehicles are charged at once.

Like the DVS, MVS features the highest power quality and most diverse multi-voltage, multi-amperage flexibility of any fast charging system available today. MVS systems are installed all across the world's largest airports, as well as Fortune and Global 100 companies. And like all PosiCharge chargers, the MVS 800 works with a broad range of battery voltages and has the same data management and onboard intelligence.

KEY FEATURES:

- Charges up to 16 vehicles simultaneously via expandable power stations
- Rugged NEMA 3R Enclosure Rating, provides all environment/weather operation
- Intelligent power-sharing prioritizes low-SOC vehicles and balances load
- Ultra-efficient IGBT technology with integrated AC-to-DC power server
- GBT CAN protocol compatibility available via add-on kit
- CAN communication for lithium battery integration
- Works with all PosiCharge BMIDs for adaptive charging and data capture
- Supports multiple vehicles and battery types on one system
- Automatic start/stop, anti-arcing disconnect, auto-thermal shutdown
- Euro or Burton connector options
- Low maintenance, easy installation, and reliable performance

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
orders@posicharge.com

HIGH VOLTAGE POWER STATION

20kW DC Fast Charger for eGSE + EVs

30kW quick charge via CCS1 + NACS

Flexible install: Runs on PosiCharge DC bus or stand-alone

PosiCharge™

KEY FEATURES:

- **High-Voltage Power Delivery** – Supports today's higher-voltage, higher-capacity assets, including compatible eGSE and EVs.
- **Backwards Compatible** – Designed to operate with DVS and MVS systems
- **Scalable Power Infrastructure** – Expands fleet charging without new utility drops by replacing a standard power station with a high-voltage unit.
- **CCS1 or NACS Single-Port Output** – Standard 5 m CCS1 or NACS connector options, supporting compatible industrial eGSE as well as road EVs.
- **Industrial Durability** – NEMA 3S enclosure, designed for industrial environments.
- **Proven Reliability** – Built on proven modular power conversion technology

Input Voltage	PosiCharge DC Bus 240 Vac Single Phase 208 or 240 Vac 3-Phase (3P + PE) Delta 480/277 Vac 3-Phase (3P + N + PE) Wye
Input Operating Range and Current	240 Vac Single Phase: 216 to 252 V, 150 A max, 60 Hz 208/240 Vac 3-Phase Delta: 190 to 252 V, 100 A max, 60 Hz 480 Vac 3-Phase Wye: 432 to 504 V, 45 A max, 60 Hz
Output Power	20 kW maximum via PosiCharge DC Bus 30 kW maximum via AC input
Output Voltage	250 to 920 Vdc
Efficiency	95%
Charging Connector	CCS1 and NACS
Charging Cable Length	5 m standard
Charging/Data Protocols	DIN 70121 and OCPP 1.6J compliant
Network Interface	Cellular 4G LTE, Wi-Fi
Display	7" color LCD
Operational Temperature	-30 °C to +50 °C
Storage Temperature	-40 °C to +80 °C
Relative Humidity	Up to 95% non-condensing
Altitude	2000 m (6560 ft)
Enclosure Rating	NEMA 3S; IP54
Impact Resistance	IK10
Weight	140 kg (Charger only)

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

PROCORE™ EDGE

Intelligent Charging System For Conventional, Opportunity, and Fast Charging Operations

PosiCharge™

ProCore Edge™ is our most advanced indoor-rated intelligent charging system, engineered to meet the high-performance demands of modern eGSE fleets. It delivers fast, efficient power for conventional, opportunity, and fast-charge applications—helping reduce downtime, eliminate battery-change delays, and keep ground operations running safely and smoothly. Built for flexibility, ProCore Edge supports all major battery chemistries and can be easily installed, configured, and maintained with minimal effort.

KEY FEATURES:

- **Universal Compatibility:** Supports all major battery types, including Lead Acid, Li-ion, Ni-MH, and Sodium-ion.
- **Auto Mode Selection:** Automatically switches between battery chemistries - no operator interaction required.
- **Easy Installation:** The only UL-approved charger that can be de-rated to fit smaller breakers—making installation simple even in facilities with limited power capacity.
- **Easy Maintenance:** Only three replaceable parts, all easily changed with a common tool kit.
- **App-Enabled:** Configure, diagnose, and program via Bluetooth.
- **Advanced Cooling:** Optimized active thermal management for extended module life and charger reliability.
- **Real-Time Status:** integrated LED stack light bar providing real-time charging information and health status.
- **High-Frequency Charging:** The only HF charger supporting 48-96V in one module.
- **Power Supply:** low- AC-ripple output protects sensitive battery chemistries.

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

PROCORE EDGE

Engineered for unmatched performance, ProCore Edge features a multi-voltage, multi-chemistry modular design that delivers flexibility, reliability, and scalability. Configurable from 24V to 96V, its power can be easily expanded by adding modules as needed.

Product Variations:

440 / 480V: 6-30kW
600V: 6-30kW
380 / 400V: 6-15kW

Mobile app allows detailed data analytics, diagnostics, and remote software updates

SINGLE CONTROLLER SERVING ALL CHEMISTRIES
With charge algorithms configured for each battery and type, optimizing performance of Lead Acid, Li-ion, Ni-MH, and Sodium-ion

LED INTERFACE

User-friendly LED interface shows real-time charging status

LED COLOR-CODED LIGHT BAR
Status indicator light bar provides visibility across facility

FLEXIBLE INSTALLATION OPTIONS
Can be pole-mounted, wall-mounted, or installed free-standing on a charger stand

MULTI-VOLTAGE MODULAR DESIGN
Supports 24–48V and 48–96V charging. The modular design scales power as needed, continues operating during a module failure, and balances load for enhanced reliability and extended lifespan

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

INSTALLATIONS

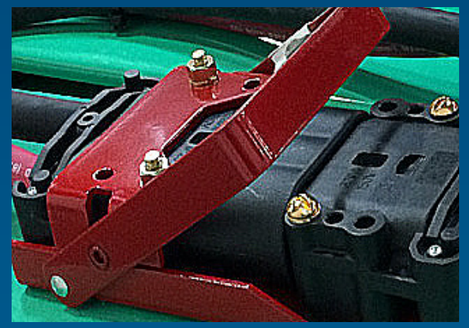

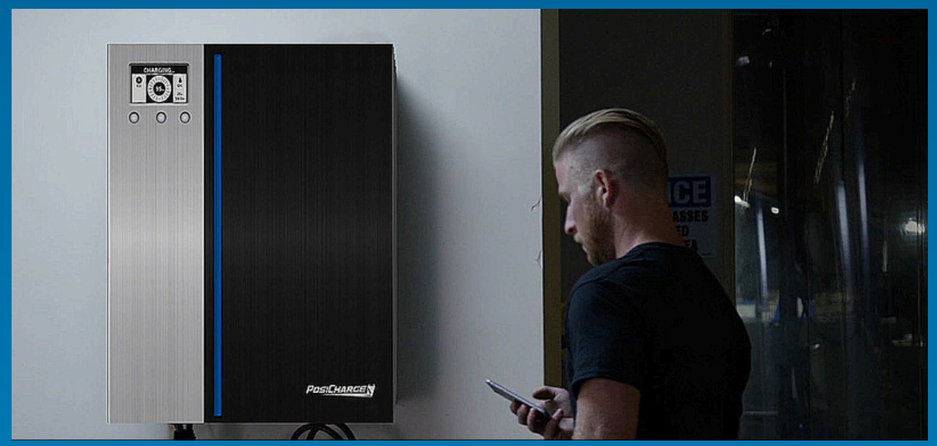

MOBILE ACCESS & CONTROL

With a mobile app for programming, diagnostics, and configuration, ProCore Edge removes the need for specialized service tools— everything from configuration to data downloads is handled seamlessly via Bluetooth. Advanced thermal management enhances battery longevity, while intelligent power management enables optimal charging for both heavy-duty lead-acid and high-efficiency lithium applications.

Mobile app allows detailed data analytics, diagnostics, and remote software updates

Download on the App Store

GET IT ON Google Play

TECHNICAL SPECIFICATIONS

ProCore Edge 24/36/48V

Output Power Rating	6 kW	9 kW	12 kW	15 kW	18 kW	21 kW	24 kW	27 kW	30 kW
Max OutputCurrent (A)	128/128/104	192/192/156	256/256/208	320/320/260	384/384/313	448/448/365	512/512/417	576/576/469	640/640/521
Full Load Amp Draw 480 VAC (A)	9	14	19	24	25	29	33	37	41
Circuit Breaker at 480 VAC	15	14	25	30	35	40	45	50	60
Cabinet	8	20	C	C	D	D	D	D	D

ProCore Edge 48/72/80/96V*

Output Power Rating	9 kW	12 kW	15 kW	18 kW	21 kW	24 kW	27 kW	30 kW
Max OutputCurrent (A)	120/111/100	160/148/133	200/185/167	240/222/200	280/259/233	320/296/267	360/333/300	400/370/333
Full Load Amp Draw 480 VAC (A)	14	19	24	26	30	35	30	43
Circuit Breaker at 480 VAC	20	25	30	35	40	45	50	60
Cabinet	B	C	C	D	D	D	D	D

*96V Li-Ion applications only

Cabinet Dimension			
Type	Bays	Dimensions (inches)	Dimensions (mm)
B	3	8.6"h X21'w X 14.7"d	472h X 533w X 373d
C	5	24.8"h X 21"w X 14.7"d	630h X 533w X 373d
D	10	40"h x 21"w x 14.8"d	1028h X 537w x 375d

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

PosiCharge™

Battery Management

KNOWLEDGE IS POWER

The more you know about your batteries, the better your fleet performs. Even a small eGSE operation can generate massive amounts of data, maintenance needs, and potential performance issues. PosiCharge battery management tools—PosiGuard, Battery Rx™, PosiLink and SkyLink™—turn that complexity into clarity.

These intelligent systems monitor battery health, capture real-time performance data, and connect seamlessly with your chargers and fleet management platforms. From in-battery monitoring to cloud-based analytics, PosiCharge gives you the insight needed to reduce downtime, extend battery life, and keep every vehicle mission-ready.

PosiCharge SkyLink™

Cloud-Based Charger & Energy Reporting

Cloud-Based Charger & Energy Reporting

PosiCharge SkyLink™ is a cloud-based platform that gives operators visibility into charger performance and energy usage. The system provides simple, actionable reporting on individual charge sessions, vehicle-level activity, and charger-level summaries. SkyLink delivers the core insights needed to efficiently manage eGSE charging operations with confidence.

PosiCharge is a product line of Ampure Charging Systems, LLC

1333 S Mayflower Ave Suite 100
Monrovia, CA 91016

www.posicharge.com

866-767-4242

SkyLink ™

Simplify Oversight, Maximize Performance

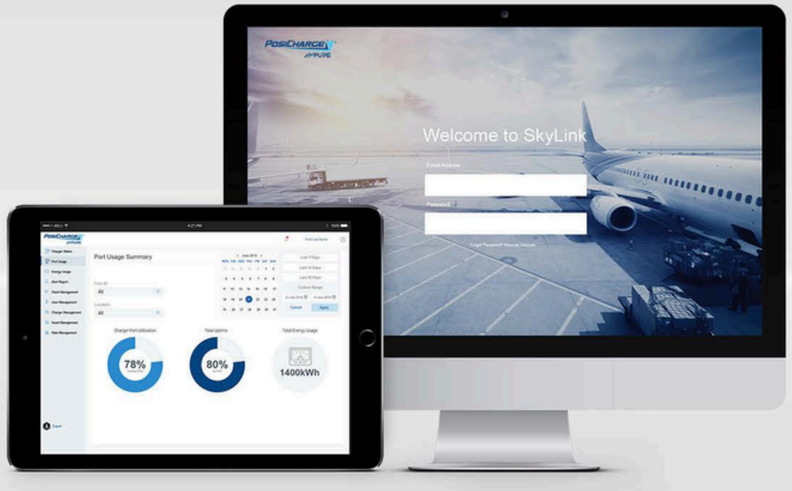

Simplified Oversight and Decision Making

SkyLink turns charger and vehicle data into clear, actionable insights. Its intuitive interface lets managers review session details, compare utilization, and identify issues across the entire operation—without complex tools or processes.

Maximize ROI from Existing Infrastructure

With reporting on energy delivered per session and vehicle-level activity (via BMID), SkyLink helps ensure charging systems are fully utilized. Lightweight billing tools support accountability and manual workflows, so every asset delivers measurable value.

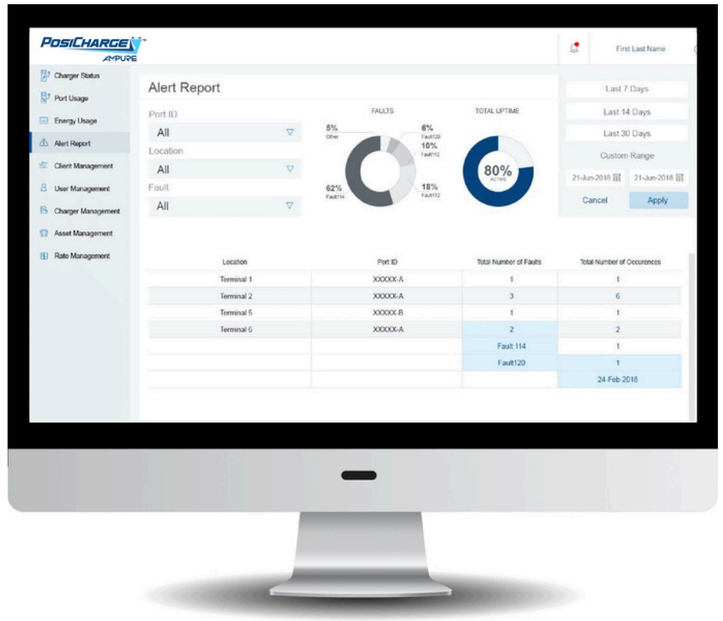

KEY FEATURES

SkyLink Kit

- Wi-Fi or Ethernet connectivity for reliable communication
- Over-the-air (OTA) firmware updates

SkyLink Portal

- Session-level, vehicle-level, and charger-level summaries
- Manual billing support (not automated invoicing)
- Intuitive, cloud-based interface for quick data access

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

POSILINK™

Smart Fleet Intelligence for Industrial Charging

Redesigned for clarity, speed, and insight.

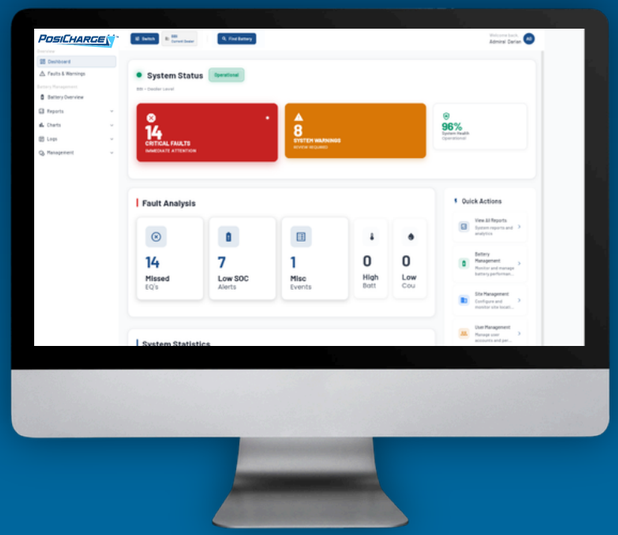

What's New in PosiLink?

We've rolled out a refreshed PosiLink experience designed to make your day-to-day fleet management faster, more intuitive, and easier to navigate. These updates are based on your feedback, and they're just the first step in a broader suite of improvements across our digital tools.

KEY UPGRADES

+ **Improved Navigation with the Context Smart Switcher**
  Navigate faster and with more clarity thanks to the newly redesigned **Context Smart Switcher**. This intuitive tool lets you easily move between Dealer, Company, Location, and Site levels so you can find the data you need in seconds.

+ **Simplified Dashboards Across All Levels**
  Quickly drill into fleet data with modernized dashboards across Dealer, Company, Location, and Site levels.

+ **Streamlined Asset Views**
  Easily access, manage, and configure your assets with a cleaner, more consolidated layout, organized by what needs attention most.

+ **Modern Look & Feel**
  A refreshed visual design improves readability and accessibility across devices.

Re-Designed Dashboard Views

Get a clear snapshot of system health across your fleet.

Enhanced Reports & Visual Analytics

Track trends, compliance, and asset behavior through intuitive charts and reports.

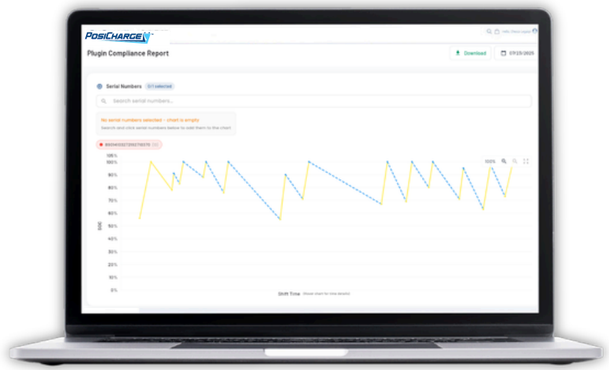

Battery / Asset Overview

Deep-dive into data on individual battery performance and usage.

Context-Aware Navigation Tools

Navigate with ease - switch between organization levels with fewer clicks.

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

POSIGUARD

Intelligent Battery Management System

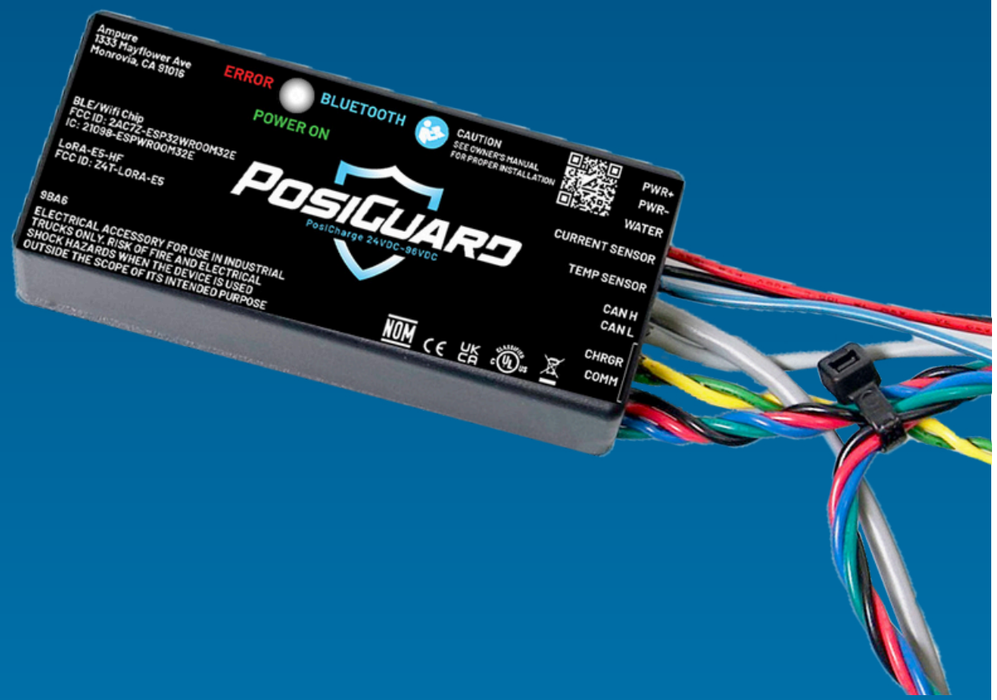

Compact, Powerful, Versatile
Battery Monitoring Identification Device

PosiCharge™

KEY FEATURES

- **Ultra-compact design** – Small footprint, easy installation.
- **Versatile compatibility** – Supports both lead-acid and lithium batteries.
- **Advanced sensor capabilities** – Monitors current, voltage, and electrolyte levels for actionable battery insights.*
- **Option for wireless connectivity via LoRa Communications** – Enables fleet-wide insights and communication over long distances with LoRa integration.
- **Seamless charger communication** – Compatible with wired, Bluetooth, and CAN communication for maximum flexibility.
- **Mobile access & configuration** – Easily download BMID data and configure settings via PosiCharge's mobile app.
- **Built for industrial use** – Designed for harsh warehouse environments, ensuring reliability in the toughest conditions.

TECHNICAL SPECIFICATIONS

PosiGuard Specifications	
Nominal Battery Voltage	24 - 96 Volts
Operating Voltage	18 - 20 Volts
Voltage Resolution	30 mV
Current Resolution	100 mA
Operating Temp Range	-25 to 75 C
Exterior Dimensions (L x W x D)	4.05" x 1.80" x 1.00"
Enclosure Rating	IP65 - Sealed against water / acid intrusion
Communication Interfaces	Serial, CAN, Bluetooth, LORA
Date and Time	Battery Backup
Storage Memory	16 MB
Safety Certifications	UL 583 and EN1175

*Some sensor capabilities may require optional components.

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

Battery Rx™

Intelligent Lead-Acid Battery Health Monitoriing

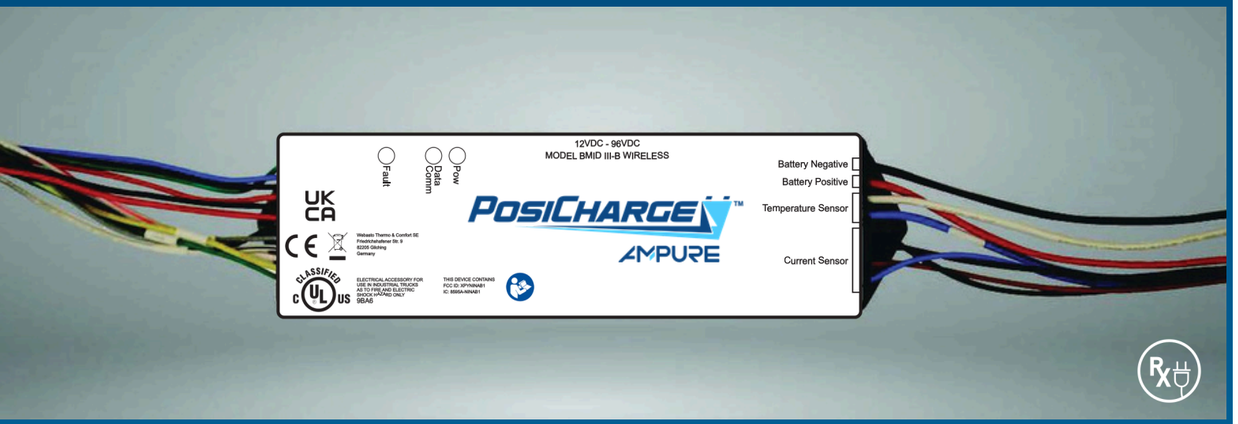

Battery Rx™ is a compact monitoring system that tracks battery health in real time—measuring state of charge, voltage, temperature, and water level to help prevent downtime and extend battery life. Mounted directly to each battery, it communicates with PosiCharge chargers to create a connected, data-driven fleet. With built-in alerts, warranty tracking, and optional cellular access via PosiLink, Battery Rx delivers actionable insights that reduce maintenance costs and improve fleet performance.

PosiCHARGE™

KEY FEATURES

- **Fast, Simple Installation:** Installs in 20 minutes with no special battery requirements
- **Continuous Monitoring:** 24/7 tracking of SOC, water level, voltage, and temperature
- **Smart Fleet Integration:** Communicates with PosiCharge chargers for optimized charging and fleet visibility
- **Warranty Compliance:** Records warranty data and usage history to prevent claim disputes
- **Actionable Data:** Direct battery downloads or cellular access via PosiLink—no IT involvement required
- **Email Alerts:** Real-time notifications for low water, over-temperature, or performance faults
- **Durable Construction:** Resistant to acid immersion and high-pressure spray during battery washing

TECHNICAL SPECIFICATIONS

Battery Compatibility	All 24 to 96V batteries
Dimensions, H x W x D	7.63" L x 2.25" W x 1.25" D
Current Measurement Range	+/- 1000 amps
Electrolyte immersed temp sensor	with -20F to 165F operating range

PosiCharge is a product line of Ampure Charging Systems, LLC
11960 Walker Ave
Monrovia, CA 91016
www.posicharge.com
866-767-4242

POSICHARGE™ ACCESSORIES

CABLE MANAGEMENT

EXTENDED, CUSTOM MODULAR CHARGE CABLES

- For the SVS & DVS systems
- 20ft, 25ft, 30ft charge cables
- Modular cable design for easy replacement
- Custom cables with nonstandard connectors also available

CHARGER STAND KIT WITH POGO STYLE CABLE HANDLER

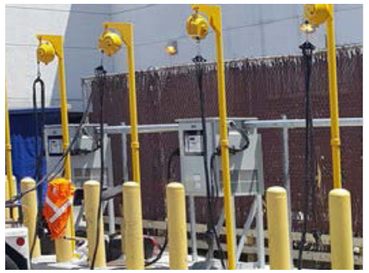

- For the SVS & DVS systems
- Keeps cables off floor for a clean and safe operation
- Provides platform for mounting charger accessoriese

AUTO WATERING KIT

Single point, charger controlled automatic battery watering system

- Ensures battery watering control at the right time, and to the right levels
- Charger waters weekly during EQ cycle and prevents overfilling
- Gravity feed via holding tank provides the most reliable watering solution
- Requires Accessory Driver Kit (ADK)

STACK LIGHTS

3 color stack lights provide clear visual of charge status

- Green = charged, Yellow = charging, Red = not charging or fault
- Requires Accessory Driver Kit (ADK)

DID YOU KNOW?

If you are an existing customer, you can sign up to get access to our online Spare Parts Store.

- Extensive selection of spare parts
- Easy, secure & fast checkout
- Say goodbye to time consuming phone orders

If you'd like to set up an account, please contact us at orders@posicharge.com

Unmatched Durability

Other chargers mightpromise reliability, but can they deliver over 20 years of unmatched performance in the field? With PosiCharge, you're not just choosing a charger; you're choosing a legacy of durability.

TESTIMONIALS

"Based on past performance ...the PosiCharge systems will be the UA standard."

Andrew Alexander Manager of GSE / Facilities Planning United Airlines

"Not only do PosiCharge systems stand out because of their people, but the products are state-of-the art...PosiCharge products have consistently rated above the competition for our operational needs."

Jody Lonegan Manager of GSE Continental Airlines

"I didn't want the cost, lost productivity and injury risks associated with changing batteries to impact our business. Posicharge gave me the solution I had been searching for."

Glenn Sutcliffe Distribution Manager Metcash Food & Grocery, Australia

"Bolthouse has seen a large reduction in maintenance costs associated with battery care, and most importantly, our operators love the ease of operation with the system and the improved productivity it allows them to attain."

Joe Gamez Mobile Equipment Supervisor Bolthouse Farms

"Since installing PosiCharge, we have generated a 30% savings in our energy costs. We are more productive, too!"

Van Hooper VPO Portland Sysco

"The system is allowing our operation to be more efficient, more productive and run 24/7. Love the system. Service has stepped up to retrain our staff with turnover."

Robert Garcia Director of Facilities Freshpoint A1A

"Self watering system means no more forgetting to fill up the batteries, this has resulted in excellent life span of our batteries."

Tim Kealley
Manager Airport Services
Gold Coast Aerocare Pty Ltd. Australia

POSICHARGE™ eGSE INSTALLATIONS