


Slip bobber

ChatGPT edition

Rig sheet — original assembly diagram

Job. Suspends bait at a measured depth while remaining castable.

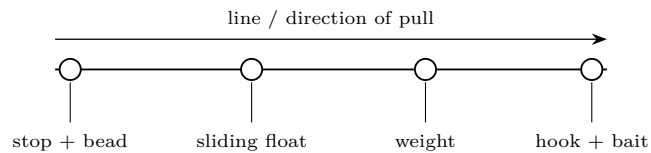

Components and build

Thread stop, bead and float; add only enough weight to stand the float; tie a small hook. Set the stop to the target depth and test beside the boat.

Fish it

Cast beyond the target, reel into position, and watch for lift, travel or submergence. Reel tight before a smooth hook-set.

Pine Lake Probe the outside vegetation edge and island saddle.

North Lake Cover panfish water on the north flat and lobe rims.

Adjustment Move the stop in one-foot steps until bites repeat.

CONTROL THE HOOKS, FISH AND LAW

Keep loose hooks secured; a float is not a substitute for watching the line. Use tackle strong enough to retrieve the target promptly. Prepare pliers and a knotless rubber net before the cast. If a hook is deep, cutting the line can be less damaging than prolonged extraction. Verify exact-water 2026–27 rules, hook count, bait law and seasons before every trip.

Source basis: Wisconsin DNR Hook, Line & Thinker; Hook Your Catch; Catch-and-Release Guidelines; Boat Transportation and Bait Laws.

Telos. Lake Country Fishing — Slip bobber. Revised 2026-07-26. Project-created text and diagrams are licensed CC BY 4.0. Incorporated public-domain artwork remains public domain and is credited on the plate it appears with. See **LICENSE** and **CREDITS.md** in the source. Nothing here is professional advice; verify current regulations and follow the stated safety procedure.