


Lindy Rig

Drag live bait along the bottom and let the fish take line

The walleye rig — also called a slip-sinker or live-bait rig

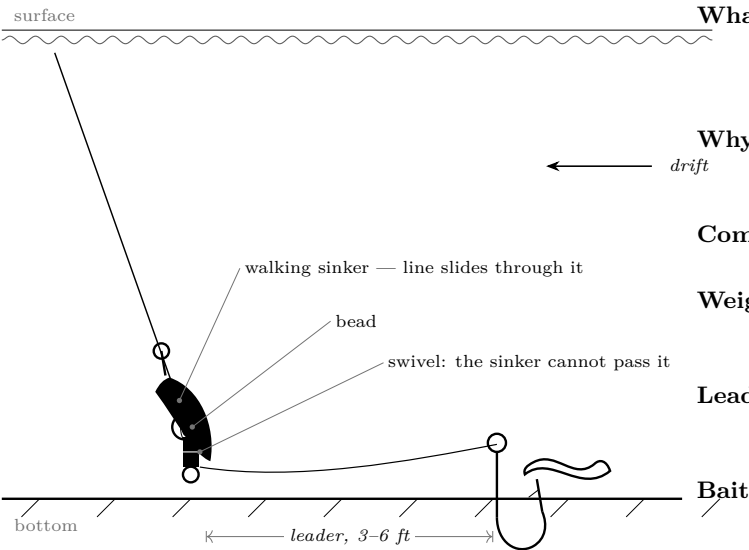

What it does	The sinker drags the bottom; the line slides <i>through</i> it. When a fish picks up the bait it feels no weight at all, so it keeps moving instead of dropping the bait.
Why it matters	A cold-water walleye mouths a bait and spits anything that resists. This rig removes the resistance.
Components	Walking or egg sinker, bead, barrel swivel, 3–6 ft leader, single hook.
Weight	1/4 oz to 20 ft, 3/8 oz to 30 ft, 1/2 oz deeper or in wind. Use the lightest that keeps bottom contact.
Leader	Long and light in Pine Lake’s clear water — 6 ft of 6 lb fluorocarbon. Shorter and heavier on North Lake.
Bait	Leech, half a nightcrawler, or a lively minnow hooked through the lips.

Build it


1. Thread the **sinker** onto the main line, narrow end first, so the line runs freely through it.
2. Add a **bead** to protect the knot from the sinker.
3. Tie the main line to one eye of a **barrel swivel**. The swivel is the stop: the sinker rides above it and cannot reach the hook.
4. Tie the **leader** to the other eye, then the **hook** to the leader.

Fish it

Speed	Slower than feels right. Drift with the wind or use the electric motor at a crawl — roughly the speed you would walk a dog that keeps stopping.
Contact	You must feel the sinker ticking bottom. If you cannot, add weight; if it is plowing, take weight off.
The take	You will feel weight, or a tap, or simply nothing where there was bottom a moment ago. Do not set the hook.
Feed it	Open the bail or drop the rod tip and give the fish line for a slow count of five to ten. The fish is turning the bait to swallow it head first.
Then set	Close the bail, reel until the line comes tight, and sweep the rod. No snap.
Follow the contour	Keep the boat on one depth line. A walleye break is a line, not a spot.

When to use it
Pine Lake spots 3 and 8 , North Lake spot 3 , in 18–35 ft. It is the highest-percentage way to catch a walleye on either lake, and it doubles as a smallmouth and perch rig. It is also the rig that most rewards patience: the whole thing depends on giving line to a fish that has not yet decided to keep your bait.

Prove the rig



- Bench test

Pull both swivel knots, slide the sinker freely, and measure the leader at 3–6 ft rather than by arm span.
- Water test

Tow beside the boat: sinker walks bottom while bait follows upright and does not spin.
- Proof at depth

With the rod low, feel intermittent ticks and confirm the sinker still slides when line is fed.
- If it fails

No ticks: add the next weight size. Bait spins: rehook it straight or slow down. Frequent weed: shorten the leader. Change one variable, repeat the same cast or drop, and keep the first setting that restores the expected proof.

Record the adjustment

Try	Depth / distance	Sink count	Observed action	Fish response	Next single change
1					
2					
3					

Questions before another cast

Did the rig reach the intended depth? What visible line, rod-tip, bottom, or lure response proves that? Did the connection and hook point survive the retrieve? Was a follow, bite, snag, or refusal observed rather than assumed? Name one variable to change and one to hold constant. If the observation cannot answer those questions, repeat the same short controlled cast before changing the setup.

☐ Sketch the cast: surface, cover, target depth, line angle, and where the response occurred

Evidence-based verdict

☐ repeat unchanged

☐ alter one variable

☐ retire or repair the rig

Reason and next prediction

Telos. Lake Country Fishing — Lindy Rig. Revised 20260725.001. Project-created text and diagrams are licensed CC BY 4.0. Incorporated public-domain artwork remains public domain and is credited on the plate it appears with. See LICENSE and CREDITS.md in the source. Nothing here is professional advice; verify current regulations and follow the stated safety procedure.