

Build Standard & Inspection Record

CHATGPT EDITION

A hold-point document for the adult builder

SUPERVISED-ONLY PROJECT

One named, sober adult controls the launcher, fuel, ignition, commands, misfires, and cease-fire. Minors do not fuel, ignite, clear a misfire, or handle a loaded launcher. This set is educational guidance, not a certification of any component or assembly.

SCOPE BOUNDARY

This record does not approve PVC for combustion service and does not replace component, primer, cement, or local-code instructions. It preserves conservative minimums for an existing project: pressure-marked solid-wall components, 48 hours or the manufacturer's longer cure, no compressed gas, and retirement on damage. If any instruction conflicts, choose the safer requirement or stop.

Hold point A · Parts before cutting

Verify directly	Recorded evidence	Initial
Every pipe section is solid wall and carries a legible pressure standard/rating Every fitting is a pressure fitting; no DWV marking or cellular/foam core anywhere in the system Primer and cement labels name this material and size; products are in date and their instructions are present No UV bleaching, impact mark, deep scratch, crack, craze, whitening, heat damage or chemical attack		

Pause and prove

Which exact marking distinguishes the pipe from drain product? Copy it rather than writing "looks right": _____

Which label instruction controls cure in today's temperature and humidity? _____


If one fitting lacks a readable mark, what evidence would make it acceptable? **None: quarantine it and obtain a documented replacement.**

Hold point B · Work that can still be inspected

1. **Mark one cut.** Observe a fine, continuous wrap line. Broken or doubled line: erase and repeat.
2. **Make one square cut.** Observe the try-square at four rotations. Any visible wedge: reject or recut while length permits.
3. **Remove the inside burr.** Observe a smooth bore under bright light. Any raised edge: dress again without thinning the wall.
4. **Remove the outside burr.** Observe an unbroken circumference. Any notch, flat, or split: reject the part.
5. **Make the label-required chamfer.** Observe equal width all around. Uneven result: stop; do not force it into a socket.
6. **Mark dry-fit depth and alignment.** Observe both witness marks before disassembly. Missing evidence: repeat the dry fit.
7. **Perform one joint exactly from its product label.** Observe full insertion, alignment, completed hold time, and the

label-described visible result. Doubt: reject the joint; never patch it.

8. **Inspect one hardware opening.** Observe it under magnification. Crack, craze, melt, distortion, or uncertain seal: reject the part.

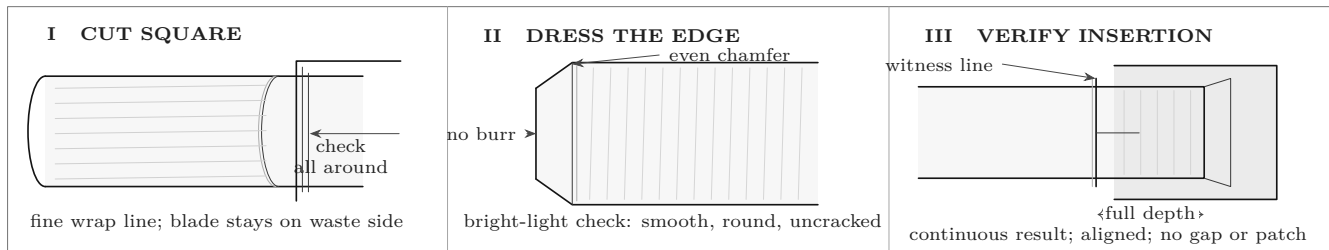

Intermediate question

What evidence will disappear after the next assembly step? Photograph or record it now. A later appearance cannot prove hidden insertion, preparation, or cure.

Hold point C · Cure lock

Last joint assembled (date/time)	_____
Temperature / humidity range	_____
Cement chart/label minimum	_____
Project minimum	48 hours
Release time (later of the two)	_____
Adult signature at release	_____

No spark test, pressure test, fueling, “quick pop,” or live use occurs before release. Cold, damp, large-diameter, tight-fit, or other manufacturer-listed conditions may extend the wait. Never pressure-test with compressed air or gas.

Hold point D · Session inspection

Retire immediately


- crack, craze, whitening, bulge or deformation;
- impact/drop or heat damage;
- loose hardware or changed witness line;
- significant UV weathering or illegible marking;
- any prior chamber anomaly.

Release only when

- build record is complete;
- all surfaces and joints pass bright-light inspection;
- cleanout and ignition controls function cold;
- range, PPE, fire and legal gates pass;
- the Range Command Card is physically present.

Diagnostic disposition

Observed state	Required diagnosis	Disposition
Witness line moved, fitting loose, or seal changed	Mechanical integrity is unknown; do not “test once”	Retire affected pressure-bearing assembly
White line, star mark, craze, bulge, deep scratch	Stress or damage is present even if it does not leak	Retire; no patch or sleeve
Cure record missing or conditions uncertain	Release time cannot be proved	Quarantine until the longer defensible time; rebuild if still uncertain
Marking unreadable or product identity disputed	Material qualification cannot be proved	Replace with documented part
All checks pass	A pass permits the next hold point only; it is not combustion certification	Sign the acceptance proof below

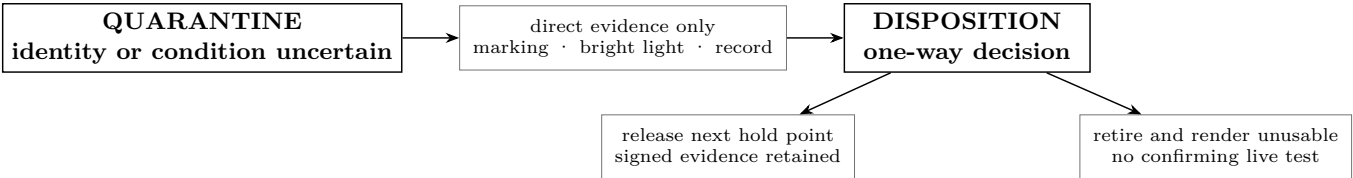

A doubtful part never returns to service by argument, patch, or successful firing.

Builder evidence packet

In-process measurement record

Joint / feature	Direct observation and measurement	Tool used	Pass / reject
Cut end	Square checked at four rotations; largest visible gap: _____	try square	
Prepared end	Burr absent; chamfer even; no notch, split, or flat: _____	bright light	
Dry fit	Socket depth marked: _____ alignment mark agrees	rule / witness line	
Finished joint	Full insertion; continuous visible result; hold completed	clock / direct view	
Hardware opening	Round, undistorted, no radial mark under magnification	light / loupe	

Quarantine and retirement ledger

Part ID	Observed reason	Disposition / replacement evidence	Adult / date
Physically segregate doubtful parts while the decision is pending. A retired part is marked and rendered unusable under adult control before disposal.			

Final acceptance proof

I inspected every pressure-bearing surface in bright light, reconciled the parts and cure records, confirmed no forbidden repair or pneumatic conversion, and verified that the separate Range Command Card is present. No live result was used as proof of soundness.

Assembly ID _____ Inspection date/time _____

Adult printed name _____ Signature _____

FORBIDDEN CONVERSIONS AND REPAIRS

Never connect compressed air, a compressor, bottled gas, or oxygen. Never use a liquid accelerant. Never patch, sleeve, tape, re-cement, heat-straighten, or otherwise return a rejected pressure-bearing part to service. Mark it “RETIRED” and render it unusable under adult control.

Telos. Potato Launcher · ChatGPT — Build Standard & Inspection Record. Revised 20260726.001. Project-created text and diagrams are licensed CC BY 4.0. Incorporated public-domain artwork remains public domain and is credited on the plate it appears with. See LICENSE and CREDITS.md in the source. Nothing here is professional advice; verify current regulations and follow the stated safety procedure.