

# Build Standard & Inspection Record

CHATGPT EDITION

A hold-point document for the adult builder

## SUPERVISED-ONLY PROJECT

One named, sober adult controls the launcher, fuel, ignition, commands, misfires, and cease-fire. Minors do not fuel, ignite, clear a misfire, or handle a loaded launcher. This set is educational guidance, not a certification of any component or assembly.

## SCOPE BOUNDARY


This record does not approve PVC for combustion service and does not replace component, primer, cement, or local-code instructions. It preserves conservative minimums for an existing project: pressure-marked solid-wall components, 48 hours or the manufacturer's longer cure, no compressed gas, and retirement on damage. If any instruction conflicts, choose the safer requirement or stop.

## Hold point A · Parts before cutting

| Verify directly                                                                                                                                                                                                                                                                                                                                                                                             | Recorded evidence | Initial |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------|
| Every pipe section is solid wall and carries a legible pressure standard/rating<br>Every fitting is a pressure fitting; no DWV marking or cellular/foam core anywhere in the system<br>Primer and cement labels name this material and size; products are in date and their instructions are present<br>No UV bleaching, impact mark, deep scratch, crack, craze, whitening, heat damage or chemical attack |                   |         |

## Hold point B · Work that can still be inspected

- Adult cuts square, deburrs inside and out, chamfers as required by the manufacturer, and dry-fits without forcing or modifying sockets.
- Adult follows the actual primer/cement label for preparation, application, assembly, twist/hold, ventilation, temperature and cleanup. No generic summary overrides that label.
- Mark each joint with a witness line. Before the next step hides it, record full insertion, alignment, and a continuous visible result; reject a doubtful joint rather than adding cement, epoxy, tape, or a patch.
- Drilling and ignition hardware are adult-only. Any crack, craze, melted area, distorted hole or uncertain seal rejects the part.

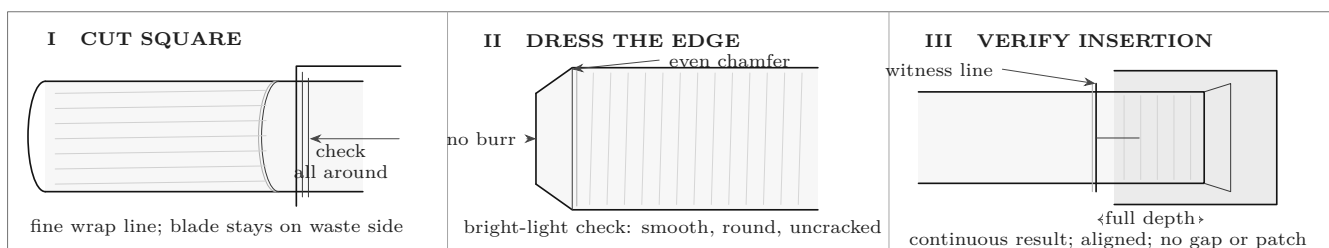

## Hold point C · Cure lock

|                                  |                 |
|----------------------------------|-----------------|
| Last joint assembled (date/time) | _____           |
| Temperature / humidity range     | _____           |
| Cement chart/label minimum       | _____           |
| Project minimum                  | <b>48 hours</b> |
| Release time (later of the two)  | _____           |
| Adult signature at release       | _____           |

No spark test, pressure test, fueling, “quick pop,” or live use occurs before release. Cold, damp, large-diameter, tight-fit, or other manufacturer-listed conditions may extend the wait. Never pressure-test with compressed air or gas.

## Hold point D · Session inspection

### Retire immediately

- crack, craze, whitening, bulge or deformation;
- impact/drop or heat damage;
- loose hardware or changed witness line;
- significant UV weathering or illegible marking;
- any prior chamber anomaly.

### Release only when

- build record is complete;
- all surfaces and joints pass bright-light inspection;
- cleanout and ignition controls function cold;
- range, PPE, fire and legal gates pass;
- the Range Command Card is physically present.

### FORBIDDEN CONVERSIONS AND REPAIRS

Never connect compressed air, a compressor, bottled gas, or oxygen. Never use a liquid accelerant. Never patch, sleeve, tape, re-cement, heat-straighten, or otherwise return a rejected pressure-bearing part to service. Mark it “RETIRED” and render it unusable under adult control.

**Telos.** Potato Launcher · ChatGPT — Build Standard & Inspection Record. Revised 2026-07-26. Project-created text and diagrams are licensed CC BY 4.0. Incorporated public-domain artwork remains public domain and is credited on the plate it appears with. See LICENSE and CREDITS.md in the source. Nothing here is professional advice; verify current regulations and follow the stated safety procedure.