

COMPUTATIONAL SCIENCES
WINTER TERM 2026
FREIE UNIVERSITÄT BERLIN



INCOMPRESSIBLE NAVIER-STOKES EQUATIONS

Annie Krillenberger, Amir Foruzanfard, Ceren Ayeri,
Göktuğ Korkulu, Jaza Nowrin, and Louis Dee

Professors:	Dr. Luca Donati, Dr. Sebastian Matera
Semester:	Winter term 2026
Program:	MSc. Computational Sciences
Submission:	18. March 2026

Abstract

The simulation of fluid dynamics is a classical physical problem and is described by the Navier-Stokes equations. Nevertheless, it is still a matter of research as it is hard to solve. Analytical solutions exist only for specific simple cases. In more general cases, numerical methods are necessary to solve the system of partial differential equations. Here, not only the convergence of the method but also the computational efficiency are crucial to model accurate physical behavior. In this work, we use Operator splitting and Spectral methods to obtain numerical solutions of two-dimensional incompressible fluid dynamics. First, we deal with linear advection and implement Lie-Splitting to gain computational efficiency. Further, we then extend this approach to respect the incompressibility constraint by using Chorin's projection method. Here we obtain a Poisson equation that enables us to correct the pressure field to match the incompressible characteristics. In particular, the solution of such Poisson equation is performed in two different ways which we evaluate. We (1) use the Jacobi method and find that it is not suitable for our desired degree of accuracy. We therefore (2) implement spectral methods to address this issue. Finally, these improvements let us reproduce Rayleigh-Bénard Convection cells and ensure that the incompressibility constraint is satisfied.

Contents

List of Figures	v
List of Tables	vi
1 Introduction	1
1.1 Introduction and Physics of the Problem	1
1.2 System of Equations and Numerical Methods	1
1.3 Rayleigh-Bénard Convection	2
2 Methodology	5
2.1 Operator Splitting	5
2.2 The Velocity Equation	8
2.3 Upwind Finite Difference Method	11
2.4 Two-Dimensional Upwind Scheme with Operator Splitting	14
2.5 Incompressible Flow	16
2.6 Initial Conditions	17
2.7 Time Step Selection	18
2.8 Chorin's Projection Method	19
2.9 Summary	23
2.10 Rayleigh-Benard Convection	24
3 Results and Discussion	28
3.1 Numerical Verification of Advection	28
3.2 Analysis of the Projection Method Step	29
3.3 Rayleigh-Benard Convection	32
3.4 Rayleigh-Bénard Convection Results	34
4 Conclusion	36
Bibliography	37

List of Figures

1.1	Rayleigh-Bénard Convection (Chang, 2026)(Chang, n.d.)	3
3.1	Comparison of analytical and numerical results	29
3.2	Simulated flow	31
3.3	Divergence Jacobi method	33
3.4	Divergence FFT	33
3.5	Rayleigh-Bénard convection cells	34

List of Tables

2.1	Initial condition modes	18
3.1	Divergence Comparison	30

1 Introduction

1.1 Introduction and Physics of the Problem

The focus of this project is the numerical solution of the incompressible Navier-Stokes equations in a two-dimensional domain subject to a thermal gradient. Unlike many steady-state engineering problems, this project follows a transient simulation approach. This is dictated by the physics of Rayleigh-Benard convection, where our objective is to observe the evolution of “convection cells” from an initial state of rest toward dynamic equilibrium.

The system consists of a fluid confined between two horizontal plates; the bottom plate is heated while the top plate is kept cold. Based on the Boussinesq approximation, density variations are neglected in all terms except for the buoyancy term in the vertical momentum equation ($\beta T e_z$). This coupling allows temperature differences to drive fluid motion. Consequently, the task involved the solution of a coupled system of three Partial Differential Equations (PDEs): continuity (mass conservation), Navier-Stokes (momentum) and the energy (heat) equation.

1.2 System of Equations and Numerical Methods

To solve the Navier-Stokes equations that describes incompressible flow, we use different methods to ensure convergence and computational efficiency. We implemented explicit numerical schemes, operator splitting and spectral methods to model incompressible flow. These methods address the complexity of the system of partial differential equations (PDE):

$$\partial_t T + \vec{u} \cdot \nabla T = \Delta T \tag{1.1}$$

$$\partial_t \vec{u} + \vec{u} \cdot \nabla \vec{u} + \frac{1}{\rho} \nabla p = \nu \Delta \vec{u} + T \beta e_z \tag{1.2}$$

$$\nabla \cdot \vec{u} = 0 \tag{1.3}$$

$$\vec{u}(0, y, z) = \vec{u}_0(y, z) \tag{1.4}$$

$$T(0, y, z) = T_0(y, z) \tag{1.5}$$

1 Introduction

We consider values in the domain $y, z \in \Sigma = [0, 1]^2$ and $t \in [0, t_{end}]$. We additionally set the following boundary conditions provided by the project description.

$$\vec{u}(t, 0, z) = \vec{u}(t, 1, z) \quad (1.6)$$

$$w(t, y, 0) = 0 = w(t, y, 1) \quad (1.7)$$

$$T(t, y, 0) = 1 \quad (1.8)$$

$$T(t, y, 1) = 0 \quad (1.9)$$

$$T(t, 0, z) = T(t, 1, z) \quad (1.10)$$

In the following chapters, we will deal with different aspects of the numerical solution of this system of equations. Finally, our goal is the reproduction of Rayleigh-Bénard convection cells due to thermal heating.

1.3 Rayleigh-Bénard Convection

Rayleigh-Bénard convection cells can be observed in everyday situations such as a boiling kettle or in atmospheric studies. They form when a fluid (such as water or air) is heated from below, causing it to circulate through its entire depth by rising from the bottom, cooling near the top, and sinking again in a repeating loop.

To describe this phenomenon using the example of a water kettle placed on a heater, as the fluid at the bottom begins to warm it becomes less dense and therefore more buoyant. The warmer fluid rises toward the surface while the cooler and denser fluid sinks downward to replace it. As this process continues, a pattern can be observed forming in the fluid flow. These patterns are known as Bénard cells and are caused by Rayleigh-Bénard convection.

As the warm fluid reaches the surface it spreads outward across the top of the container, while the cooler fluid moves inward and downward along the edges of the cells. Once the fluid reaches these cooler regions it begins to lose heat and sink back down toward the bottom of the container where it can be reheated. This process creates a continuous circulation loop in the fluid. When the temperature difference across the fluid layer becomes sufficiently large, these convection cells form stable and organized patterns across the surface of the fluid. The center of each cell is typically warmer, while the boundaries between cells are cooler, producing the characteristic cellular pattern.

Rayleigh Number

Whether or not Bénard cells form is determined by a non-dimensional quantity called the Rayleigh number (Ra). The Rayleigh number represents the ratio of buoyancy forces that drive convection to the stabilizing effects of thermal diffusion and viscous damping within the fluid.

$$Ra_x = \frac{g\beta(T_b - T_u)x^3}{\nu\alpha} = Gr_x Pr \quad (1.11)$$

$$Gr_x = \frac{g\beta(T_b - T_u)x^3}{\nu^2} \quad (1.12)$$

$$Pr = \frac{\nu}{\alpha} \quad (1.13)$$

In these expressions, g is the acceleration due to gravity, β is the thermal expansion coefficient of the fluid, ν and α are the fluid kinematic viscosity and thermal diffusivity respectively. The term $(T_b - T_u)$ represents the temperature difference between the bottom and top of the fluid layer, and x (or L) represents the height of the fluid layer.

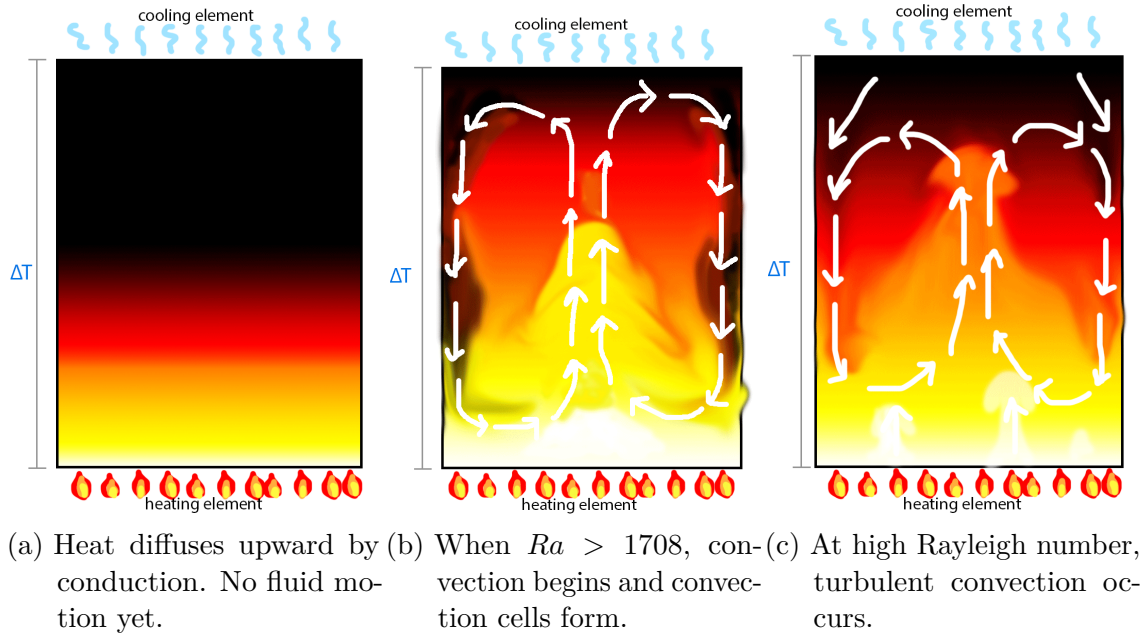


Figure 1.1: **Rayleigh-Bénard Convection** (Chang, 2026)(Chang, n.d.)

The Rayleigh number can also be expressed as the product of two other dimensionless numbers: the Grashof number (Gr) and the Prandtl number (Pr). The Grashof number

1 Introduction

represents the ratio of buoyancy forces to viscous forces in the fluid, while the Prandtl number represents the ratio of momentum diffusion (viscous effects) to thermal diffusion.

For a horizontal fluid layer heated from below, convection begins when the Rayleigh number exceeds a critical value of approximately 1708 (see Figure 1.1). If the Rayleigh number is less than 1708 ($Ra < 1708$), heat transfer takes place mainly through thermal conduction, and the fluid layer remains stable with little or no circulation. When the Rayleigh number exceeds 1708 ($Ra > 1708$), the fluid becomes unstable and organized convection cells begin to form, producing the characteristic Rayleigh-Bénard cell pattern. Therefore, low Rayleigh numbers indicate weaker convection and higher Rayleigh numbers indicate stronger, more intense convection.

2 Methodology

2.1 Operator Splitting

Consider a typical partial differential equation (PDE) of the form

$$\partial_t \mathbf{u} = (A + B + C)\mathbf{u}.$$

Here, $\mathbf{u}$ denotes the fluid velocity at a given location. The terms A , B , and C are called *operators*, which represent individual processes within the PDE corresponding to different physical effects. As an example, consider the basic advection-diffusion equation

$$\partial_t T = \Delta T - \mathbf{u} \cdot \nabla T.$$

Defining the operators $A := \Delta$ and $B := \mathbf{u} \cdot \nabla$, the equation can be written as

$$\partial_t T = (A - B)T.$$

Here, A represents the Laplace operator (diffusion), while B represents advection by the fluid velocity field $\mathbf{u}$.

For most PDEs, analytical solutions do not exist, and instead, instead one must use numerical methods to approximate their solutions. However, these methods can be computationally expensive. *Operator splitting* reduces this computational cost by partitioning the problem into simpler subproblems, where each operator is treated individually. To continue with our previous example, one solves the following subproblems sequentially:

$$\partial_t \mathbf{u} = A\mathbf{u} \tag{2.1}$$

$$\partial_t \mathbf{u} = B\mathbf{u} \tag{2.2}$$

When the first equation is solved numerically, the resulting state is used as the initial condition for the second subproblem. This procedure is repeated at each timestep. However, this introduces an approximation error. The intermediate state does not exactly correspond to the solution that would be obtained by analytically solving the combined system. Different

operator splitting methods lead to different magnitudes of error. In general, the error remains controlled if the timestep Δt is sufficiently small.

First order Operator Splitting

The first-order operator splitting solves each operator sequentially over a timestep Δt . To illustrate this, consider the equation

$$\partial_t \mathbf{u} = (A + B)\mathbf{u} \quad (2.3)$$

$$(2.4)$$

Instead of directly solving the full equation, the problem is approximated by solving the following subproblems in sequence:

$$\partial_t \mathbf{u} = A\mathbf{u}, \quad (2.5)$$

$$\partial_t \mathbf{u} = B\mathbf{u}. \quad (2.6)$$

$$(2.7)$$

For our problem, these operators arise from the advection-diffusion equation, as will be discussed later. Note that applying operator splitting results in two separate **linear** subproblems. This allows us to obtain simple solutions for the resulting split-operating problems, namely

$$\mathbf{u}_A(t) = e^{(t-t_0)A}\mathbf{u}_0 \quad (2.8)$$

$$\mathbf{u}_B(t) = e^{(t-t_0)B}\mathbf{u}_0 \quad (2.9)$$

In practice, however, we only advance the solution over the next discrete time interval $[t_k, t_{k+1}] = [t_k, t_k + \Delta t]$, rather than continuously solving the entire time domain. Therefore, the solutions are rewritten for a single timestep as

$$\mathbf{u}_{k+1,A} = e^{(t_{k+1}-t_k)A}\mathbf{u}_{k,A} \quad (2.10)$$

$$\mathbf{u}_{k+1,B} = e^{(t_{k+1}-t_k)B}\mathbf{u}_{k,B} \quad (2.11)$$

2 Methodology

Using $\Delta t = t_{k+1} - t_k$, we obtain the timestep formulation

$$\mathbf{u}_{k+1,A} = e^{\Delta t A} \mathbf{u}_{k,A} \quad (2.12)$$

$$\mathbf{u}_{k+1,B} = e^{\Delta t B} \mathbf{u}_{k,B}, \quad (2.13)$$

where an equidistant discretization in time is assumed. For first-order operator splitting, the following algorithm is applied to the abstract For first-order operator splitting, the following algorithm is applied to the abstract problem $\partial_t \mathbf{u} = (A + B)\mathbf{u}$. The equation is split into two separate operator problems:

1. Set $\mathbf{u}_{k,A} := \mathbf{u}_k$.
2. Solve $\mathbf{u}_{k+1,A} = e^{\Delta t A} \mathbf{u}_{k,A}$ in the interval $[t_k, t_k + \Delta t]$.
3. Use $\mathbf{u}_{k+1,A}$.
4. Consider $\mathbf{u}_{k+1,A}$ as the initial condition for the second operator problem setting $\mathbf{u}_{k,B} := \mathbf{u}_{k+1,A}$.
5. Solve $\mathbf{u}_{k+1,B} = e^{\Delta t B} \mathbf{u}_{k,B} = e^{\Delta t B} \mathbf{u}_{k+1,A}$.
6. Set $\mathbf{u}_{k+1} := \mathbf{u}_{k+1,B}$.

Written in a compact form, the procedure becomes

$$\mathbf{u}_{k+1} = e^{\Delta t B} e^{\Delta t A} \mathbf{u}_k$$

As mentioned previously, this algorithm relies on the assumption that for small timesteps Δt , only small differences remain between $u_{k+1,A}$ and $u_{k+1,B}$ when the operators are applied subsequently. This algorithm is simple and easy to implement. However, the global truncation error (GTE) is of order $\mathcal{O}(\Delta t)$, which motivates the development of second-order splitting methods.

Second Order Operator Splitting (Strang-Splitting)

To reduce the GTE of the operator splitting scheme to order $\mathcal{O}(\Delta t^2)$, Strang splitting can be applied. The solution $\mathbf{u}_{k+1}$ at the next timestep $t_{k+1} = t_k + \Delta t$ is approximated by

$$\mathbf{u}_{k+1} = e^{\frac{\Delta t}{2} A} e^{\Delta t B} e^{\frac{\Delta t}{2} A} \mathbf{u}_k \quad (2.14)$$

2.2 The Velocity Equation

We have seen operator splitting for a general problem and now apply the method to the context of the velocity equation from the Navier-Stokes equations

$$\partial_t \mathbf{u} + \mathbf{u} \cdot \nabla \mathbf{u} + \frac{1}{\rho} \nabla p = \nu \Delta \mathbf{u} + \beta T \mathbf{e}_z$$

This equation can be split into three different operators:

1. Advection: $\partial_z \mathbf{u} = \mathbf{u} \cdot \nabla \mathbf{u}$
2. Diffusion + forcing: $\partial_t \mathbf{u} = \nu \Delta \mathbf{u} + \beta T \mathbf{e}_z$
3. Projection step (Incompressibility): $\mathbf{u}^{k+1} = \mathbf{u}^* - \Delta \mathbf{p}$, with $\nabla \cdot \mathbf{u}^{k+1} = 0$
The pressure acts like a Lagrange multiplier, enforcing the incompressibility constraint, $\nabla \cdot \mathbf{u} = 0$.

To compute the numerical solution for the velocity field, the problem is solved in two stages.

1. Step 1: Compute the intermediate velocity

Ignoring the incompressibility constraint, we solve $\partial_t \mathbf{u} + \mathbf{u} \cdot \nabla \mathbf{u} = \nu \cdot \Delta \mathbf{u} + f$. This yields an intermediate velocity $\mathbf{u}^*$ that generally does not satisfy the divergence-free condition, $\nabla \cdot \mathbf{u}^* \neq 0$

2. Step 2: Projection step

The intermediate velocity is then corrected to enforce incompressibility:

$$\mathbf{u}^{k+1} = \mathbf{u}^* - \nabla \mathbf{p}.$$

Using the *Helmholtz decomposition*,

$$\mathbf{u}^* = \mathbf{u}^\perp + \nabla \phi,$$

where

$$\mathbf{u}^\perp$$

is divergence free. Taking the divergence yields

$$\nabla \cdot \mathbf{u}^* = \Delta \phi.$$

2 Methodology

Imposing incompressibility on $\mathbf{u}^{k+1}$,

$$\nabla \cdot \mathbf{u}^{k+1} = 0,$$

leads to the Poisson equation for pressure:

$$\Delta p = \nabla \cdot \mathbf{u}^*.$$

Here, we briefly summarize the developments so far. Readers who feel confident with the material presented above may skip the following paragraphs. Nevertheless, we provide a short overview of the underlying problem to make the discussion in the later sections easier to follow.

We begin by giving context to the physical problem addressed by the Navier–Stokes equations.

The Navier–Stokes equations are partial differential equations that are generally difficult to solve analytically. Consequently, numerical methods are necessary to compute the velocity in our domain.

The physical problem described by Navier–Stokes can be interpreted as follows. Certain properties of the fluid must be satisfied, such as how the volume changes under pressure, how the flow evolves with time, how the motion at one point is influenced by surrounding fluid, etc. These properties are represented by different operators that describe the evolution of the flow. Our main interest, therefore, is the velocity of the fluid at each grid point in our domain at each timestep. The temporal development of the velocity at a given location is determined by spatial characteristics at that location, such as the first and second spatial derivatives of the velocity relative to the surrounding fluid. In other words, the *temporal* evolution is driven by *spatial* derivatives of the velocity itself. Advection, for example, describes the transport of fluid along the direction of flow. Diffusion, on the other hand, models the smoothing of velocity differences within the domain. Therefore, in the absence of any external force or energy, input would cause unevenly distributed velocity behavior, and we would observe an eventual state of rest. These mechanisms depend only on characteristics of the velocity field $\mathbf{u}$. However, additional terms such as buoyancy forcing βT_z and pressure gradient $\frac{1}{\rho} \nabla p$ introduce additional complexity. In the following sections, we neglect additional forcing terms (which could represent, for example, heating to induce convection) and focus primarily on the effects of the pressure term.

Consider a generalized incompressible fluid, characterized by $\nabla \cdot \mathbf{u} = 0$. By definition,

an incompressible fluid does not change its volume when forces or pressure are applied. Consequently, no volume should be lost or gained during the flow. The pressure, which is coupled to the velocity field, therefore becomes an additional dynamical variable that must be solved.

If the governing equation only depends on the velocity field $\mathbf{u}$, we could simply discretize the equation and solve numerically for $\mathbf{u}$. But with the presence of the pressure term p , this makes the problem more complicated. To address this, we break the numerical process into two stages. First, the coupling between velocity $\mathbf{u}$ and pressure p is temporarily ignored and the incompressibility condition $\nabla \mathbf{u} = 0$ is not enforced. This step yields an intermediate velocity $\mathbf{u}^*$ for the velocity for the next timestep. Secondly, pressure is introduced to enforce the incompressibility constraint. This can be done efficiently by applying the *Helmholtz decomposition* to the velocity field. As a result, the pressure can be determined by solving the Poisson equation, which ensures the corrected velocity field satisfies the divergence-free condition.

We have obtained numerical solutions for an intermediate velocity and pressure that satisfies the incompressibility constraint. Using these quantities, we can compute the velocity at the next discrete timestep while preserving incompressibility. A detailed description of this procedure is given in Chapter 2.5.

2.2.1 Operator splitting for the Velocity Equation

Returning to the operators of the velocity equation, we now apply operator splitting for all the different terms. We begin with the advection operator

$$\partial_t \mathbf{u} + a_y \partial_y \mathbf{u} + a_z \partial_z \mathbf{u} = 0$$

Here we define $\mathbf{a} = \begin{pmatrix} a_y(y, z) \\ a_z(y, z) \end{pmatrix}$ and $\mathbf{u} = \begin{pmatrix} v \\ w \end{pmatrix}$

The operator splitting is first applied in their spatial directions. This leads to two one-dimensional advection problems:

1. Solve

$$\partial_t \mathbf{u} + a_y \partial_y \mathbf{u} = 0$$

2 Methodology

Or, more explicitly written component wise:

$$\begin{cases} \partial_t v + a_y \partial_y v &= 0 \\ \partial_t w + a_y \partial_y w &= 0 \end{cases}$$

We do the same for the second spatial dimension:

2. Solve

$$\partial_t \mathbf{u} + a_z \partial_z \mathbf{u} = 0$$

Again, more explicitly written component wise:

$$\begin{cases} \partial_t v + a_z \partial_z v &= 0 \\ \partial_t w + a_z \partial_z w &= 0 \end{cases}$$

3. Apply Lie Splitting in time: $\mathbf{u}^{k+1} = A_z(\Delta t) A_y(\Delta t) \mathbf{u}^k$

We have now obtained an operator splitting for the (linear) advection equation. In the next section, we will examine the upwind finite difference method to solve the resulting equations numerically.

2.3 Upwind Finite Difference Method

To introduce the upwind finite difference method, we consider the one-dimensional linear advection equation

$$\frac{\partial u}{\partial t} + a \frac{\partial u}{\partial x} = 0.$$

This equation describes a wave propagating along the x -axis with velocity a . If $a > 0$, the wave propagates to the right. Thus, an upwind direction would correspond to the direction in the left, towards smaller x values. Conversely, if $a < 0$, the wave propagates to the left, and the upwind direction corresponds to larger values of x .

Therefore, we will use backward finite difference methods for $a > 0$ and forward finite difference methods for $a < 0$. For the one-dimensional discretization we define

$$\begin{aligned} x_i &:= i \Delta x, \quad i = 0, \dots, N \\ t^n &:= n \Delta t \end{aligned}$$

2 Methodology

1. $a > 0$ (backward):

$$\partial_x \mathbf{u} \approx \frac{\mathbf{u}_i - \mathbf{u}_{i-1}}{\Delta x}$$

2. $a < 0$ (forward):

$$\partial_x \mathbf{u} \approx \frac{\mathbf{u}_{i+1} - \mathbf{u}_i}{\Delta x}$$

Using a forward Euler discretization in time,

$$\frac{\mathbf{u}_{i+1}^n - \mathbf{u}_i^{n+1}}{\Delta t} = -a(\partial_x \mathbf{u})_i^n$$

1. $a > 0$ (backward):

$$\frac{\mathbf{u}_{i+1}^n - \mathbf{u}_i^{n+1}}{\Delta t} = -a(\partial_x \mathbf{u})_i^n \quad (2.15)$$

$$\Rightarrow \mathbf{u}_i^{n+1} - \mathbf{u}_i^n = -a \frac{\Delta t}{\Delta x} (\mathbf{u}_i^n - \mathbf{u}_{i-1}^n) \quad (2.16)$$

$$\Rightarrow \mathbf{u}_i^{n+1} = \left(1 - a \frac{\Delta t}{\Delta x}\right) \mathbf{u}_i^n + a \frac{\Delta t}{\Delta x} \mathbf{u}_{i-1}^n \quad (2.17)$$

$$\Rightarrow \mathbf{u}_i^{n+1} = A_1 \mathbf{u}_i^n \quad (2.18)$$

2. $a < 0$ (forward):

$$\frac{\mathbf{u}_{i+1}^n - \mathbf{u}_i^{n+1}}{\Delta t} = -a(\partial_x \mathbf{u})_i^n \quad (2.19)$$

$$\Rightarrow \mathbf{u}_i^{n+1} - \mathbf{u}_i^n = -a \frac{\Delta t}{\Delta x} (\mathbf{u}_{i+1}^n - \mathbf{u}_i^n) \quad (2.20)$$

$$\Rightarrow \mathbf{u}_i^{n+1} = \left(1 - a \frac{\Delta t}{\Delta x}\right) \mathbf{u}_i^n - a \frac{\Delta t}{\Delta x} \mathbf{u}_{i+1}^n \quad (2.21)$$

$$\Rightarrow \mathbf{u}_i^{n+1} = A_2 \mathbf{u}_i^n \quad (2.22)$$

Thus, we obtain an operator for each upwind case, depending only on the sign of a . To compactly represent the update for all grid points, we write the scheme in matrix form.

$$A_1 = \begin{pmatrix} \left(1 - a \frac{\Delta t}{\Delta x}\right) & 0 & \dots & 0 \\ a \frac{\Delta t}{\Delta x} & \ddots & & \vdots \\ 0 & \ddots & \ddots & \vdots \\ \vdots & & \ddots & \ddots & 0 \\ 0 & \dots & 0 & a \frac{\Delta t}{\Delta x} & \left(1 - a \frac{\Delta t}{\Delta x}\right) \end{pmatrix}$$

$$A_2 = \begin{pmatrix} \left(1 - a \frac{\Delta t}{\Delta x}\right) & -a \frac{\Delta t}{\Delta x} & 0 & \dots & 0 \\ 0 & \ddots & \ddots & & \vdots \\ & & \ddots & \ddots & 0 \\ \vdots & & & \ddots & -a \frac{\Delta t}{\Delta x} \\ 0 & \dots & 0 & \left(1 - a \frac{\Delta t}{\Delta x}\right) \end{pmatrix}$$

2.3.1 Stability of the Operators

In general, a matrix operator A is stable if its infinity norm satisfies $\|A\|_\infty \leq 1$. We investigate both operators A_1 (corresponding to the case $a > 0$ and therefore backward finite difference method) and A_2 (corresponding to the case $a < 0$ and therefore forward finite difference method).

$$\|A_1\|_\infty = \left|a \frac{\Delta t}{\Delta x}\right| + \left|1 - a \frac{\Delta t}{\Delta x}\right| \leq 1 \quad (2.23)$$

$$\Rightarrow^{a>0} \left|1 - a \frac{\Delta t}{\Delta x}\right| \leq 1 - a \frac{\Delta t}{\Delta x} \quad (2.24)$$

$$\Rightarrow 1 - a \frac{\Delta t}{\Delta x} \geq 0 \quad (2.25)$$

$$\Rightarrow a \frac{\Delta t}{\Delta x} \leq 1 \quad (2.26)$$

2 Methodology

Repeating this argument for our second operator A_2 yields

$$\|A_2\|_\infty = \left| a \frac{\Delta t}{\Delta x} \right| + \left| 1 - a \frac{\Delta t}{\Delta x} \right| \leq 1 \quad (2.27)$$

$$\Rightarrow^{a>0} \left| 1 - a \frac{\Delta t}{\Delta x} \right| \leq 1 + a \frac{\Delta t}{\Delta x} \quad (2.28)$$

$$\Rightarrow 1 + a \frac{\Delta t}{\Delta x} \geq 0 \quad (2.29)$$

$$\Rightarrow -a \frac{\Delta t}{\Delta x} \leq 1 \quad (2.30)$$

Combining both cases yields the general stability condition

$$\left| a \frac{\Delta t}{\Delta x} \right| \leq 1,$$

which is the CFL condition for the upwind scheme.

2.4 Two-Dimensional Upwind Scheme with Operator Splitting

Now we jointly apply operator splitting with the upwind finite difference method for the two-dimensional advection equation. We define $u_{ij}^n := u(t^n, y_i, z_i)$ and assume an equidistant spatial grid. The spacings Δy and Δz denote the distances between neighboring grid points.

We first solve the advection term in the y direction. For a fixed value z_j , the equation becomes

$$\partial_t \mathbf{u} + a_y \partial_y \mathbf{u} = 0.$$

The spatial derivative is approximated using an upwind scheme, depending on the sign of a_y :

$$(\partial_y \mathbf{u})_{ij} = \begin{cases} \frac{\mathbf{u}_{ij} - \mathbf{u}_{i-1,j}}{\Delta y} & a_y > 0 \\ \frac{\mathbf{u}_{i+1,j} - \mathbf{u}_{ij}}{\Delta y} & a_y < 0 \end{cases}$$

Using a forward Euler step in time yields

$$u_{ij}^* = u_{ij}^n - \Delta t a_{y,ij} (\partial_y \mathbf{u})_{ij}.$$

Stability requires the CFL condition

$$a_y \frac{\Delta t}{\Delta y} \leq 1.$$

2 Methodology

We use this result to proceed with the solution of the z -coordinate corresponding to the second operator:

$$\partial_t \mathbf{u} + a_z \partial_z \mathbf{u} = 0$$

We define analogously

$$(\partial_y \mathbf{u})_{ij} = \begin{cases} \frac{\mathbf{u}_{ij} - \mathbf{u}_{i-1j}}{\Delta y} & a_y > 0 \\ \frac{\mathbf{u}_{i+1j} - \mathbf{u}_{ij}}{\Delta y} & a_y < 0 \end{cases}$$

Using the result from the first split operator, we now compute

$$u_{ij}^{n+1} = u_{ij}^* - \Delta t a_{z,ij} (\partial_z \mathbf{u})_{ij}$$

We ensure stability in this case as well by respecting $\frac{|a_z| \Delta t}{\Delta z} \leq 1$.

We can now derive a stability condition for all of our discretized points in space. We first obtain

$$\max |a_y| = \max_{i,j} |a_y(y_i, z_j)|$$

and

$$\max |a_z| = \max_{i,j} |a_z(y_i, z_j)|.$$

With the help of these variables, we deduce the overall constraint for Δt , that is necessary to ensure stability:

$$\Delta t \leq \min \left(\frac{\Delta y}{\max |a_y|}, \frac{\Delta z}{\max |a_z|} \right)$$

In summary, we have implemented operator splitting together with the upwind finite difference method for the two-dimensional linear advection equation and derived a stability condition that must be satisfied over the entire computational domain.

2.5 Incompressible Flow

2.5.1 Problem Setup

We consider the incompressible Navier–Stokes equations for velocity field $\mathbf{u} = (v, w)$ and pressure p ,

$$\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u} + \frac{1}{\rho} \nabla p = \nu \Delta \mathbf{u}, \quad (2.31)$$

$$\nabla \cdot \mathbf{u} = 0, \quad (2.32)$$

where ρ is the fluid density and ν the kinematic viscosity. The buoyancy parameter β is set to zero throughout this section, so that (2.31) describes a purely viscous incompressible flow without external forcing.

The computational domain is the two-dimensional rectangle $\Omega = [0, L_y) \times [0, L_z]$. The y direction is periodic and the z direction is wall-bounded, reflecting a channel-like geometry.

Periodicity in y . The velocity field satisfies

$$\mathbf{u}(t, 0, z) = \mathbf{u}(t, L_y, z) \quad \forall t \geq 0, z \in [0, L_z], \quad (2.33)$$

so that the domain wraps around in y and no boundary treatment is required in that direction.

Wall conditions at $z = 0$ and $z = L_z$. Two conditions are imposed on each solid wall. First, no fluid may penetrate the boundary (*no-penetration*):

$$w(t, y, 0) = w(t, y, L_z) = 0 \quad \forall t \geq 0, y \in [0, L_y). \quad (2.34)$$

Second, the tangential component v is subject to a *free-slip* condition,

$$\left. \frac{\partial v}{\partial z} \right|_{z=0, L_z} = 0, \quad (2.35)$$

allowing the flow to move freely parallel to the wall without friction while exerting no viscous shear stress on it. Numerically, (2.35) is enforced via a ghost-cell extrapolation: the value of v at each wall is node is set equal to the value at the adjacent interior node.

2.6 Initial Conditions

For projection methods, it is advantageous to begin with an initial velocity field that is analytically divergence-free. If the initial condition contains a large divergence, the first projection step must remove it, which can introduce sizable error into the velocity and pressure fields. Therefore, to avoid this issue, we initialize the flow with velocity fields that satisfy $\nabla \cdot \mathbf{u}_0 = 0$. The built-in modes take the form

$$v_0(y, z) = \sin(n_y k_y y) \cos(n_z k_z z), \quad (2.36)$$

$$w_0(y, z) = -\frac{n_y k_y}{n_z k_z} \cos(n_y k_y y) \sin(n_z k_z z), \quad (2.37)$$

where $k_y = 2\pi/L_y$ and $k_z = \pi/L_z$ are the fundamental wavenumbers in each direction, and $n_y, n_z \in \mathbb{Z}^+$ select the mode numbers.

Divergence-free condition. Taking the divergence of (2.36)–(2.37) gives

$$\partial_y v_0 + \partial_z w_0 \quad (2.38)$$

$$= n_y k_y \cos(n_y k_y y) \cos(n_z k_z z) - n_y k_y \cos(n_y k_y y) \cos(n_z k_z z) = 0, \quad (2.39)$$

so $\nabla \cdot \mathbf{u}_0 = 0$ holds pointwise throughout the domain.

Boundary conditions. The choice of $k_z = \pi/L_z$ places a node of $\sin(n_z k_z z)$ at both $z = 0$ and $z = L_z$ for every $n_z \in \mathbb{Z}^+$ so

$$w_0(y, 0) = w_0(y, L_z) = 0 \quad \forall y, \quad (2.40)$$

and the no-penetration wall condition is satisfied by construction. The periodicity in the y direction is automatically satisfied by the sinusoidal dependence.

Implemented modes. The implemented modes are summarized in Table 2.1. The **double** mode is the linear superposition

$$v_0 = \sin(k_y y) \cos(k_z z) + \sin(2k_y y) \cos(k_z z), \quad (2.41)$$

$$w_0 = -\frac{k_y}{k_z} \cos(k_y y) \sin(k_z z) - \frac{2k_y}{k_z} \cos(2k_y y) \sin(k_z z), \quad (2.42)$$

which is divergence-free by linearity. The solver also accepts a `custom` mode in which the user supplies arbitrary functions $v_0(y, z)$ and $w_0(y, z)$ directly. In this case, the user is responsible for ensuring that the supplied field satisfies $\nabla \cdot \mathbf{u}_0 = 0$ and the wall boundary conditions.

Mode	n_y	n_z
mode1	1	1
mode2	2	1
mode3	1	2
double	superposition of mode1 and mode2	

Table 2.1: **Initial condition modes.** Each built-in mode is characterized by its y - and z -wavenumber multipliers (n_y, n_z) . The `double` mode is the linear superposition of `mode1` and `mode2`; the `custom` mode accepts user-supplied velocity functions.

2.7 Time Step Selection

Because the predictor step uses an explicit time discretization for both advection and diffusion, the time step Δt must satisfy stability conditions imposed by each operator independently. The overall time step is chosen as

$$\Delta t = \alpha \min(\Delta t_{\text{adv}}, \Delta t_{\text{diff}}), \quad (2.43)$$

where $\alpha \in (0, 1)$ is a safety factor (set to $\alpha = 0.4$ in our implementation) and $\Delta t_{\text{adv}}, \Delta t_{\text{diff}}$ are the stability limits from advection and diffusion, respectively.

Advection limit (CFL condition). For first-order upwind advection on a uniform grid, the Courant–Friedrichs–Lewy (CFL) condition requires

$$\frac{\max |\mathbf{u}| \Delta t}{\Delta x} \leq 1 \quad (2.44)$$

in each spatial direction. Applying this to both the y - and z -directions gives the advective time step limit

$$\Delta t_{\text{adv}} = \min \left(\frac{\Delta y}{\max |v|}, \frac{\Delta z}{\max |w|} \right), \quad (2.45)$$

where $\max |v|$ and $\max |w|$ denote the global maxima of the velocity magnitudes over the entire domain at the current time level. A small floor value is applied to each velocity

maximum before division to prevent division by zero in the case of a quiescent initial field.

Diffusion limit (von Neumann condition). For the explicit discretization of the diffusion term $\nu\Delta\mathbf{u}$, stability requires that the diffusive CFL number remain bounded. On a two-dimensional uniform grid this yields the von Neumann stability condition

$$\Delta t_{\text{diff}} \leq \frac{1}{2\nu} \left(\frac{1}{\Delta y^2} + \frac{1}{\Delta z^2} \right)^{-1}, \quad (2.46)$$

which is independent of the velocity field and depends only on the kinematic viscosity ν and the grid spacings.

Combined condition. The time step (2.43) takes the minimum of both limits and scales it by the safety factor α , ensuring a margin against the onset of instability as the velocity field evolves. At each time step, the CFL numbers

$$C_y = \frac{\max |v| \Delta t}{\Delta y}, \quad C_z = \frac{\max |w| \Delta t}{\Delta z} \quad (2.47)$$

are monitored, and a warning is issued if either exceeds 1. Note that Δt is computed once from the initial velocity field and held fixed throughout the simulation; it is not recomputed adaptively at each step.

2.8 Chorin's Projection Method

We consider again the incompressible Navier–Stokes equations

$$\partial_t \mathbf{u} + \mathbf{u} \cdot \nabla \mathbf{u} + \frac{1}{\rho} \nabla p = \nu \Delta \mathbf{u} \quad (\beta = 0), \quad (2.48)$$

$$\nabla \cdot \mathbf{u} = 0, \quad (2.49)$$

on the domain $\Omega = [0, L_y] \times [0, L_z]$, subject to periodic boundary conditions in y and no-penetration / free-slip conditions at the walls $z = 0$ and $z = L_z$. To solve this system, we employ Chorin's *projection method* (Chorin, 1968), which decouples the velocity update from the pressure solve by splitting the computation into three steps at each timestep:

1. **Predictor Step** — advance the momentum equation without the pressure gradient to obtain an intermediate velocity $\mathbf{u}^*$, which is generally not divergence-free.

2. **Pressure Poisson Equation** — compute the pressure correction p by solving a Poisson equation derived from the incompressibility constraint.

3. **Projection Step** — correct $\mathbf{u}^*$ using ∇p to recover a divergence-free velocity $\mathbf{u}^{n+1}$.

This procedure is a form of operator splitting. The nonlinear advection, diffusion, and incompressibility constraint are each treated in a dedicated sub-step rather than simultaneously.

Predictor Step

The predictor step advances the momentum equation over one time step Δt , while temporarily ignoring the pressure gradient. The intermediate velocity $\mathbf{u}^* = (v^*, w^*)$ is obtained from the explicit Euler discretization

$$\mathbf{u}^* = \mathbf{u}^n + \Delta t \left[-(\mathbf{u}^n \cdot \nabla) \mathbf{u}^n + \nu \Delta \mathbf{u}^n \right], \quad (2.50)$$

or written componentwise,

$$v^* = v^n - \Delta t \left(v^n \frac{\partial v^n}{\partial y} + w^n \frac{\partial v^n}{\partial z} \right) + \Delta t \nu \Delta v^n, \quad (2.51)$$

$$w^* = w^n - \Delta t \left(v^n \frac{\partial w^n}{\partial y} + w^n \frac{\partial w^n}{\partial z} \right) + \Delta t \nu \Delta w^n. \quad (2.52)$$

The right-hand side of (2.50) is split into an advection contribution and a diffusion contribution, each treated separately.

Advection. The advection terms in (2.51)–(2.52) are discretized using the operator-split first-order upwind scheme described in Section 2.4. The two velocity components v and w are each advected by the full velocity field $\mathbf{u}^n = (v^n, w^n)$, with the y -sweep applied first, followed by the z -sweep:

$$v_{\text{adv}} = A_z(\Delta t) A_y(\Delta t) v^n, \quad (2.53)$$

$$w_{\text{adv}} = A_z(\Delta t) A_y(\Delta t) w^n, \quad (2.54)$$

where A_y and A_z denote the one-dimensional upwind operators in the y - and z -directions respectively.

2 Methodology

Diffusion. The diffusion increment is evaluated on the *original* velocity field $\mathbf{u}^n$, not on the intermediate advected field $\mathbf{u}_{\text{adv}}$. This is consistent with an explicit Euler splitting in which advection and diffusion are treated as independent operators acting on the same base state. The intermediate velocity is then assembled as

$$v^* = v_{\text{adv}} + \Delta t \nu \Delta v^n, \quad (2.55)$$

$$w^* = w_{\text{adv}} + \Delta t \nu \Delta w^n, \quad (2.56)$$

where Δ denotes the discrete Laplacian.

Boundary conditions. Wall boundary conditions are enforced at two points during the predictor step. They are first applied to $\mathbf{u}^n$ before any stencil evaluation, ensuring that the finite-difference operators see a consistent velocity field at the boundaries. They are then re-applied to $\mathbf{u}^*$ after the advection and diffusion increments have been added, correcting any boundary values that may have been corrupted by the interior stencils. Specifically, the no-penetration condition $w^* = 0$ and free-slip condition $\partial_z v^* = 0$ are enforced at $z = 0$ and $z = L_z$.

Pressure Poisson Equation

Given the intermediate velocity $\mathbf{u}^*$ from the predictor step, the right-hand side of the Poisson equation is assembled as

$$f = \frac{\rho}{\Delta t} \nabla \cdot \mathbf{u}^*, \quad (2.57)$$

The pressure field p is then obtained by solving

$$\Delta p = f \quad \text{in } \Omega, \quad (2.58)$$

subject to Neumann conditions $\partial p / \partial \mathbf{n} = 0$ at the walls $z = 0$ and $z = L_z$, periodic conditions in y , and the zero-mean gauge $\langle p \rangle = 0$.

Compatibility Condition. The Neumann problem (2.58) admits a solution only if the right-hand side satisfies the compatibility condition

$$\int_{\Omega} f \, d\Omega = 0. \quad (2.59)$$

This is enforced numerically by subtracting the spatial mean of f before solving, replacing f with $f - \langle f \rangle$.

Spectral Diagonalization. The Poisson equation is solved using a spectral direct solver that exploits the structure of the boundary conditions in each direction. In the periodic y -direction, the discrete operator is diagonalized by the Fast Fourier Transform (FFT). In the wall-bounded z -direction, the Neumann boundary conditions are compatible with the Discrete Cosine Transform of type I (DCT-I), which diagonalizes the corresponding Neumann Laplacian stencil. Applying both transforms to (2.58) yields a decoupled system of algebraic equations in spectral space,

$$(\lambda_k^y + \lambda_m^z) \hat{P}_{k,m} = \hat{F}_{k,m}, \quad (2.60)$$

where $\hat{P}_{k,m}$ and $\hat{F}_{k,m}$ are the spectral coefficients of p and f respectively, and the eigenvalues of the discrete Laplacian are

$$\lambda_k^y = \frac{2}{\Delta y^2} \left(\cos \frac{2\pi k}{N_y} - 1 \right), \quad k = 0, \dots, N_y - 1, \quad (2.61)$$

$$\lambda_m^z = \frac{2}{\Delta z^2} \left(\cos \frac{\pi m}{N_z - 1} - 1 \right), \quad m = 0, \dots, N_z - 1. \quad (2.62)$$

These eigenvalues are the exact eigenvalues of the second-order central-difference operators in each direction: (2.61) corresponds to the periodic tridiagonal stencil on N_y points, and (2.62) corresponds to the Neumann-reflected tridiagonal stencil on N_z points with endpoints included.

Gauge Fix and Inversion. The $(k, m) = (0, 0)$ mode corresponds to $\lambda_0^y + \lambda_0^z = 0$, so (2.60) is singular for this mode. Physically, this reflects the fact that the Neumann problem determines p only up to an additive constant. The zero mode is handled by setting $\hat{P}_{0,0} = 0$, which enforces the zero-mean gauge $\langle p \rangle = 0$. All other modes are inverted as

$$\hat{P}_{k,m} = \frac{\hat{F}_{k,m}}{\lambda_k^y + \lambda_m^z}, \quad (k, m) \neq (0, 0). \quad (2.63)$$

The pressure field is then recovered by applying the inverse DCT-I in z followed by the inverse FFT in y . A final subtraction of the spatial mean is applied to enforce $\langle p \rangle = 0$ to floating-point precision.

Treatment of complex transforms. Because the right-hand side f is real-valued, the FFT in y produces complex coefficients. Since the `scipy` DCT implementation operates on real arrays only, the DCT-I is applied separately to the real and imaginary parts of the FFT output, and the results are recombined before inversion. The imaginary part of the final result is discarded, as it arises only from floating-point rounding.

Projection Step

Given the pressure field p obtained from solving the Poisson equation, the intermediate velocity $\mathbf{u}^*$ is corrected by removing its irrotational component. The corrected velocity at the new time level is

$$\mathbf{u}^{n+1} = \mathbf{u}^* - \frac{\Delta t}{\rho} \nabla p. \quad (2.64)$$

Evaluating (2.64) componentwise gives

$$v^{n+1} = v^* - \frac{\Delta t}{\rho} \frac{\partial p}{\partial y}, \quad (2.65)$$

$$w^{n+1} = w^* - \frac{\Delta t}{\rho} \frac{\partial p}{\partial z}. \quad (2.66)$$

Both partial derivatives of p are computed using the central-difference gradient operator, with Neumann ghost cells ($p_{i,0} = p_{i,1}$, $p_{i,N_z-1} = p_{i,N_z-2}$) applied at the walls to enforce $\partial p / \partial z = 0$ there, and periodic differences via `np.roll` in the y -direction.

To verify that (2.65)–(2.66) enforces incompressibility, take the divergence of (2.64):

$$\nabla \cdot \mathbf{u}^{n+1} = \nabla \cdot \mathbf{u}^* - \frac{\Delta t}{\rho} \Delta p. \quad (2.67)$$

Substituting the Poisson equation, $\Delta p = (\rho / \Delta t) \nabla \cdot \mathbf{u}^*$, yields

$$\nabla \cdot \mathbf{u}^{n+1} = \nabla \cdot \mathbf{u}^* - \nabla \cdot \mathbf{u}^* = 0, \quad (2.68)$$

so $\mathbf{u}^{n+1}$ is divergence-free to within the accuracy of the Poisson solver. In practice, the residual divergence $\|\nabla \cdot \mathbf{u}^{n+1}\|_\infty$ is monitored at each step as a convergence diagnostic.

2.9 Summary

The complete numerical procedure at each time step $t^n \rightarrow t^{n+1}$ is as follows:

1. **Predictor.** Solve

$$\mathbf{u}^* = \mathbf{u}^n + \Delta t \left[-(\mathbf{u}^n \cdot \nabla) \mathbf{u}^n + \nu \Delta \mathbf{u}^n \right],$$

using operator-split upwind advection followed by explicit diffusion. Apply wall boundary conditions to $\mathbf{u}^*$.

2. **Poisson solve.** Compute $\nabla \cdot \mathbf{u}^*$ and solve

$$\Delta p = \frac{\rho}{\Delta t} \nabla \cdot \mathbf{u}^*$$

via the spectral direct solver, enforcing zero mean pressure.

3. **Projection.** Correct the velocity,

$$\mathbf{u}^{n+1} = \mathbf{u}^* - \frac{\Delta t}{\rho} \nabla p,$$

and apply wall boundary conditions to $\mathbf{u}^{n+1}$.

2.10 Rayleigh-Benard Convection

So far we have ignored any forcing in the velocity equation of the Navier-Stokes equation. In the following section, we want to introduce thermal forcing to reproduce the Rayleigh-Bernard convection cells. Just to name one example, they occur in climatology on different scales and convective phenomena are important in various processes all over the global atmospheric system. In this section, we want to find adequate initial conditions and parameters to reproduce such a convective behavior using our solutions.

2.10.1 Physical Model

The dynamics of Rayleigh–Bénard convection are governed by the Boussinesq approximation, which assumes that density variations are negligible everywhere except in the buoyancy term, where they drive fluid motion. Under this approximation, the system is described by three coupled governing equations.

The temperature field evolves according to the advection–diffusion equation:

$$\partial_t T + \mathbf{u} \cdot \nabla T = \Delta T. \tag{2.69}$$

2 Methodology

The momentum equation including buoyancy is given by:

$$\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u} + \frac{1}{\rho} \nabla p = \nu \Delta \mathbf{u} + \beta T \mathbf{e}_z. \quad (2.70)$$

In addition, the incompressibility condition must be satisfied:

$$\nabla \cdot \mathbf{u} = 0. \quad (2.71)$$

The onset of convection is determined by the balance between buoyancy forces, viscous damping, and thermal diffusion. This balance is characterized by the Rayleigh number (Ra), a dimensionless parameter defined as the ratio of buoyancy driving to the combined effects of viscous damping and thermal diffusion:

$$Ra = \frac{\text{Buoyancy Force}}{\text{Viscous Damping} \times \text{Thermal Diffusion}}. \quad (2.72)$$

In this system, the buoyancy coefficient (representing the thermal coupling strength) and the kinematic viscosity (representing momentum damping) play key roles in determining the Rayleigh number. If the Rayleigh number remains below a critical threshold, viscous and diffusive effects dominate, and the fluid remains in a purely conductive state. When the Rayleigh number exceeds this critical value, buoyancy overcomes these stabilizing effects, and convection cells begin to form.

2.10.2 Initial and Boundary Conditions

The domain

$$\Omega = [0, 1]^2$$

is periodic in y and wall-bounded in z .

Boundary Conditions

The temperature boundary conditions are

$$T(z = 0) = 1, \quad T(z = 1) = 0. \quad (2.73)$$

The velocity field satisfies the no-penetration and free-slip conditions at the boundaries:

$$w = 0, \quad \frac{\partial v}{\partial z} = 0. \quad (2.74)$$

Initial Conditions

The initial conditions are designed to trigger the transition from a stable, motionless conductive state to organized convective motion in Rayleigh-Bénard convection. This is achieved by combining a steady-state conductive temperature profile with a small perturbation that breaks the symmetry of the system and induces instability.

1. Conductive Base State

The primary component of the initial temperature field $T_0(y, z)$ is the linear conduction profile. This profile represents the equilibrium state of a purely conductive fluid confined between a hot bottom plate and a cold top plate.

Mathematical form:

$$T(z) = 1 - z \quad (2.75)$$

Physical significance: This profile ensures that the temperature satisfies the imposed Dirichlet boundary conditions at the plates. At the initial time, the temperature is $T = 1$ at the bottom boundary ($z = 0$) and $T = 0$ at the top boundary ($z = 1$).

2. Symmetry Breaking via Thermal Perturbation

A fluid in a perfectly conductive state with no motion will remain static indefinitely unless the equilibrium is disturbed. To initiate the instability that leads to the formation of convective circulation cells, a small thermal perturbation is added to the conductive temperature profile.

The perturbed temperature field is defined as

$$T = (1 - z) + \epsilon \cos\left(\frac{2\pi y}{L_y}\right) \sin\left(\frac{\pi z}{L_z}\right), \quad (2.76)$$

where ϵ is a small perturbation amplitude (typically in the range 0.01–0.05 in the present implementation).

Boundary compatibility: The vertical perturbation term $\sin(\pi z/L_z)$ vanishes at the top and bottom plates, ensuring that the imposed temperature boundary conditions remain satisfied.

Role of the perturbation: This perturbation introduces small local temperature variations, which create density differences in the fluid. These density variations are acted upon by the buoyancy force term $\beta T \mathbf{e}_z$ in the momentum equation, generating the initial vertical motion that eventually develops into convective circulation cells.

3. Initial Velocity and Pressure Fields

The fluid is initially at rest. Therefore, the velocity components are set to zero throughout

the domain:

$$v(0, y, z) = 0, \quad w(0, y, z) = 0. \quad (2.77)$$

The pressure field is initialized to zero as a reference gauge:

$$p(0, y, z) = 0. \quad (2.78)$$

As the simulation begins, the buoyancy force generated by the temperature perturbation produces the first vertical motions in the fluid. These motions grow over time and eventually form the closed circulation patterns characteristic of Rayleigh–Bénard convection.

2.10.3 Solution Strategy

The simulation utilises an Explicit Euler scheme for temporal advancement. Although explicit methods are straightforward to implement, they impose a strict constraint on the time step, defined by the Courant-Friedrichs-Lewy (CFL) condition. In our implementation, we selected a grid to ensure that the Courant number remains below 1. This prevents physical information from propagating faster than the numerical scheme, avoiding numerical divergence.

To simulate Rayleigh-Benard Convection under the Boussinesq approximation, we employed Chorin’s projection method - to decouple velocity and pressure and enforce divergence-free velocity field - using an explicit Euler scheme to solve the coupled Navier-Stokes and heat equations. Initially, the pressure Poisson equation was addressed using the Jacobi iterative method. While this approach incorporated the horizontal periodic and vertical Neumann boundary conditions, it struggled with convergence; the divergence value was initially high at 1.8, and improved to around 5.55×10^{-2} after refinement, with the computational complexity of $O(N^2)$ per iteration. Therefore, the main concern was that the convergence values of the solution remain within the allowed limits. For this purpose, individual and overall amounts of divergence values were carefully observed at each step in the development of the solution. The strategy was subsequently upgraded to a spectral FFT-DCT approach, utilising Fast Fourier Transforms for the periodic y-direction and Discrete Cosine Transforms for the vertical z-direction to satisfy the Neumann conditions. This transition transformed the solver’s efficiency and precision, reducing the divergence values to 10^{-6} and below, while drastically lowering the total computational complexity to $O(N \log N)$. This robust numerical framework successfully generated the characteristic counter-rotating Rayleigh-Benard convection rolls, maintaining high fidelity throughout the simulation.

3 Results and Discussion

3.1 Numerical Verification of Advection

The first task involved testing the Upwind finite difference scheme using a $2D$ advection problem. The numerical results for the velocity components v and w were compared against the analytical solutions. For a 100×100 grid, we observed a maximum error of approximately 0.38 for v and 0.42 for w (See Figure 3.1). This level of error is consistent with first-order numerical schemes, which are known for introducing numerical diffusion, causing the profiles to dampen over time. This dampening can be seen in figure 3.1: Local extrema are slightly less pronounced in the numerical solutions (indicated by slightly weaker blue and yellow intensity). Additionally, the transition from extrema to non-extreme locations is 'smoother' in the numerical solutions. Vice versa, we can observe sharper color transitions in the analytical solution. Although this phenomenon is difficult to spot optically, it indicates the numerical diffusion property.

3 Results and Discussion

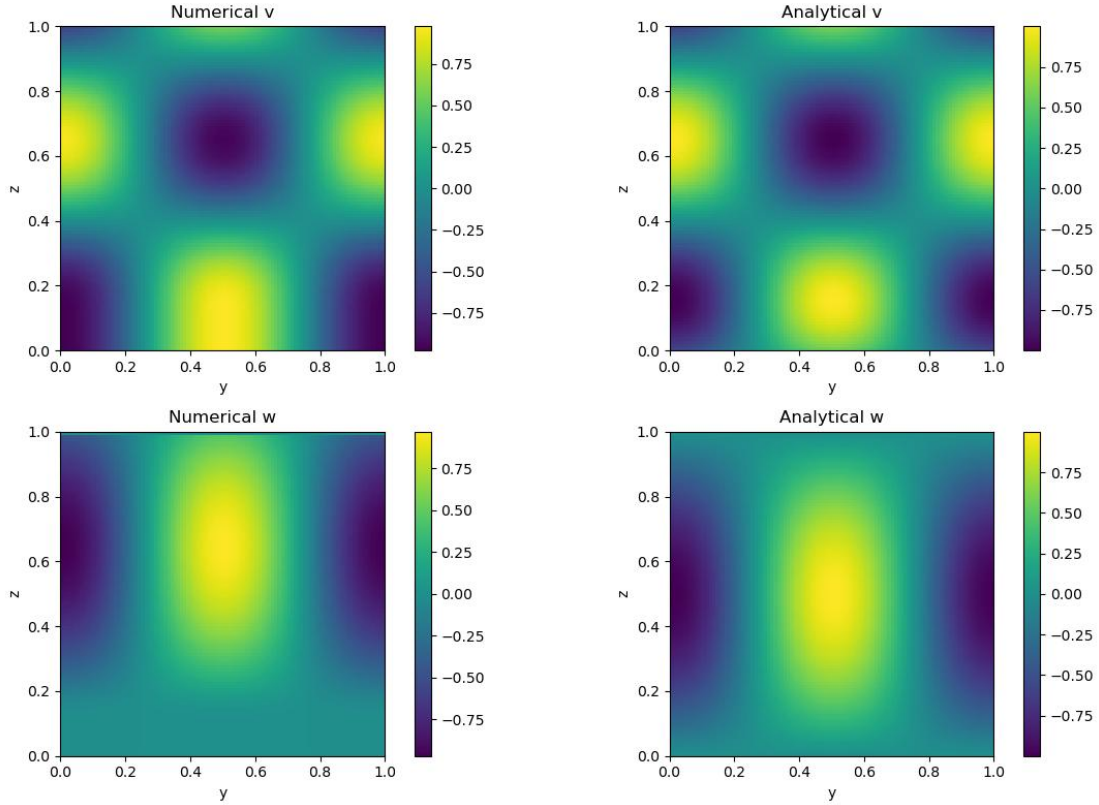


Figure 3.1: Comparison of analytical and numerical solutions in advection test.

Concluding, the implementation of a numerical solver for the linear advection was successful. We used operator splitting to enhance computational efficiency and respected the given boundary conditions. In the next subtask, we had to extend the simple linear advection case by the incompressibility constraint.

3.2 Analysis of the Projection Method Step

3.2.1 Stability and Time-Stepping

The use of an Explicit Euler scheme necessitates a strict adherence to the Courant (CFL) condition. In our simulations, a time step of the order of magnitude of $\Delta t \approx 10^{-3}$ was chosen to maintain a Courant number below 1. Although an implicit scheme would allow for larger time steps, the current explicit implementation provides a clear and computationally straightforward approach to studying transient Rayleigh-Benard convection cells without the excessive computational costs of massive matrix inversions.

We considered two options for the numerical approach: Explicit Euler and Implicit Euler.

3 Results and Discussion

If we chose Explicit, we had to tune the solver with many simple, “cheap” time steps governed by strict stability limits ($CFL < 1$). If we opted for the Implicit approach, we would have executed fewer, “expensive” time steps that are stable at larger intervals but require heavy matrix calculations. Eventually, due to fewer complexities and need for stronger processors, we employed the Explicit Euler method for our numerical approach.

We were surprised that such ‘simple’ methods modelled the flow accurately.

Solver Type	Iterations / Method	Max Div.	Status Analysis
Initial Jacobi	1,000 Iterations	1.894	Unstable / Unacceptable
Optimized Jacobi	5,000 Iterations	5.55×10^{-2}	Moderate Accuracy (5% error)
FFT (Final Version)	Direct Solver	$\approx 10^{-6 \text{ to } -16}$	Ideal (Machine Precision)

Table 3.1: **Divergence Comparison.** Divergence analysis for the numerical solution of the Poisson equation for different numerical methods. The maximum value of divergence as a measure for the successful implementation of the incompressibility can be found in the third column from the left.

The implementation of the incompressibility lead to a Poisson equation which constrained the pressure of our simulation. Thus, the pressure field is calculated after we ensured $\nabla \mathbf{u} = 0$ (incompressibility condition) and should be near zero for a physically correct simulation. The correction of the pressure values led to a computational challenge and turned out to be crucial for the convergence of our numerical procedure. To reduce the divergence in the velocity field we applied different Poisson solver.

The core of the simulation, the Chorin’s projection method, was tested for mass conservation (see table 3.1). In the initial implementation, the maximum divergence of the velocity field was high (1.8, see table 3.1), indicating poor pressure correction. After refining the Neumann boundary conditions for the pressure Poisson solver and ensuring the grid spacing correctly accounts for the wall boundaries, the maximum divergence was significantly reduced to 5.55×10^{-2} . This confirms that the projection step is effectively enforcing the incompressibility constraint $\nabla \cdot \mathbf{u} \approx 0$.

Since the Jacobi method has a slow convergence rate for high-frequency errors, increasing the number of iterations or employing a more robust solver like the Conjugate Gradient method (CG) or Fast Fourier Transform (FFT) would further drive the divergence towards machine epsilon. This reduction of divergence by using Fast-Fourier-Transformation is further elaborated in section 3.3.1.

3 Results and Discussion

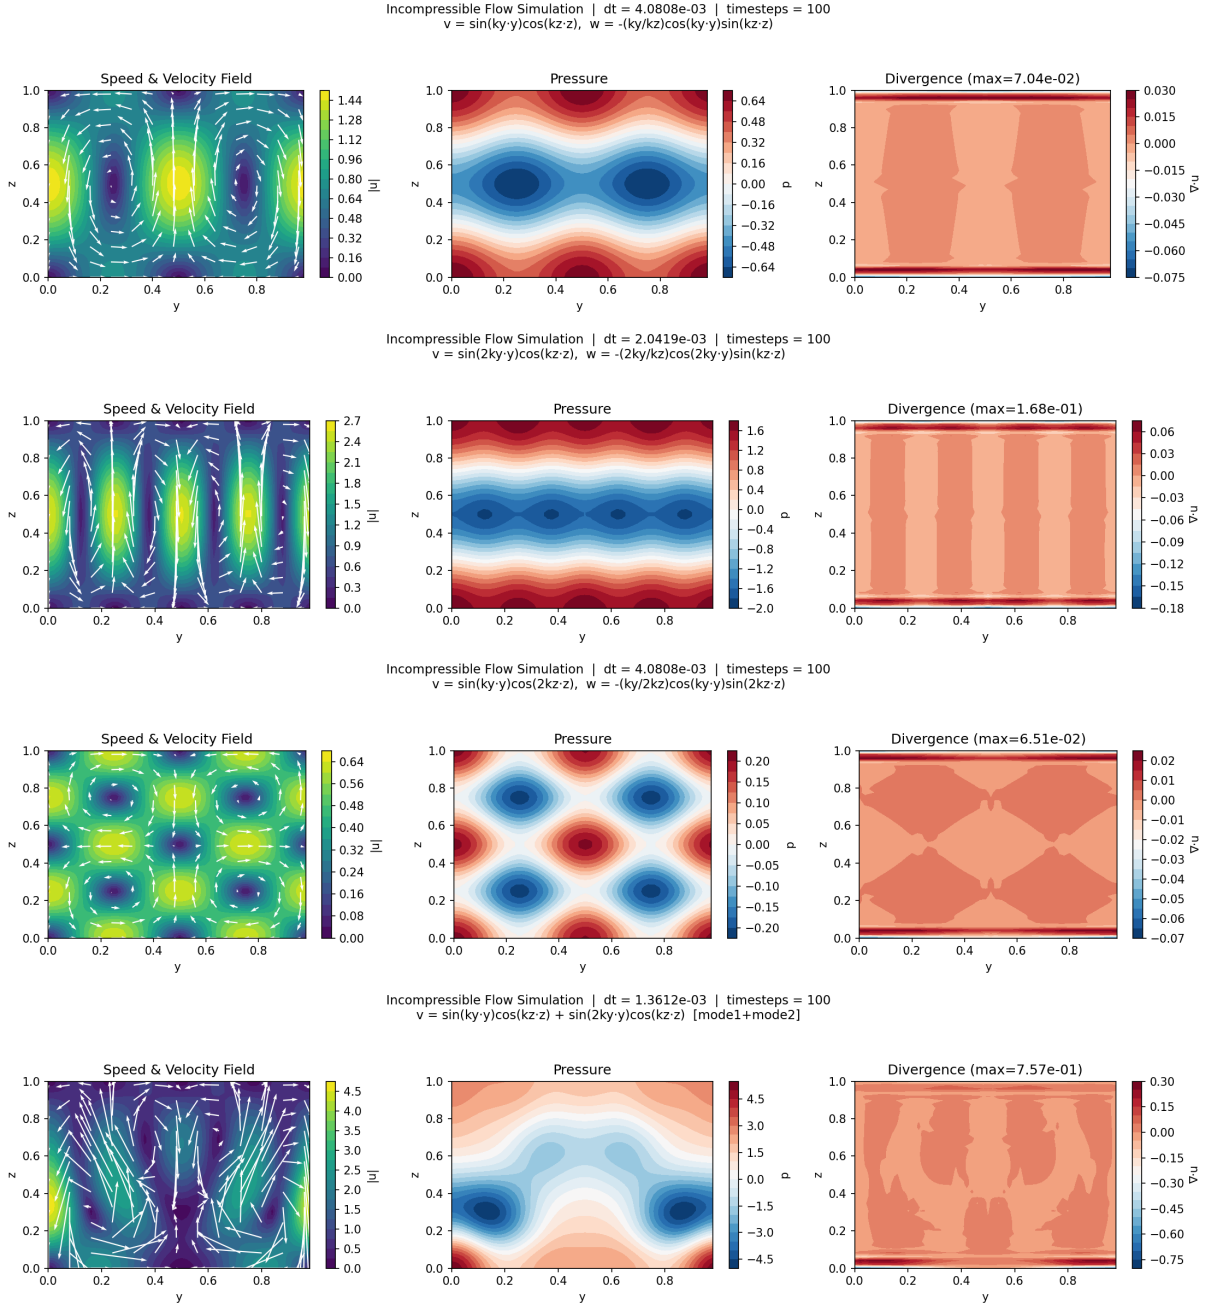


Figure 3.2: **Resulting simulation results.** Flow behavior for different parameterisations. Numerical calculations have been performed by using FFT and spectral decomposition.

In figure 3.2 we can see, that the implementation of spectral methods to tackle the solution of the Poisson equation is successful. Different modes lead to different spatial distributions of pressure and divergence. But for all simulations we obtain bounded values in divergence

implying convergence of the numerical method. In the last row, the superposition of the different modes is showing increased complexity in flow behaviour. We therefore consider the use of spectral methods (such as FFT and DCT) as successful.

Additionally, computational cost could be reduced and we expect increased accuracy for enhanced spatial and temporal resolution. Intuitively, the reduction in computational cost would easily allow such an increased resolution. But for our simulation we did not systematically compare different resolutions as simulation results were already satisfying physical behaviour. Nevertheless, for the last part, the use of FFT and spectral methods regarding the Poisson equation were especially important to produce realistic convective behavior.

3.3 Rayleigh-Benard Convection

3.3.1 Poisson Solvers: Divergence analysis

In the previous sections, forcing was ignored when the Navier-Stokes equations were solved. But for the last task, the model was further extended by incorporating the temperature (T) advection-diffusion equation and coupling it with the Navier-Stokes equations. The buoyancy term, scaled by coefficient β , was added to the vertical velocity (w) equation to simulate the thermal effects on fluid motion, which would be rising of warm air and sinking of cold air. As we still had to respect the incompressibility constraints, the solution of the Poisson equation by Chorin's Projection method remained a central numerical challenge. We explored two distinct approaches

Jacobi Iterative Method

The resulting divergence of the Jacobi method exhibited values of up to 0.055. These values were too high to reproduce the successful reproduction of convection cells. Unrealistic behavior occurred and can be observed in figure 3.3. We see that the spatial distribution of high values of divergence is inhomogeneous. Around the top ($z = 1.0$) and bottom ($z = 0.0$) of our simulated domain, the divergence values are peak. As we were in need of further reducing the divergence as a result of unrealistic simulation output, we tested spectral methods for the solution of the Poisson equation.

3 Results and Discussion

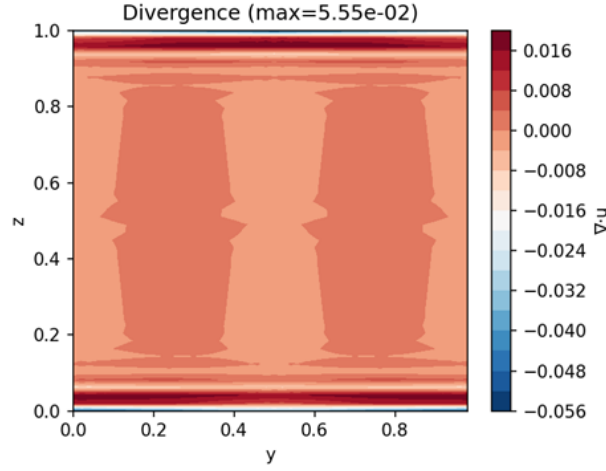


Figure 3.3: Divergence field in the Jacobi method. Max Divergence = 5.55×10^{-2} .

Fast Fourier Transform (FFT) Method

In the final version of our implementation, the Poisson solver was replaced by an FFT-based approach. This method transforms the problem from the spatial domain to the frequency domain, where complex derivatives become simple algebraic divisions.

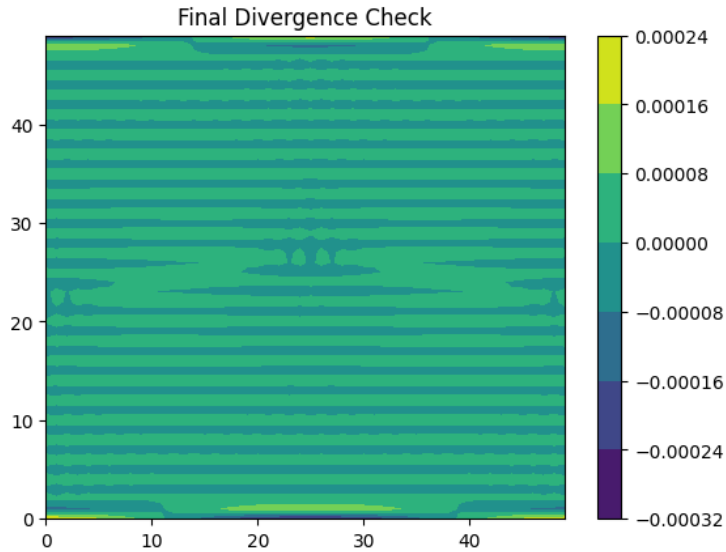


Figure 3.4: Divergence error at machine precision accuracy using FFT solver.

The primary challenge in previous versions of numerical solutions was the high divergence caused by the limitations of the Jacobi iterative solver in handling the Poisson equation. By replacing it with the Fast Fourier Transform (FFT) method, the maximum divergence was

reduced from 10^{-2} to approximately 10^{-15} . A spatial distribution of the divergence values is given in figure 3.4. We can clearly observe uniform low values for this method across the entire domain. This transition not only achieved machine-precision accuracy but also significantly accelerated computational performance. Reaching divergence $\approx 10^{-6}$ signifies that the principle of mass conservation is almost perfectly satisfied. This resolves a major bottleneck in the CFD code, providing a robust foundation for the thermal simulation.

3.4 Rayleigh-Bénard Convection Results

The last task consisted of finding suitable initial conditions and parameterization that would lead to convective behaviour.

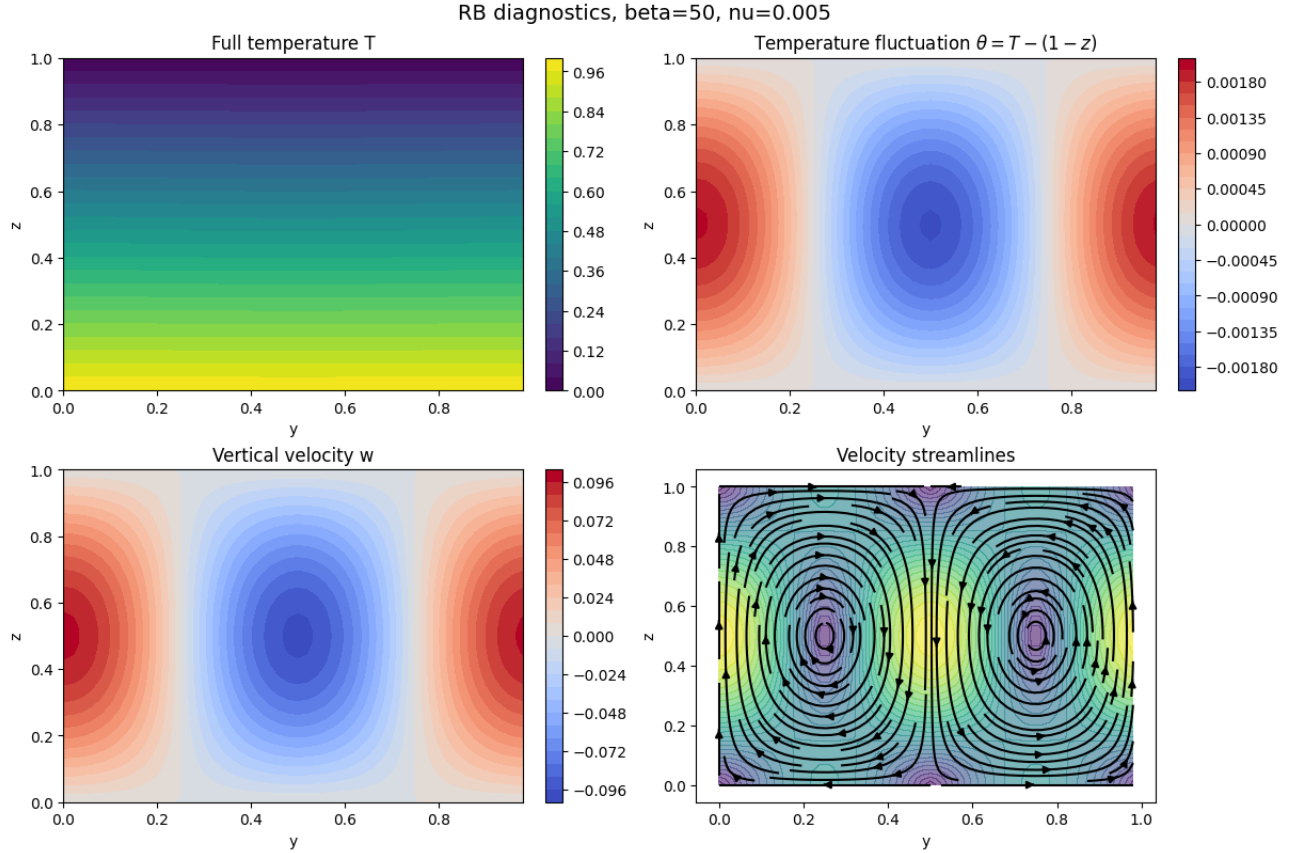


Figure 3.5: **Results of the numerical solution for $\beta = 50$, $\nu = 0.005$.** Results for a parameterisation causing Rayleigh-Bénard convection cells induced by thermal forcing (for thermal forcing see plot at the upper left).

The simulation efficiently exhibits the formation of classical convection cells for the implementation of all previously described numerical methods, with the buoyancy term

3 Results and Discussion

$\beta = 50.0$ and viscosity $\nu = 0.005$. The results in Figure 3.5 illustrate the formation of Rayleigh-Benard convection. The temperature fluctuation figure shows the temperature deviation from the conductive profile in the previous stage. It displays alternating warm and cold regions, such that warm fluid rises from the heated bottom, while cooler fluid -when reaches the top- sinks from there. In the Vertical velocity field w , the motion appeared due to the temperature difference. This result confirms the motion caused by convective heat transfer. The Regions of higher temperature, warm plumes in red, correspond to upward flow, and colder regions, cold plumes in blue, correspond to downward motion. In the final part of this figure, the flow field streamlines can be observed, displaying two counter-rotating convection rolls. The streamlines clearly show that the hot fluid rises from the bottom, spreads horizontally near the top, cools there, and then descends along the sides. This circulation pattern is the characteristic of the two-D Rayleigh-Benard convection cells. These circulation patterns confirm the simulation's success in capturing Rayleigh-Bénard physics and the stability of the numerical method under periodic (in y) and wall-bounded (in z) boundary conditions.

4 Conclusion

We solved the two-dimensional system of equations that describe incompressible fluid dynamics. To do this, we first dealt with the simpler case of linear advection and were able to show that our methods were accurate compared to analytical solutions. Here, we also implemented Lie-Splitting to reduce computational cost. We then extended our numerical procedure to respect the incompressible characteristics: Chorin's projection method allowed us to reduce the dimensionality of the problem by accepting a numerical error. The pressure was calculated by solving the Poisson equation that could be derived from the incompressibility constraint. We can show that the error remains bounded. To further minimize it, we implemented spectral methods to solve the Poisson equation. The resulting divergence can be reduced to within machine precision. Lastly, these methods proved to be suitable for reproducing Rayleigh-Bénard convection cells. This was done by certain parametrization and initialization of the model. Initial conditions with small perturbations were introduced to trigger the emergence of convective behaviour. The parameters $\beta = 50.0$ (related to buoyancy) and $\nu = 0.005$ (viscosity) yielded the desired result and are consistent with Rayleigh theory. Overall, we consider the project to be a successful numerical solution of the incompressible Navier-Stokes problem.

Bibliography

Chang (2026). Rayleigh-benard convection. <https://www.terpconnect.umd.edu/~dsvolpe/TREND/2019/Media/Chang/convection.html>. Accessed: 2026-03-16.

Chorin, A. J. (1968). Numerical solution of the navier-stokes equations. *Mathematics of Computation*, 22:745—762.

Appendix

All code, documents regarding group organisation and further ressources like Latex code are accessible on https://github.com/splishyfishbowl/Comp_Sci_Navier_Stokes_Equations.