
SCHÄFER

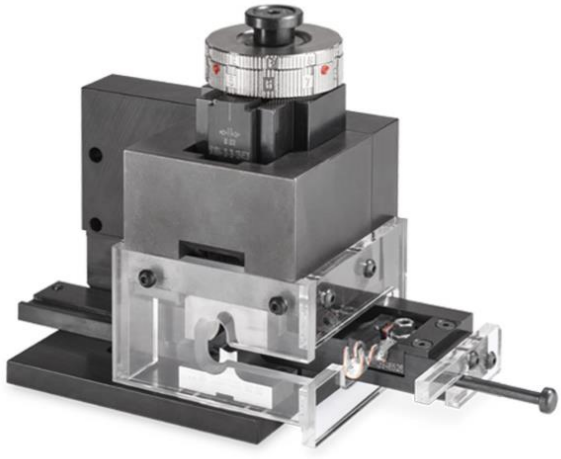

Crimping Applicator 23.100-S

Feeding of terminals with sliding table

Technical Data

Processable materials	
Max. thickness of the sheet [1]	up to 1,8 mm
Wire cross sections [1]	up to 25 mm^2
Characteristic of the machine	
Range of crimp height adjustment	2 mm
Width of the punch	38 mm
Geometry of the Machine	
Force	60 kN
Stroke	40 mm / 50 mm
Shut height	135.78 mm

[1] depending on the material and geometry of the materials to be processed
[2] approximate indication of the basic equipment

Internal

SCHÄFER



Crimping Applicator 690.100

Processing of big wire cross-sections

Technical Data

Processable materials	
Max. thickness of the sheet [1]	up to 3 mm
Wire cross sections [1]	up to 120 mm^2
Characteristic of the machine	
Range of crimp height adjustment	1.5 mm +/- 0.01 mm, 2 mm +/- 0.02 mm, 3 mm +/- 0.02 mm
Width of the punch	60 mm
Geometry of the Machine	
Force	100 – 150 kN
Stroke	50 mm
Shut height	204.8 mm
Dimensions and weight	
Dimensions (W x D x H) [2]	235 x 177 x 305 mm
Weight [2]	34 kg

[1] depending on the material and geometry of the materials to be processed
[2] approximate indication of the basic equipment

Internal