


Open hall $\approx 290 \text{ m}^2$, octagon 20.00 m across the flats
Clear height 3.56 m (3.34 m under the beams)
Only 4 slim columns (steel core $\varnothing 219$ in a carved
 $\varnothing 30\text{--}35$ cm timber casing) carry the ring beam
Big windows with deep window seats on 4 faces,
garden doors to the south
Annex on the N/NE faces: entrance, changing,
showers, WC, tech

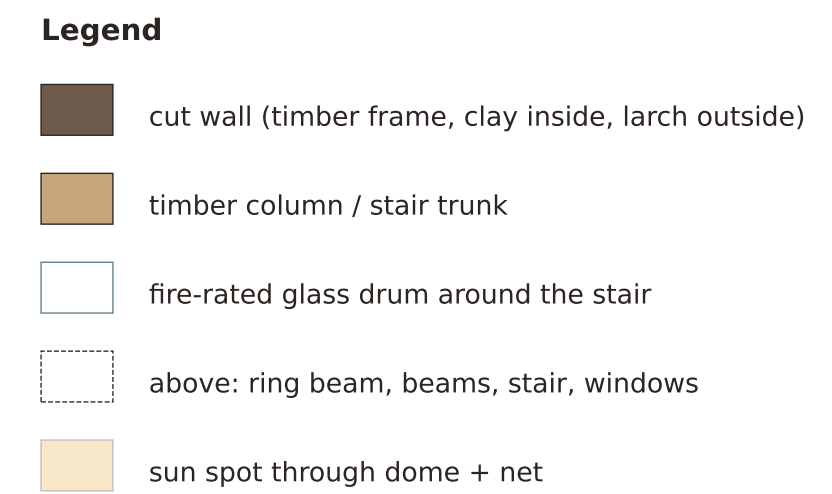

- Underfloor heating (low-temp., heat pump) in hall, rooms, annex – floors ~26–28 °C, air ~24–26 °C
- Balanced ventilation with heat recovery; vents in the dome crown and stair house for smoke + summer purge
- Clay plaster buffers humidity and sound
- Outside shading on dome and big windows (summer overheating, GEG / DIN 4108-2)