


Step-free access to the upper floor (+3.96) and the roof terrace (+7.10)

DIN 18040-1 (public buildings): ramps max. 6 %, a 1.50 m landing after every 6 m, clear width ≥ 1.20 m, handrails both sides. → Ramp to the upper floor ≈ 84 m long, to the roof ≈ 150 m.

A Ramp gallery wrapped around the building


- + becomes a covered gallery / veranda
- runs in front of every window, clashes with annex + external stair, very large and costly

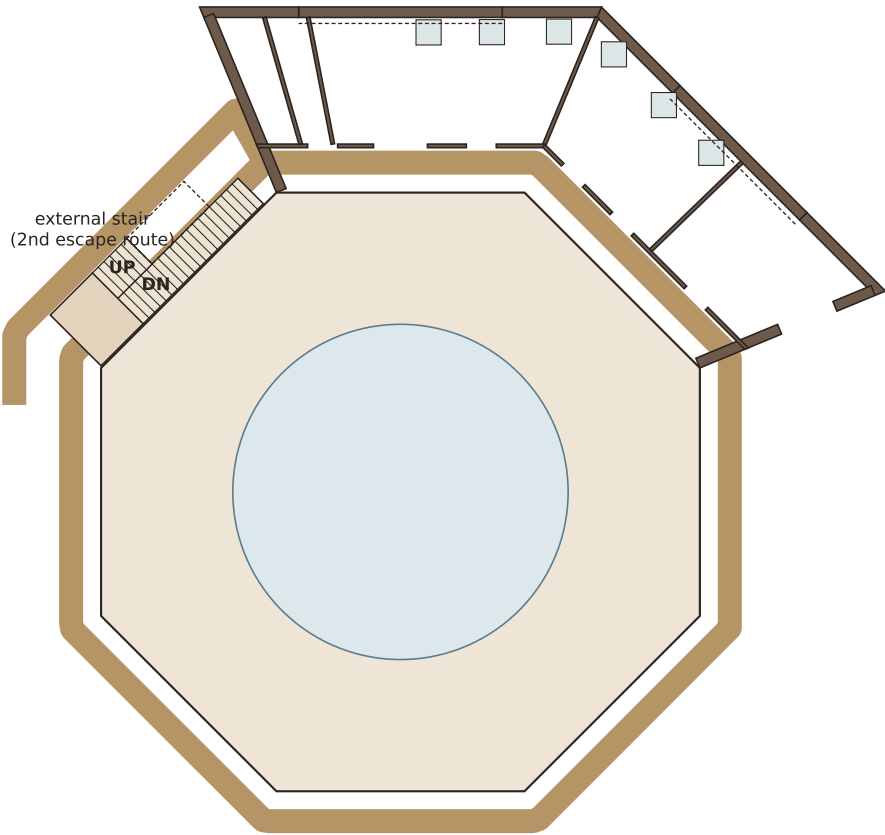

to the upper floor: ≈ 84 m ≈ 1.2 times round the building
to the roof: ≈ 150 m ≈ 2.1 times round (stacked 2 storeys high)

B Garden hill with switchback ramp

- 12 switchbacks
≈ 84 m ramp
on a 4 m high planted earth hill
- + could be a garden amphitheatre / sun slope
- huge earthworks, only makes sense if the site already slopes

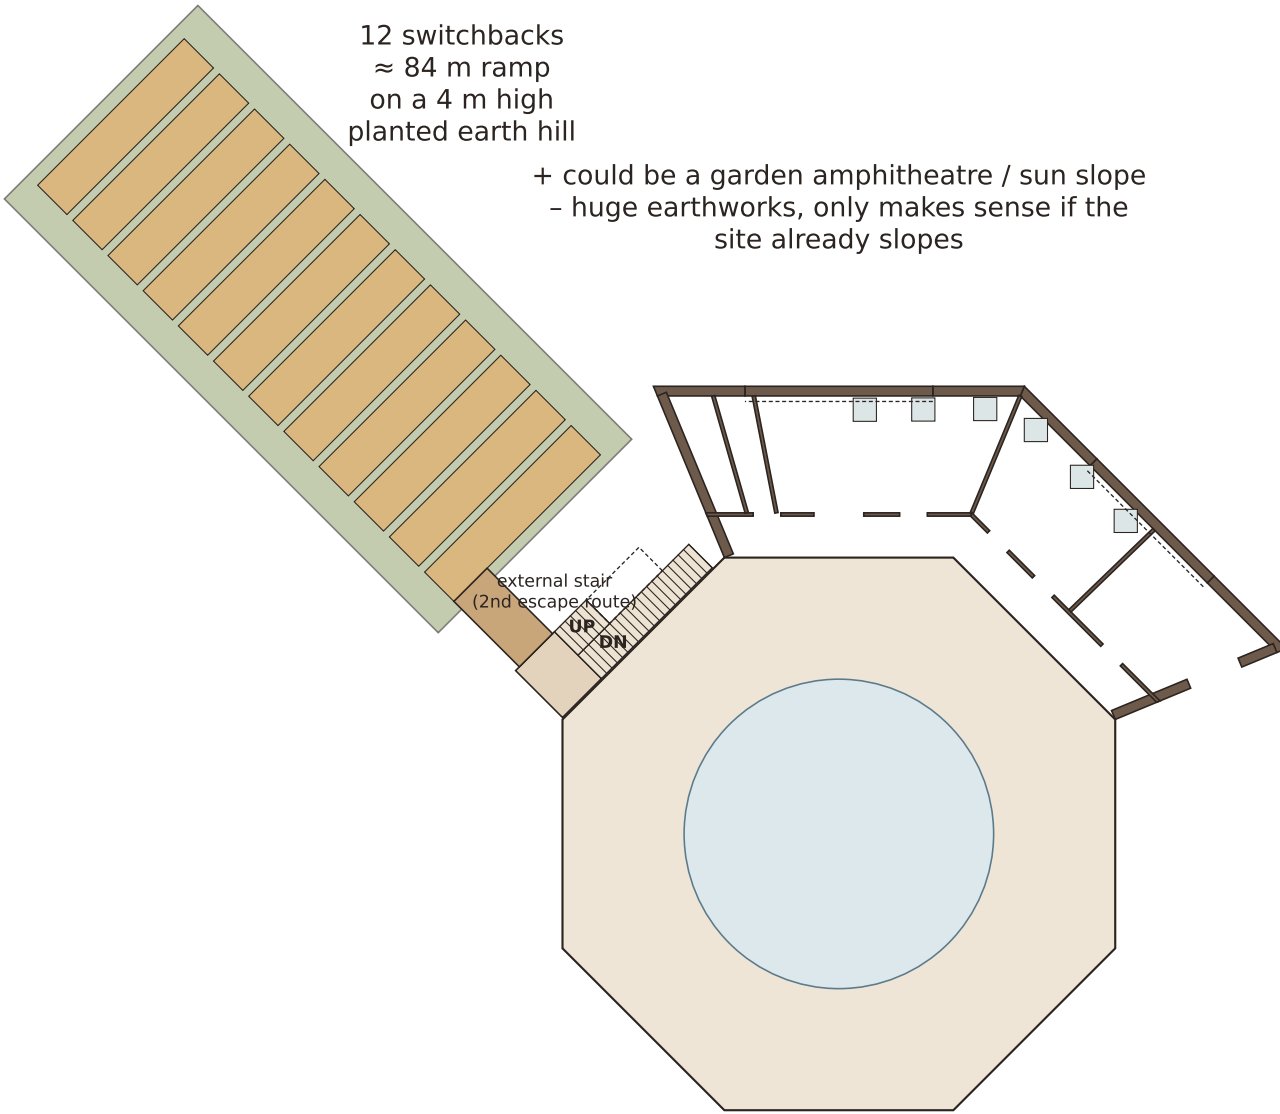


footprint ≈ 10 × 23 m next to the house; reaches the upper floor only
(the roof needs another ≈ 66 m)

C Platform lift in the external stair tower

- + smallest, reaches all three levels, cheapest
- still a machine (service contract), slow (0.15 m/s)

vertical platform lift
1.6 × 1.9 m shaft
3 stops: garden, upper floor
landing, terrace (bridge)

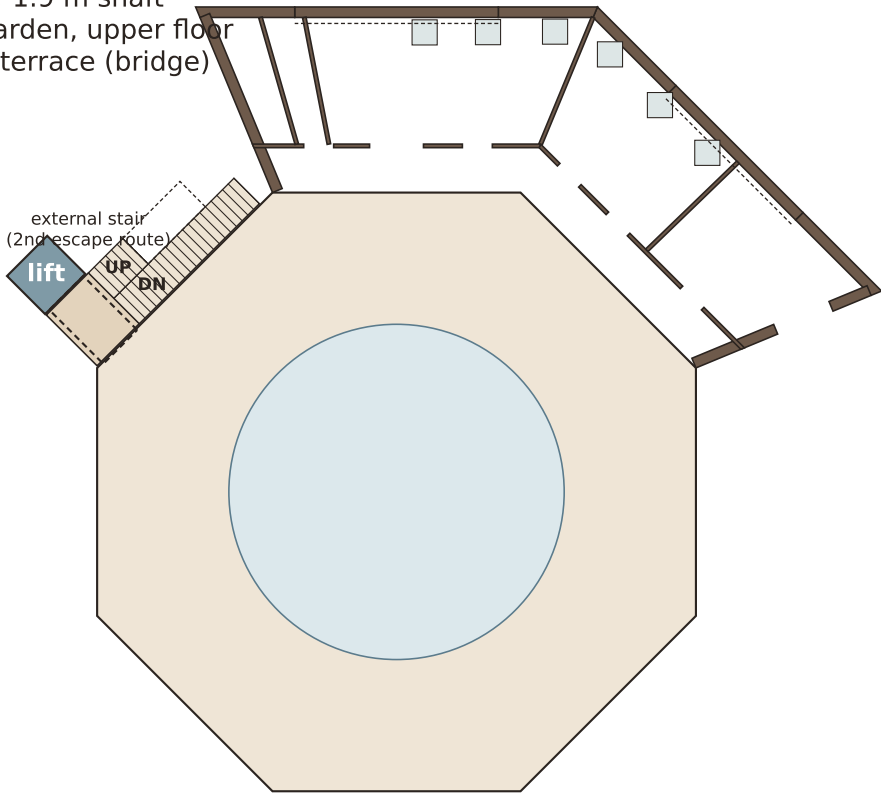

no machine room, no pit; clad in larch with climbing plants as part of the external stair