
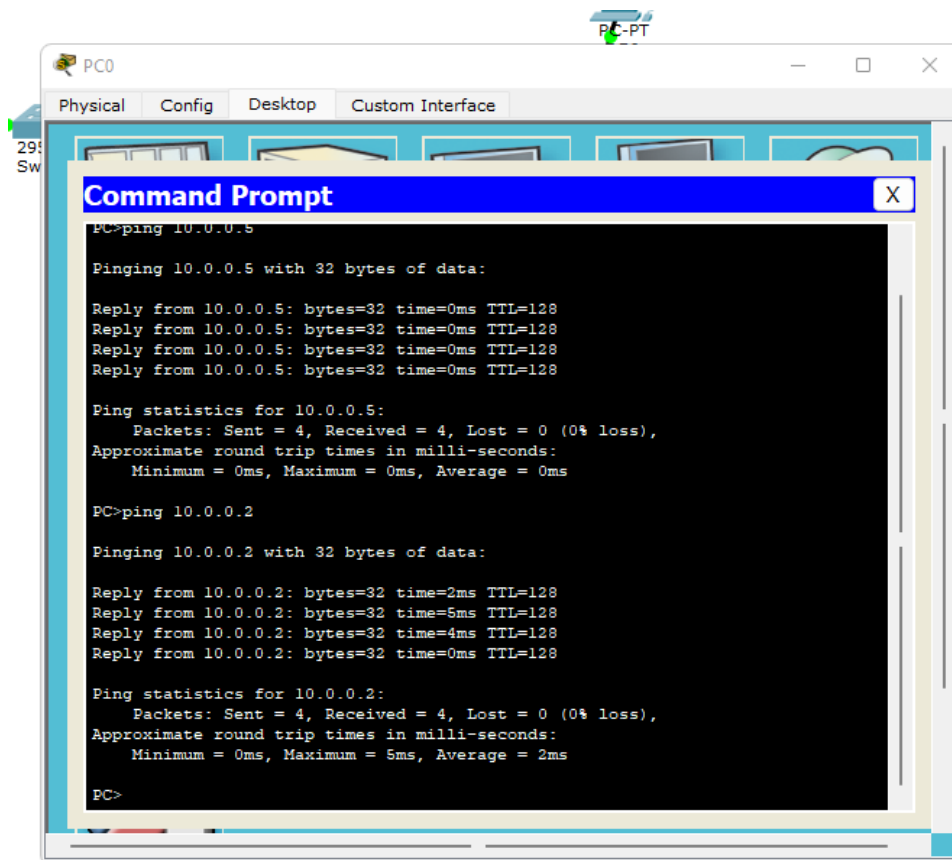


COMPUTER NETWORK LAB-01

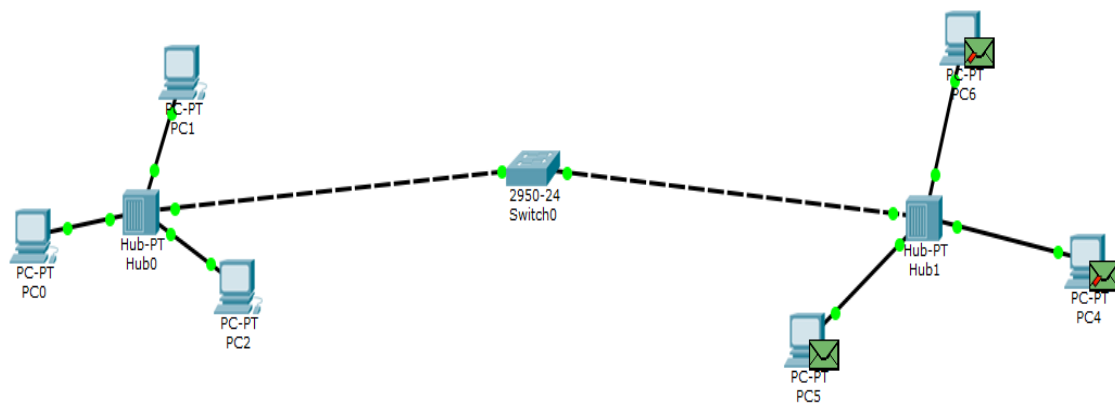

① Create a topology consisting of two or more end devices connected with the help of hub and switch and simulating PDU.

→ When Hub is used

- * In real time ~~simulation~~ when we use ping command we notice that response is received from destination.
- * In simulation mode, hub gets PDU, it broadcast to all the connected devices, then one device accept the others drop or reject.

→ When switch is used

- * In simulation mode, as it receives the PDU, switch only transmits or forwards to the destination / mentioned end device.

→ When both are connected (hub and switch)

- * The hub broadcasts to all the connected devices including the switch, then the switch forwards the PDU only to destination device.

O/p seen
21/6/23.