




MCU

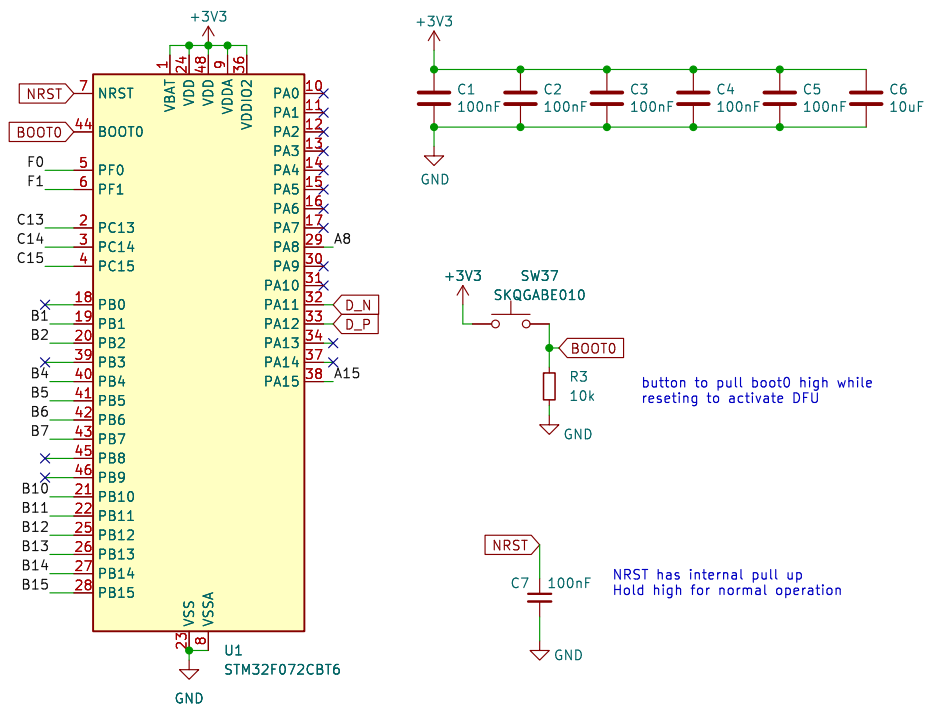

MCU pin mapping

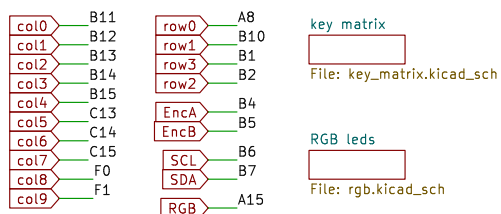


USB-C and ESD

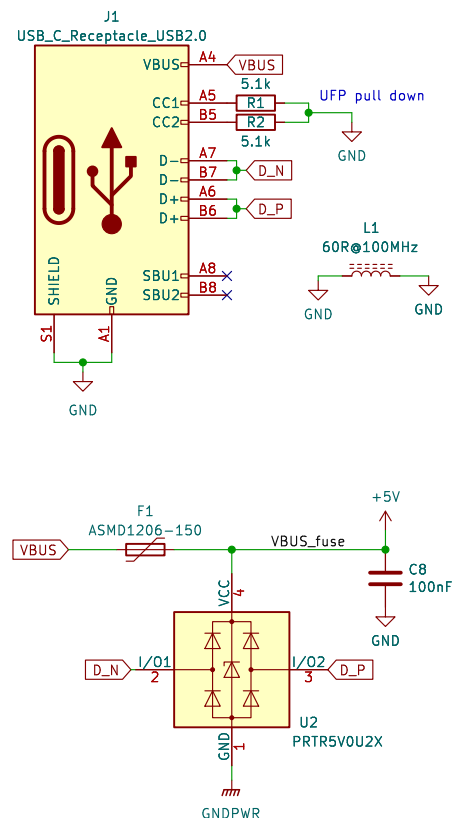


Differential pair ref:
2 layer PCB
microstrip spacing: 0.127mm
coplanar reference spacing: 0.127mm
signal width: 0.25mm
dielectric thickness: 1.6mm


calculator: <https://www.eweb.com/tools/edge-coupled-microstrip-impedance/>
<https://resources.altium.com/p/routing-requirements-usb-20-2-layer-pcb>

3.3V LDO




OLED display



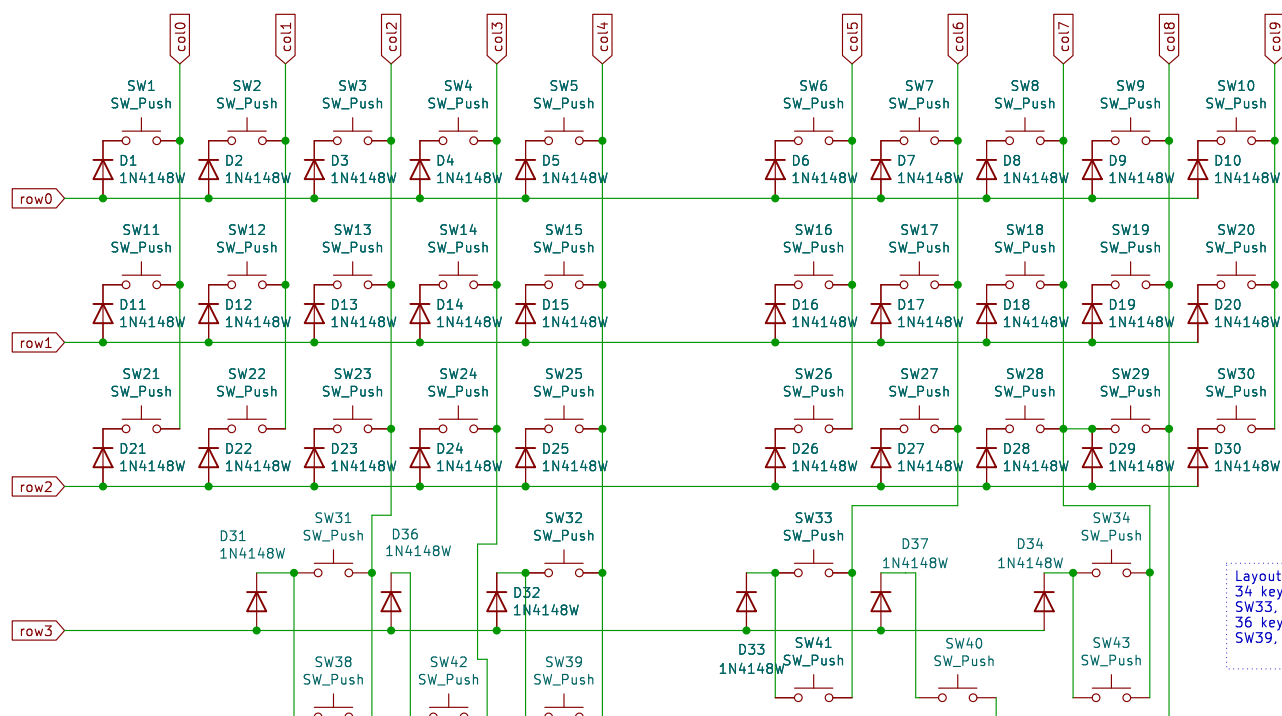


Layout option:
 34 key – SW31, SW32,
 SW33, SW34
 36 key – SW38, SW42,
 SW39, SW41, SW40, SW43

SW40 is mapped to
 3.8 to avoid
 changing existing
 matrix

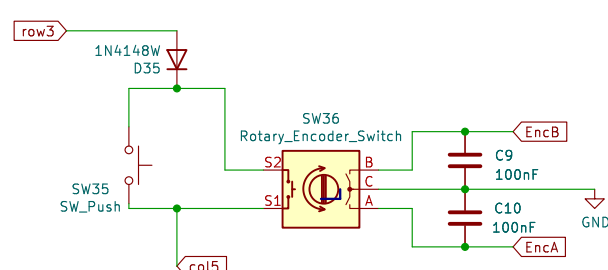

sporkus	
Sheet: /key matrix/ File: key_matrix.kicad_sch	
Title: Hotswap Chiffre (36 key)	
Size: A4	Date: 2024-03-06
KiCad E.D.A. kicad-cli 7.0.11+1	Rev: 0.3 Id: 2/3

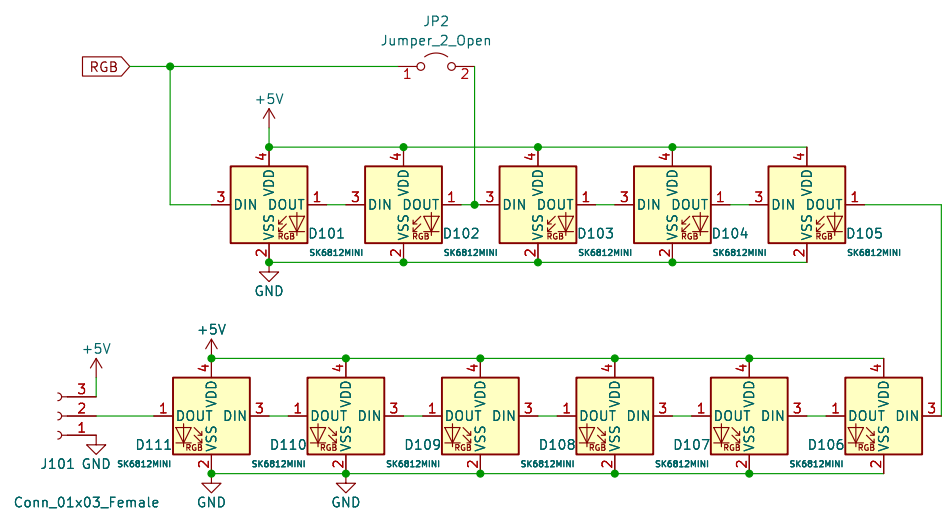

sporkus

Sheet: /RGB leds/
File: rgb.kicad_sch

Title: Hotswap Chiffre (36 key)

Size: A4 Date: 2024-03-06

KiCad E.D.A. kicad-cli 7.0.11+1

Rev: 0.3

Id: 3/3