




MCU

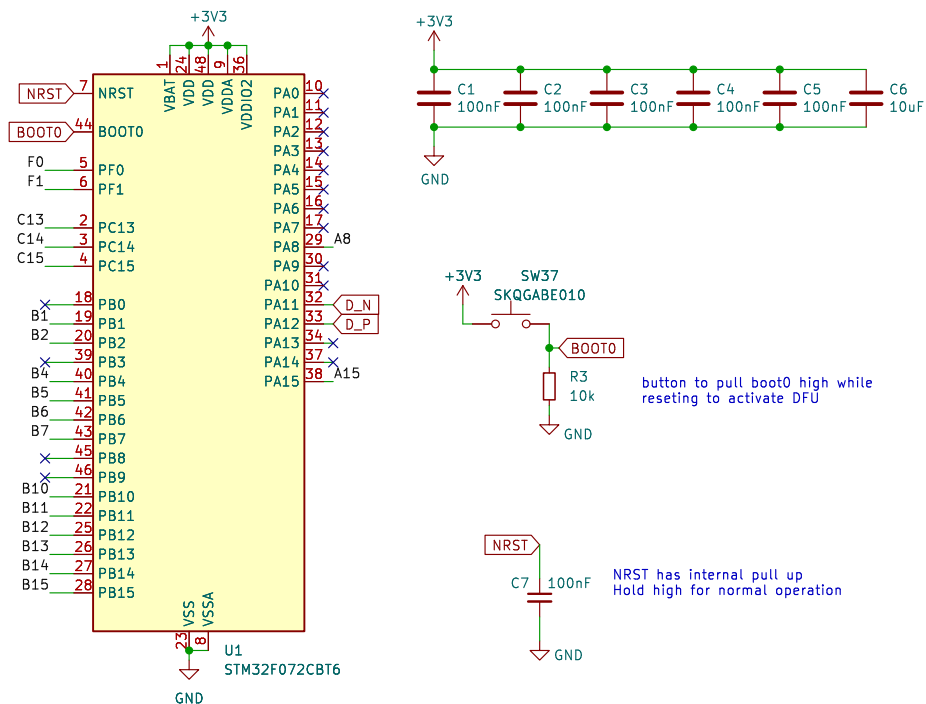

MCU pin mapping

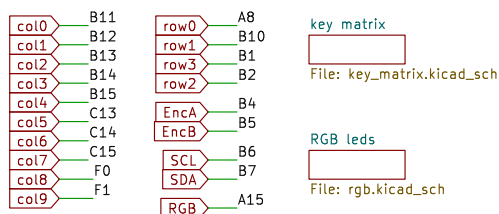


USB-C and ESD

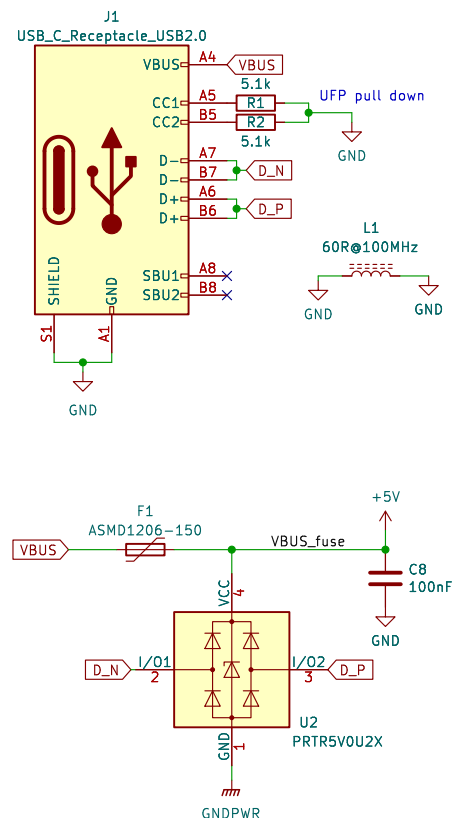


Differential pair ref:
2 layer PCB
microstrip spacing: 0.127mm
coplanar reference spacing: 0.127mm
signal width: 0.25mm
dielectric thickness: 1.6mm

calculator: <https://www.eeweb.com/tools/edge-coupled-microstrip-impedance/>
<https://resources.altium.com/p/routing-requirements-usb-20-2-layer-pcb>

3.3V LDO



OLED display



sporkus

Sheet: /
File: stm32_chiffre_36keys.kicad_sch


Title: Hotswap Chiffre (36 key)


Size: A4	Date: 2024-03-06
----------	------------------

Size: 1.1	Date: 2021-03-03
KiCad E.D.A.	kicad-cli 7.0.11+1

Rev: 0.3

Id: 1/3



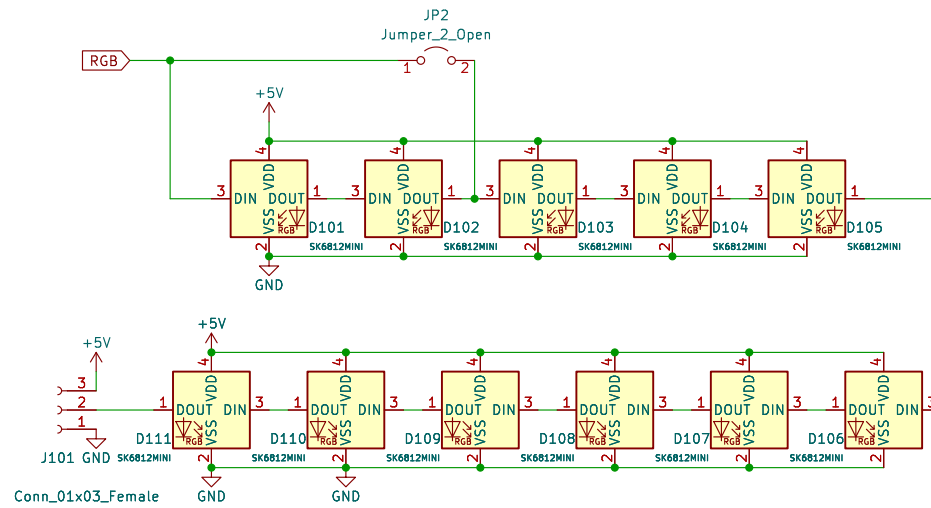

sporkus

Sheet: /RGB leds/
File: rgb.kicad_sch

Title: Hotswap Chiffre (36 key)

Size: A4 Date: 2024-03-06

KiCad E.D.A. kicad-cli 7.0.11+1

Rev: 0.3

Id: 3/3