


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

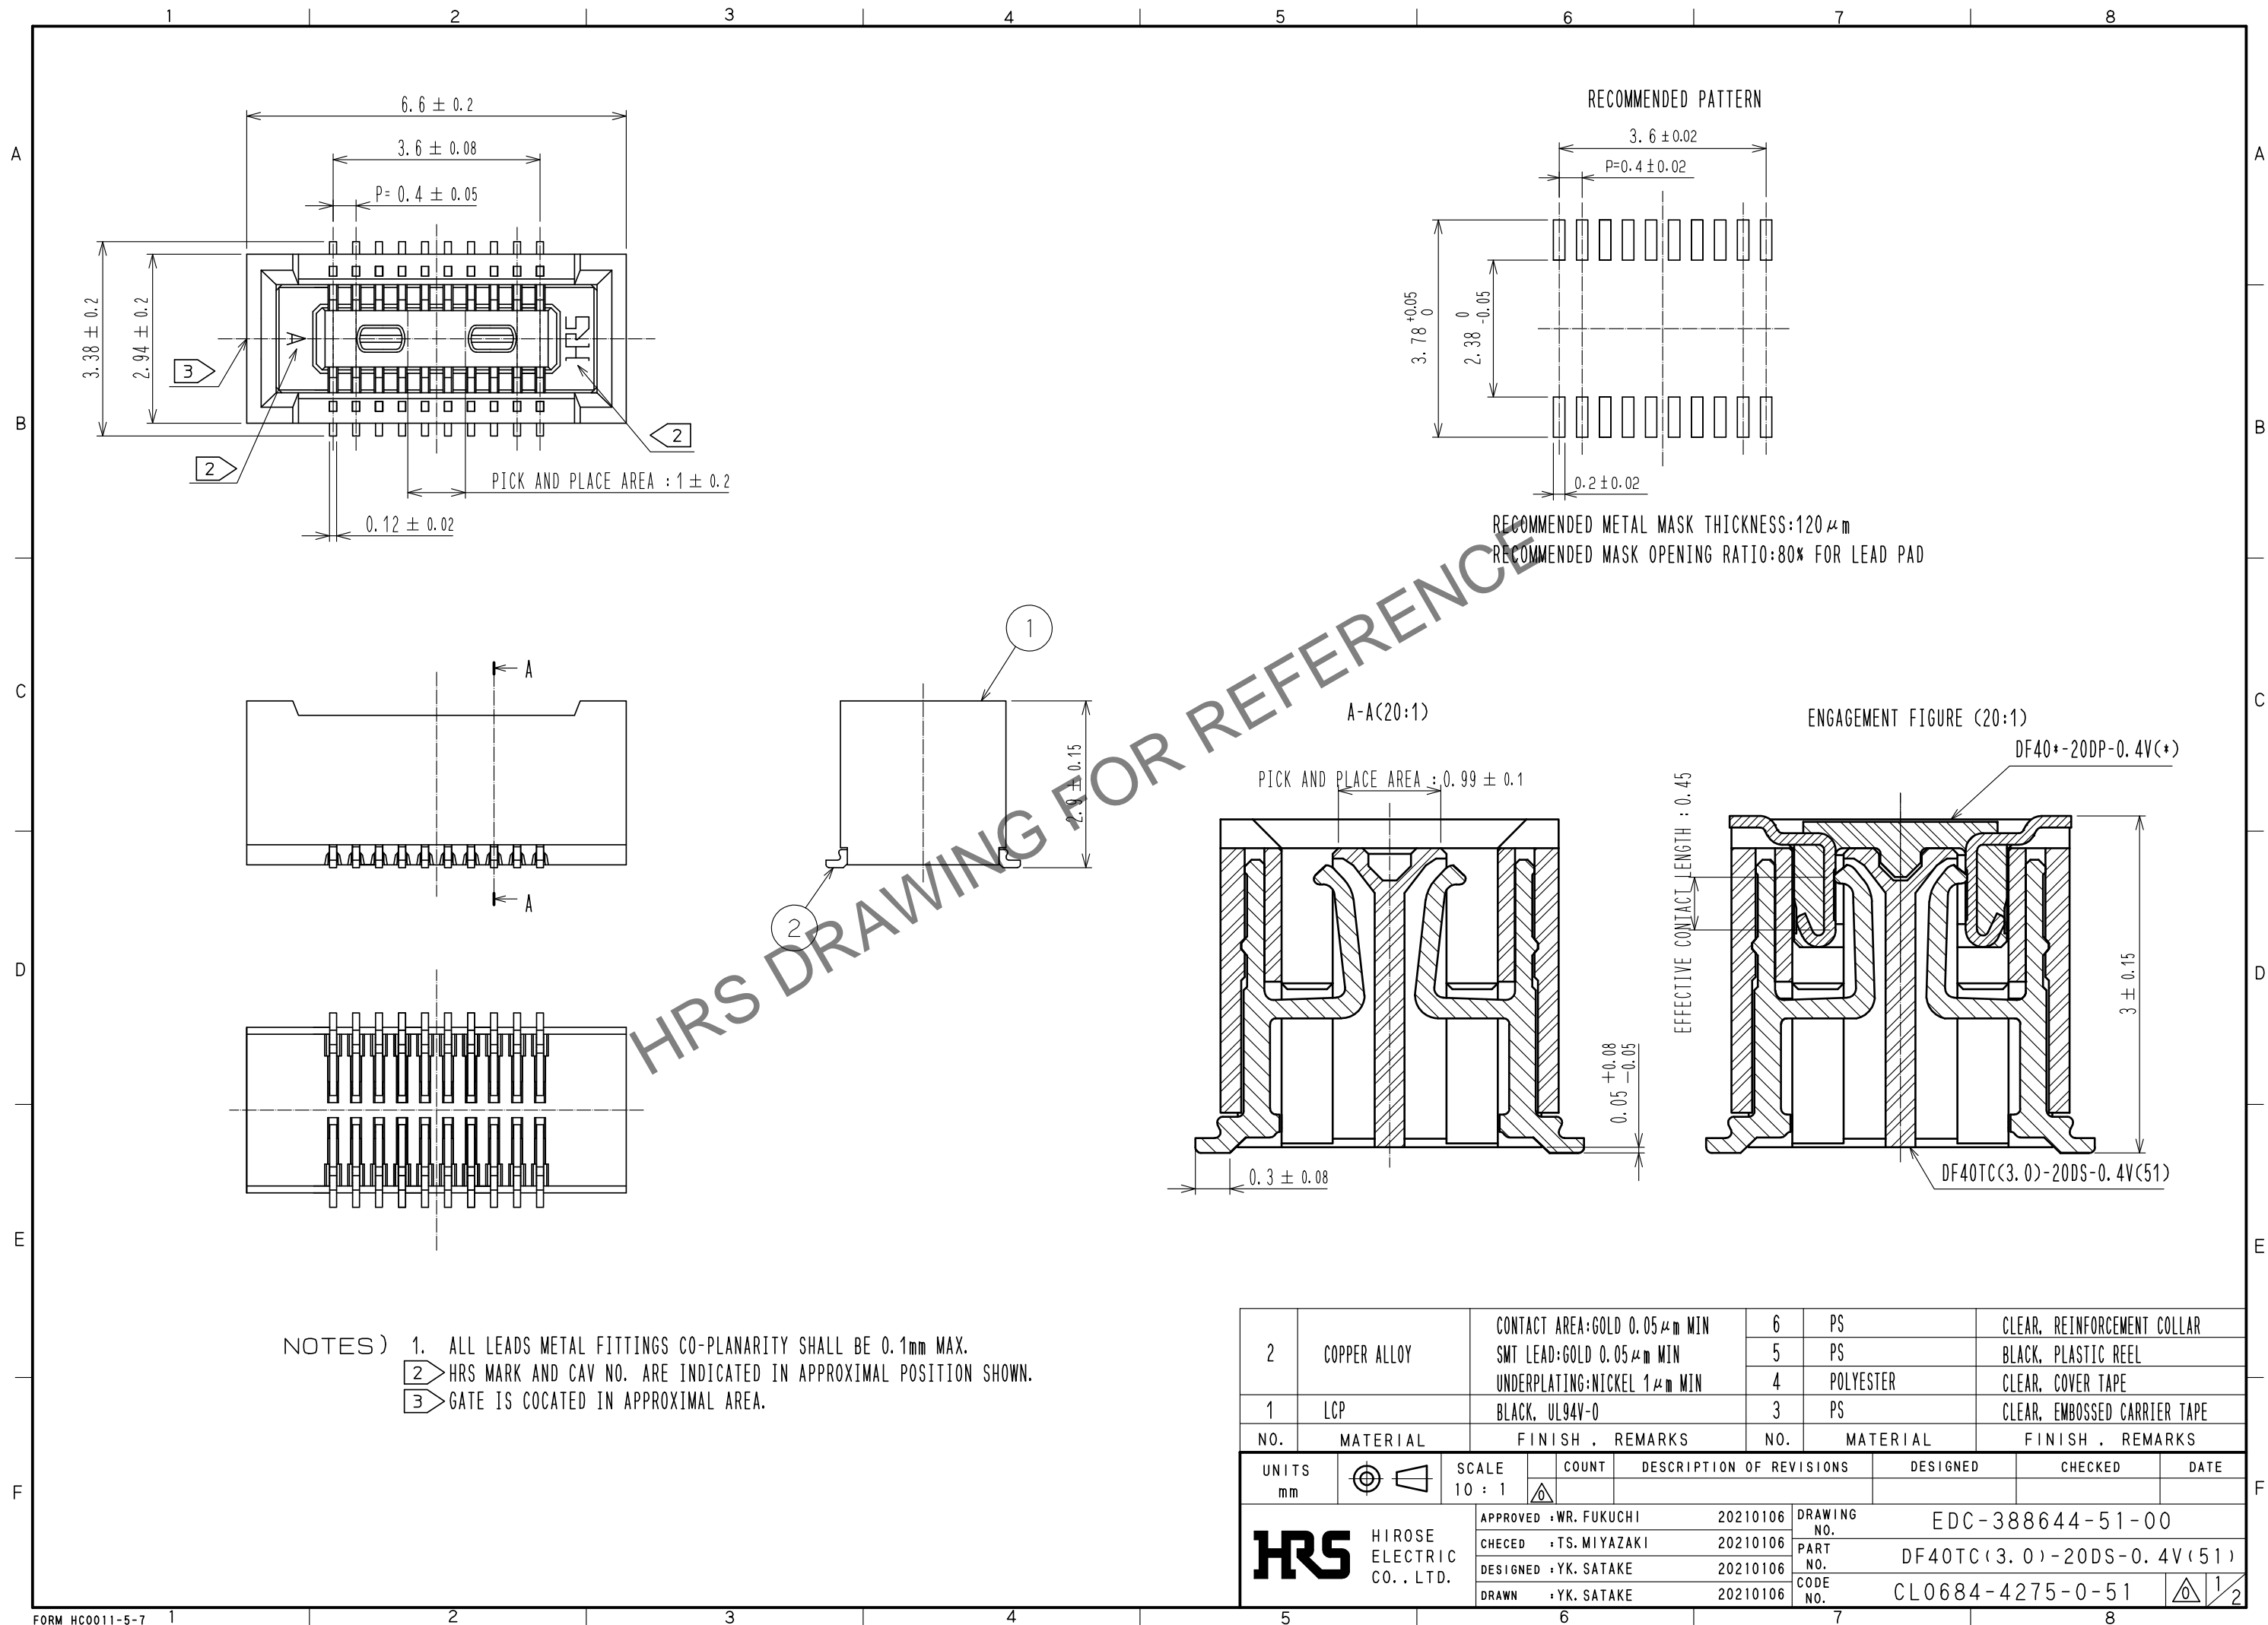

NOTES) 1. ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
2. HRS MARK AND CAV NO. ARE INDICATED IN APPROXIMAL POSITION SHOWN.
3. GATE IS COCATED IN APPROXIMAL AREA.

2	COPPER ALLOY	CONTACT AREA:GOLD 0.05 μ m MIN SMT LEAD:GOLD 0.05 μ m MIN UNDERPLATING:NICKEL 1 μ m MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
			5	PS	BLACK, PLASTIC REEL
			4	POLYESTER	CLEAR, COVER TAPE
			3	PS	CLEAR, EMBOSSED CARRIER TAPE
1	LCP	BLACK, UL94V-0	NO.	MATERIAL	FINISH, REMARKS
UNITS mm					
SCALE 10:1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED
HRS		APPROVED: WR. FUKUCHI	20210106	DRAWING NO.	EDC-388644-51-00
HIROSE ELECTRIC CO., LTD.		CHECED: TS. MIYAZAKI	20210106	PART NO.	DF40TC(3.0)-20DS-0.4V(51)
		DESIGNED: YK. SATAKE	20210106	CODE NO.	CL0684-4275-0-51
		DRAWN: YK. SATAKE	20210106		

Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

