


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
03	<u>03</u>	增加CAP配方	2010.06.30	曹 熙
04	<u>04</u>	變更圖號	2011.11.29	黃小燕
05	<u>05</u>	依業務要求，變更註解	2015.01.29	邱國強

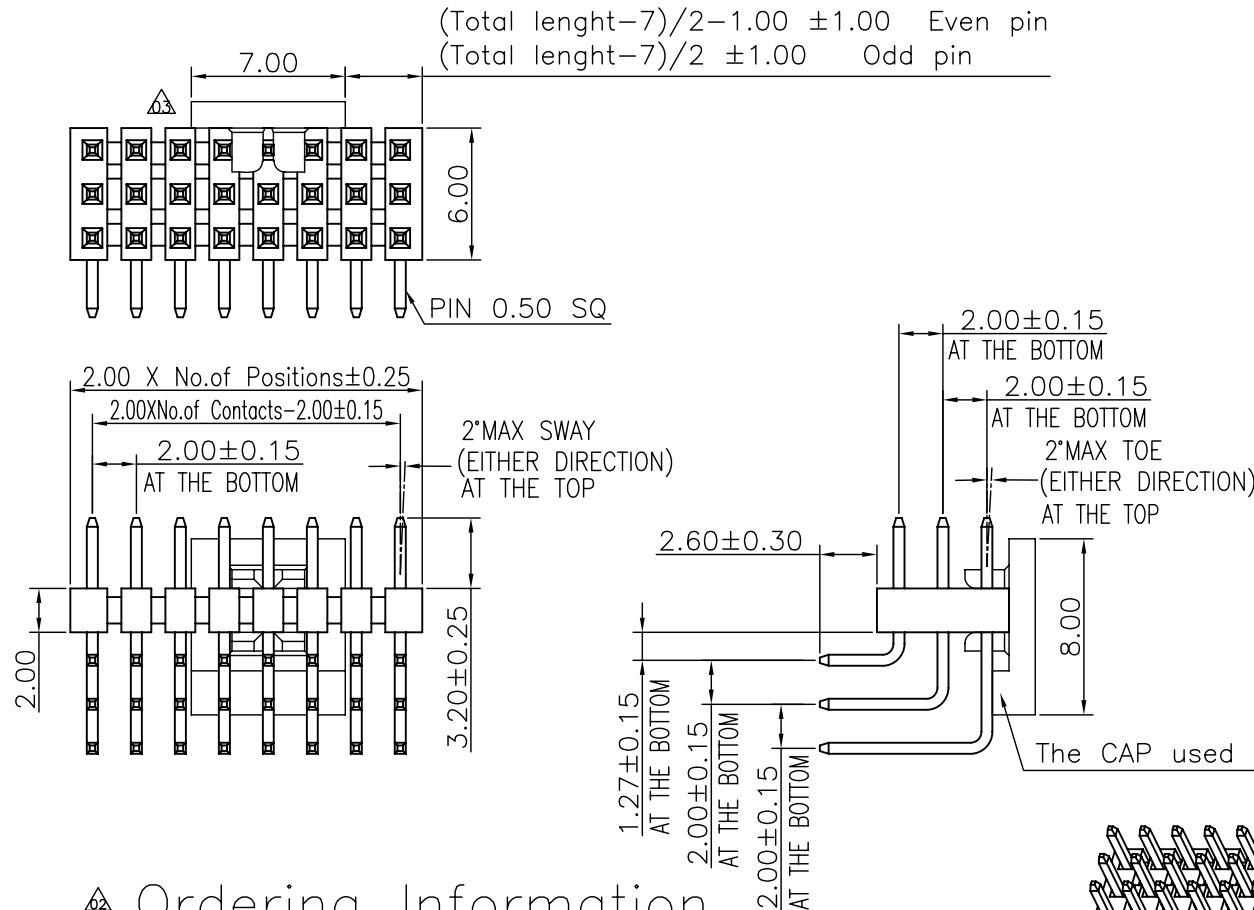

Specifications

▲ Current Rating:3.2Amp(Single pin).
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP
 or the equivalent material
 All materials must meet Greenconn
 hazardous substances control standards.

Ordering Information


G PFB301 - XX XX A 001 C 1 A X

No. of Pins per Row
02~40


Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin
96=Matte Tin(200u")
54=10u" Gold/Tin(100u"Min)

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box



Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

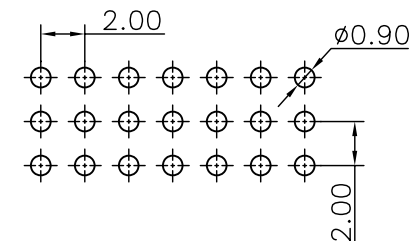

格 稜 股 份 有 限 公 司
Greenconn Corporation

<div>格稜股份有限公司</div> <div>Greenconn Corporation</div>					GENERAL TOLERANCE		DESIGNED: 邱國強	DATE: 2015.01.29	DWG. NO. <div><div></div><div></div></div> GPFB301-CA1CA	TITLE. 2.00 PIN HEADER THREE ROWS R/A TYPE CONNECTOR
					X.*±5.0°	X.±0.30	CHECKED:	DATE:		
					.X*±3.0°	.X±0.25	CO SIGNED: 劉北平	DATE: 2015.01.29	PART NO. <div><div></div></div> GPFB301-XXXX A001C1AX	
					.XX*±2.0°	.XX±0.15	APPROVED:	DATE:		
REV. 05	UNIT. mm	SCALE. 3:1	PAGE. 1/1	<div><div></div><div></div></div>	.XXX*±1.0°	.XXX±0.10				