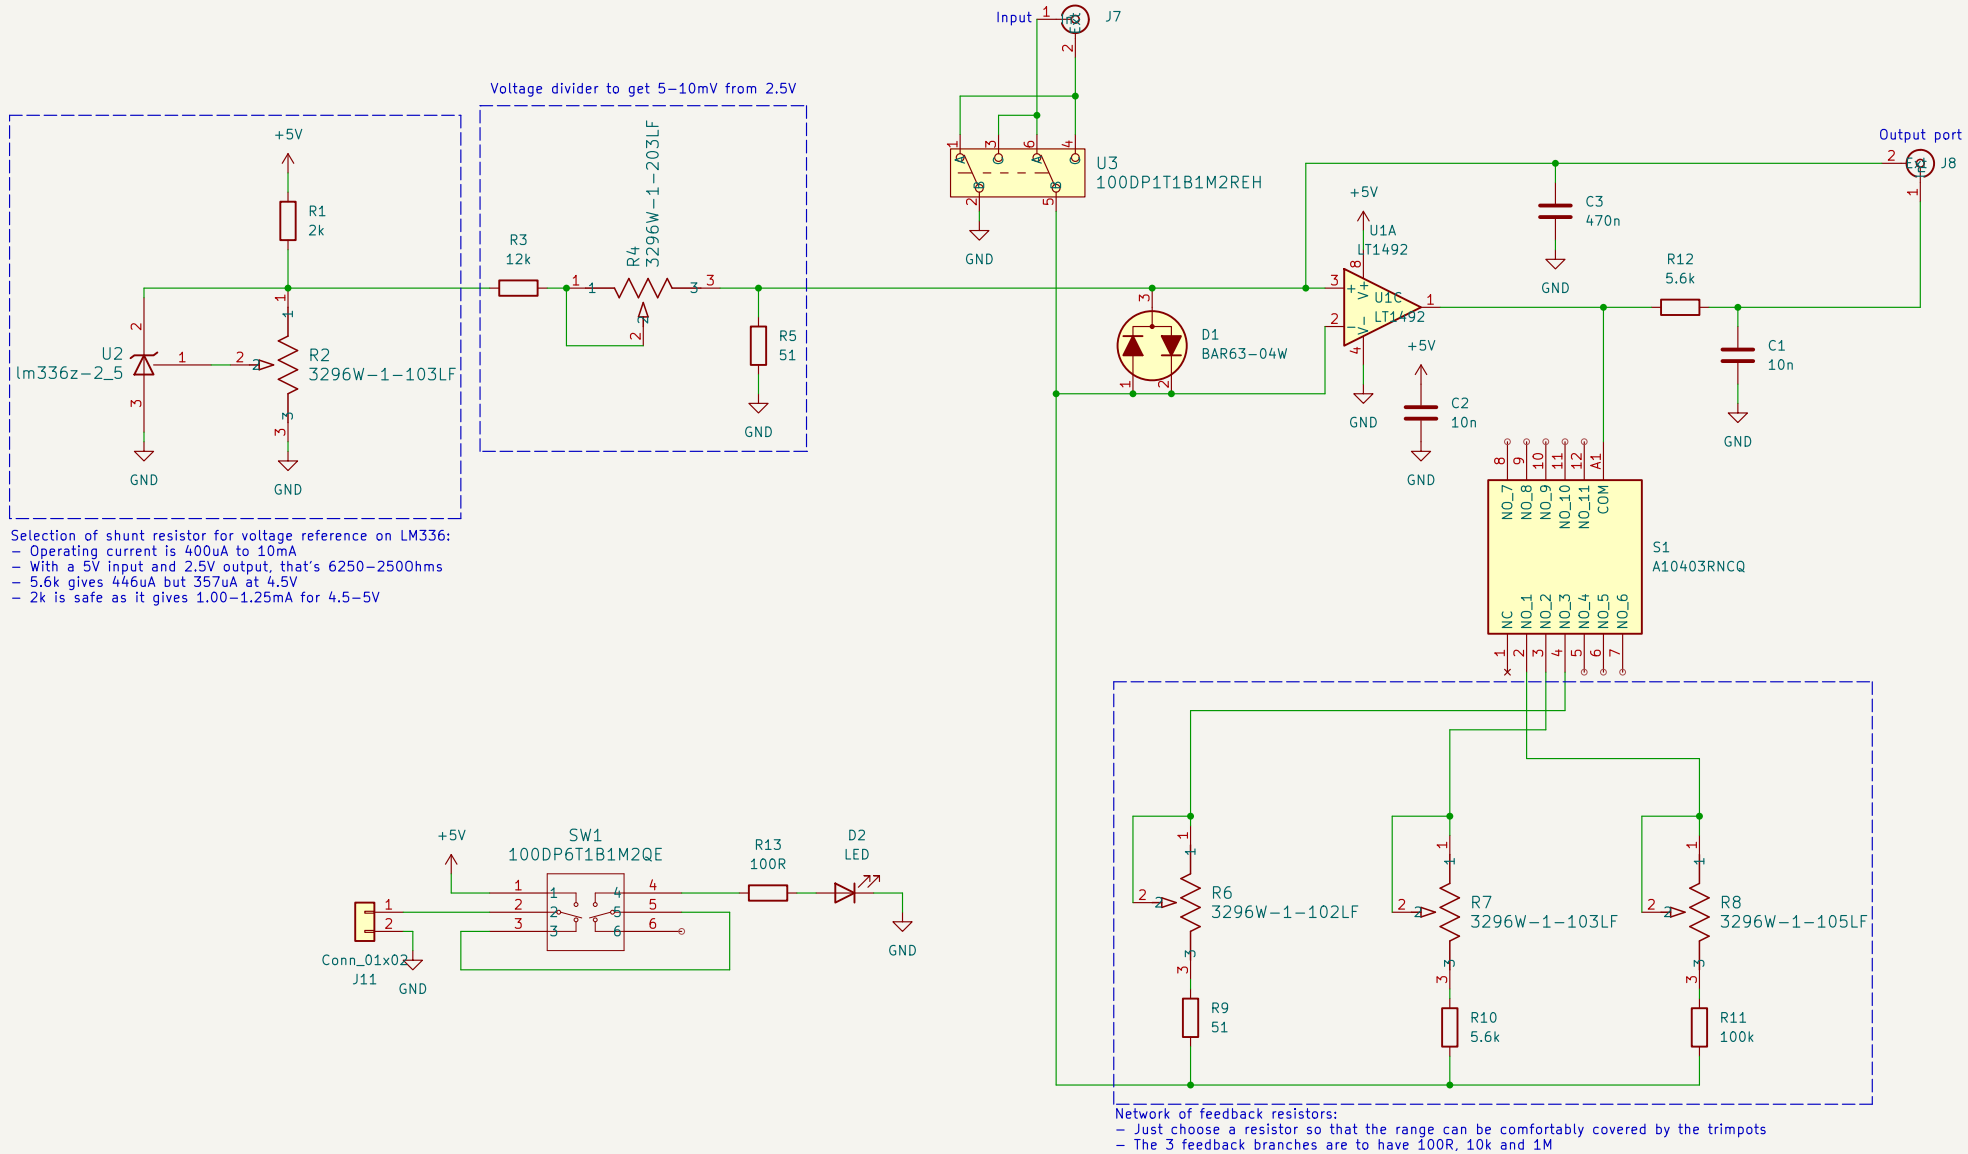


Selection of shunt resistor for voltage reference on LM336:
- Operating current is 400uA to 10mA
- With a 5V input and 2.5V output, that's 6250–2500hms
- 5.6k gives 446uA but 357uA at 4.5V
- 2k is safe as it gives 1.00–1.25mA for 4.5–5V

Network of feedback resistors:
- Just choose a resistor so that the range can be comfortably covered by the trimpots
- The 3 feedback branches are to have 100R, 10k and 1M

Sheet: /
File: JJ_Box.kicad_sch

Title: Safe Ohmmeter, Author: Prasanna Pakkiam

Size: A4 | Date: | **Rev: 2.0**
KiCad E.D.A. 8.0.9 | Id: 1/1