

| 版本号 | 日期 | 修改人 | 修改内容 |
| --- | --- | --- | --- |
| V1.0 | 2025.08.11 | 彭福权 | 新建 |
| V1.1 | 2025.10.24 | 彭福权 | 新增功能 |
| V1.1 | 2026.03.18 | 彭福权 | 新增1路编码器 |
| | | | |


| | | |
| --- | --- | --- |
| Title | | |
| Size<br>A4 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\..\00_Modify Note.SchDoc | | Drawn By: |

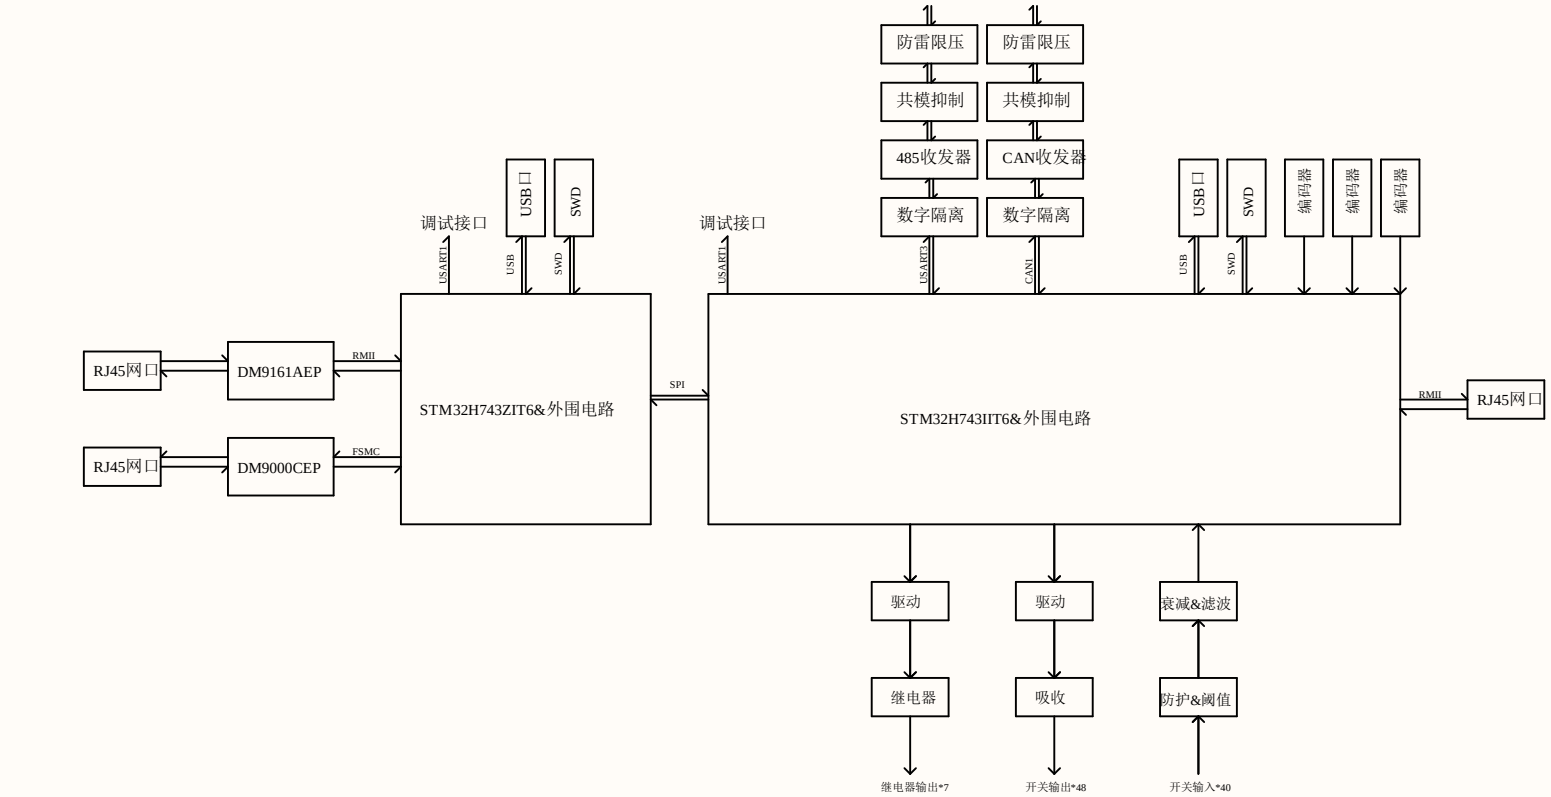




| | | |
|---|---|---|
| Title | | |
| Size A4 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\..\01_BLOCK DIAGRAM.SchDoc | | Drawn By: |


# 保护电路

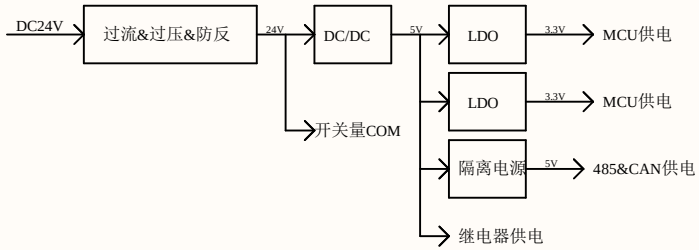

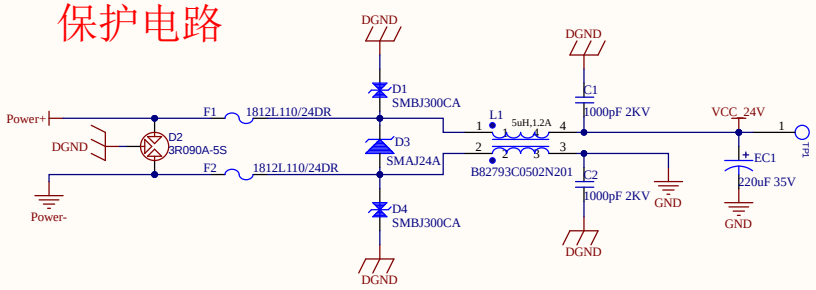


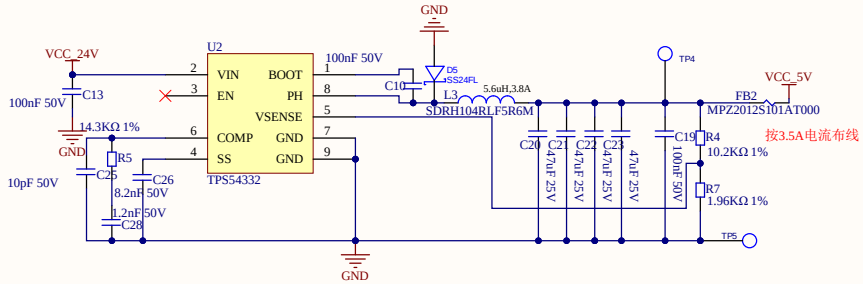
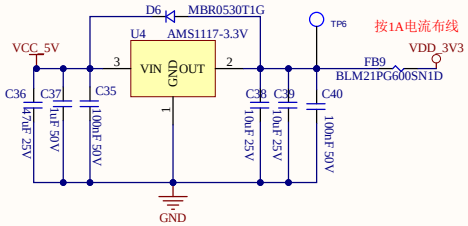
# 单片机供电

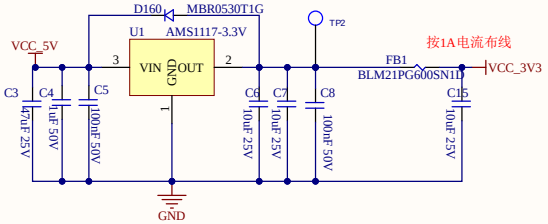

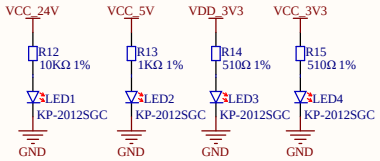



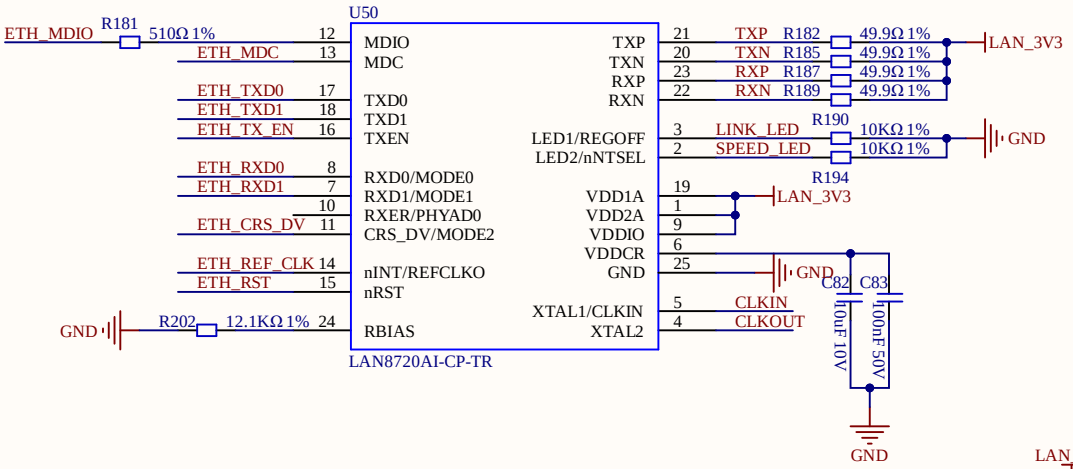

# 信号指示灯






MARK1 MARK2 MARK3


| | | |
|---|---|---|
| Title | | |
| Size A3 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\...\02_POWER.SchDoc | | Drawn By: |

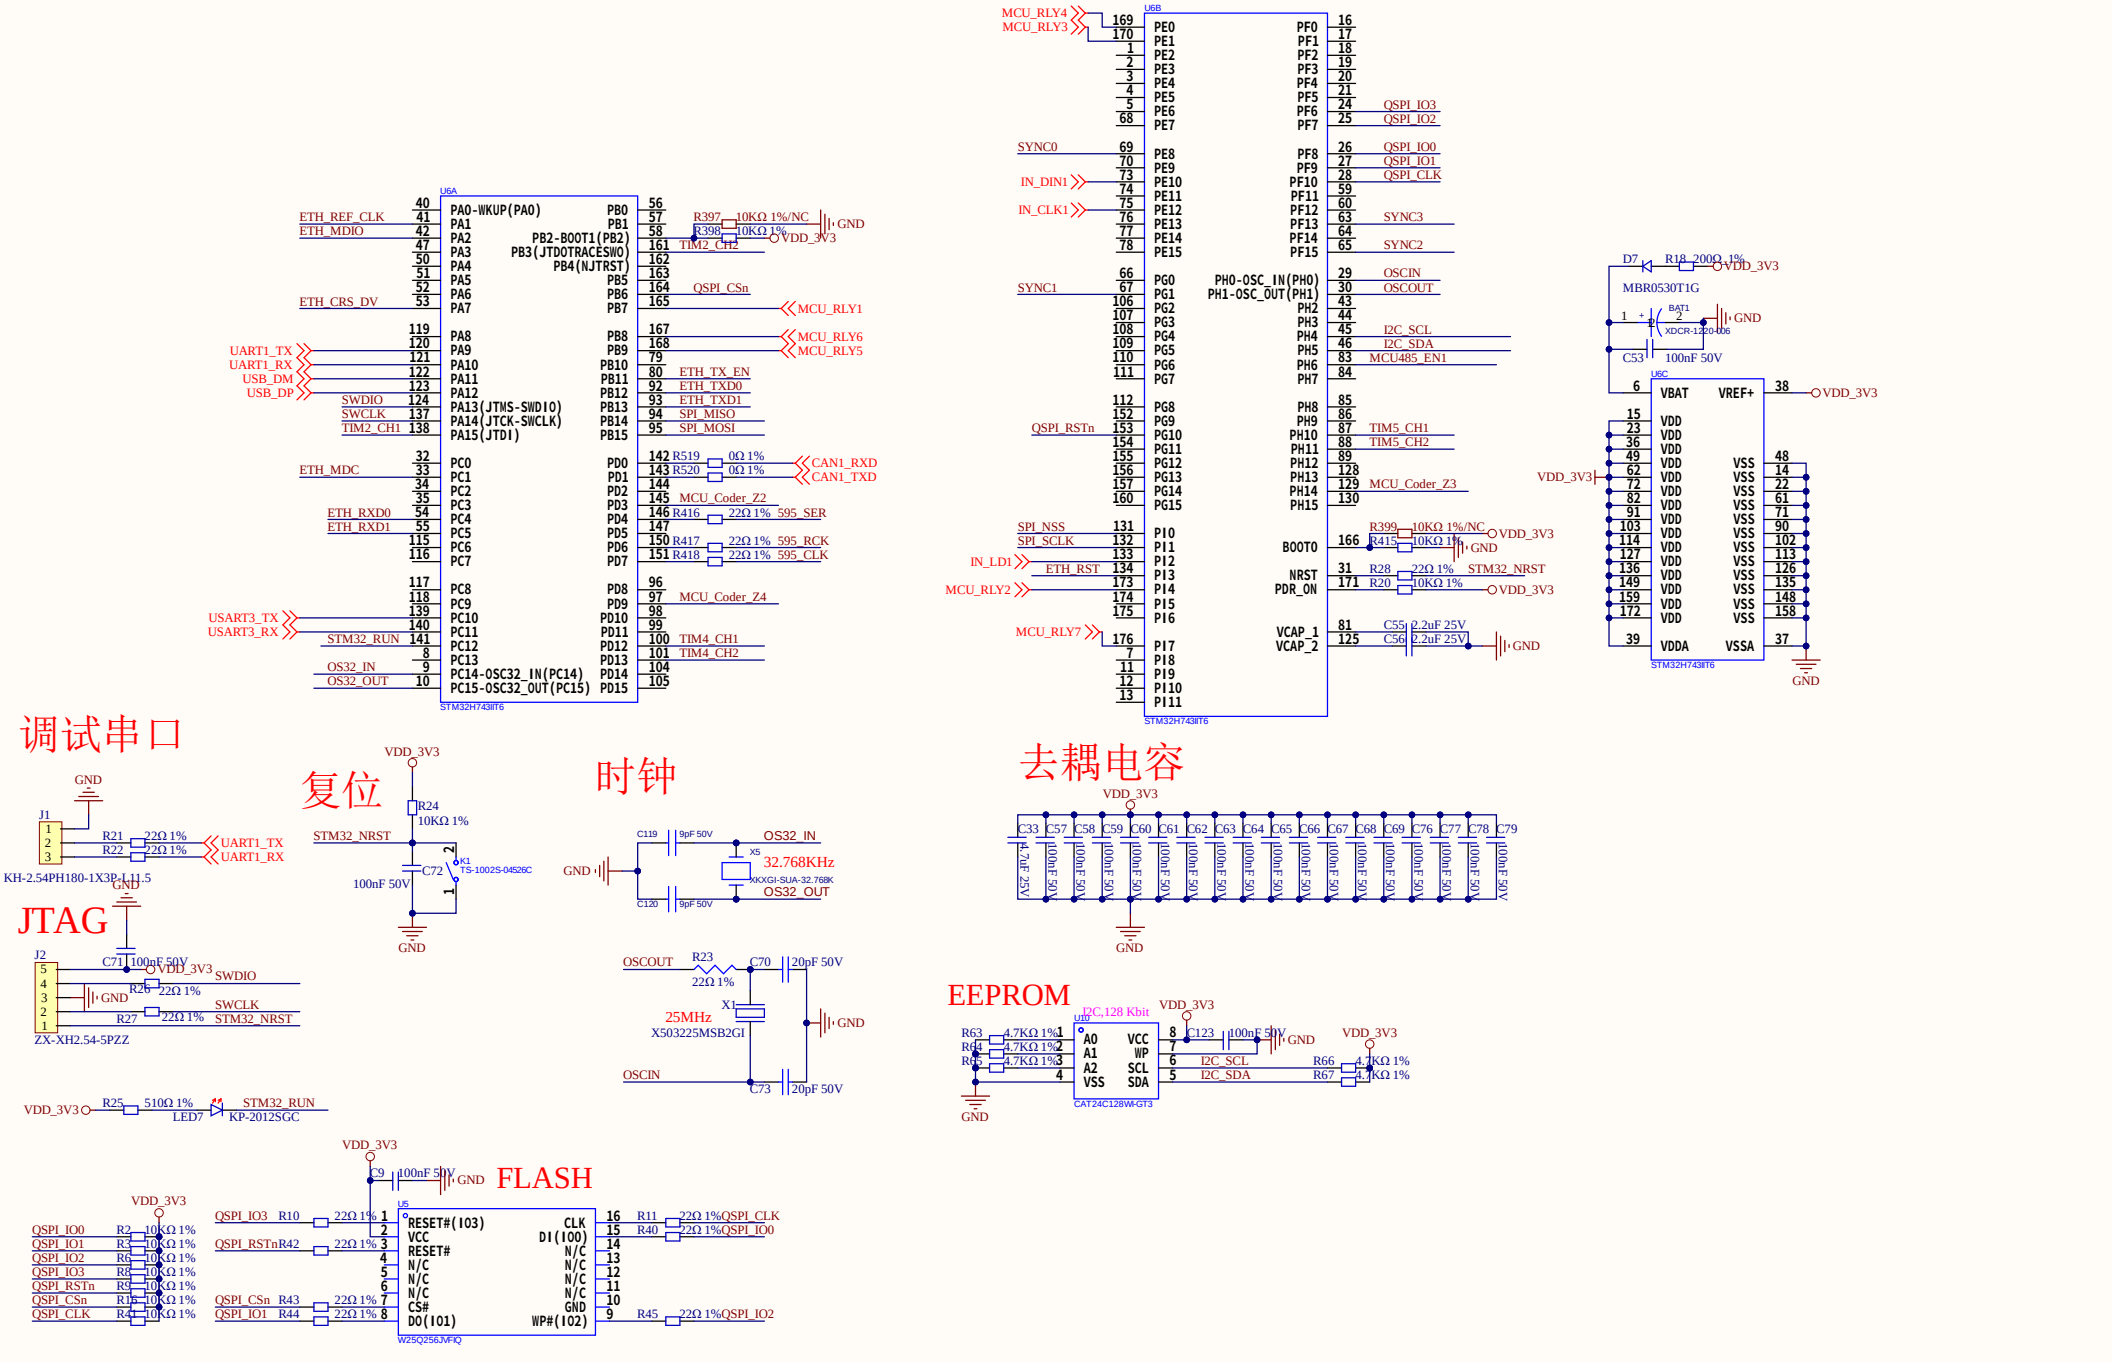

U6A
STM32H743IIT6
U6B
STM32H743IIT6
U6C
STM32H743IIT6
调试串口
J1
KH-2.54PH180-1X3P-L11.5
JTAG
J2
ZX-XH2.54-5PZZ
复位
时钟
32.768KHz
去耦电容
EEPROM
I2C,128 Kbit
CAT24C128WI-GT3
FLASH
W25Q256JVFIQ



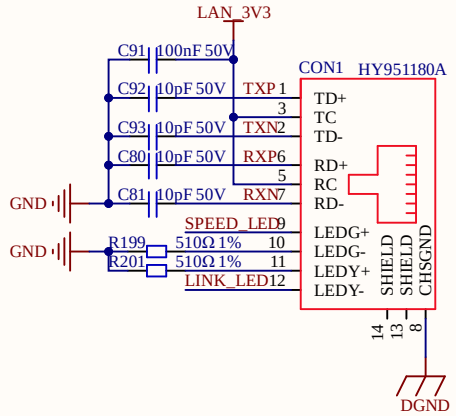


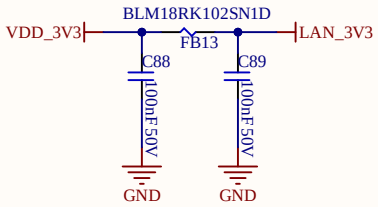
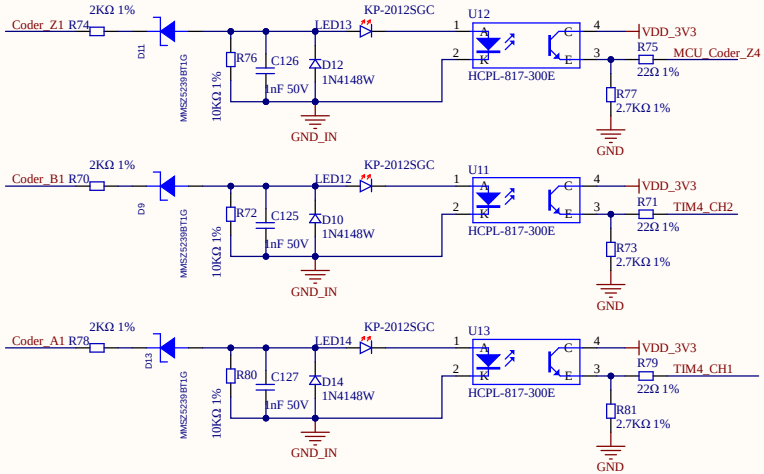

VDD_3V3总电流=28mA


| | | |
|---|---|---|
| Title | | |
| Size A4 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\..\04_ETH_STM32H743IIT6.SchDoc | | Drawn By: |


# USB

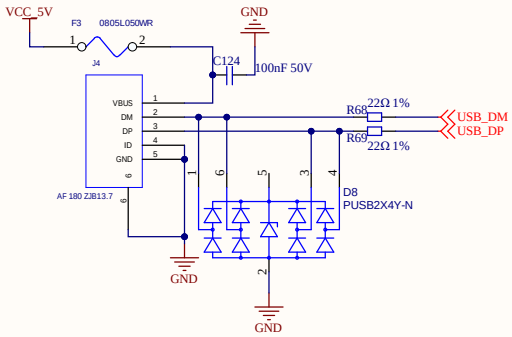



# Coder



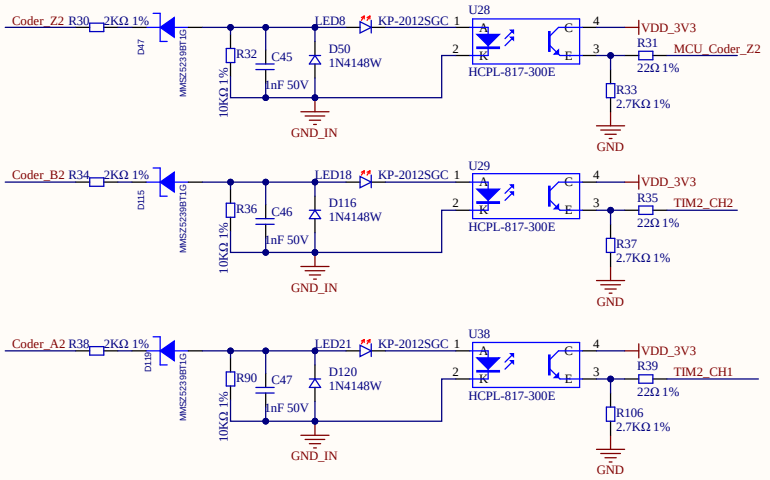


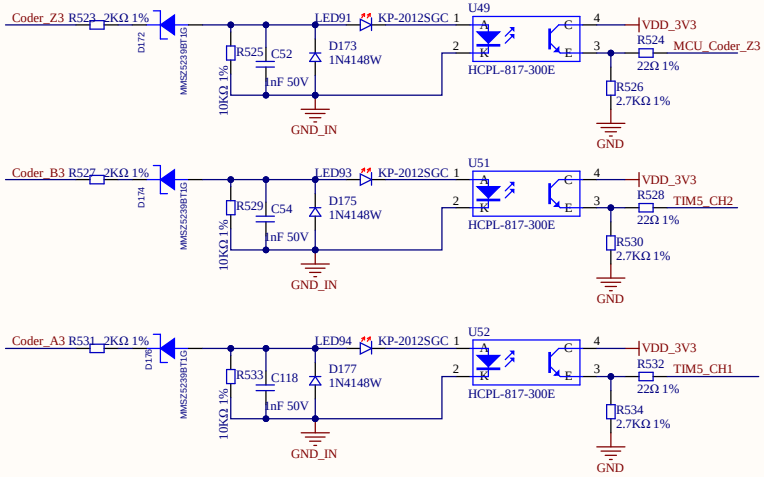
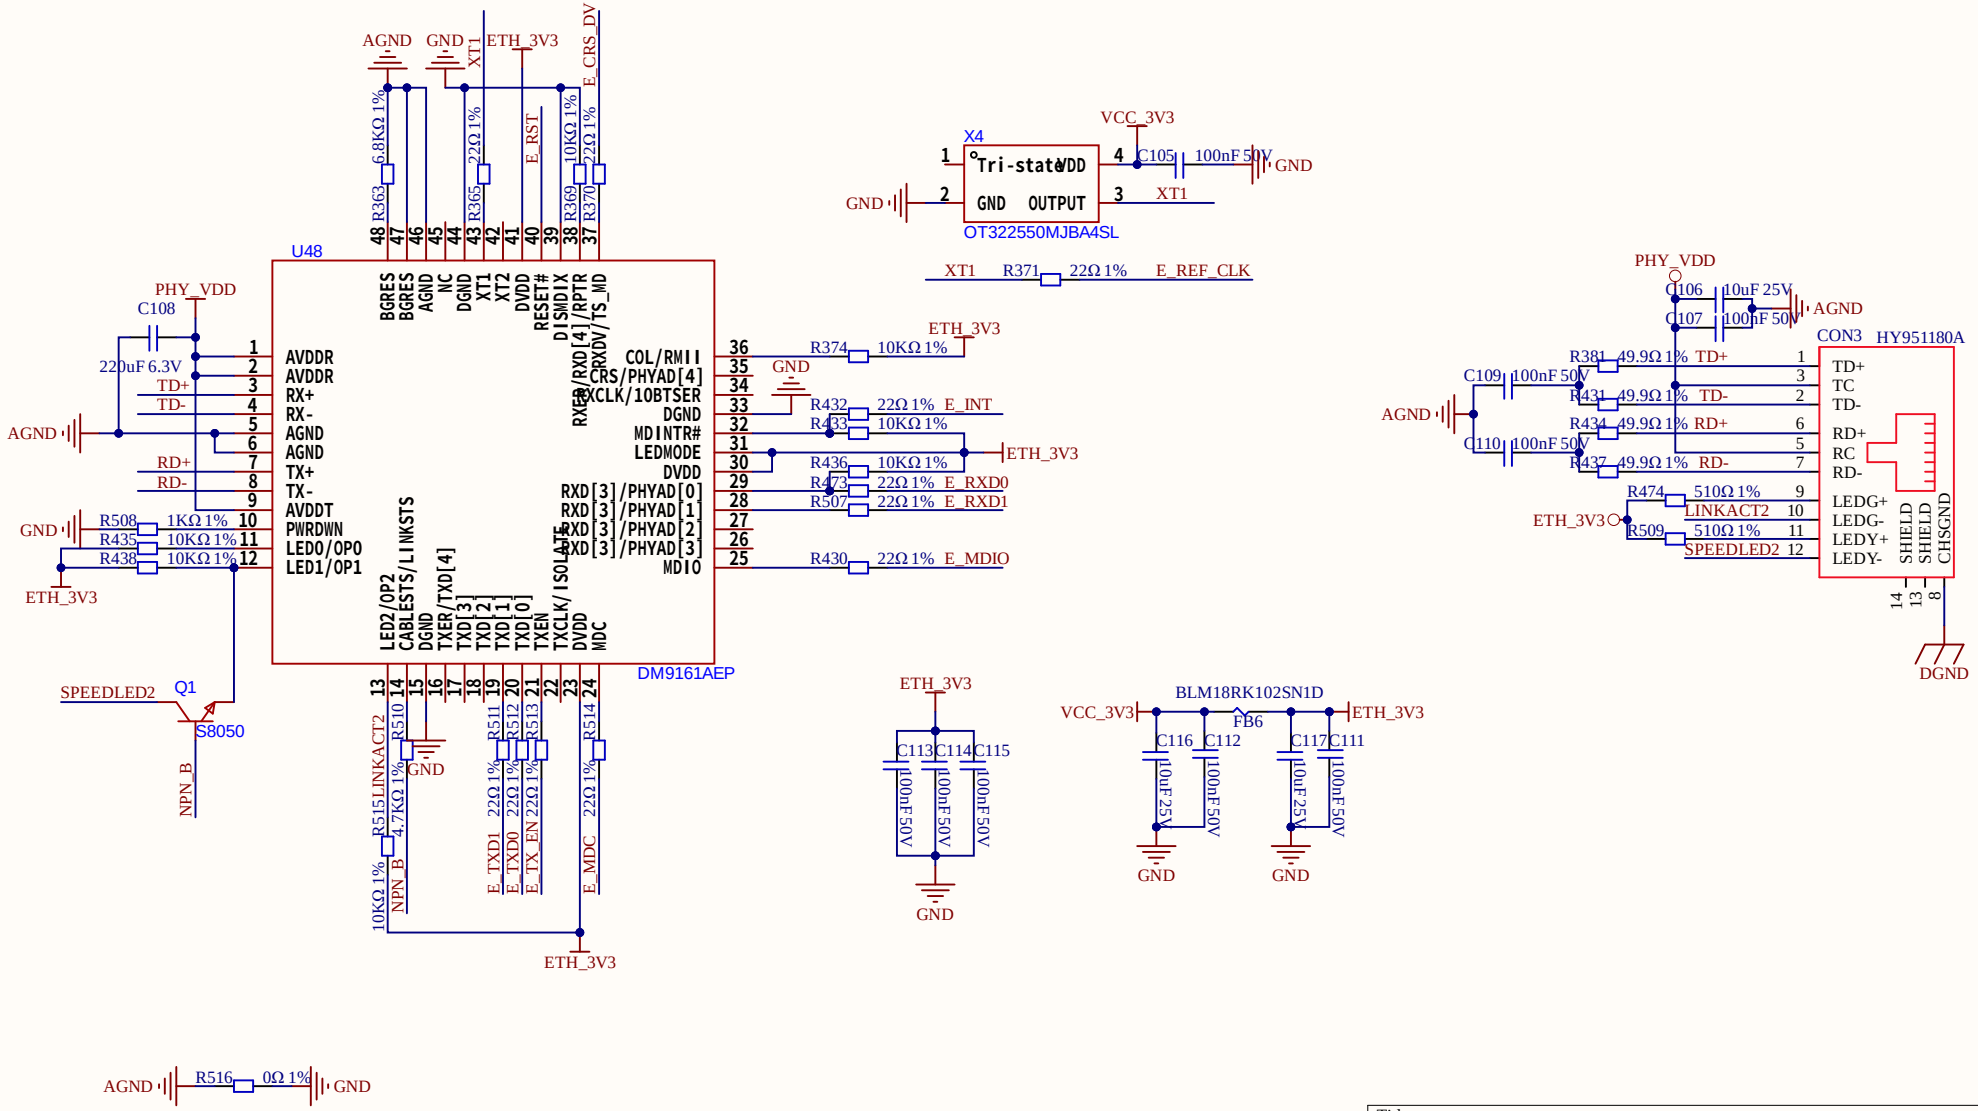

| | | |
|---|---|---|
| Title | | |
| Size A3 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\..\05_USB&Coder.SchDoc | | Drawn By: |

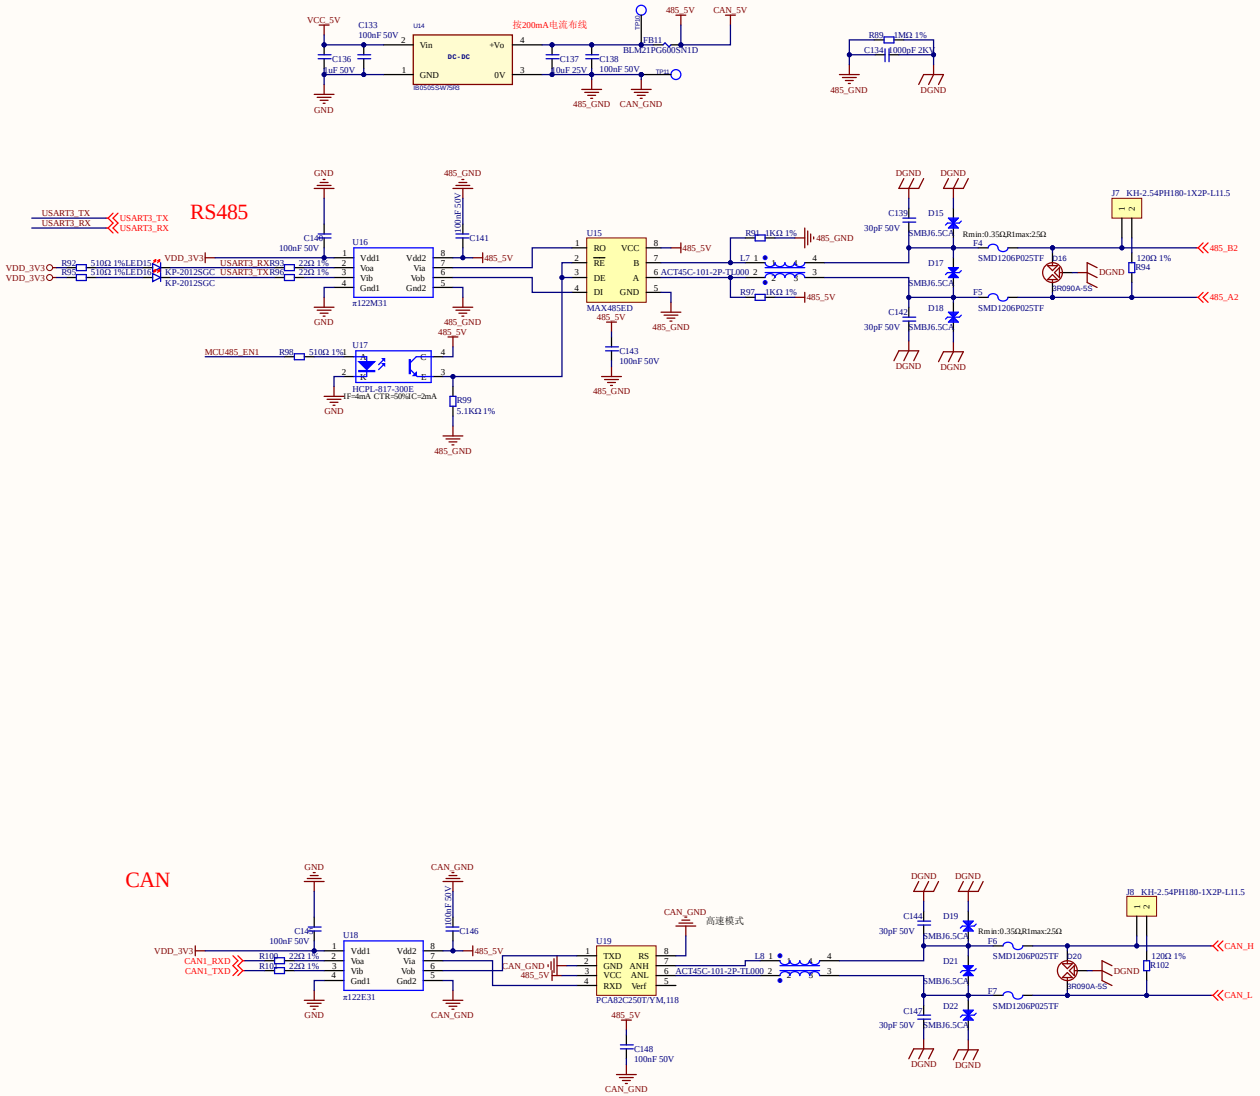



| | | |
|---|---|---|
| Title | | |
| Size: A2 | Number | Revision |
| Date: 3/18/2026 | Sheet of | |
| File: F:\xiangmu\...\06_RS485&CAN.SchDoc | Drawn By: | |

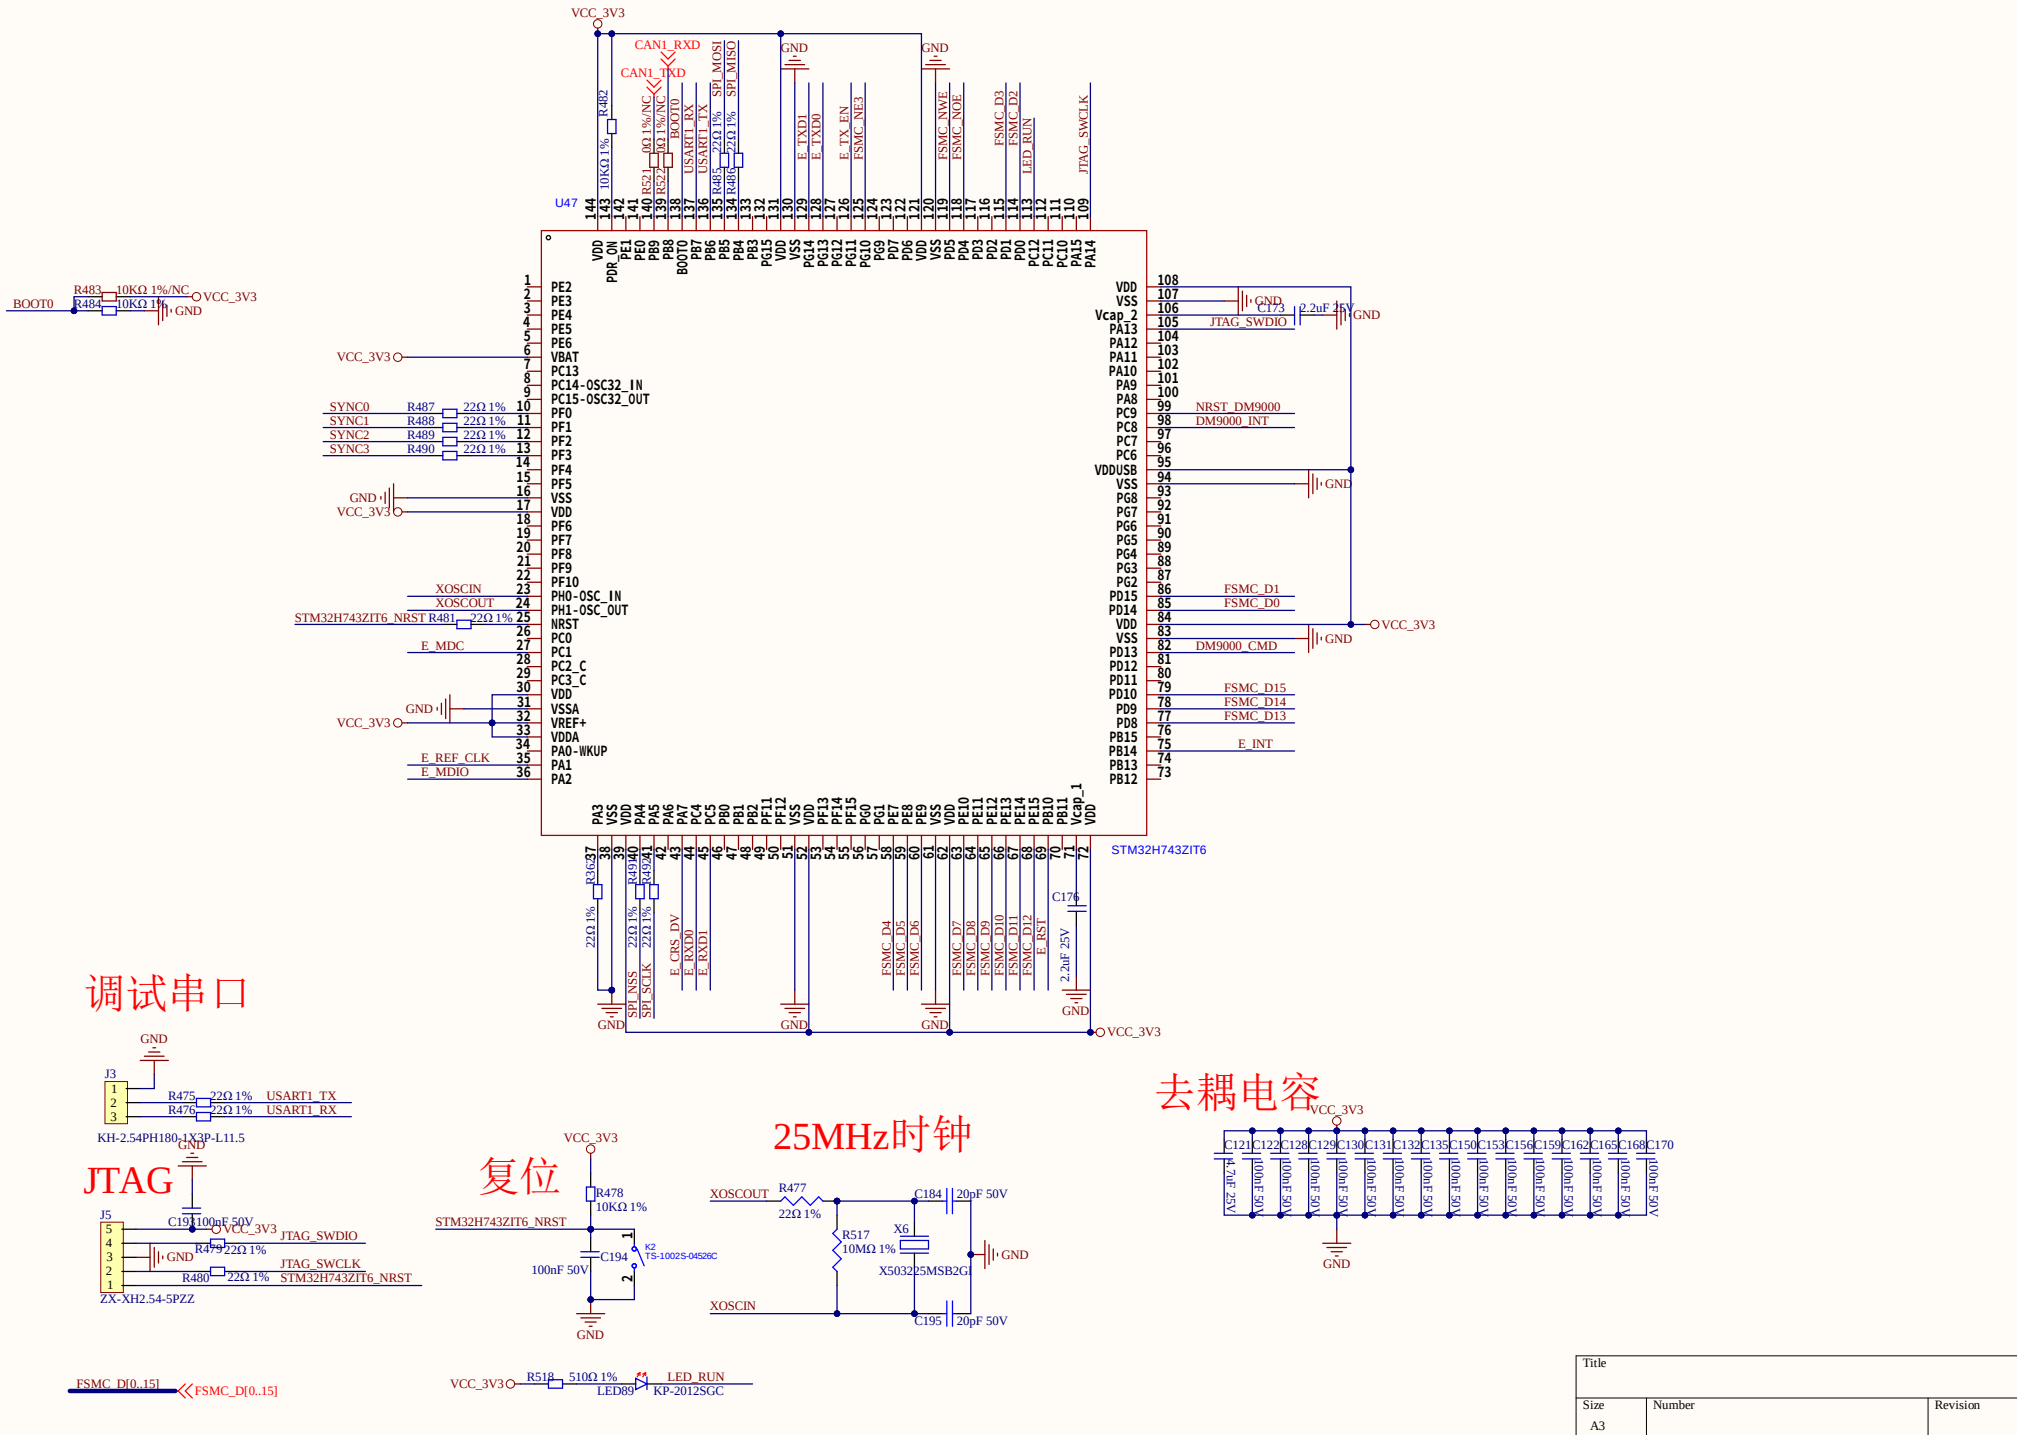


| | | |
|---|---|---|
| Title | | |
| Size A3 | Number | Revision |
| Date: 3/18/2026 | Sheet of | |
| File: F:\xiangmu\...\07_MCU_STM32H743ZIT6.SchDoc | Drawn By: | |





| | | |
|---|---|---|
| Title | | |
| Size A4 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\..\08_ETH_9161AEP.SchDoc | | Drawn By: |

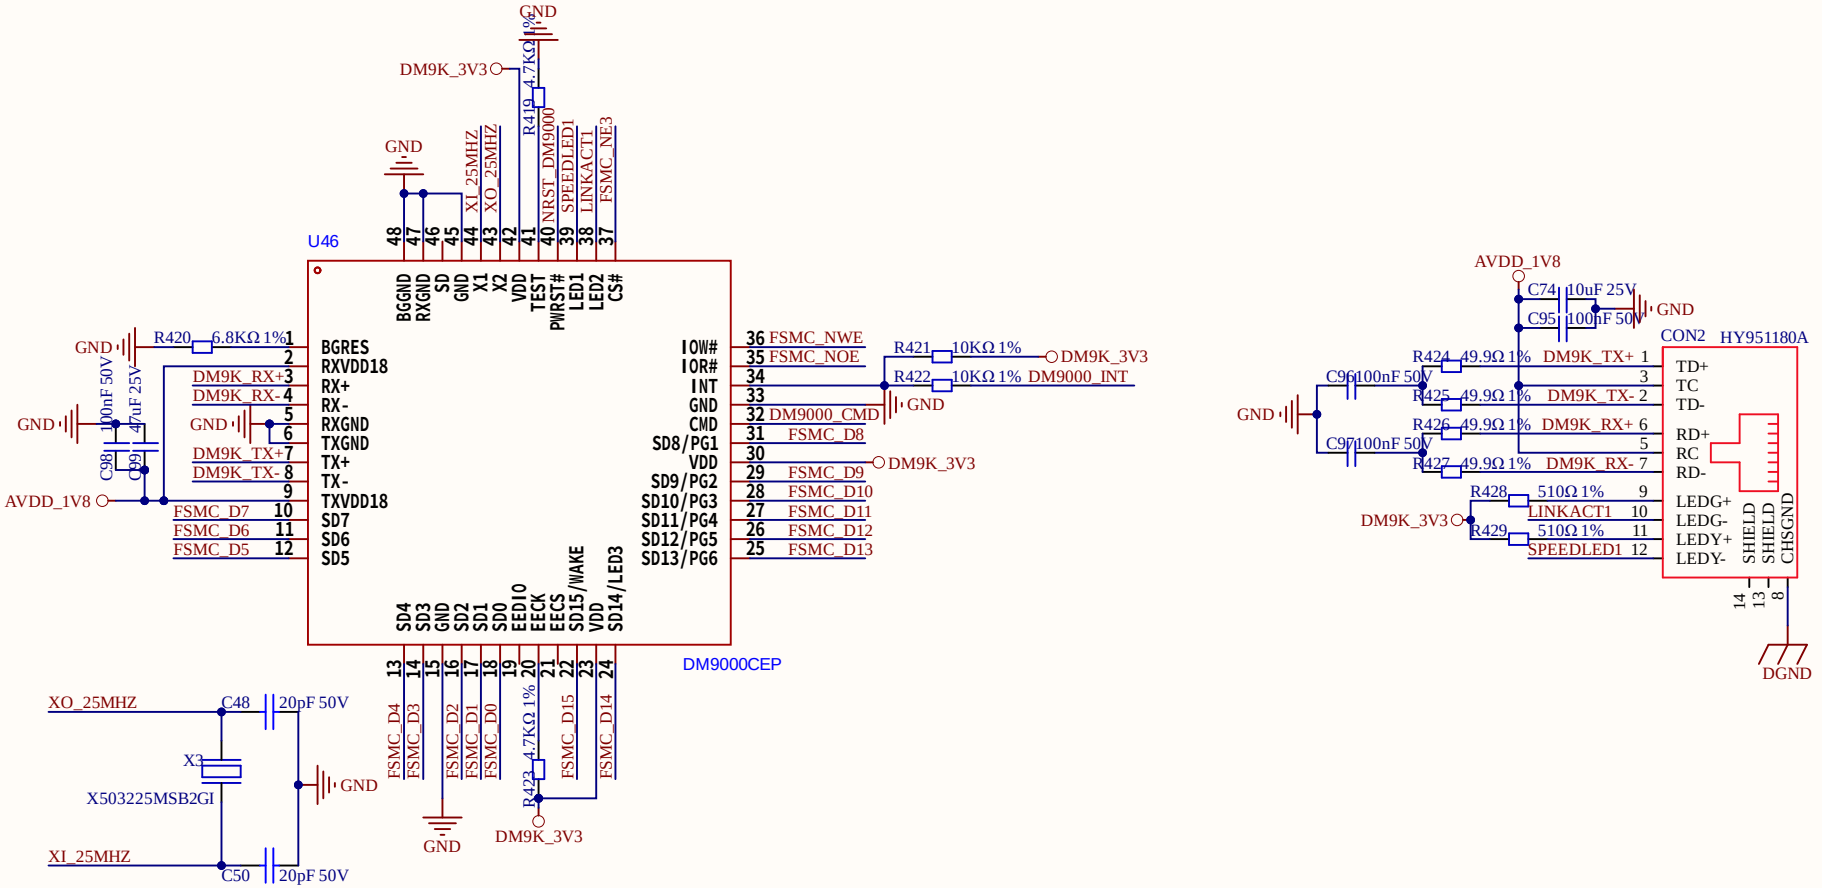



| | | |
|---|---|---|
| Title | | |
| Size A4 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\..\09_ETH_DM9000CEP.SchDoc | | Drawn By: |

# 共40路输入

稳压管选择6V，LED工作电流约为2.2mA,输入为24V时，输出为(24-6)*10/(10+30)=4.5V。

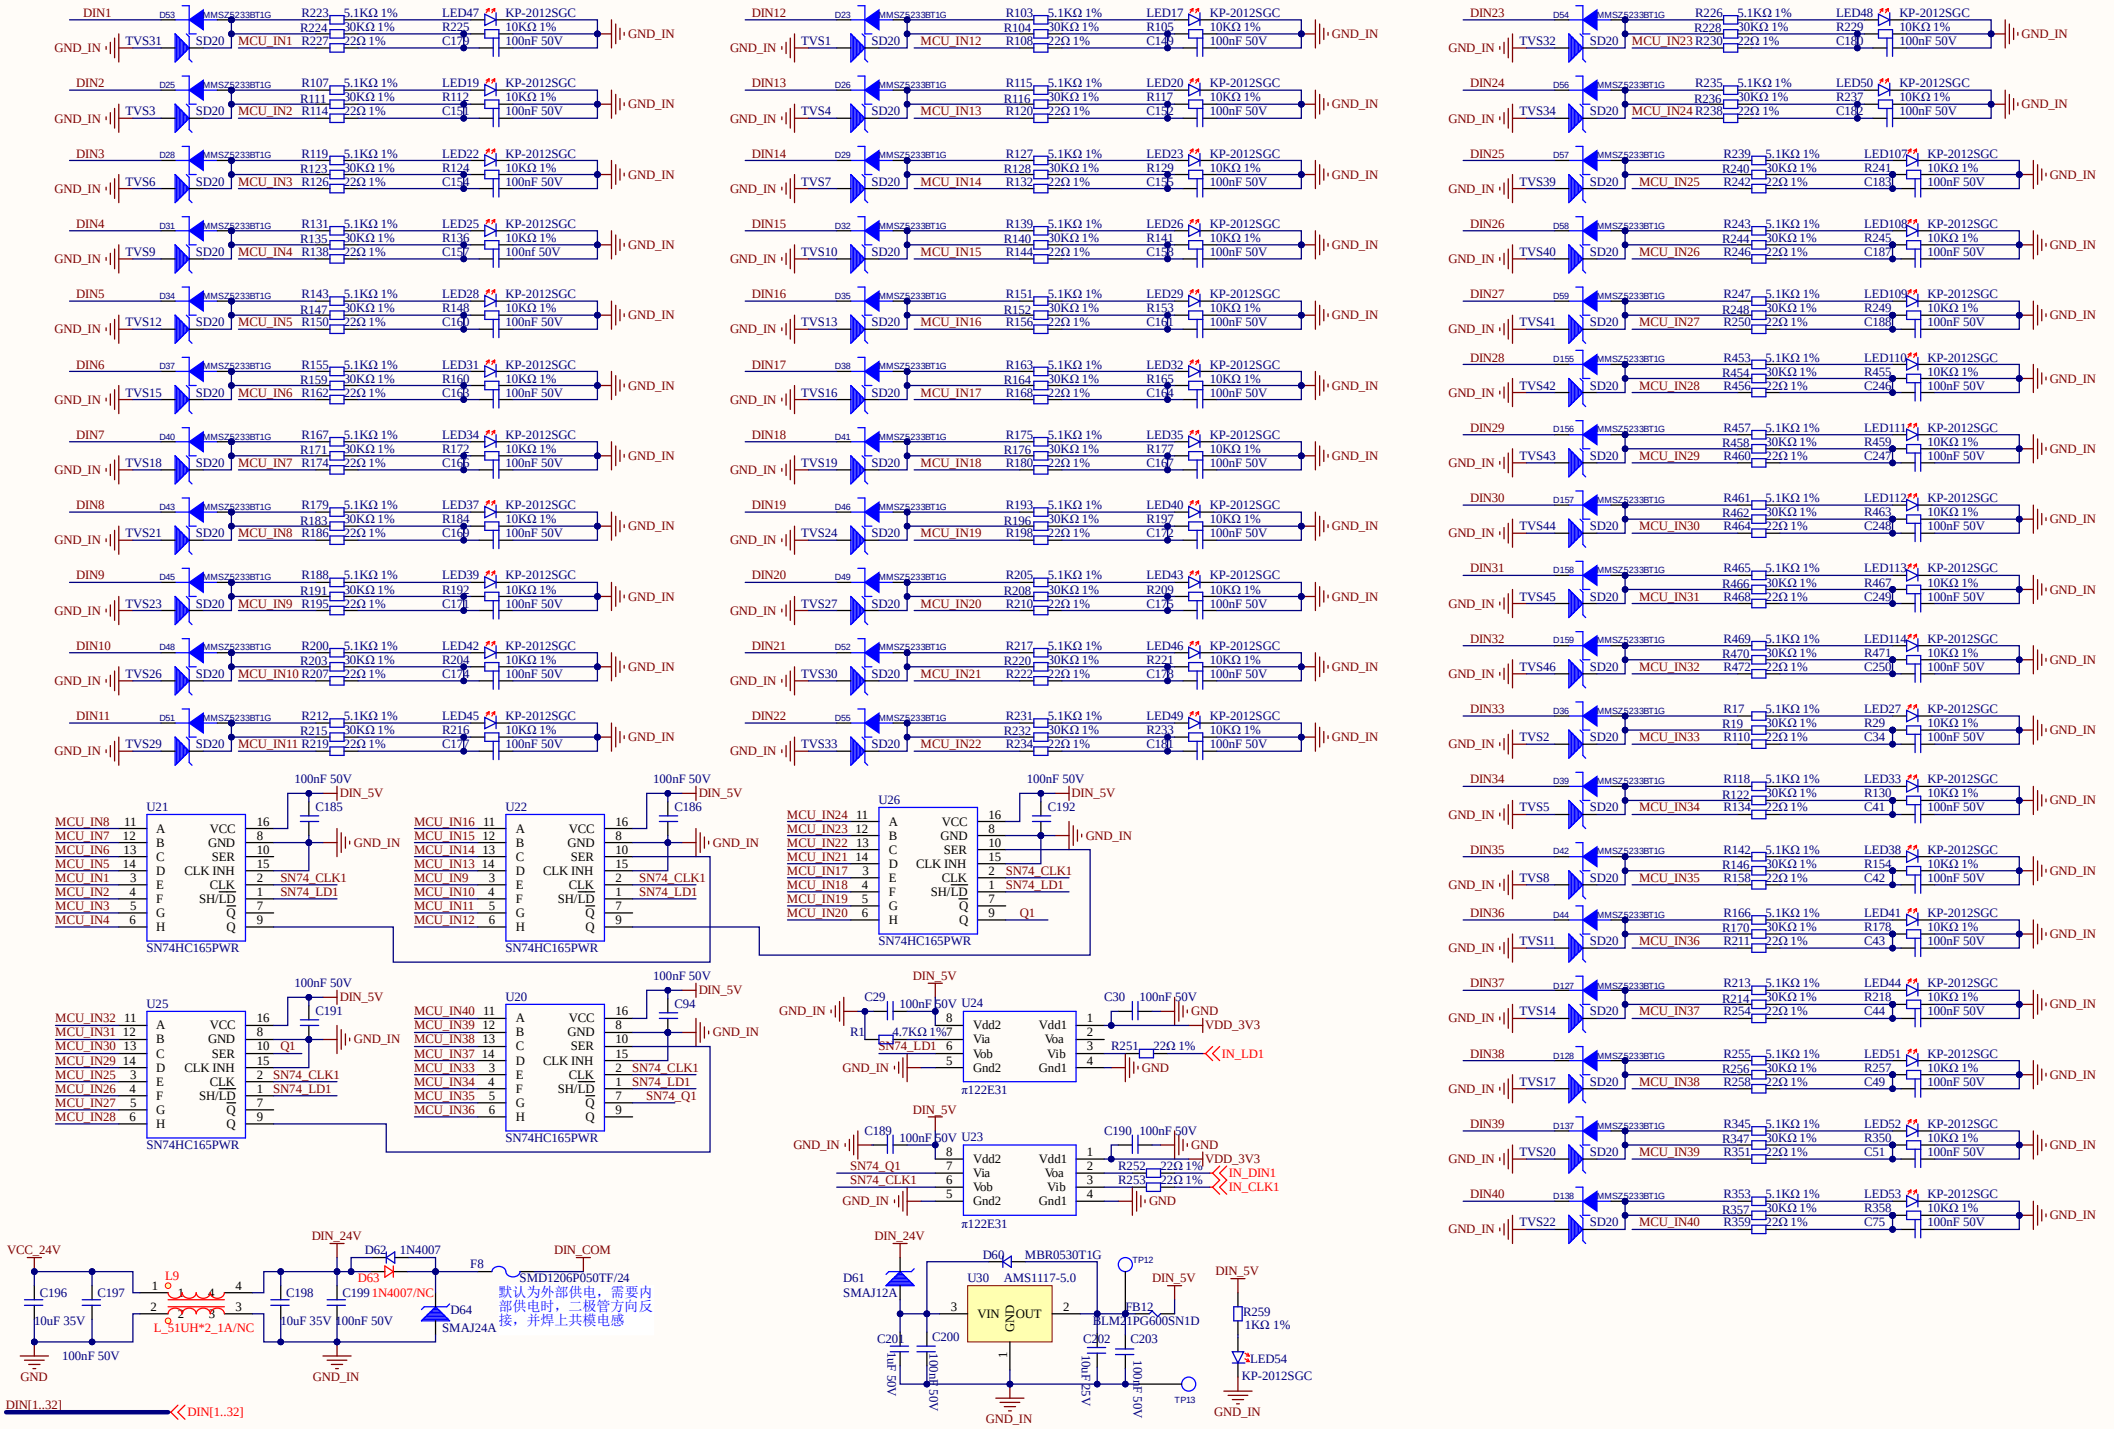



# 共48路输出

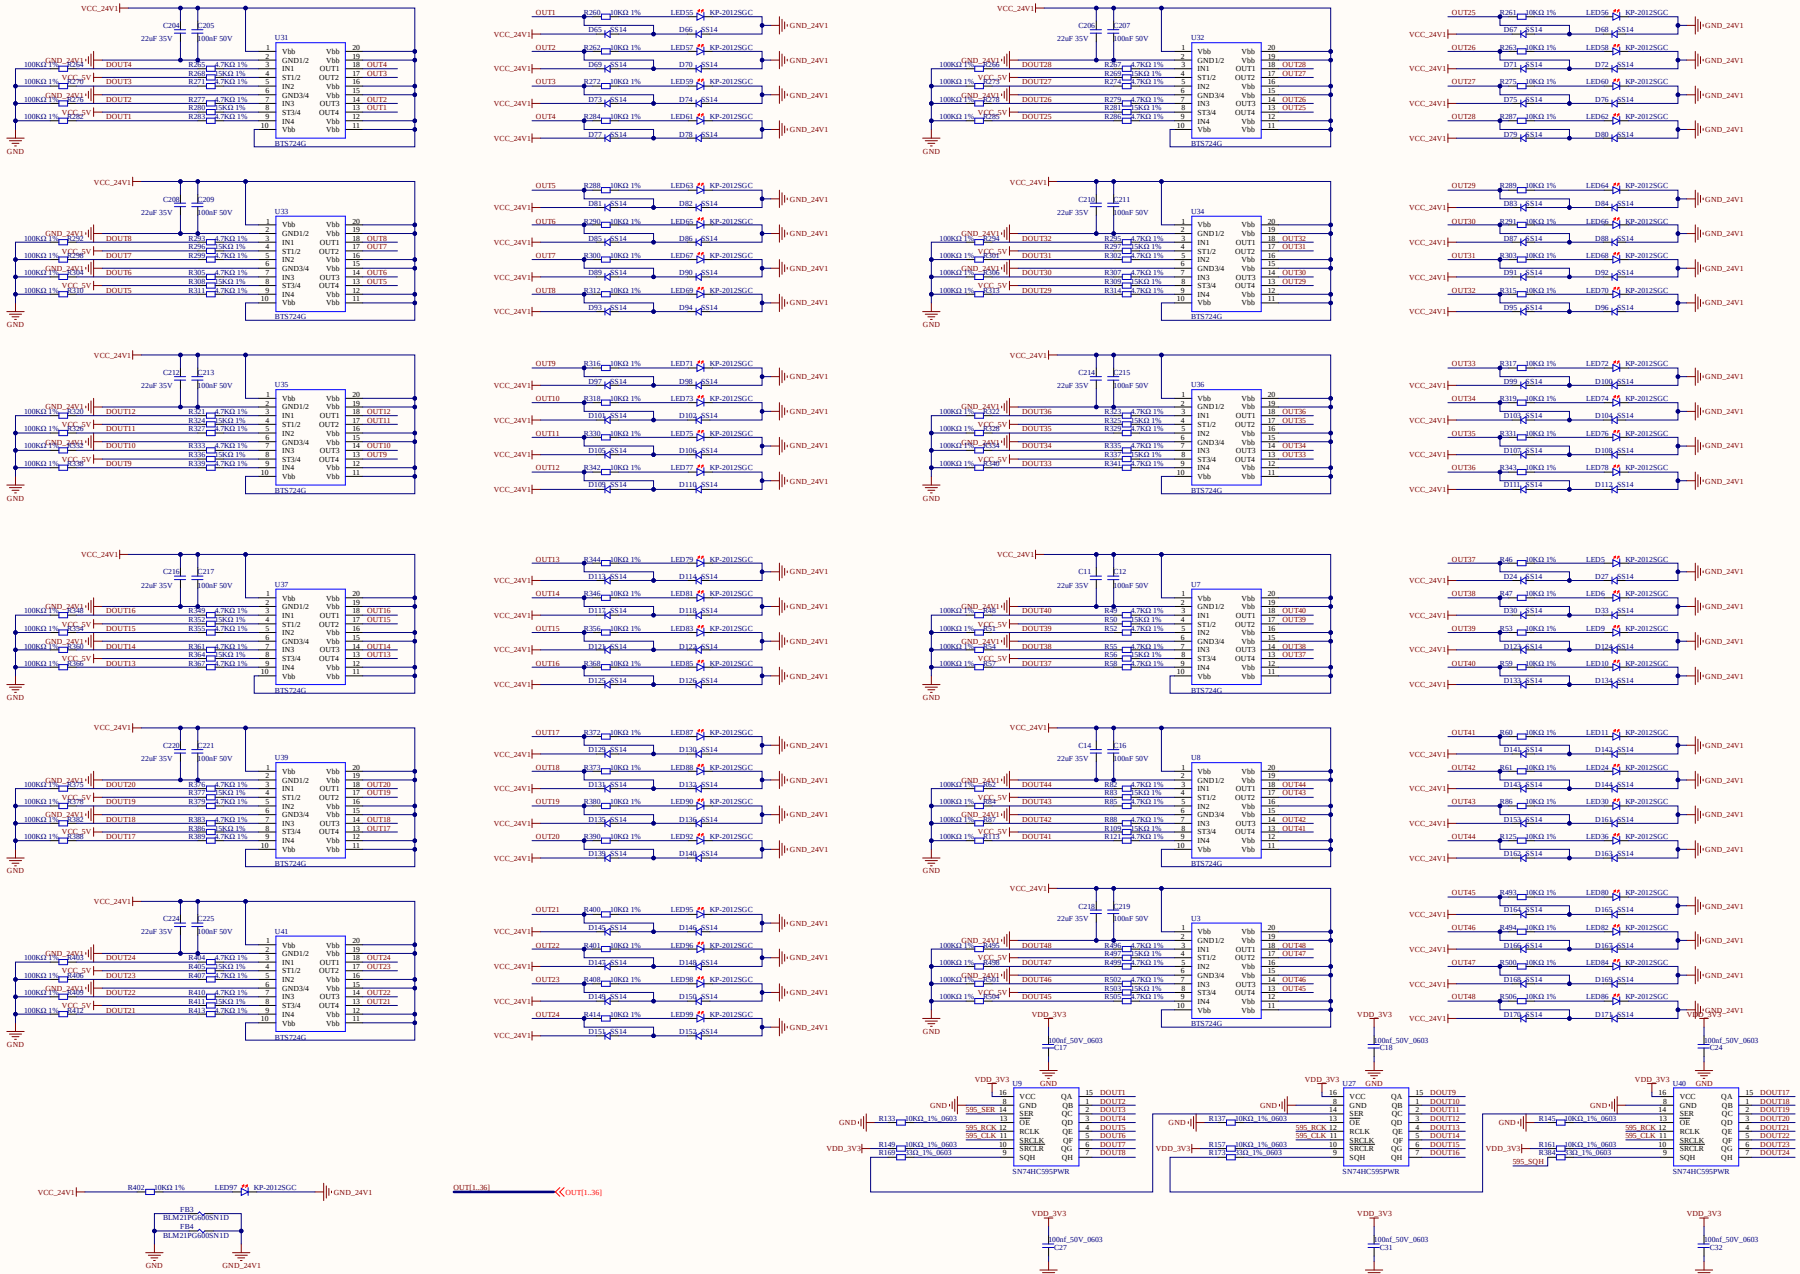




| Title | | | |
|---|---|---|---|
| Size | Number | | Revision |
| A2 | | | |
| Date: | 3/18/2026 | Sheet of | |
| File: | F:\xiangma\...\11_DOUT.SchDoc | Drawn By: | |


# 7路继电器输出

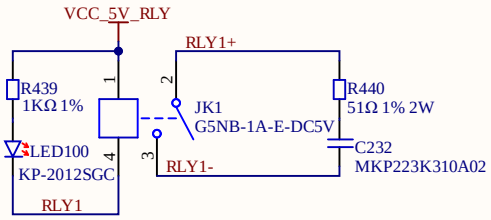


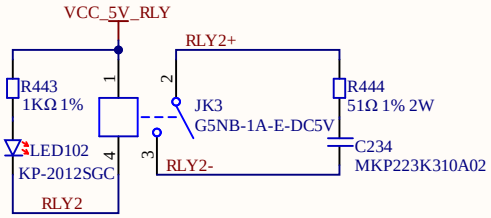


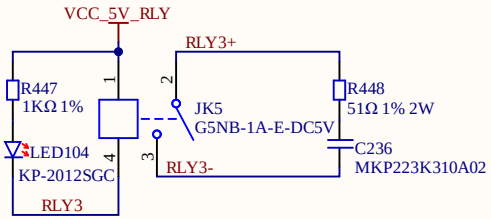



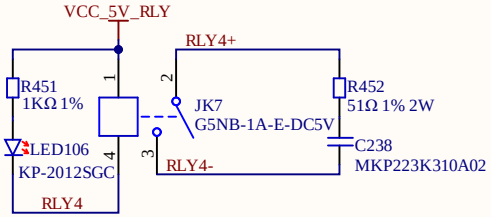
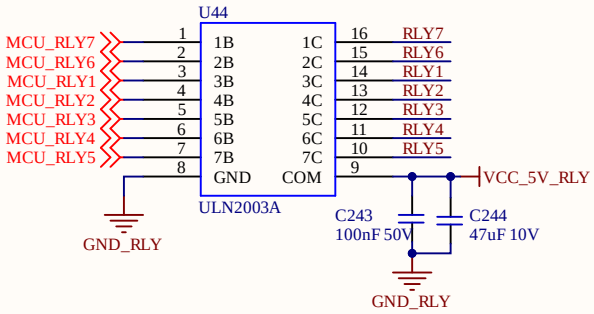


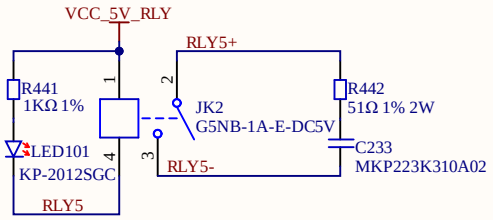
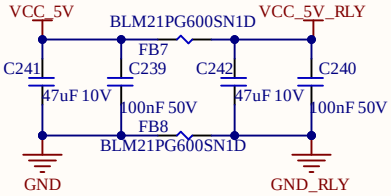


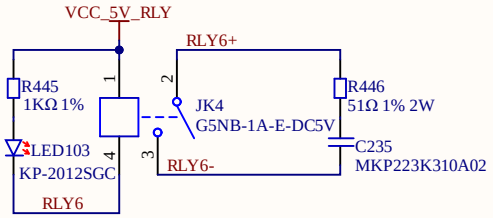
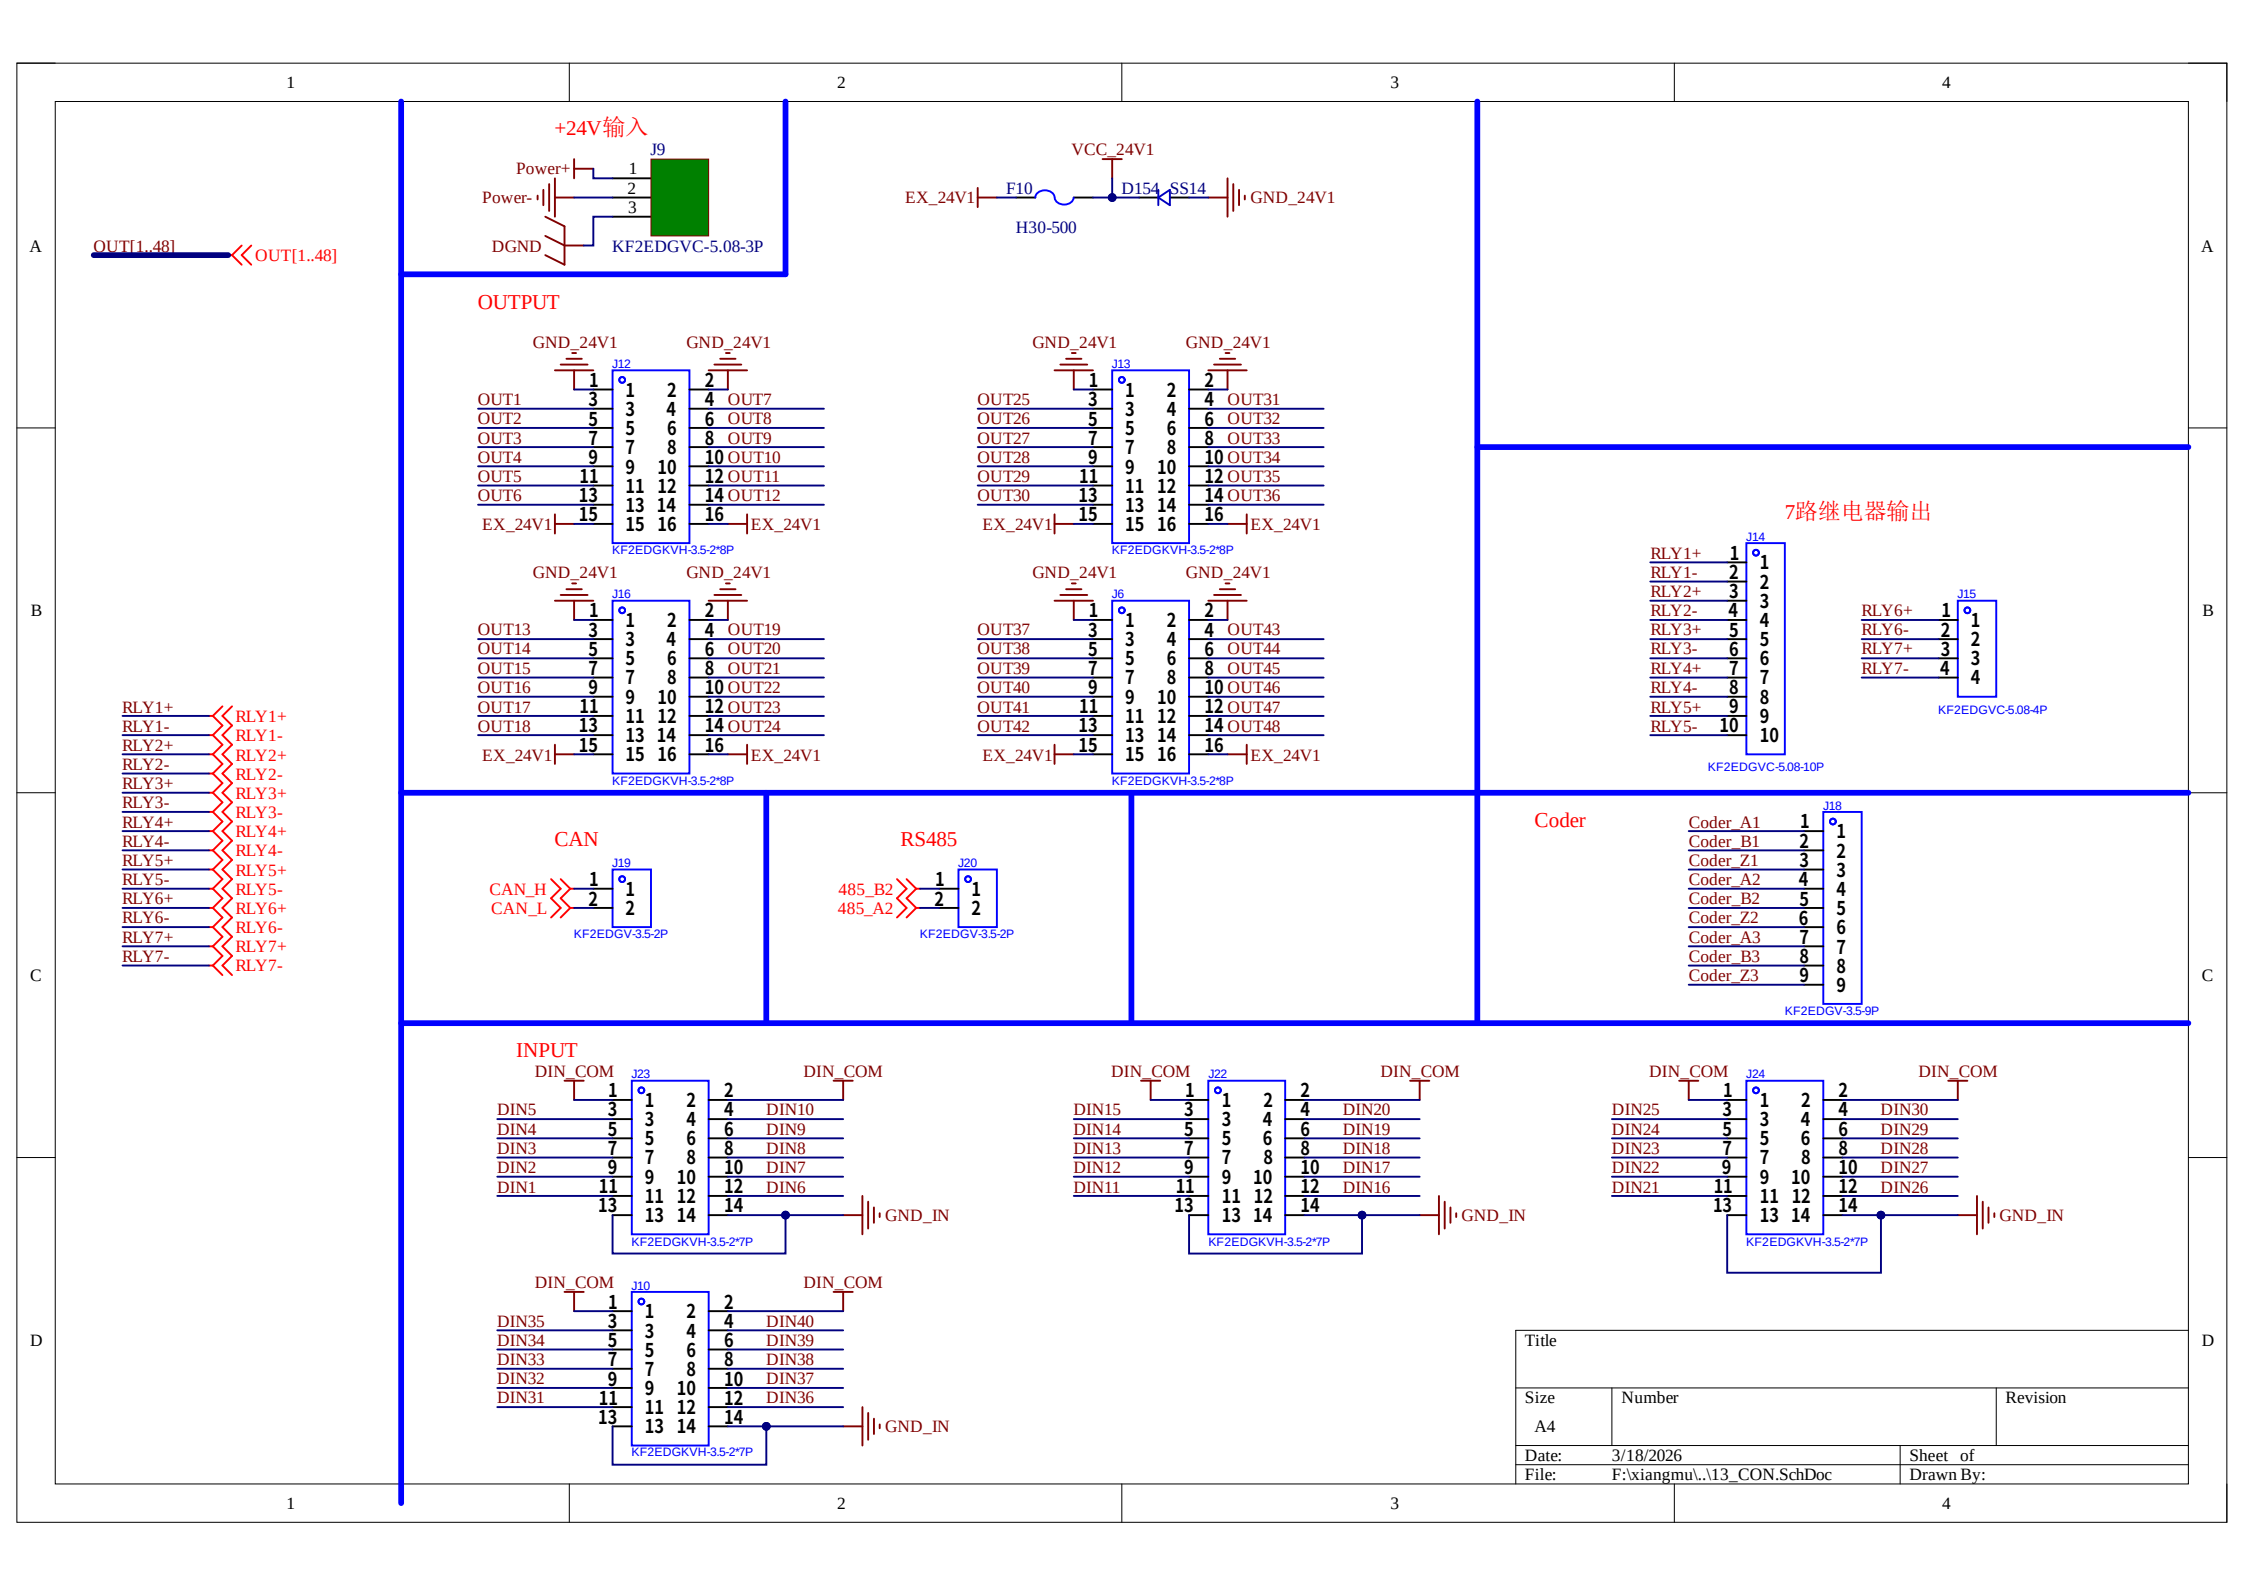


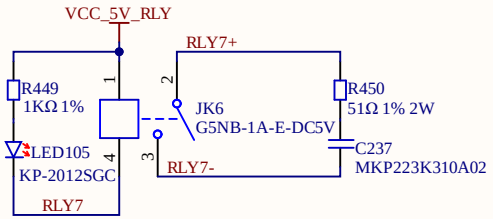
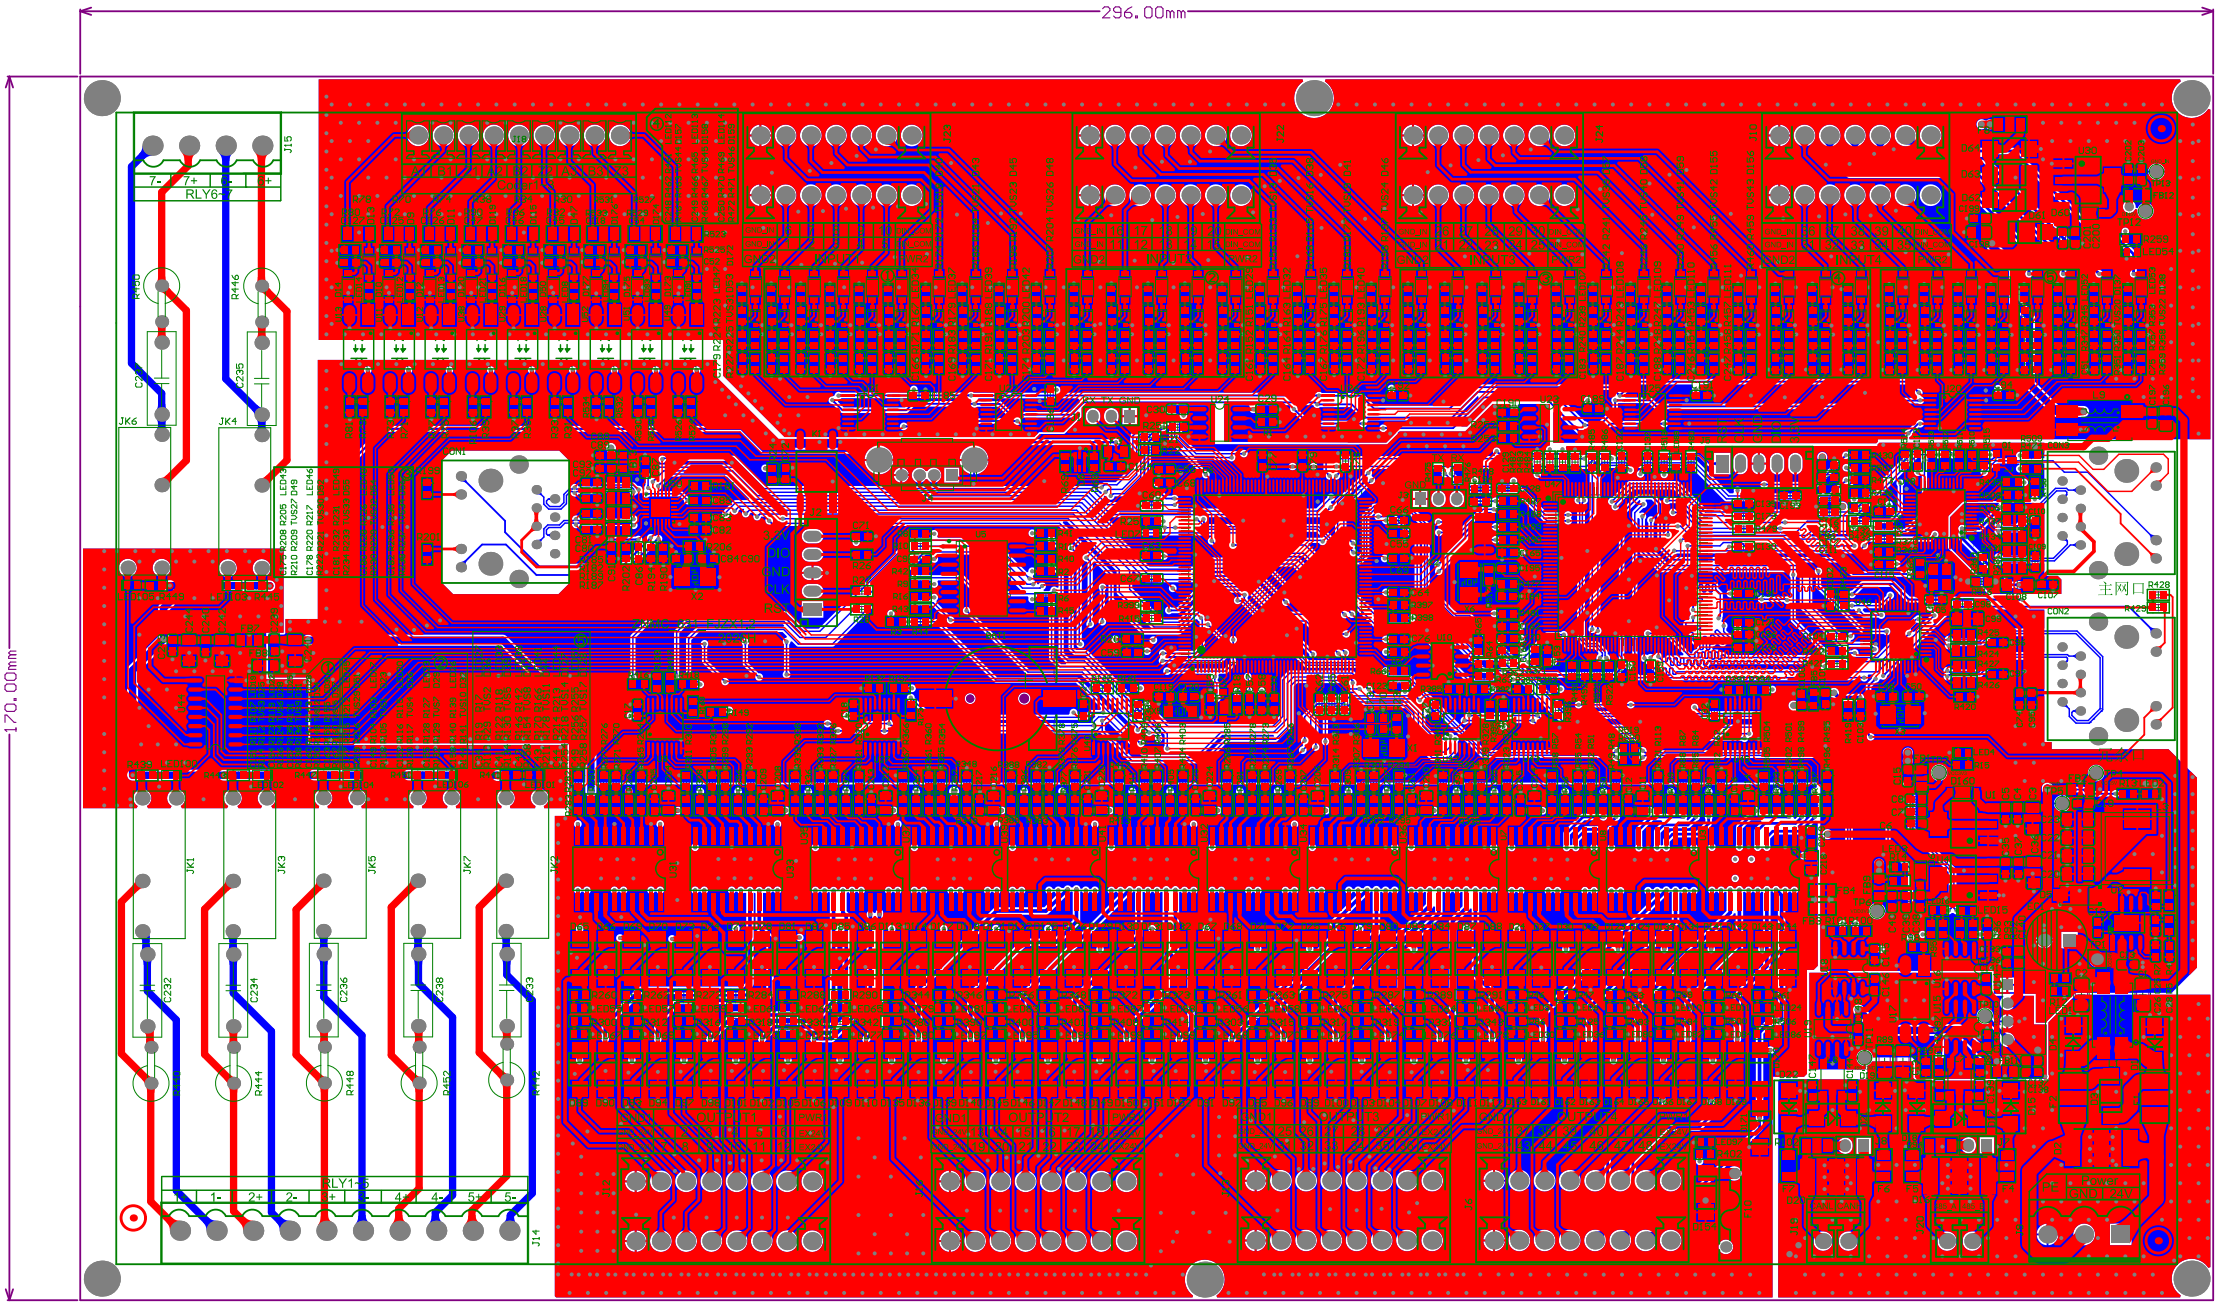




| | | |
|---|---|---|
| Title | | |
| Size A4 | Number | Revision |
| Date: 3/18/2026 | | Sheet of |
| File: F:\xiangmu\..\12_RLY.SchDoc | | Drawn By: |


+24V输入
J9
Power+
Power-
DGND
KF2EDGVC-5.08-3P
VCC_24V1
EX_24V1
F10
H30-500
D154
SS14
GND_24V1
OUT[1..48]
OUTPUT
J12
J13
J16
J6
KF2EDGKVH-3.5-2*8P
7路继电器输出
J14
J15
KF2EDGVC-5.08-10P
KF2EDGVC-5.08-4P
RLY1+
RLY1-
RLY2+
RLY2-
RLY3+
RLY3-
RLY4+
RLY4-
RLY5+
RLY5-
RLY6+
RLY6-
RLY7+
RLY7-
CAN
J19
CAN_H
CAN_L
KF2EDGV-3.5-2P
RS485
J20
485_B2
485_A2
Coder
J18
Coder_A1
Coder_B1
Coder_Z1
Coder_A2
Coder_B2
Coder_Z2
Coder_A3
Coder_B3
Coder_Z3
KF2EDGV-3.5-9P
INPUT
DIN_COM
J23
J22
J24
J10
KF2EDGKVH-3.5-2*7P
GND_IN
Title
Size
A4
Number
Revision
Date:
3/18/2026
Sheet of
File:
F:\xiangmu\..\13_CON.SchDoc
Drawn By:


296.00mm
170.00mm
J15
RLY6-7
JK6
JK4
JK1
JK3
JK5
JK7
JK2
RLY1-5
J14
主网口