
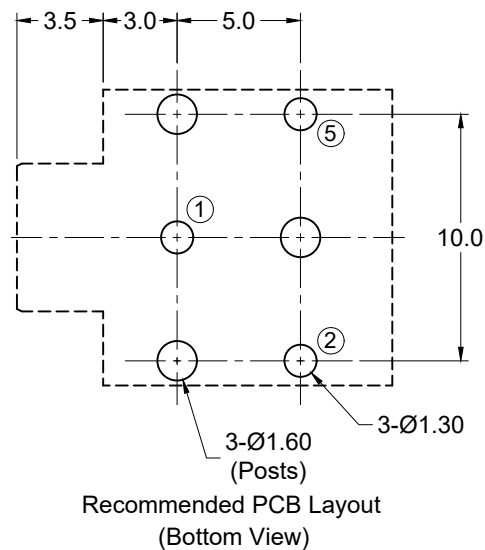

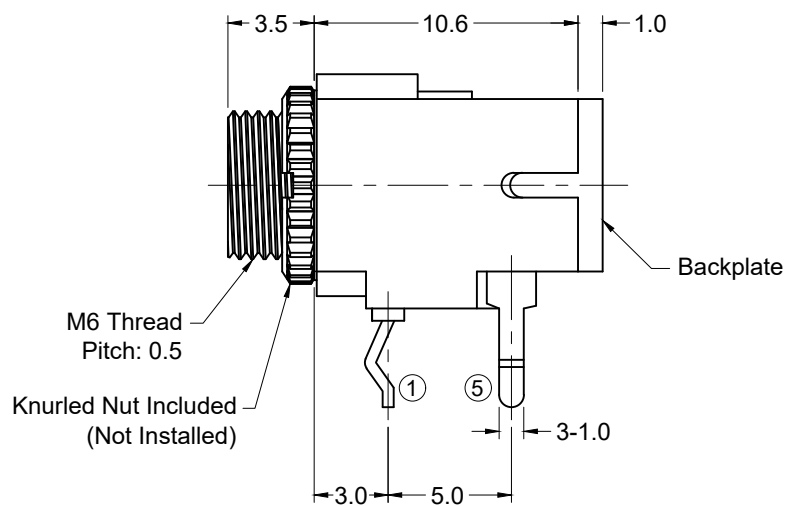


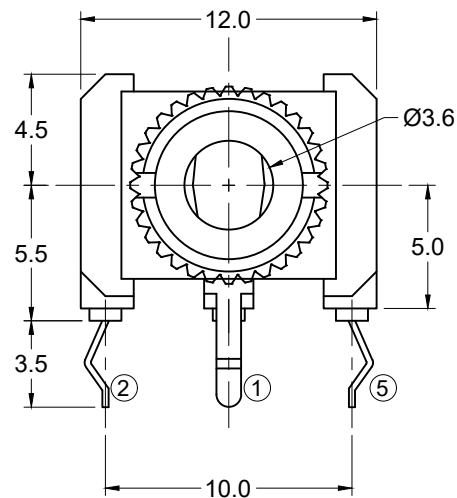

Materials and Finish

Housing: PBT Thermoplastic
15% Glass Filled, Black Color
UL 94V-0 Rated

Terminals:
Pin #1: Brass, Nickel Plated
Pin #5 & Pin #2:
Phosphor Bronze, Matte Tin Plated

Bushing: Brass, Nickel Plated

Electrical Characteristics

Rated Voltage: DC 24 V

Rated Current: 3.0 A

Contact Resistance:
Before Test: 50mohms Max.
After Durability Test: 100 mohms Max.

Insulation Resistance:
More Than 100 Megohms
At 500V DC

Dielectric Strength:
500V AC RMS for 1 Minute

Operating Temp: -25°C to +85°C

Mechanical Characteristics

Insertion Force: 0.3kg - 3.0kg

Extraction Force: 0.3kg - 3.0kg


Durability: 5000 Mating Cycles Min.

Tolerances

X.X ± 0.3
X.XX ± 0.15
Unless Stated
Otherwise

RoHS COMPLIANT

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	04/22/19	New Drawing	C. Kelleher	D. Shehan	C. Kelleher	04/16/19



STX-3100-3CB

Thru-Hole 3.5 mm Stereo Jack, RoHS Compliant

3 Pos., No Switch, Threaded Barrel, With Backplate

