




Foil Fusing

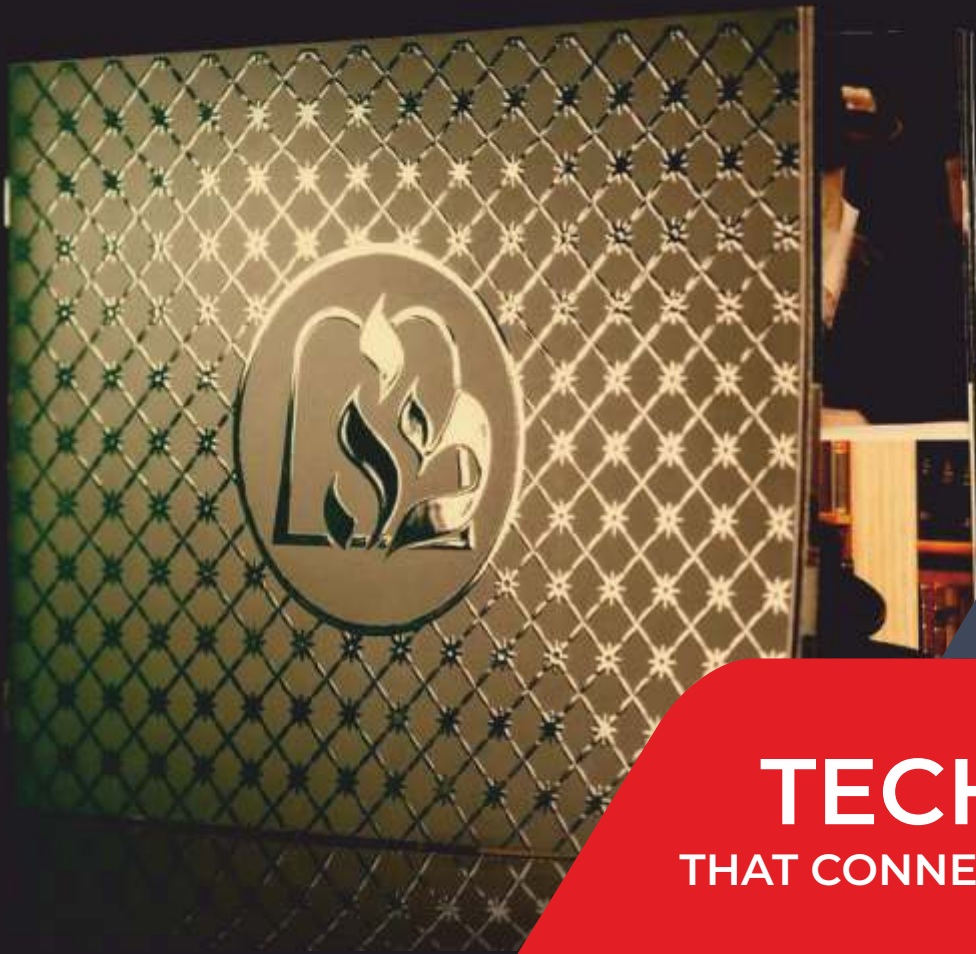

www.indiacot.in

TECHNOLOGY
THAT CONNECT WITH YOUR PAST

info@indiacot.com ✉
+91 96241 86098 | +91 82004 79696 ☎

Perfect for clients **ALREADY HAVING SCREEN PRINTING**
units wanting to enhance their print
with hot and embossed foil, the Foil Fusing removes
the need for dies and minimises foil waste.



The foil adheres to cured screen printed UV glue and depending upon the design, can achieve mazing flat, tactile or 3D effects.

The main Job Setting parameters are as follows:

- Foil application temperature
- Foil application pressure
- Substrate length
- Number of foiling area (Foil saving)
- Start and end point of each substrate

Foil Fusing Machine Features:

1. Working Principle: Electric + Pneumatic:

- Operates using a combination of electric and pneumatic systems for efficient performance.
- Ensures reliable and controlled application of foil.

2. Core Heating System:

- Utilizes a core heating system for consistent and even heating across the foil application area.
- Enhances foil adhesion and quality of finished prints.

3. Zero Foil Wastage Automated - Foil Saver:

- Integrated Foil Saver mechanism minimizes foil wastage during operation.
- Improves cost-effectiveness and sustainability in foil usage.

4. Robust Structure:

- Built with a sturdy and durable structure to withstand continuous operation.
- Ensures long-term reliability and minimal maintenance.

5. Foil Solution for 3D High-Building Effect Realization:

- Capable of achieving a 3D high-building effect with metallic foils for enhanced visual impact.
- Ideal for creating textured and embossed foil designs.

6. Dual Unwinder System:

- Supports two different film rolls simultaneously without the need for extra replacement.
- Increases operational efficiency and versatility in foil applications.

7. Soft Surface & Strong Pressure of IDH Foil Roller:

- IDH (Infrared Drying and Heating) foil roller ensures a soft surface and applies strong pressure.
- Enables precise and consistent foil application, especially for 3D high-build images.

8. Automatic Feeding Gap Control Device:

- Features an automatic feeding gap control device for precise positioning of substrates.
- Ensures accurate foil placement and alignment.

9. IDH Silicon Roller for Embossing Print:

- Utilizes IDH silicon roller technology for perfect embossing and foil application.
- Enhances the quality and detail of embossed foil prints.


10. Accurate & Stable Temperature Control:

- Maintains precise temperature control throughout the foil fusing process.
- Ensures consistent results and adherence of foil to substrates.

These features collectively make the Foil Fusing Machine a versatile and efficient solution for businesses looking to achieve high-quality foil effects with reliability, flexibility, and minimal material wastage.




Multiple Shaft

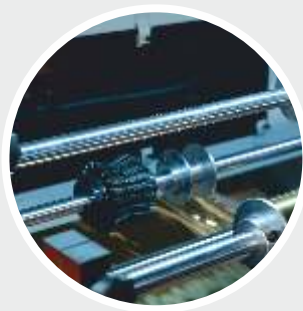

1 in and 3 in core
mount



Precise Pressure
System



Standard Electric
Panel



Standard Pneumatic
Panel




Flawless Rewinding
System



Foil Saving
System

Technical Specification			
MODEL	26"	32"	42"
FUNCTION	FOIL GLAZING	FOIL GLAZING	FOIL GLAZING
WORKING AREA	24 INCHES	30 INCHES	40 INCHES
THICKNESS RANGE	110-500GSM	110-500GSM	110-500GSM
CORE SIZE	1 & 3 INCHES	1 & 3 INCHES	1 & 3 INCHES
HEATING SYSTEM	INFRARED + OIL BASED	INFRARED + OIL BASED	INFRARED + OIL BASED
PRESSURE SYSTEM	PNEUMATIC	PNEUMATIC	PNEUMATIC
OPERATION	TOUCH SCREEN PANEL	TOUCH SCREEN PANEL	TOUCH SCREEN PANEL
FOIL SAVING JUMPS	10 TO 20 INBUILT	10 TO 20 INBUILT	10 TO 20 INBUILT
SPEED	10-12 m/min	10-12 m/min	10-12 m/min
WARM UP TIME	15-20 min	20-25min	25-30 min
WORKING PRESSURE REQUIRED	1.5-2.5 bar	1.5-3 bar	1.5-4 bar
DIMENSIONS (LxWxH) (Inch)	92" x 44" x 68"	92" x 50" x 68"	92" x 66" x 68"
WEIGHT (KG)	650	750	900
POWER SOURCES	220 volts/50 hz	220 volts/50 hz	220 volts/50 hz
POWER CONSUMPTION	3.5 kw	5 kw	7 kw

Above data can be change with or without prior notice.

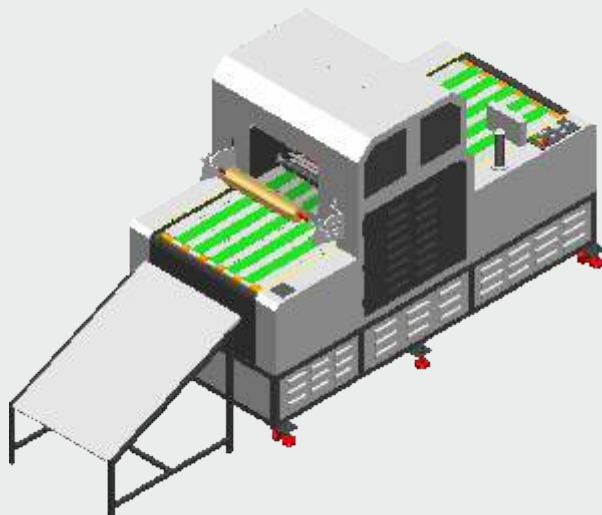

Survey no.49/2, Opp. toyoto showroom, B/h shyam sales corporation,
NH8-B, Gondal Road, Rajkot.
info@indiacot.com
+91 96241 86098 | +91 82004 79696