




i-Foil online

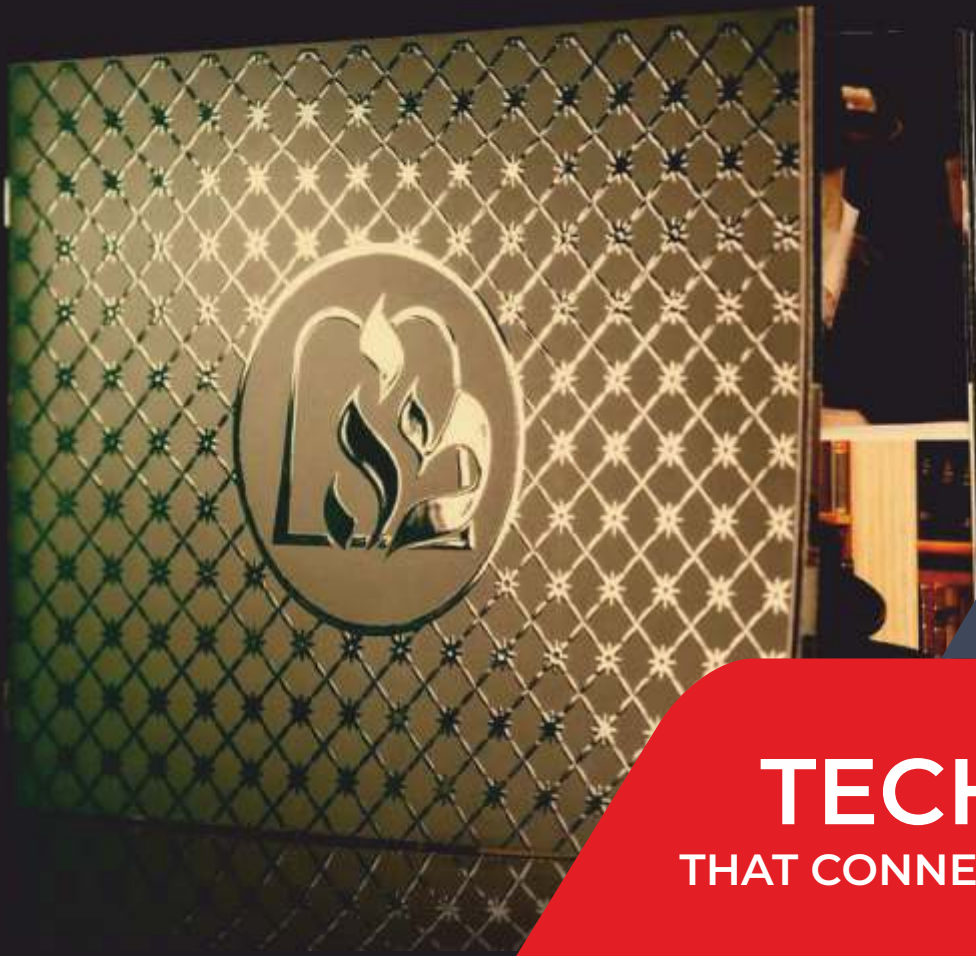

www.indiacot.in

TECHNOLOGY

THAT CONNECT WITH YOUR PAST

ATTACHMENT FOR AUTOMATIC SCREEN PRESS

info@indiacot.com ✉
+91 96241 86098 | +91 82004 79696 ☎

Perfect for clients wanting to enhance their print with hot and embossed foil, the i-Foil removes the need for dies and minimises foil waste.




The i-Foil Online is unique foil application system with combination of automatic screen printing machine , hybrid UV LED dryer and foiling section.

The foil adheres to cured screen printed UV glue and depending upon the design, can achieve mazing flat , tactile or 3D effects.

The main Job Setting parameters are as follows:

- Foil application temperature
- Foil application pressure
- Substrate length
- Number of foiling area (Foil saving)
- Start and end point of each substrate
- Intensity of Curing system

i-Foil Machine Features:




1. LED Curing System with Industrial Chiller:

- Utilizes LED technology for curing, offering energy efficiency and consistent curing results.
- Industrial chiller ensures optimal temperature control, extending LED lamp lifespan up to 20,000 hours*.
- Suitable for Spot UV and Cast & Cure applications.




2. Foiling System with Foil Saver, Multiple Shaft and Micro Pressure Adjustment:

- Includes a foiling system equipped with a foil saver mechanism to reduce material waste.
- Multiple shaft design enhances flexibility and efficiency in handling various foiling tasks.
- Micro pressure adjustment capability ensures precise and consistent foiling results.



3. UV Lamp System with EPS for SPOT UV and CAST & Cure Application:

- Features UV lamp system with EPS (Energy Pinning System) for Spot UV applications.
- Supports Cast & Cure application, providing a glossy, high-end finish.
- Enhances print quality and durability of finished products.

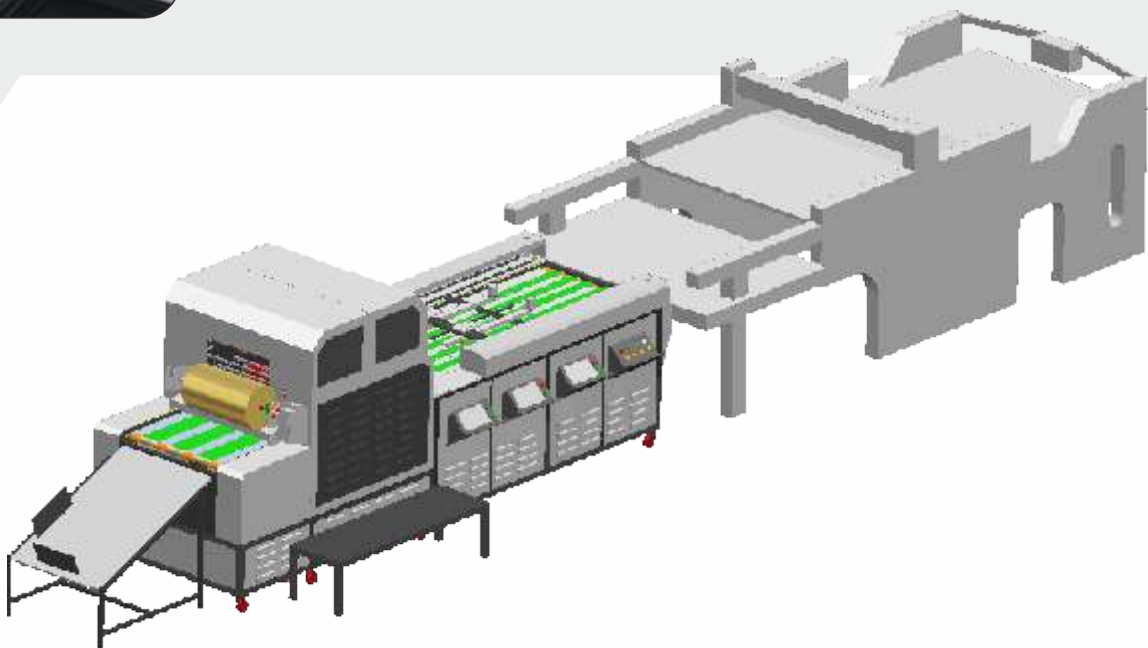

Additional Benefits:

Unique Solution for In-House Offset Printers:

- Tailored to meet the needs of in-house offset printing operations.
- Provides advanced capabilities typically found in larger-scale operations.

Versatile Capabilities:

- Enables Spot UV, Spot Embossed Foil, and Cast & Cure applications.
- Enhances the visual appeal and value of printed materials.


Single Operator Efficiency:

- Designed for operation by a single operator, reducing labour costs and optimizing workflow.

Technical Specification

MODEL	770	1010
MINIMUM SHEET SIZE	Depend on screen model*	Depend on screen model*
MAX SHEET SIZE	510x770 mm	700x1000 mm
MAX. FOIL TEMPRATURE	150'Celcius	150'Celcius
INTERNAL CORE DIAMETER	1 & 3 inches	1 & 3 inches
MINIUM FOIL WIDTH	25 mm	25 mm
MAXIMUM FOIL WIDTH	760	1010
FOILING SPEED	600-900 max size sheets/h	600-900 max size sheets/h
POWER SUPPLY	440 volts 50-60Hz-3 phase	440 volts 50-60Hz-3 phase
POWER CONSUMPTION	22 kw	25 kw
WORKING POWER	10-13 kw	13-15 kw
DIMENSION (LxWxH) (Inch)	148" x 51" x 68"	148" x 59" x 68"
WEIGHT (Kg)	950	1100

Above data can be change with or without prior notice.

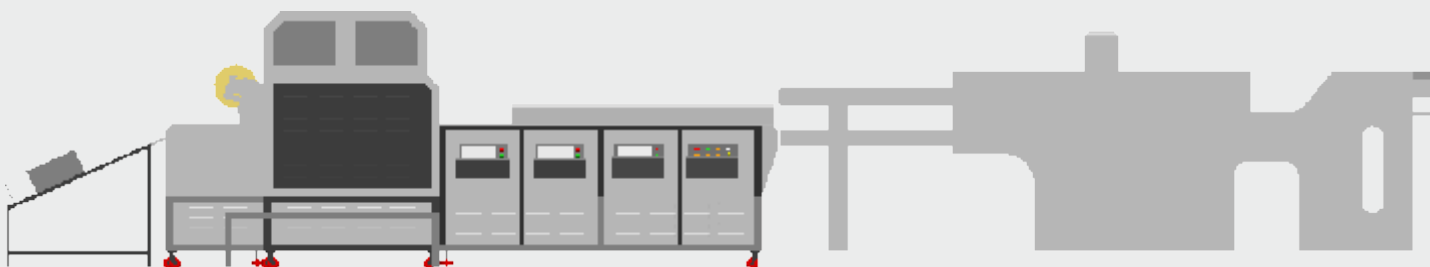

Survey no.49/2, Opp. toyoto showroom, B/h shyam sales corporation,
NH8-B, Gondal Road, Rajkot.
info@indiacot.com
+91 96241 86098 | +91 82004 79696