


Dual Side thermal lam for digital prints

Click the box for More Video

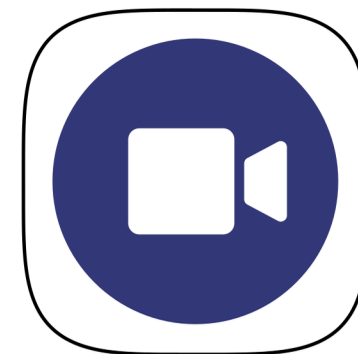

Only Lam

#### Technical Data

|                    |                          |
|--------------------|--------------------------|
| Power Supply       | 220 volt -50hz           |
| Dimension          | 28x30x60 inches<br>L W H |
| Roller size        | 15 inches                |
| Working area       | 13 inches                |
| Roller OD          | 75 mm                    |
| Lamination temp.   | 75-120' C                |
| Weight             | 95 kg                    |
| Pressure system    | Pneumatic                |
| Power Consumption  | 3.5 KW                   |
| Speed Control      | Jog Dial                 |
| Substrate weight   | 90-500 gsm               |
| First Heating time | 10-15 minutes*           |
| Heating System     | Infrared + Oil based     |
| Lamination speed   | 350 Meters / Hour**      |

#### Features

- 2 Roller lamination system
- Mirror Chromed Roller – High gloss and feather-touch output
- Infrared heating system – Strong bonding on thicker film
- Oil-based roller – Accurate temperature at every single point of roller
- Pneumatic roller pressure – Easy to operate
- Variable speed drive system
- Lamination capability up to 3000 meters film roller
- Separate temperature controller for all rollers
- Paper handling tray
- DC motor with gearbox for long run
- Bearing shaft mechanism for hassle-free lamination